

Nov. 24, 1931.

J. E. WATSON ET AL


1,833,666

HEAT EXCHANGER

Filed May 26, 1930

3 Sheets-Sheet 1

Fig. 1.

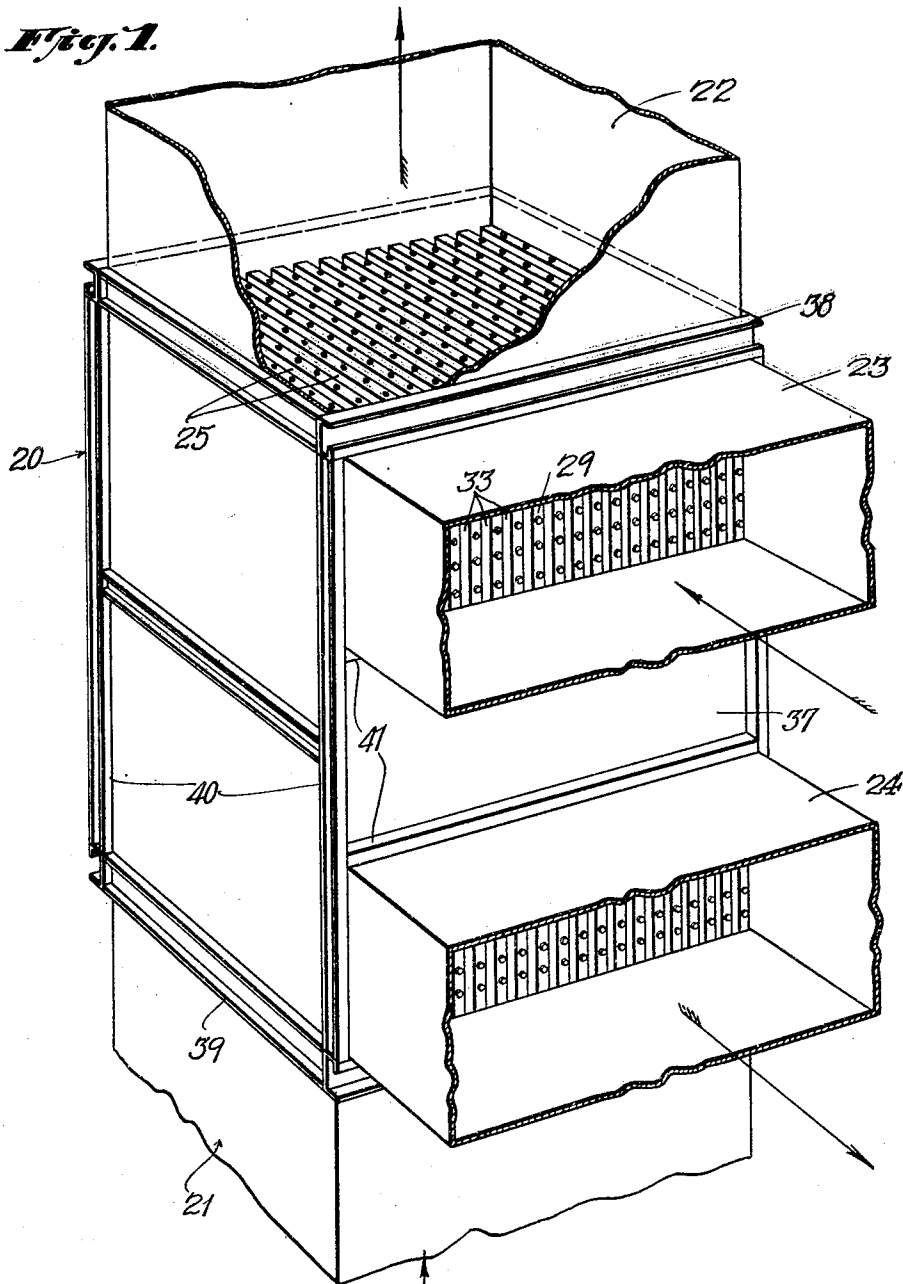

Inventors
JOHN E. WATSON.
VARNUM S. LEWIS.
By Their Attorneys
Hanna + Pawber

Nov. 24, 1931.


J. E. WATSON ET AL

1,833,666

HEAT EXCHANGER

Filed May 26, 1930

3 Sheets-Sheet 2

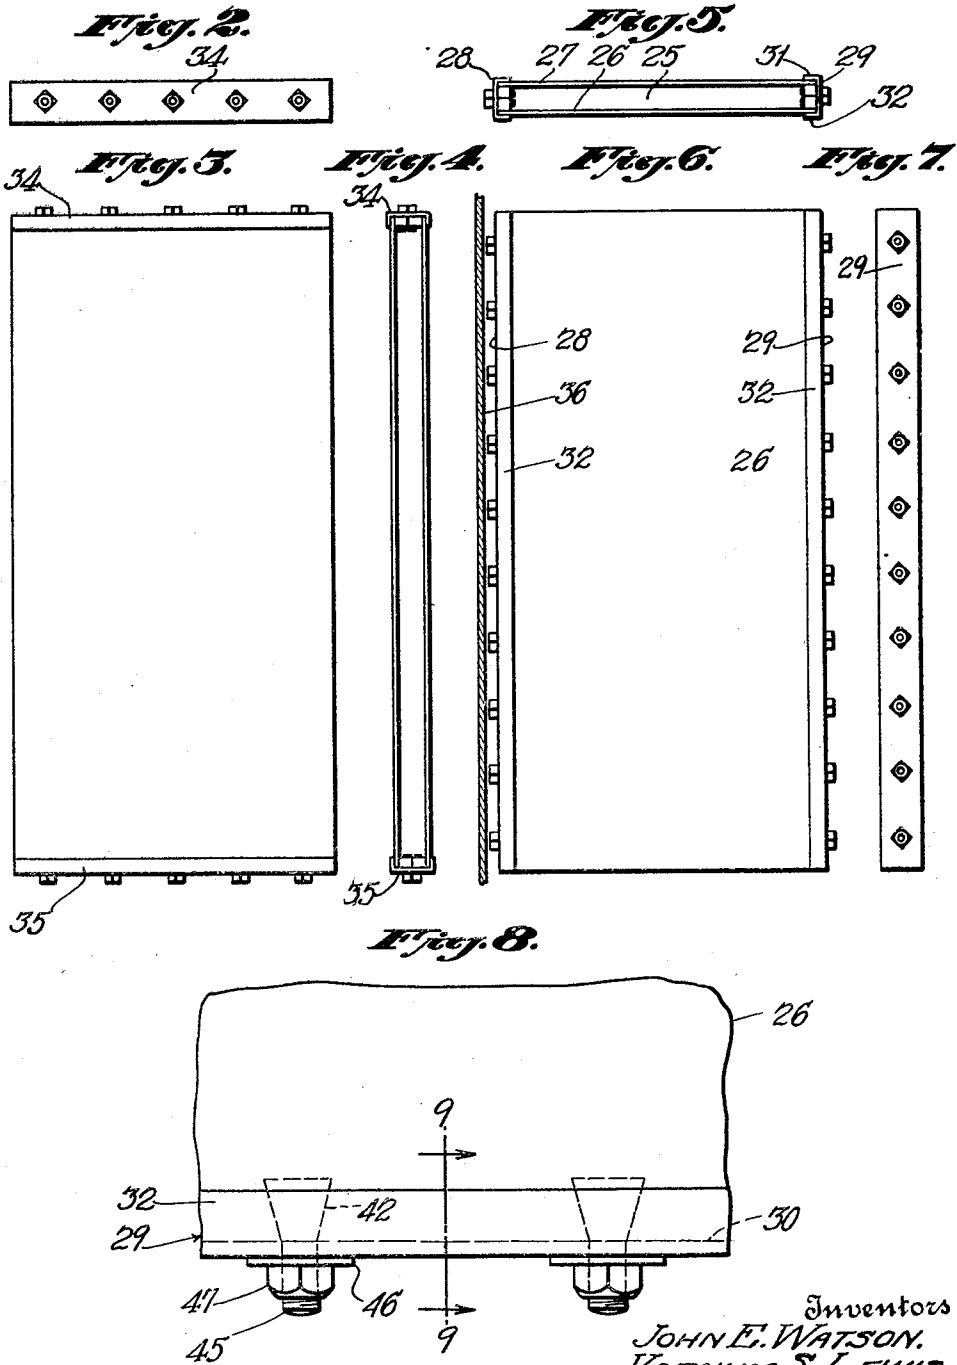

Inventors
JOHN E. WATSON.
VARNUM S. LEWIS.
By Their Attorneys
Usina & Rauber

Nov. 24, 1931.

J. E. WATSON ET AL

1,833,666

HEAT EXCHANGER

Filed May 26, 1930

3 Sheets-Sheet 3

Fig. 9.




Fig. 10.




Fig. 11.




Fig. 12.




Fig. 13.




Fig. 14.




Fig. 15.




Fig. 16.




Fig. 17.





Fig. 18.



Inventors
JOHN E. WATSON.
VARNUM S. LEWIS.
By Their Attorneys
Heima & Rauber

UNITED STATES PATENT OFFICE

JOHN E. WATSON AND VARNUM S. LEWIS, OF NEW ROCHELLE, NEW YORK

HEAT EXCHANGER

Application filed May 26, 1930. Serial No. 455,592.

This invention relates to heat exchangers and particularly heat exchangers of the type in which heat is caused to flow from a hotter fluid through a partition or dividing wall into a cooler fluid while said fluids are passing through the heat exchanger.

In heat exchangers of this type the hotter or heating fluid and the cooler fluid are passed in separate passages or channels and, in order to provide the largest amount of heat transferring surfaces, the fluids are preferably broken up into thin streams in narrow alternating passages so that each of the heat receiving or cooler fluid streams is exposed on each side to a heat transmitting wall that is exposed to the hotter fluid. The passages or channels through which the heating and heat receiving fluids pass are thus in intimate contact, and in order to prevent a leakage and intermingling of the fluids, a tight or fluid proof joint must be provided for each set of fluid channels. Owing to the varying expansions and contractions of the metal of which the fluid separating walls are made, the provision and maintenance of fluid tight joints has heretofore presented considerable difficulty.

An object of our invention is to provide a heat exchanger of simple and compact construction in which tight joints may be simply and easily formed and maintained.

A further object of the invention is to provide a heat exchanger of the above type in which the joints or seams in the fluid chambers may be easily and readily tightened.

With these and other objects in view which will more fully appear from the following description, the invention comprises the heat exchanger and constructions described and set forth in the following specification and claims.

The various features of the invention are illustrated in the accompanying drawings, in which—

Fig. 1 is a perspective view, partly in section, of a heat exchanger embodying a preferred form of the invention.

Figs. 2, 3 and 4 are, respectively, a plan, side and front elevation of a channel for the heat receiving fluid of the heat exchanger.

Figs. 5, 6 and 7 are, respectively, plan, side and front elevations of the heating fluid channel of the heat exchanger.

Fig. 8 is a detailed side elevation of a closure or joint used in the heat receiving and heating channels of the heat exchanger.

Fig. 9 is a cross sectional view of the closure shown in Fig. 8 taken on line 9—9 of Fig. 8.

Figs. 10—18, inclusive, are similar sectional views of alternative forms of closures embodying our invention.

In the accompanying drawings our invention is illustrated as applied to a heat exchanger for transferring heat from a hot gas such as an exhaust flue gas to a current of air for example, the air to be supplied to a furnace. In this form of the invention the hot flue gases are conducted to the lower end of the exchanger 20 by means of a flue 21, and leave the upper part of the heat exchanger through an exhaust or outlet flue 22. The cold air to be heated in the exchanger enters the upper side part of the exchanger through an inlet conduit 23 and the heated air is withdrawn through an outlet conduit 24 at the lower portion of a side wall of the heat exchanger.

In the embodiment shown by way of example in Fig. 1, the air flues 23 and 24 enter and leave the same side of the heat exchanger, the inlet flue 23 entering throughout approximately the upper third of the area of the side of the heat exchanger and the flue 24 connecting to the lowest third of the area of the heat exchanger. Other alternatives may, however, be employed within the scope of our invention.

As the heating or flue gas enters the heat exchanger 20 it is divided into thin streams and passes through a number of closely spaced, narrow, vertical passages 25 as indicated in Figs. 1 and 5, which are formed between spaced vertical plates 26 and 27 and are closed at their side edges by means of channel irons 28 and 29. As indicated in Figs. 8—18, these channel irons comprise a web 30 that spans the distance between the plates 26 and 27 and the thickness of the

plates, and flanges 31 and 32 that overlap and enclose the side edges of the plates.

After passing through the passages 25 the exhaust flue gas leaves the apparatus through the flue 22. The air entering the apparatus through the inlet conduit or flue 23 is also divided into thin streams and enters side-wise into vertical passages 33 interspersed between the flue gas passages 25. The passages 33 are closed at their upper and lower ends by means of channel irons 34 and 35 similar in construction and arrangement to the channel irons 28 and 29 and arranged to overlap the plates 26 and 27 on the faces opposite those overlapped by the flanges 31 and 32 of the channel irons 28 and 29. Each of the plates 26 and 27 is thus connected at its top and bottom by means of channel irons extending to the next adjacent plate on one side, and at its side edges to the next adjacent plate on the opposite side or face of the plate. The side edges of the air passages opposite those at which the air enters and leaves are closed by means of a plate 36, as indicated in Fig. 6, and the opposite edges of the air passages 33 between the inlet and outlet flues 23 and 24 are closed by a narrower plate 37 so that the air entering the passages through the flue 23 passes in a reversely curved path downwardly through the air passages. The heat exchanger is enclosed in a framework comprising an upper angle iron rectangular frame 38, and a similar lower or bottom frame 39 to which the flues 22 and 21 are respectively connected, and of vertical posts 40 connecting the frames 38 and 39. The flues 23 and 24 may be attached to the side edges of the upper and lower frames 38 and 39 and the posts 40 and to cross bars 41.

It will be evident also that the channel irons 34 and 35 that enclose the air passages at their upper and lower ends serve to separate the air passages from the heating gas passages, and that the channel irons 28 and 29 that serve to enclose and form the heating gas channels also serve to separate them from the air inlet and outlet ducts or flues.

The joints formed between the overlapping channel flanges 31 and 32 and the plates 26 and 27 must be made air or fluid tight in order to prevent the mixing or commingling of the heating gas or fluid with the heat receiving gas or fluid. Inasmuch as the plates 26 and 27 and other parts of the heat exchanger are subjected to varying temperatures and degrees of heat as the apparatus is put into use, the joints between the channel irons and the plates must be tight at temperatures and variations in temperatures met with in common practice.

In our present invention this is accomplished by providing a joint structure in which the edge portions of the plates 26 and 27 are compressed against the flanges 31 and

32, and in which the pressure may be maintained at all temperature variations by maintenance or adjustment of the plates against the channel flanges. This is accomplished by spreaders between the edge portions of the plates 26 and 27 which may be expanded with a multiplied force or pressure by readily accessible means. These spreaders and expanders may have a wide variety of forms as illustrated in Figs. 9-17.

In the form shown in Fig. 9 the expander comprises a pair of square bars 42, 43 that fill the space between the edge portions of the plates 26 and 27 up to about the edge of the flanges 31 and 32. The bars 42 and 43 are countersunk at their meeting faces at suitable intervals to receive the flaring head 44 of a stove bolt 45 which passes through an opening in the web 30 of the channel iron 29 and through a washer 46, and is drawn up tightly between the channel iron 29 and the bars 42 and 43 by means of a nut 47. It will be obvious that as the nut 47 is threaded tightly onto the bolt 45 it compresses the washer 46 tightly against the web 30, forming a tight joint about the stem of the bolt 45 and also wedges apart the square bars 42, 43, pressing them tightly against the plates 26 and 27 and compressing the latter tightly against the flanges 31, 32 of the channel iron 29.

In the form shown in Fig. 10, a curved plate 48 is compressed and flattened against the plates 26 and 27 by means of a bolt 49 which flattens the spreader plate 48 against a filler block 50.

The form of embodiment shown in Fig. 11 is similar to that of Fig. 10, except that in place of a filler block 50, a curved plate 51 reverse to the position of the plate 40 is employed.

In the form shown in Fig. 12 a curved spreader plate 48 is used, but the filler block 50 is omitted, the edges of the plate 48 fitting directly against the edges of the plates 26 and 27 and the web 30 of the connecting channel iron.

The forms of embodiment shown in Figs. 13 and 14 are similar to those shown in Figs. 10 and 11, except that angular spreader plates 52 and 53 are used instead of the curved plates 48 and 51.

The form of embodiment shown in Fig. 15 is similar to that of Fig. 9, except that the spreader bars 42 and 43 are spread by means of a wedge-shaped nut 54 and a bolt 55.

In the form of embodiment shown in Fig. 16, a pair of small cylindrical tubes or bars 56 and 57 are placed in the corners between the plates 26 and 27 and the channel iron 29, and are wedged into these corners by means of a larger cylindrical pipe or bar 58 and a bolt 59 by which the pipe 58 is drawn towards the web of the channel iron.

In the embodiment shown in Fig. 17, the channel iron is provided with a re-entrant section 60 having a pair of upwardly and outwardly inclined walls 61 and 62 and a connecting web 63, the web 63 spanning the distance between the plates 26 and 27. The walls 61 and 62 are subjected to a compression stress by means of a bolt 64, there being a slight clearance between the stem of the bolt and the nearer edges of the walls 61, 62, so that as the nut is tightened on the bolt, the walls 61 and 62 are forced outwardly, thereby wedging them more tightly against the partition walls 26 and 27 and more tightly sealing the channel irons against the partition walls.

In the embodiment shown in Fig. 18 the plates 26 and 27 are offset inwardly as at 64 and 65, the offset edges being overlapped by the flanges 31 and 32 of the channel iron 29. In this way the outer surfaces of the flanges 31 and 32 may be made even with the outer surfaces of the plates 26 and 27.

The embodiment of Fig. 18 also illustrates the use of a wedge 66 instead of the nut 47 for drawing the spreading bolt against the web of the channel iron. A wedging bolt having the same type of head as in Fig. 9 is shown by way of example, but it will be understood that any of the other types of wedging devices may be employed with the wedge 66.

The nuts or tightening heads of the bolts are accessible from the exterior of the heat exchanger and, by tightening these bolts as the elements of the exchanger expand or contract, the air and gas passages may be maintained air or fluid tight. In the event that a leakage occurs, this may be readily corrected by tightening the respective bolts or nuts.

In the usual arrangement of heat exchangers the heating gases enter at the bottom or lower end of the exchanger corresponding to the inlet tube 21 in the accompanying drawings. In cases in which these flue gases are at or near a temperature at or near which the strength of the steel is very low, the weight of the upper part of the exchanger tends to cause the lower, hotter parts of the plates to buckle, causing deformation and warping unless a special and higher cost steel is employed.

In our invention, however, the weight of the plates of the heat exchanger may be supported by the clamped closure channels which, in turn, may be supported by attachment of said channels to the frame 38, 39 and 40 holding the assembly, or to an intermediate plate to said frame, thus avoiding having the entire weight of the assembly rest upon the bottom edge of the plates.

What we claim is:—

1. A heat exchanger having a series of spaced plates, channel irons at the top, bottom and side edges of said plates and said

channel irons having webs spanning the spaces between adjacent plates, and flanges enclosing the edge portions of said plates, each plate being connected by channel irons at the top and bottom to a plate spaced from one face and at its side edges to the plate spaced from its opposite face, and spreaders between the edge portions of said plates to compress said edge portions of said plates against the flanges of said channel irons.

2. A heat exchanger having a series of spaced plates, channel irons at the top, bottom and side edges of said plates and said channel irons having webs spanning the spaces between adjacent plates, and flanges enclosing the edge portions of said plates, each plate being connected by channel irons at the top and bottom to a plate spaced from one face and at its side edges to the plate spaced from its opposite face, spreaders between the edge portions of said plates to compress said edge portions of said plates against the flanges of said channel irons, and means for expanding said spreaders against the edge portions of said plates.

3. A heat exchanger element having side plates, end retaining and closing means having flanges overlapping the outer edges of a pair of said side plates, and means for wedging said plates outwardly against said flanges.

4. A heat exchanger element having side plates, end retaining and closing means having flanges overlapping the outer edges of a pair of said side plates, wedging means comprising fillers between the inner edges of said plates, and bolts extending through said wedging and said closing means and expanding said wedging means against said plates as said bolt is tightened.

5. A heat exchanger element having side plates, end retaining and closing means having flanges overlapping the outer edges of a pair of said side plates, expanding means between the edge portions of said plates enclosed by said closing means, and bolts extending through said expanding means and said closing means to expand said expanding means as said bolts are tightened.

6. A heat exchanger element having side plates, channel irons spanning and overlapping the side edges of adjacent plates, and spreading means for compressing the edge portions of said plates against the overlapping parts of said channel irons.

7. A heat exchanger element having side plates, channel irons spanning and overlapping the side edges of adjacent plates, and spreading means for compressing the edge portions of said plates against the overlapping parts of said channel irons alternately at the top and bottom and at the side edges of said plates.

8. A closure for heat exchanger elements which comprises a pair of spaced plates, a

channel iron having a web spanning the space between said plates and flanges overlapping the edge of said plates, a spreader between the edge portions of each of said plates, and means for expanding said spreaders.

9. A closure for heat exchanger elements which comprises a pair of spaced plates, a channel iron having a web spanning the space between said plates and flanges overlapping the edge of said plates, a spreader between the edge portions of each of said plates, bolts for drawing said spreader towards said web and expanding it against the inner edge portions of said plates.

10. A closure for heat exchanger elements which comprises a pair of spaced plates, a channel iron having a web spanning the space between said plates and flanges overlapping the edge of said plates, a spreader between the edge portions of each of said plates, bolts for drawing said spreader towards said web and expanding it against the inner edge portions of said plates, said spreaders having a slight spreading motion relative to the tightening motion of said bolt.

11. A closure for heat exchanger elements which comprises a pair of spaced plates, a channel iron having a web spanning the distance between said plates and having flanges overlapping the edges of said plates, a spreader between the overlapping edges of said plates, and a wedge bolt having an outwardly wedging action against said spreaders.

12. A closure for heat exchanger elements which comprises a pair of spaced plates, a channel iron having a web spanning the distance between said plates, and flanges overlapping the edges of said plates, a slightly curved spreader between an overlapped portion of said plates, and means for flattening said curved spreader to wedge it against said plates.

13. A closure for heat exchanger elements which comprises a pair of spaced plates, a channel iron having a web spanning the distance between said plates and flanges overlapping the edges of said plates, an expansible spreader between the overlapped edges of said plates, and a force multiplying means to expand said spreaders against the overlapped portions of said plates.

14. A closure for heat exchanger elements which comprises a pair of spaced plates, a channel iron having a web spanning the distance between said plates and flanges overlapping the edges of said plates, an expansible spreader between the overlapped edges of said plates, and an adjustable force multiplying means to expand said spreaders against the overlapped portions of said plates.

15. A closure for heat exchanger elements which comprises a pair of spaced plates, a channel iron having a web spanning the dis-

tance between said plates and flanges overlapping the edges of said plates, an expansible spreader between the overlapped edges of said plates, a bolt extending through the web of said channel iron and exerting a straightening action on said expansible spreader, and a wedge to draw said bolt against said expansible spreader.

In witness whereof we have hereunto set our hands.

JOHN E. WATSON.
VARNUM S. LEWIS.

75

80

85

90

95

100

105

110

115

120

125

130