



(86) Date de dépôt PCT/PCT Filing Date: 2004/01/06
(87) Date publication PCT/PCT Publication Date: 2004/08/12
(45) Date de délivrance/Issue Date: 2008/12/09
(85) Entrée phase nationale/National Entry: 2005/06/06
(86) N° demande PCT/PCT Application No.: US 2004/000051
(87) N° publication PCT/PCT Publication No.: 2004/067822
(30) Priorité/Priority: 2003/01/21 (US10/348,101)

(51) Cl.Int./Int.Cl. *D03D 25/00* (2006.01),
A41D 31/00 (2006.01), *D03D 15/12* (2006.01)


(72) Inventeurs/Inventors:
HESS, DIANE B., US;
THOMAS, CHARLES A., US;
PERRY, CLIFTON A., US;
TUCKER, RICHARD O., US

(73) Propriétaire/Owner:
PBI PERFORMANCE PRODUCTS, INC., US

(74) Agent: SMART & BIGGAR

(54) Titre : TISSU DESTINE A L'ENVELOPPE EXTERIEURE DES VETEMENTS DE POMPIERS

(54) Title: TEXTILE FABRIC FOR THE OUTER SHELL OF A FIREFIGHTER'S GARMENT

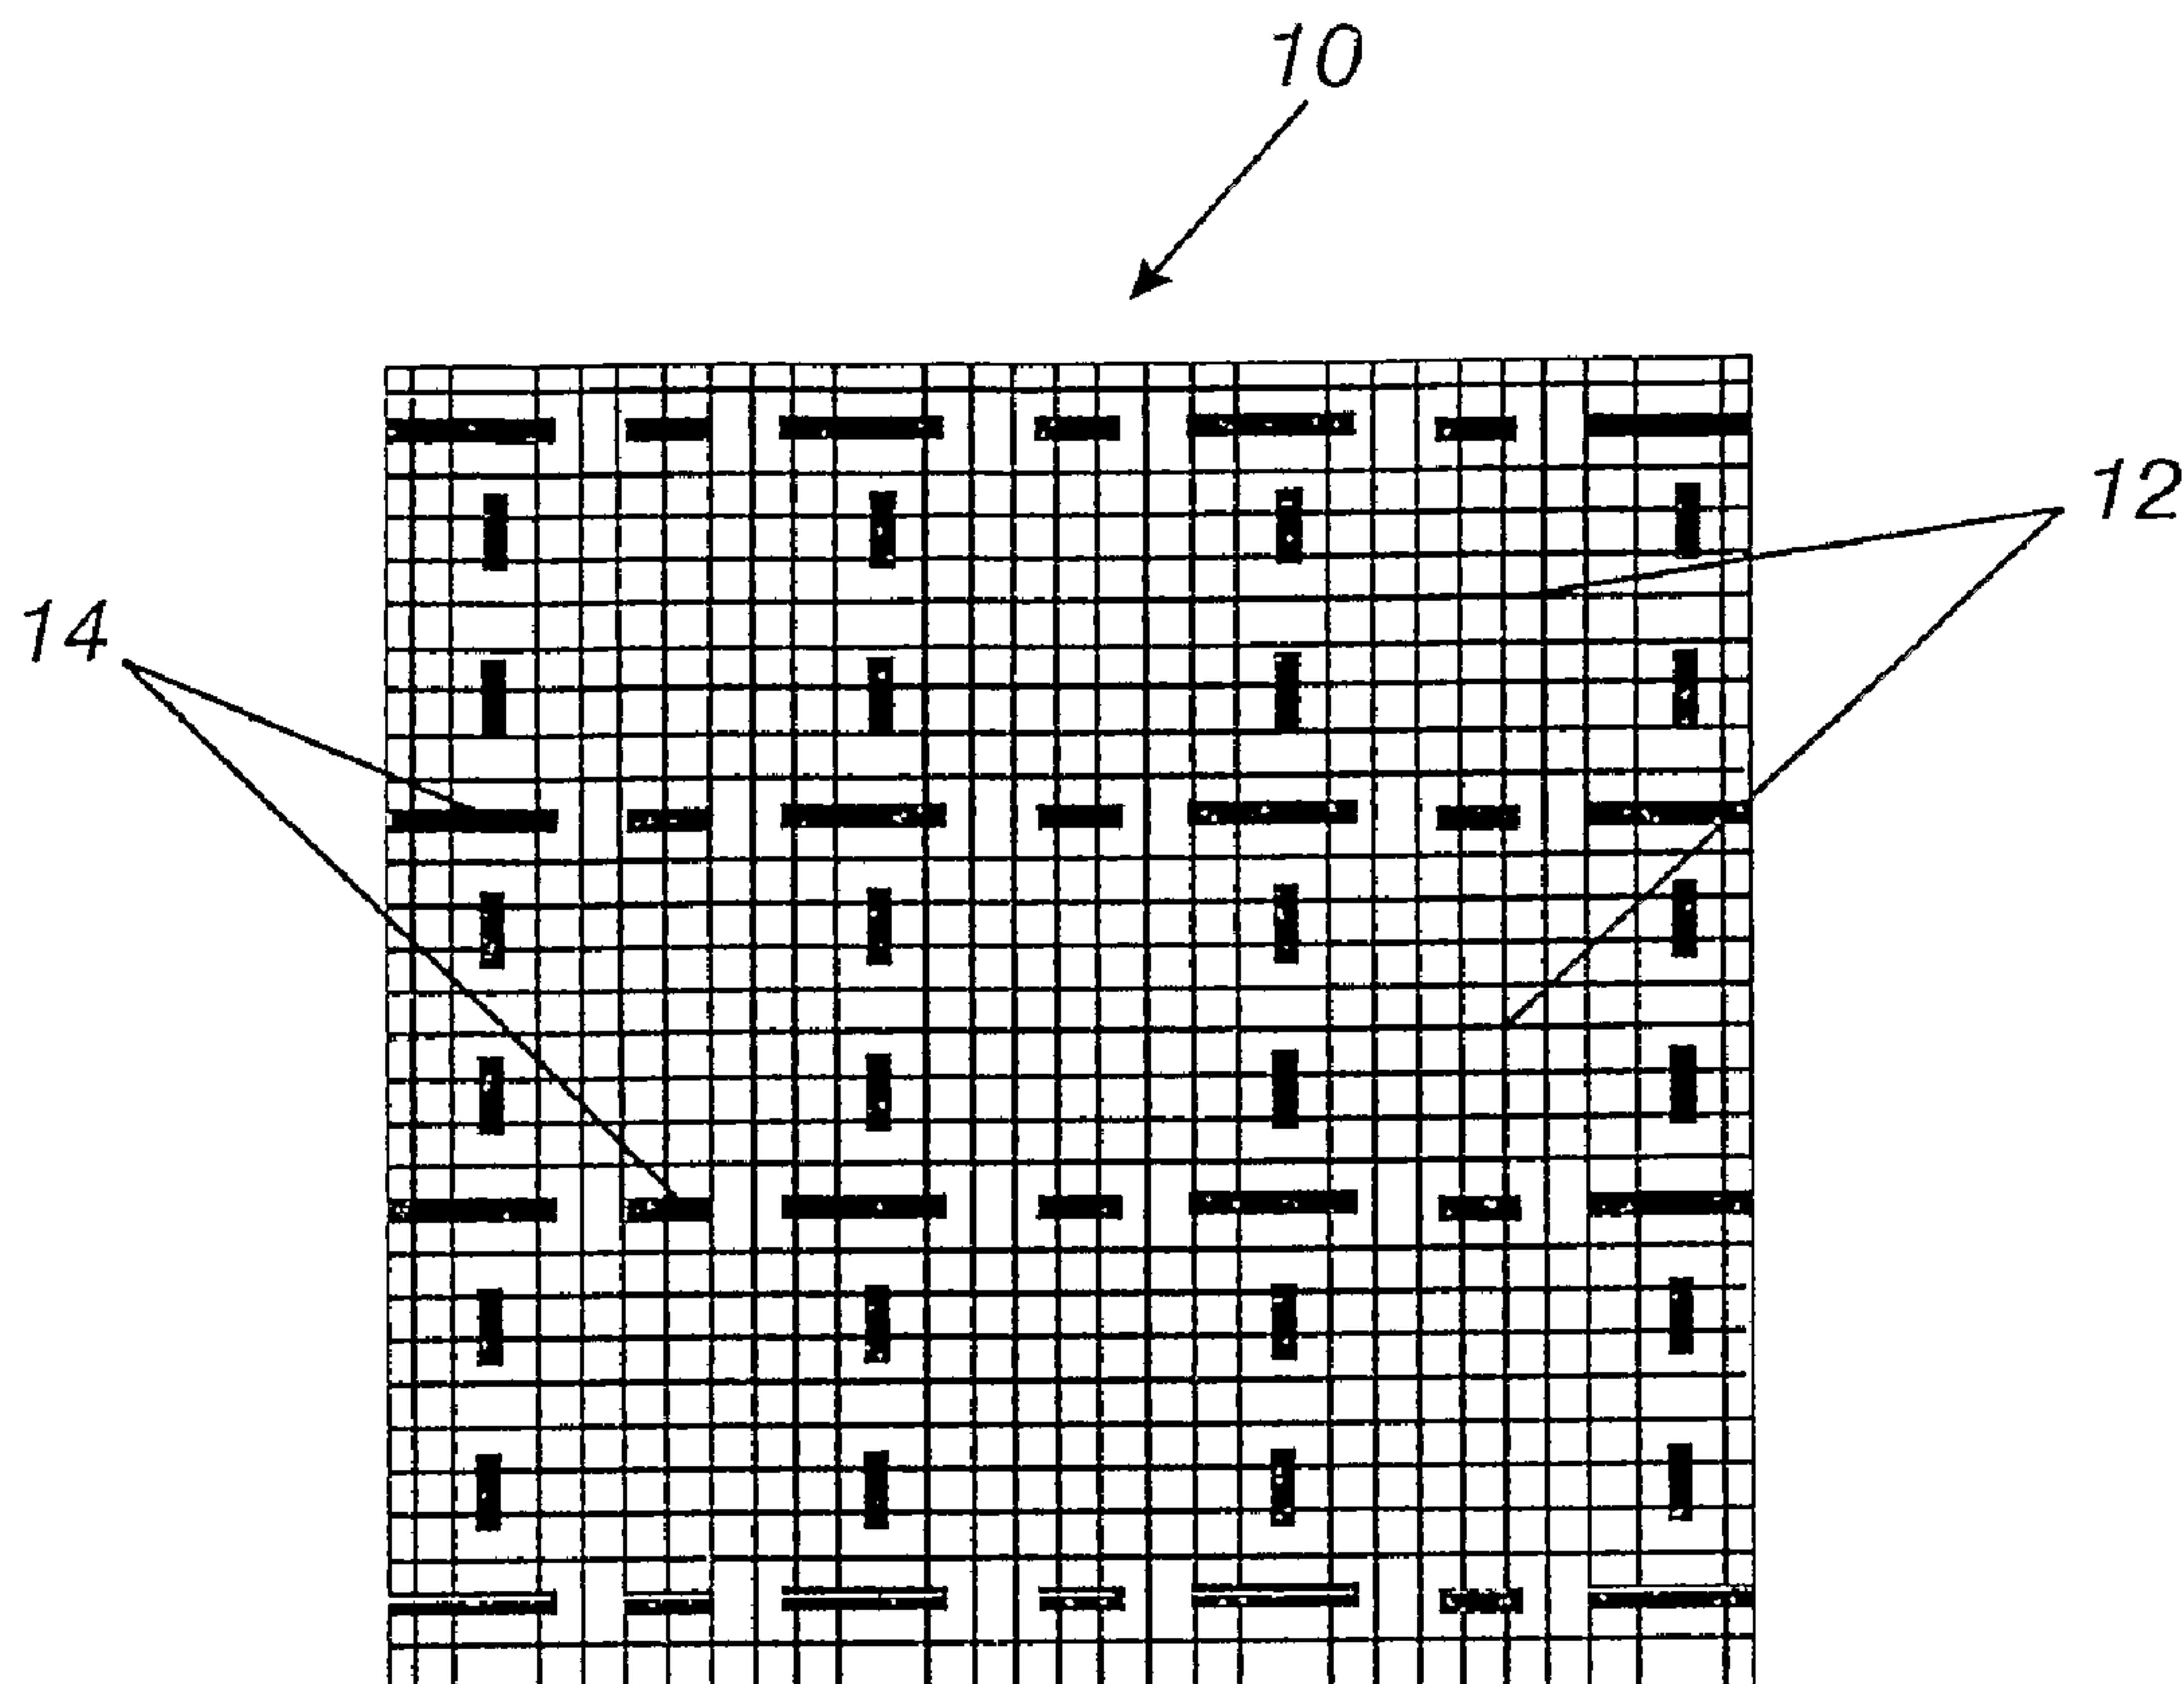

(57) Abrégé/Abstract:

The present invention is directed to a textile fabric. This fabric is particularly well suited for use as the outer shell fabric of a firefighter's garment. The fabric is a woven or knitted fabric of spun yarns and multifilament yarns. The spun yarn includes a first staple being a polymer selected from the group consisting of aramid, PBI or PBO or melamine formaldehyde, and a second staple being an aramid polymer. The multi-filament yarn includes an aramid filament.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 August 2004 (12.08.2004)

PCT

(10) International Publication Number
WO 2004/067822 A3

(51) International Patent Classification⁷: **D03D 25/00**

Clifton, A.; 9331 Snow Ridge Lane, Charlotte, NC 28278 (US). **TUCKER, Richard, O.**; 16043 Peach Tree Road, Oakboro, NC 28129 (US).

(21) International Application Number:

PCT/US2004/000051

(74) Agent: **HAMMER, Robert, H., III**; Robert H. Hammer III, P.C., Suite I, 3121 Springbank Lane, Charlotte, NC 28226 (US).

(22) International Filing Date: 6 January 2004 (06.01.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10/348,101

21 January 2003 (21.01.2003)

US


(71) Applicant (for all designated States except US):
CELANESE ADVANCED MATERIALS, INC.
[US/US]; 2300 Archdale Drive, Charlotte, NC 28210 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: TEXTILE FABRIC FOR THE OUTER SHELL OF A FIREFIGHTER'S GARMENT

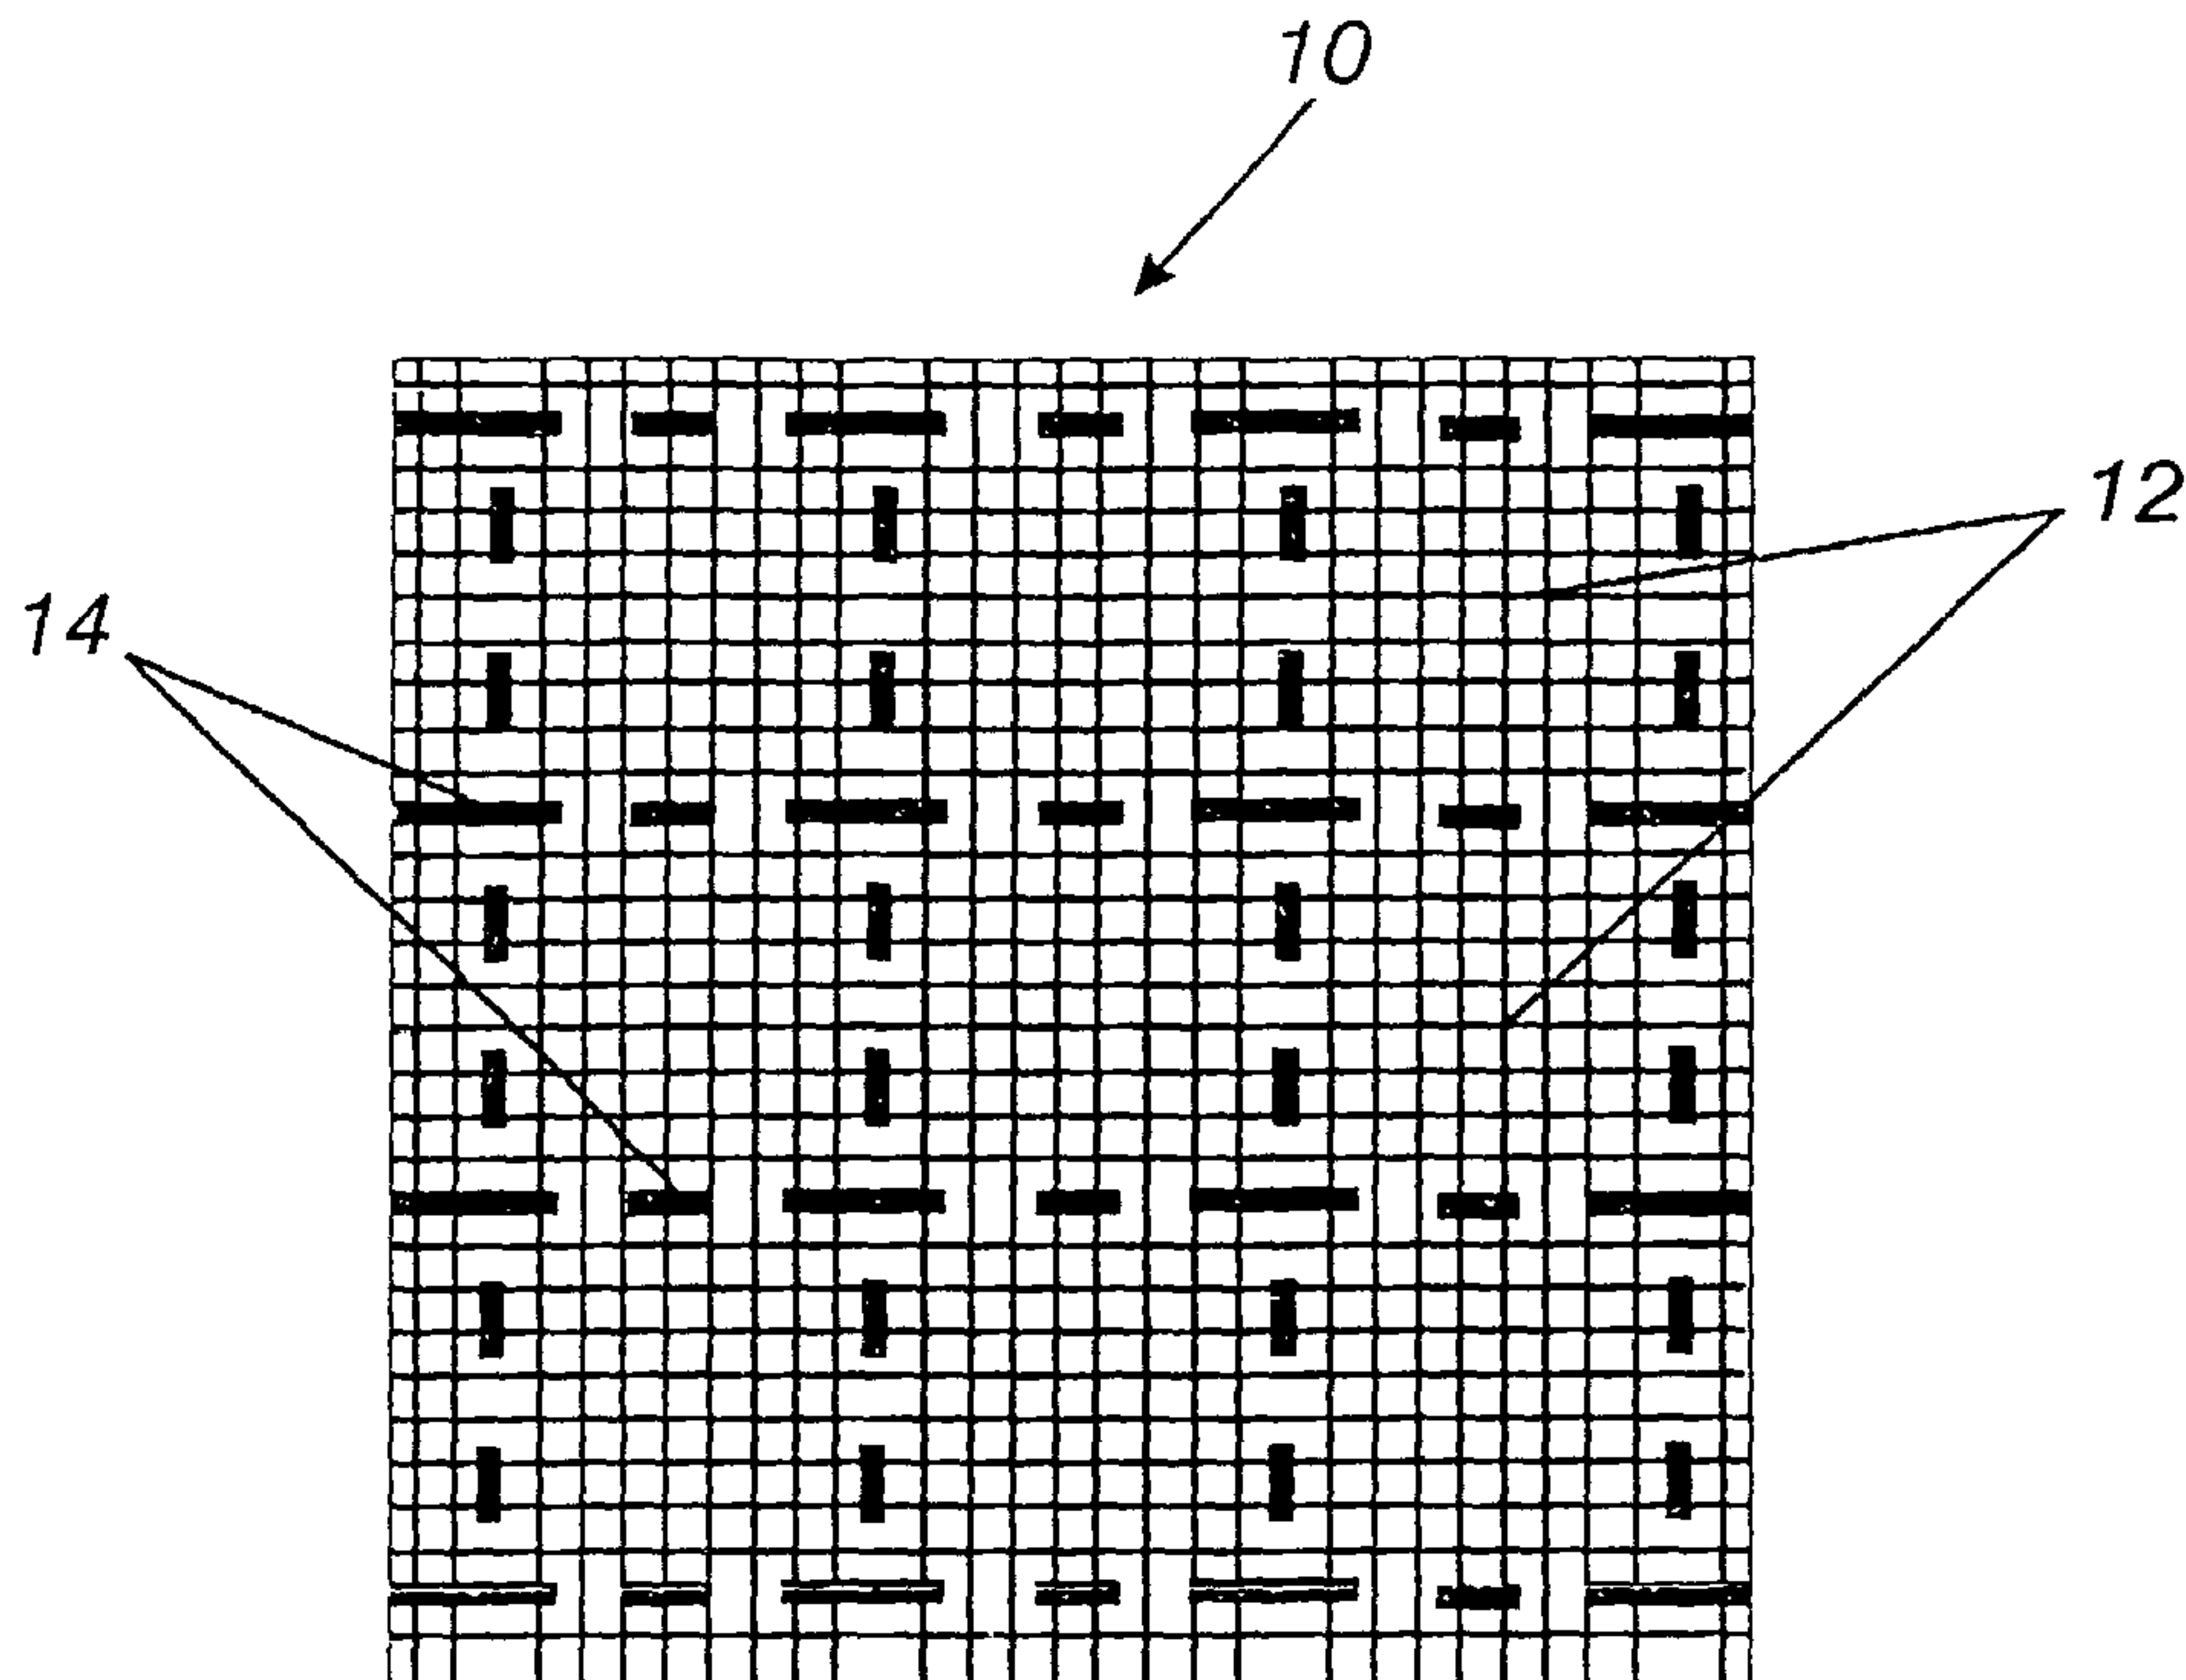

(57) Abstract: The present invention is directed to a textile fabric. This fabric is particularly well suited for use as the outer shell fabric of a firefighter's garment. The fabric is a woven or knitted fabric of spun yarns and multifilament yarns. The spun yarn includes a first staple being a polymer selected from the group consisting of aramid, PBI or PBO or melamine formaldehyde, and a second staple being an aramid polymer. The multi-filament yarn includes an aramid filament.

WO 2004/067822 A3

WO 2004/067822 A3



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

(88) Date of publication of the international search report:

20 January 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

79471-60

Textile Fabric For The Outer Shell
Of A Firefighter's Garment

Field of the Invention

The present invention is directed to a textile fabric for use as the outer shell fabric of a firefighter's garment.

Background of the Invention

The outer shell fabric of a firefighter's garment must be flame, heat, abrasion, tear, and moisture resistant, durable, and lightweight. This outer shell fabric provides the first layer of protection for the firefighter.

U.S. Patent Nos. 5,095,549; 5,136,723; 5,701,606; 5,983,409; 5,996,122; and 6,038,700 disclose, among other

things, firefighter's garments having an outer shell fabric made of PBI/aramid fibers.

U.S. Patent No. 5,299,602 discloses a woven, outer shell fabric made for firefighter's garments where the warp yarns are multi-filament aramid yarns and the weft yarns are either multi-filament or spun aramid yarns.

U.S. Patent 5,628,065 discloses a firefighter's hood of a knit fabric formed of a blend of PBI and aramid fibers.

U.S. Patent Nos. 6,065,153 and 6,192,520 disclose a woven outer shell fabric for a firefighter's garments. This fabric has a plain, twill or rip stop weave and the yarns are a mixture of PBI and aramid fibers. The fabric has a weight ranging from 5.5 to 8 OSY, preferably, 7.5 OSY.

One popular outer shell fabric is a woven fabric of spun yarns consisting of PBI and aramid staple. This fabric is known in the market as 'PBI GOLD®.' In the U.S., this fabric generally is made in the following forms: 1) a 7.5 OSY rip stop weave made from a 16/2 c.c. spun yarns

consisting of 40% by weight PBI and 60% by weight of a para-aramid; or 2) a nominal 7.0 OSY (actual 7.3 to 7.4 OSY) rip stop weave made from a 21/2 c.c. spun yarns consisting of 40% PBI and 60% of the para-aramid. Internationally, this fabric is in the form of a 6.0 to 6.5 OSY rip stop weave 24-25/2 c.c. spun yarns of 40% PBI and 60% para-aramid, or a twill weave made from 35/2 c.c. spun yarns of 40% PBI and 60% para-aramid.

Another fabric used as an outer shell fabric is marketed under the trade name 'Millenia' from Southern Mills, Inc. of Union City, GA. The Millenia fabric is made with a spun yarn consisting of 40% PBO and 60% para-aramid staple.

While 'PBI GOLD®' has proven to be an excellent outer shell fabric, there is still a need to improve these fabrics. There is a desire to have lighter weight fabrics that have better tear and abrasion resistance.

Summary of the Invention

The present invention is directed to a textile fabric. This fabric is preferably used as the outer shell fabric of

79471-60

a firefighter's garment. The fabric is a woven or knitted fabric of spun yarns and multi-filament yarns. The spun yarn includes a first staple being a polymer selected from the group consisting of aramid or PBI or PBO or melamine
5 formaldehyde, and a second staple being an aramid polymer. The multi-filament yarn includes an aramid filament.

In one aspect, the invention provides a textile fabric comprising: a woven material of spun yarns including first staple being an aramid polymer, and a second staple of
10 an aramid polymer; multi-filament yarns including an aramid filament; and a weight ratio of spun yarn to multi-filament yarn ranges from 85:15 to 92:8.

In a further aspect, the invention provides a textile fabric comprising: a woven material of spun yarn,
15 said spun yarn being a blend of staple, a first staple being an aramid polymer and a second staple being made of an aramid, a weight ratio of the first staple to the second staple ranges from 20-60%:40-80%, and a multi-filament yarn including aramid filaments, said multi-filament yarns being
20 inserted into said woven material, in both the warp and the weft, at a multi-filament yarn to spun yarn insertion ratio of 1:5 to 1:20.

In a still further aspect, the invention provides a textile fabric comprising: a woven material of spun yarn,
25 said spun yarn being a blend of staple, a first staple being made of an aramid polymer selected from the group consisting of meta-aramid, para-aramid and combinations thereof, and a second staple being made of an aramid polymer selected from the group consisting of meta-aramid, para-aramid and
30 combinations thereof, and a multi-filament yarn including

79471-60

aramid filaments, said multi-filament yarns being inserted into said woven material, in both the warp and the weft, at a multi-filament yarn to spun yarn insertion ratio of 1:5 to 1:20.

5 In a yet further aspect, the invention provides a textile fabric comprising: a woven material of spun yarns including first staple being an aramid polymer selected from the group consisting of meta-aramid, para-aramid and combinations thereof, and a second staple of an aramid
10 polymer; multi-filament yarns including an aramid filament; and a weight ratio of spun yarn to multi-filament yarn ranges from 85:15 to 92:8.

79471-60

Description of the Drawings

For the purpose of illustrating the invention, there is shown in the drawings a form of the invention; it being understood, however, that this invention is not limited to the precise arrangements and instrumentality shown.

Figure 1 is a plan view of the textile fabric made according to the present invention.

Figure 2 is a magnified plan view of the textile fabric made according to the present invention.

Description of the Invention

Referring to the drawings wherein like numerals indicate like elements there is shown in Figure 1 an illustration of the textile fabric 10 made according to the

present invention. Preferably, the fabric 10 has a gold color with a 'checkered' pattern created by black multi-filament yarns 14. The fabric 10 may be woven or knitted. The fabric 10 is preferably woven with spun yarns 12 and multi-filament yarns 14. The weaves are selected from the group consisting of plain, twill, rip stop, and oxford. The fabric weight may range from 6 to 8 OSY, preferably, 7 OSY. The weight ratio of spun yarns to multi-filament yarns should range from 85:15 to 92:8, preferably, 90:10. The multi-filament yarn may be inserted among the spun yarns, in both the warp and weft, at an insertion ratio of 1:5 to 1:20, preferably, 1:9. Preferably, the fabric is treated with a water/moisture resistant finish, as is well known.

The spun yarns 12 are a blend of a first staple and a second staple. The first staple is fiber made from a polymer selected from the group of aramid, PBI, PBO, melamine formaldehyde, or combinations thereof. The second staple is a fiber made from an aramid or blends of aramids. Exemplary spun yarns include, but are not limited to, blends of aramid staple, PBI and aramid staple, PBO and aramid staple, melamine formaldehyde and aramid staple, and PBI, PBO, melamine formaldehyde and aramid staple. The

spun yarns may have any weight ratio of first and second staples. The weight ratio of first and second staple is preferably 20 - 60% by weight first staple and 40 - 80% by weight second staple. The spun yarns most preferably comprise 30 - 45% by weight of the first staple and 55 - 70% by weight of the aramid staple. The spun yarns may range in size from 32/2 to 16/2 c.c., preferably, 24/2 c.c.

PBI staple fibers are commercially available from Celanese Acetate LLC of Charlotte, NC. PBO staple fibers are commercially available under the trade name of ZYLON® from Toyobo Co., Ltd. of Osaka, Japan. Melamine formaldehyde fibers are commercially available under the trade name of BASOFIL® from BASF Corporation of Mount Olive, New Jersey.

The aramid staple fibers may be either a meta-aramid or a para-aramid. Such aramid fibers are commercially available under the trade name of TWARON®, CONEX®, and TECHNORA® from Teijin Co. of Osaka, Japan; or NOMEX® or KELVAR® from DuPont of Wilmington, DE; or P84 from Lenzing AG of Lenzing, Austria; or KERMEL® from Rhodia Inc. of Cranbury, NJ. When the aramid staple fiber forms the

second staple mentioned above, it may be either meta-aramid or para-aramid. When the aramid staple fiber forms the second staple mentioned above, it is preferably the para-aramid.

The multi-filament yarn is made from aramid filament. Aramid may be either meta-aramid or para-aramid, the para-aramid is preferred. Such aramid fibers are commercially available under the trade name of TECHNORA[®], TWARON[®], and CONEX[®] from Teijin Co. of Osaka, Japan, or NOMEX[®] or KELVAR[®] from DuPont of Wilmington, DE, or P84 from Lenzing AG of Lenzing, Austria or KERMEL[®] from Rhodia Inc. of Cranbury, NJ. The multi-filament yarn ranges in size from 200 to 1500 denier, preferably, 400 denier. The multi-filament yarn may be a flat yarn, a twisted yarn, or a stretch broken yarn.

The instant invention has superior tear and abrasion resistance, at a lower weight, over the PBI GOLD[®] fabric. The results are set forth in Table 1.

Fabric A is 6.0 OSY fabric; spun yarn is 27/2 c.c. with 45 percent weight PBI and 55 percent Technora[®] staple;

multi-filament is a flat yarn inserted every 10th yarn in the warp and weft.

Fabric B is 6.9 OSY fabric; spun yarn is 24/2 c.c. with 45 percent weight PBI and 55 percent Twaron[®] microdenier staple; multi-filament is a twisted yarn inserted every 9th yarn in the warp and weft.

TABLE 1

Performance Characteristic	Test Method	PBI Gold	Invention A	Invention B
Weight (OSY)		7.5	6.0	6.8 - 7.0
Trap Tear (lbs.)	ASTM D5733 (Trapezoidal Method)	40 x 35	75 x 75	63 x 63
Tabor abrasion	ASTM D-3884 (500g wt. With H18 abrasion wheel)	225	180	293
Thermal Protective Performance, TPP (Composite)	NFPA 1971 (2000 Edition Section 6.10)	40	40	40
Trap Tear after UV	AATCC 16 E (Standard Method for Xenon arc exposure at 1.1 rad)			
60 hr		28.4 x 18.7	44.6 x 38.5	
180 hr		17.8 x 12.3	25.7 x 18.9	
300 hr		15.2 x 10.6	21.2 x 16.1	
Trap Tear after Sunlight	ASTM D5733 (Trapezoid Method)			
1 week		30.8 x 20.8	64.9 x 62.7	
2 week		24.3 x 17.0	45.5 x 40.1	
3 week		20.0 x 14.6	39.0 x 34.2	
4 week		18.8 x 13.1	34.0 x 33.9	
5 week		16.6 x 13.5	29.7 x 30.1	
6 week		14.8 x 10.5	26.6 x 23.6	

The present invention made be embodied in other forms without departing from the spirit and the central attributes thereof and, accordingly, reference should be made to the appended claims, rather than to the foregoing specification, as indicated the scope of the invention.

79471-60

CLAIMS:

1. A textile fabric comprising: a woven material of spun yarns including first staple being an aramid polymer, and a second staple of an aramid polymer; multi-filament
5 yarns including an aramid filament; and a weight ratio of spun yarn to multi-filament yarn ranges from 85:15 to 92:8.
2. The fabric of claim 1, wherein the weight ratio of spun yarn to multi-filament yarn is 90:10.
3. The fabric of claim 1 or 2, wherein said multi-
10 filament yarns being inserted into said woven material, in both the warp and the weft, at a multi-filament yarn to spun yarn insertion ratio of 1:5 to 1:20.
4. The fabric of any one of claims 1 to 3, wherein the woven fabric weight ranging from 6 to 8 OSY.
- 15 5. The fabric of any one of claims 1 to 4, wherein the woven fabric has a weave selected from the group consisting of plain, twill, rip stop and oxford.
6. The fabric of any one of claims 1 to 5, wherein the spun yarn ranges from 32/2 to 16/2 c.c.
- 20 7. The fabric of any one of claims 1 to 6, wherein the multi-filament yarn ranges from 200 to 1500 denier.
8. The fabric of any one of claims 1 to 7, wherein a weight ratio of the first staple to the second staple ranges from 20-60%:40-80%.
- 25 9. A textile fabric comprising: a woven material of spun yarn, said spun yarn being a blend of staple, a first staple being an aramid polymer and a second staple being made of an aramid, a weight ratio of the first staple to the

79471-60

second staple ranges from 20-60%:40-80%, and a multi-filament yarn including aramid filaments, said multi-filament yarns being inserted into said woven material, in both the warp and the weft, at a multi-filament yarn to spun
5 yarn insertion ratio of 1:5 to 1:20.

10. The fabric of claim 9, wherein the spun yarn ranges from 32/2 to 16/2 c.c.

11. The fabric of claim 9 or 10, wherein the multi-filament yarn ranges from 200 to 1500 denier.

10 12. The fabric of any one of claims 9 to 11, wherein the woven fabric weight ranging from 6 to 8 OSY.

13. The fabric of claim 12, wherein the woven fabric has a weave selected from the group consisting of plain, twill, rip stop and oxford.



15 14. A textile fabric comprising: a woven material of spun yarn, said spun yarn being a blend of staple, a first staple being made of an aramid polymer selected from the group consisting of meta-aramid, para-aramid and combinations thereof, and a second staple being made of an
20 aramid polymer selected from the group consisting of meta-aramid, para-aramid and combinations thereof, and a multi-filament yarn including aramid filaments, said multi-filament yarns being inserted into said woven material, in both the warp and the weft, at a multi-filament yarn to spun
25 yarn insertion ratio of 1:5 to 1:20.

15. A textile fabric comprising: a woven material of spun yarns including first staple being an aramid polymer selected from the group consisting of meta-aramid, para-aramid and combinations thereof, and a second staple of an
30 aramid polymer; multi-filament yarns including an aramid

79471-60

filament; and a weight ratio of spun yarn to multi-filament yarn ranges from 85:15 to 92:8.


SMART & BIGGAR
OTTAWA, CANADA
PATENT AGENTS

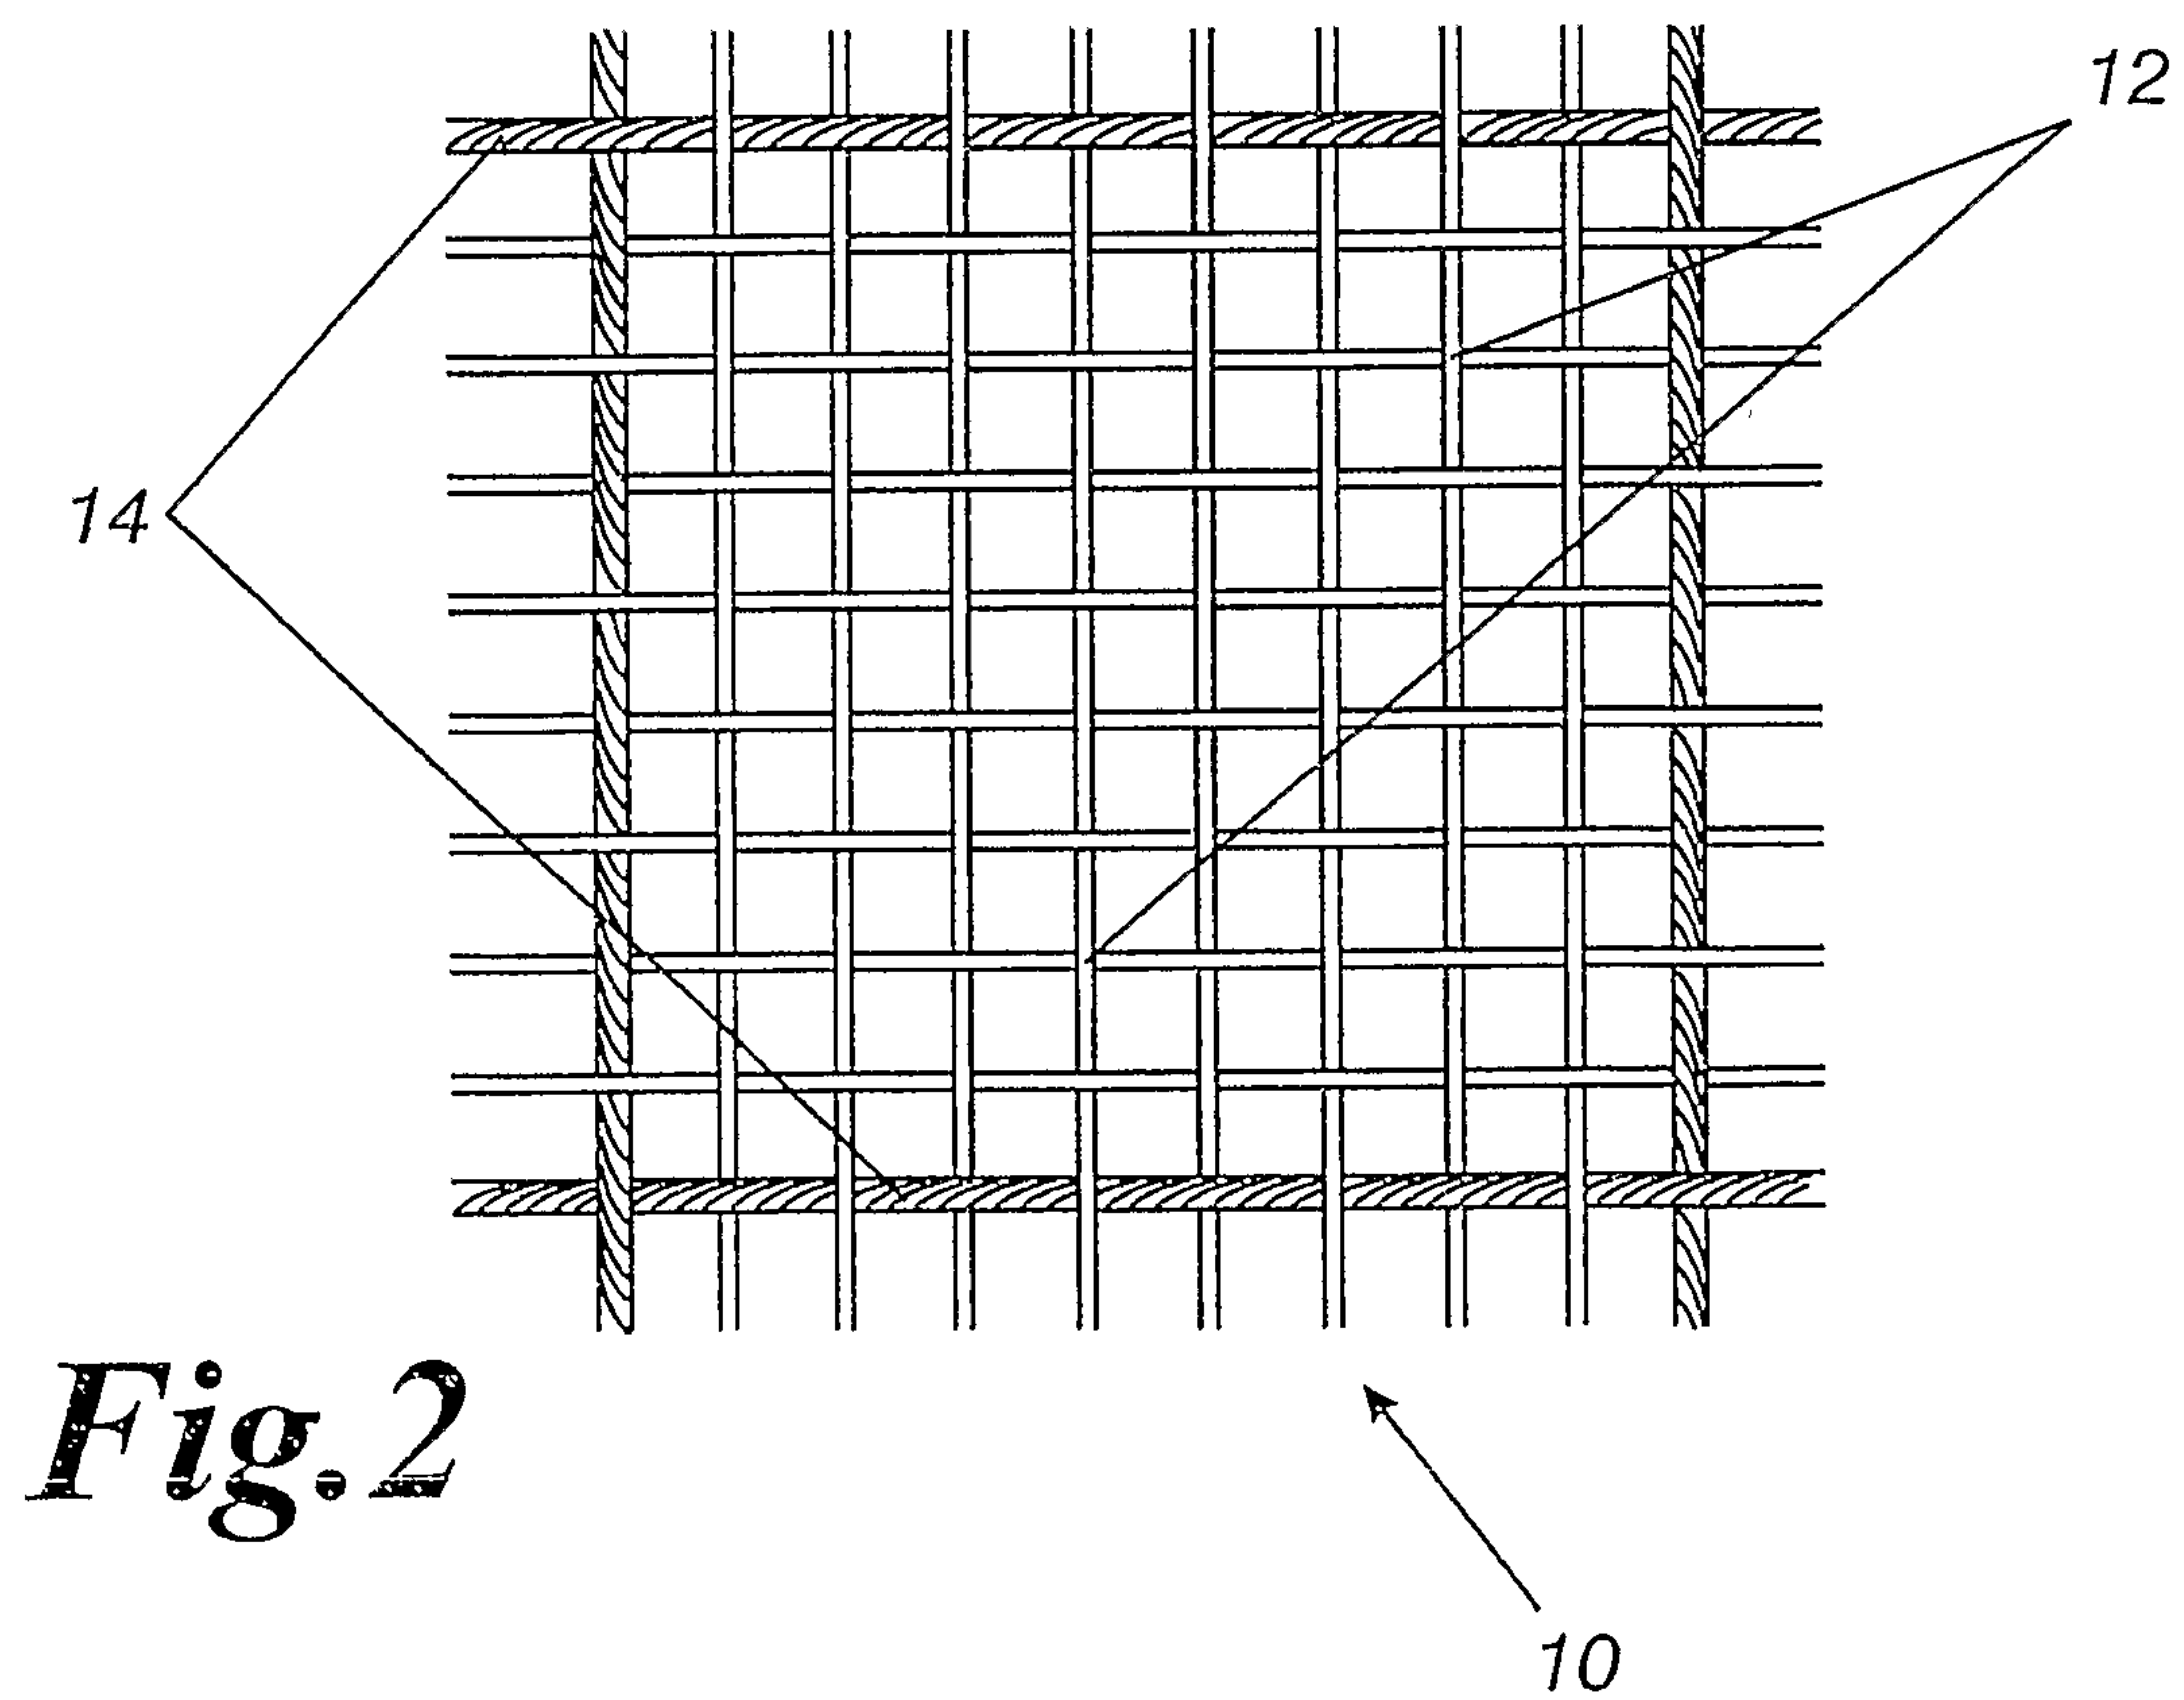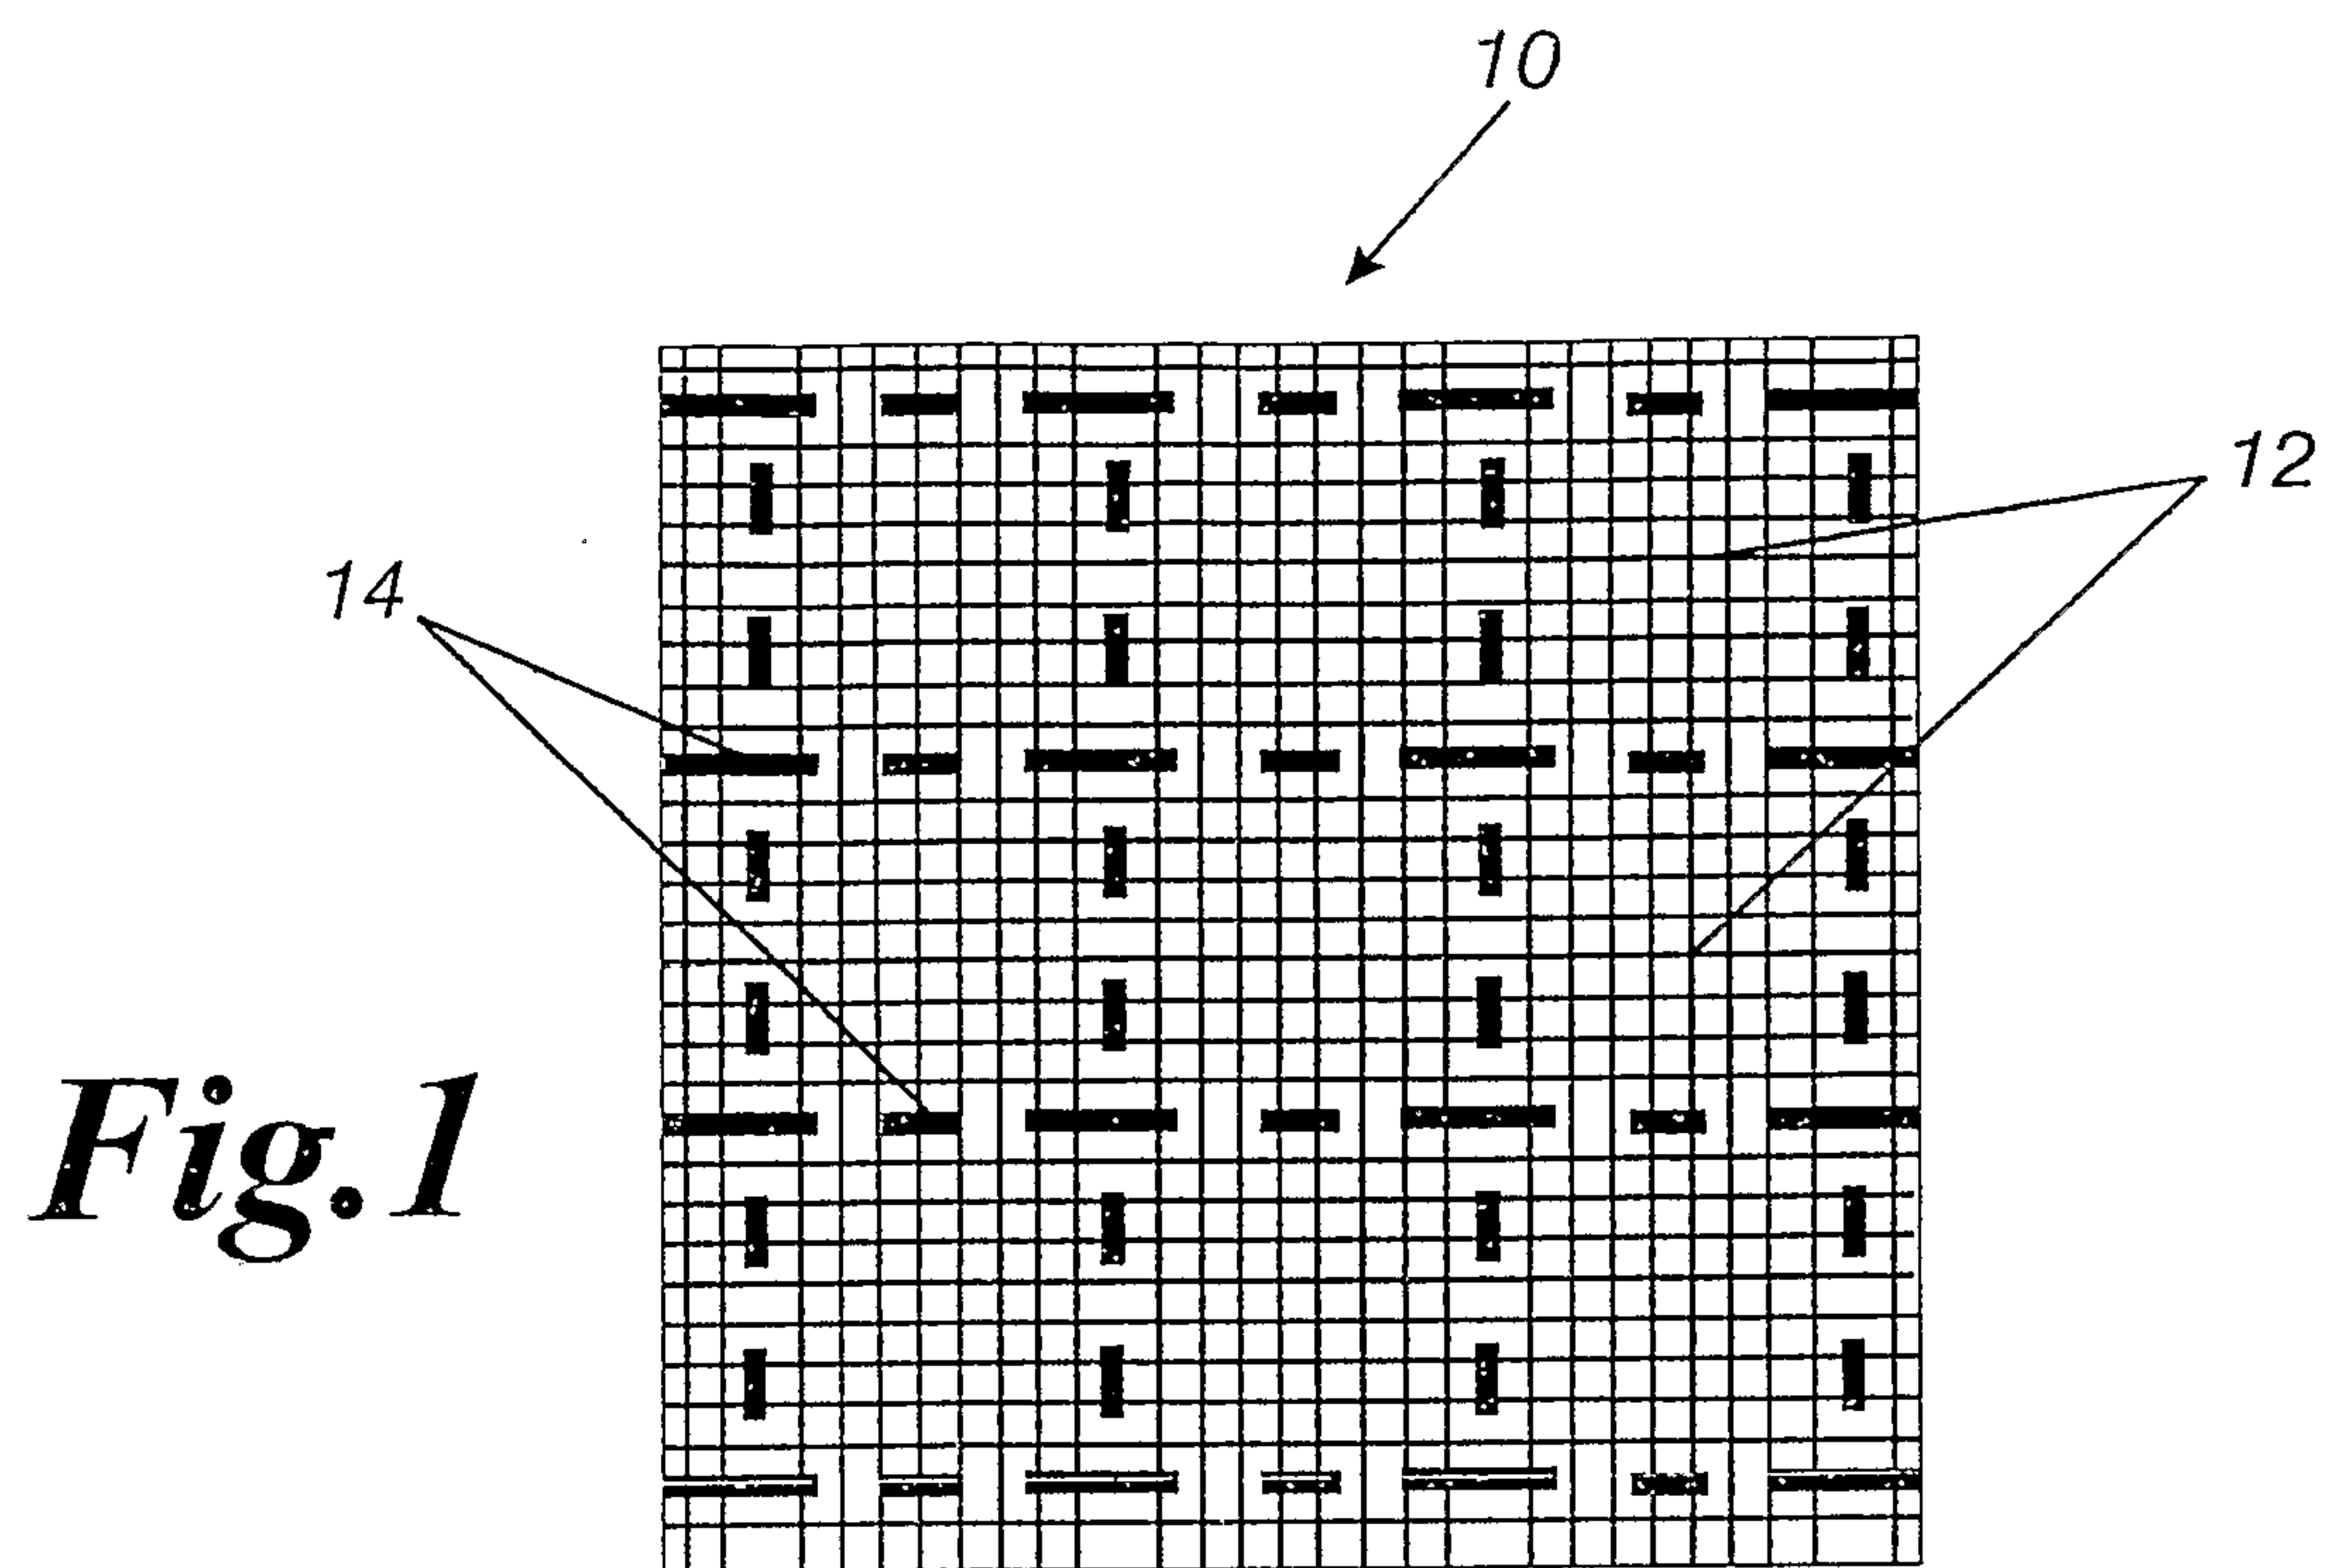

10



12

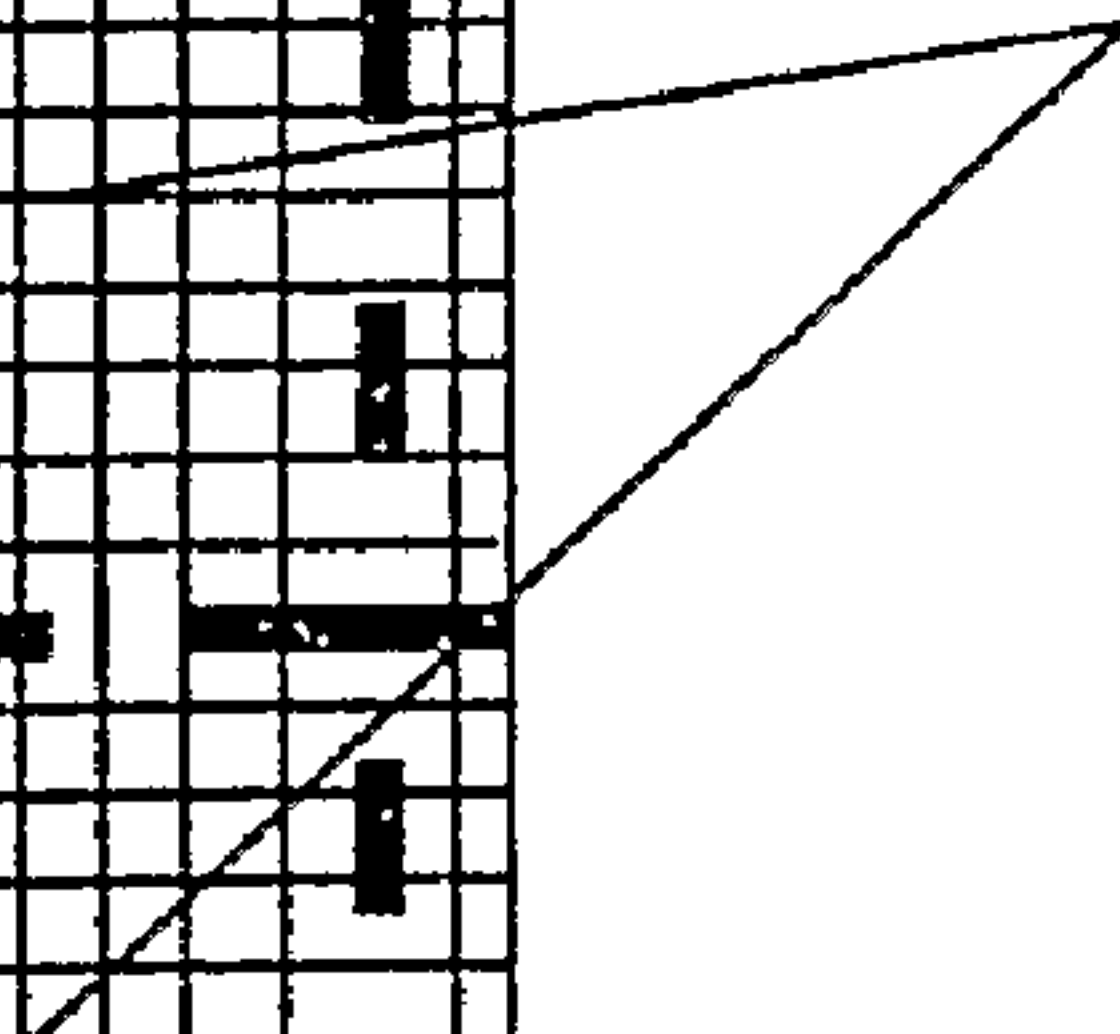

14

