



(43) International Publication Date
6 September 2013 (06.09.2013)

- (51) International Patent Classification:
B65H 35/02 (2006.01) *B26D 7/18* (2006.01)
- (21) International Application Number:
PCT/CA2013/050141
- (22) International Filing Date:
26 February 2013 (26.02.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/406,852 28 February 2012 (28.02.2012) US
- (71) Applicant: **PAPRIMA INDUSTRIES INC.** [CA/CA]; 75
av. Guthrie, Dorval, Québec H9P 2P1 (CA).
- (72) Inventor: **MICHAUD, Gabriel**; 357 Jubinville, Laval,
Québec H7G 3E4 (CA).
- (74) Agents: **ANGLEHART ET AL.** et al.; 1939 de Maison-
neuve Ouest, Montreal, Québec H3H 1K3 (CA).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: PAPER MANUFACTURING

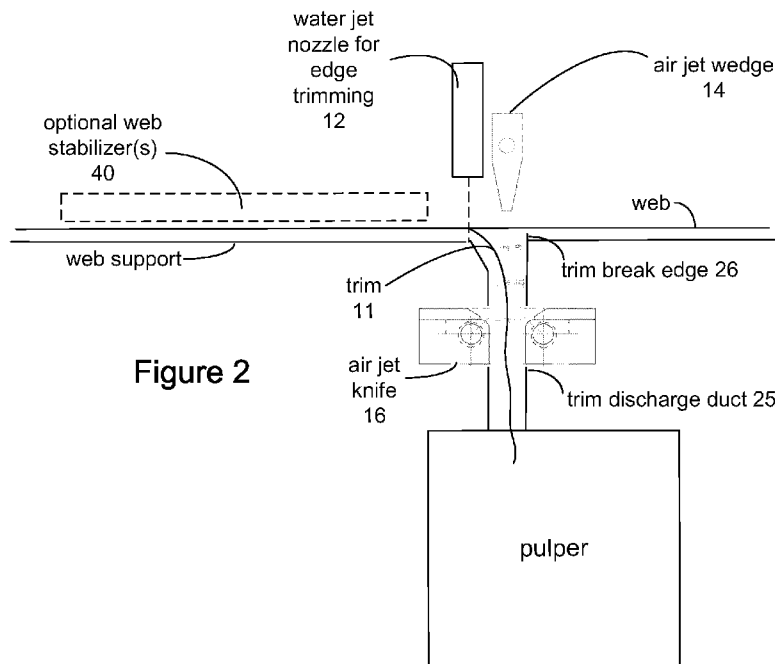


Figure 2

(57) Abstract: In a paper production machine, trim is cut at a trim station located near a final reel with a trim handling duct leading into a recycling pulper. The trim is propelled into the pulper using an air jet without using a source of vacuum in the duct. A linear air jet for propelling trim in a trim duct is also disclosed.



Published:

— *with international search report (Art. 21(3))*

PAPER MANUFACTURING

Technical Field

The present application relates to paper manufacturing, and in particular to equipment and methods for handling trim.

5 Background

Paper making machinery produces a web of paper. It is known to trim side edges of the web. It is known in the art to cut the trim using a blade, such as a rotary blade, or using a water jet. An overview of trim handling systems is described in the article, "Trim Handling Systems" presented at the TAPPI Papermaking
10 Conference, Atlanta, Georgia, 1999.

As described, trim conveying systems may be divided into five categories as follows:

- 1) a system for discharging the trim directly into a repulper below the winder,
- 15 2) an injector system,
- 3) a chopper fan system,
- 4) a combination shredder and transport fan system, and
- 5) a vacuum system.

Even in case (1) where the repulper is immediately below the winder area, the
20 trim material is removed from the web using a duct or chute and a source of negative pressure to draw the trim into the duct or chute. The trim material is typically guided into the pulper of the paper making machine and immediately returned into producing paper.

Some paper making machines have web speeds well above 60km/h, and in fact
25 as high as 100km/h to 140km/h. At such speeds, a number of problems arise in edge trimming, for example, the stability of the web due to air turbulence, as is described in commonly-assigned PCT publication WO 2011/121390.

One such problem is the starting of trimming. When an untrimmed web is already in motion on the machine, the introduction or insertion of the cutting tool could disturb the web in a negative way. In some cases, bringing the tool in from the outside could cause the outer side edge to fold up. If the tool is brought down
5 onto the web from above or below, not only must care be taken not to cause too much resistance on the web and crumple the web, but the trim must be carefully separated from the trim downstream of the cutting tool to allow the trim being cut from the web to go into duct or chute for recovery. If this separation is not done properly, the stability of the web can be jeopardized.

10 The separating of the trim can be done on slow webs by hand, however, this is not the case for high speed webs. It is known in the art to use a water jet system to separate the trim when the trimming tool engages the web. This typically involves using a number of small water jets placed across the trim width that are pulsed to cause a break in the trim (and not in the web). In the case of a water jet
15 trim tool, the jet is positioned over the web, and the jet is turned on to begin the trim cutting. Very shortly thereafter, the separation of the trim from itself ensues.

The guiding of the trim into a handling chute, shaft or duct is done in paper making machines by connecting the duct to a source of suction. The flow rate of air drawn for such operation is considerable.

20 Applicants have used in a trim handling duct an air amplifier jet, at the outlet of the duct in an upper part of the repulper, to create a negative pressure in the duct to draw trim along the duct. The same system used additionally a pair of conical air jets to push trim into the inlet of the trim handling duct.

Summary

25 It has been discovered that a wide air jet covering the width of the trim, namely a jet from an air knife or air wedge, can propel trim into a trim handling duct over distances of about 2m to 3m without the use of a vacuum source in the duct. The trim is efficiently carried and/or propelled by the air jet and pushed out the outlet of the duct into the pulper.

30 It has been discovered that trim can be propelled farther along a duct, or heavier trim can be propelled along a duct for the same distance, using additional air

knives within the trim handling duct. This propulsion of trim within the duct can be done without use of a source of negative pressure in the duct.

In the case that the air jet is used both for separating the trim and for driving the trim into the duct or chute, it has been found that the air jet that is powerful
5 enough to sever the trim is sufficiently strong to create a driving airflow that will guide the trim into a duct or along a chute over a distance sufficient for effective removal of the trim from the immediate area of web. The airflow created by the trim separating air jet can carry the trim at sufficient speed between one to five meters.

10 **Brief Description of the Drawings**

The invention will be better understood by way of the following detailed description of embodiments of the invention with reference to the appended drawings, in which:

Figure 1 illustrates a paper making machine having a web edge trimming
15 apparatus in accordance with Figure 9 of PCT publication WO 2011/121390;

Figure 2 illustrates a schematic side view (not to scale and not showing
mountings) of one embodiment of the invention in which edge trimming is performed using a water jet (as in Figure 1) in which the trim is pushed into the duct or shaft using forced air from a wedge nozzle, and the same air nozzle is
20 used to cause an initial break in the trim to cause the trim to be guided into the duct; and

Figure 3 illustrates a perspective view of the embodiment of Figure 2.

Detailed Description

Figure 1 shows a three-dimensional sketch of a portion of a paper production
25 installation according to PCT publication WO 2011/121390. A stabilizer 40 has attached thereto an apparatus for cutting a material web, which apparatus has an extension device 44 having a recess 45, and has a cutting device 20 (e.g. a water jet) and a cutting table 23 that has an optional inclined surface 24. The cutting device 20 and the cutting table 23, having an inclined surface 24 and a duct or
30 shaft 25, again constitute a structural unit 30. There, the material web 10 runs

through an edge trimming apparatus to a succeeding reel. Here, the apparatus for cutting a material web 10 consists of an air guide box or stabilizer 40 having a cutting device 20, which has an extension device 44. In addition, a recess 45 is provided in the extension device 44. The structural unit 30, via a carrier beam 31
5 mounted transversely over the material web 10, is arranged so as to be movable transversely in relation to the material web 10.

During operation of the apparatus, the material web 10 is severed by means of a high-pressure water jet 22. The resultant edge strip 11 is removed via the shaft 25 provided on the cutting table 23. The edge strip 11 in this case is already sliding
10 into the shaft 25 because of the forward motion of the material web 10. In addition, the edge strip 11 is sucked away out of the plane of the material web and into the shaft 25 by a suction device attached to the shaft 25. The inclined surface 24 provided on the cutting table 23 effects additional stabilization of the material web 10 over the cutting table. In the case of a web loading operation, the
15 structural unit 30, consisting of the cutting device 20 and the cutting table 23, and of the elements attached thereto, is moved laterally out of the recess 45 by means of the carrier beam 31. This structural unit 30 is then moved back into the transport path of the material web 10, in order to support the newly incoming and extending web.

20 Air jets that produce a wide and thin stream of air are known in the art. For convenience, in this specification, "linear air nozzle" and "linear air jet" are used to mean an air nozzle and an air jet air flow or stream respectively, such as an air knife or air wedge nozzle that produces a wide and thin stream at sufficient velocity to propel the paper trim.

25 An air knife is a tool used typically for cleaning surfaces of objects. The high velocity stream can be formed by arranging a number of small nozzles in a row or by having a nozzle orifice that is a slit. Air wedge nozzles have a row of small nozzles. The jets from the small nozzles blend together into the stream. High velocity air jets also induce ambient air around the nozzle to flow with the nozzle
30 jet, an effect known as air amplification. The flow rate induced by an air amplifier nozzle can be many times the flow rate fed to the high velocity nozzle. An air wedge nozzle can be shaped to help air amplification flow. In the case of a slit

nozzle, the slit can be uniform or provide greater airflow at the side ends of the stream for better stream stability.

While laminar flow is typically the goal in providing such a stream, the stream of air resulting from a wide nozzle will form a turbulent airflow with greater distance
5 from the nozzle. Some air knife nozzles use the Coandă effect to help form the thin and wide stream, and are able to achieve efficient, high velocity streams. Whether such a thin stream can be sufficient for propelling trim into the duct opening can depend on trim speed and weight.

It would appear that the air flow near the nozzle is very effective in redirecting the
10 trim into the duct. Further away from the nozzle, the air flow created by such nozzles has some turbulence, and it would appear that this turbulence helps transport trim material.

In the embodiment of Figure 2, the water jet cuts the edge trim, and the trim is pushed into the shaft or duct using a linear air jet 14. Applicants have used the
15 Hurricane(TM) wedge 38150 from AiRTX of Cincinnati, Ohio, USA, and found it to work satisfactorily on tissue trim with an air supply at 40 psi (about 270kPa) without using any suction in the duct. The airflow of the nozzle in this case is about 1470 litres per minute.

An AiRTX 80000 series air knife nozzle 16 was also arranged on both sides of the
20 duct 25 used at 50 psi (about 325kPa) and a flow of about 425 litres per minute to drive the trim within the duct. The wedge has a large number of small nozzle orifices and is shaped to create a strong inverted wedge-shaped air curtain that travels with good speed and distance. The air knife uses higher pressure and less air flow, however, its strong air curtain travels a shorter distance.

25 While the nozzles recited above worked well on tissue trim, it is expected that heavier paper trim can be handled efficiently with air nozzles.

The combined air flow of about 1900 litres per minute was found to be less than what is required to reliably handle the trim discharge using suction flow or even using a plurality of air nozzles with a shorter nozzle dimension in the transverse
30 direction with respect to the web transport direction.

For example, an arrangement of two super air nozzles from Exair at 80 psi (550kPa) and 14 CFM (400 litres per minute) each used to divert the trim into the duct, followed at the duct outlet by an AiRTX model 15000 air amplifier at 80 psi (550kPa) and 60 CFM (1700 litres per minute) has been used by Applicant and shown to perform satisfactorily for trim handling from the trim station to a repulper immediately below the trim station. However, the three nozzles consume a total of 88CFM (2500 litres per minute), namely about 30% more compressed air flow. Furthermore, the air amplifier used induces suction in the duct, creating greater air flow through the duct into the repulper.

10 In Figure 2, three air jet nozzles are provided, one wedge and two knife. It will be appreciated that other types of nozzle can be selected for the purpose of driving trim into the duct and/or performing the initial separation of the trim.

The use of the air knife jet, as illustrated in Figure 2, is on both sides of the trim. This provides active air flow on both sides of the trim within the duct to transport the trim to its destination, for example, a pulper.

The duct can be substantially of rectangular cross-section as illustrated in Figure 2. However, in some embodiments, the duct shape, while possibly initially rectangular, can transition to a circular cross-section duct. Furthermore, in some embodiments, the cross-section of the duct can be determined in accordance with an expected trim and air flow rate. For example, reducing a cross-sectional area will increase a flow speed, while this can result in a greater chance for blockage as the cross-sectional area of the duct decreases. Likewise, a decrease in flow speed of trim can lead to a pile up of trim and blockage of the duct. The design of the duct and the provision of the air jets are selected to provide efficient carriage of the trim without blockage.

In the embodiment illustrated in Figure 2, the air wedge is mounted within 3 cm to 15 cm from the cutting water jet. When the trim is initially separated, the air wedge can have sufficient force to break the trim held under tension, or the air wedge can cause a break in the trim by forcing the trim against the downstream edge of the duct opening. Alternatively, a water spray can be applied to the trim to weaken it prior to causing the break and separation.

As shown in Figure 2, the pulper is located below the cutting station near the winder. The duct can be straight or it can involve one or more bends before reaching the pulper.

In the perspective view of Figure 3, the trim cutting water jet 12 is shown with a
5 bowl-shaped air flow stabilizer. The web support surface forms part of the remaining web support surface of the paper making machine. The air wedge 14 is positioned above the inlet to the trim discharge duct 25 having a break edge 26 on its downstream side. At the beginning of a production cycle, the trim cut by the jet 12 is initially separated from the web by turning on the wedge nozzle 14 with
10 the result that the trim is pushed into the duct inlet against the edge 26. The trim is thereby torn and the air stream from wedge 14 propels the trim into and along duct 25.

While in the embodiment of Figures 2 and 3, transport of the trim in the duct takes place without using a source of negative pressure, it will be appreciated that it can
15 be efficient to use a source of negative pressure, such as a suction fan or blower, to help carry trim along the duct.

While a linear jet has been shown to be particularly efficient in propelling trim into the duct, in some embodiments, the air jet propelling trim into the duct can be conical or of other configuration, while the trim is propelled to a discharge end of
20 the duct into a repulper near the trim station (namely less than about 5m of duct), without needing a source of suction or negative pressure.

What is claimed is:

1. A method of producing paper in which a web of paper is prepared and conveyed toward a final reel with at least one side edge of the web being trimmed to produce trim conveyed by a duct for recycling, the method comprising:

using at least one linear air jet over said duct and acting on said trim downstream and near a location of trimming to propel said trim into an inlet of said duct; and

feeding said web after trimming toward said final reel.

2. The method as defined in claim 1, further comprising:

at the onset of trimming, using said linear air jet to initially break said trim so that said trim can begin to move into said duct.

3. The method as defined in claim 2, wherein said inlet has a trim breaking edge on a downstream side thereof, said breaking using said trim breaking edge.

4. The method as defined in claim 1, 2 or 3, wherein said linear air jet is used to propel said trim from said inlet to a discharge of said duct without a source of suction.

5. The method as defined in claim 4, wherein said trim is directed into a recycling pulper at a distance less than 4.5m from said inlet of said duct.

6. The method as defined in any one of claims 1 to 5, wherein said trim is further propelled by a pair of linear air jets arranged on both sides of said trim in said duct.

7. The method as defined in any one of claims 1 to 6, wherein said trim is further propelled by at least one further air jet arranged at an outlet of said duct.

8. A method of producing paper in which a web of paper is prepared and conveyed toward a final reel with at least one side edge of the web being trimmed to produce trim conveyed by a duct for recycling, the method comprising:

using at least one air jet over said duct and acting on said trim downstream and near a location of trimming to propel said trim into an inlet of said duct, said air jet is used to propel said trim from said inlet to a discharge of said duct without a source of suction, said trim is directed into a recycling pulper at a distance less than about 5m from said inlet of said duct; and

feeding said web after trimming toward said final reel.

9. The method as defined in claim 8, wherein said trim is further propelled by a pair of linear air jets arranged on both sides of said trim in said duct.

10. An apparatus for handling trim in a paper production machine having a trim station with a trim handling duct, the apparatus comprising:

at least one linear air jet mounted over said duct for acting on said trim downstream and near a location of trimming to propel said trim into an inlet of said duct.

11. The apparatus as claimed in claim 10, wherein no source of suction is provided within said duct, said linear air jet being used to propel said trim from said inlet to a discharge of said duct.

12. The apparatus as claimed in claim 11, wherein a recycling pulper is located at said discharge of said duct and said duct has a length less than 4.5m.

13. An apparatus for handling trim in a paper production machine having a trim station located near a final reel with a trim handling duct leading into a recycling pulper, the apparatus comprising:

a duct having a length less than about 4.5m;

at least one air jet mounted over said duct for acting on said trim downstream and near a location of trimming to propel said trim into an inlet of said duct,

wherein no source of suction is provided within said duct, said air jet being used to propel said trim from said inlet to a discharge of said duct into said recycling pulper.

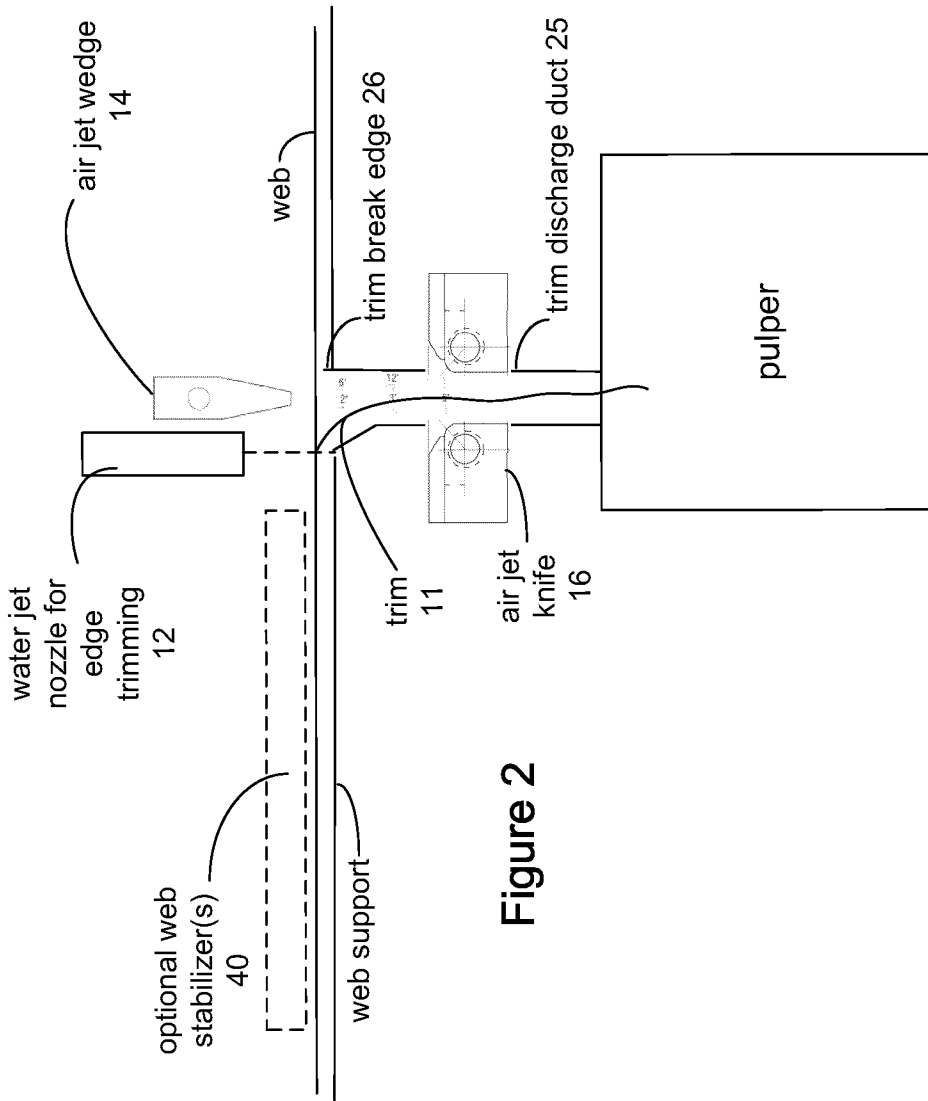


Figure 2

3/3

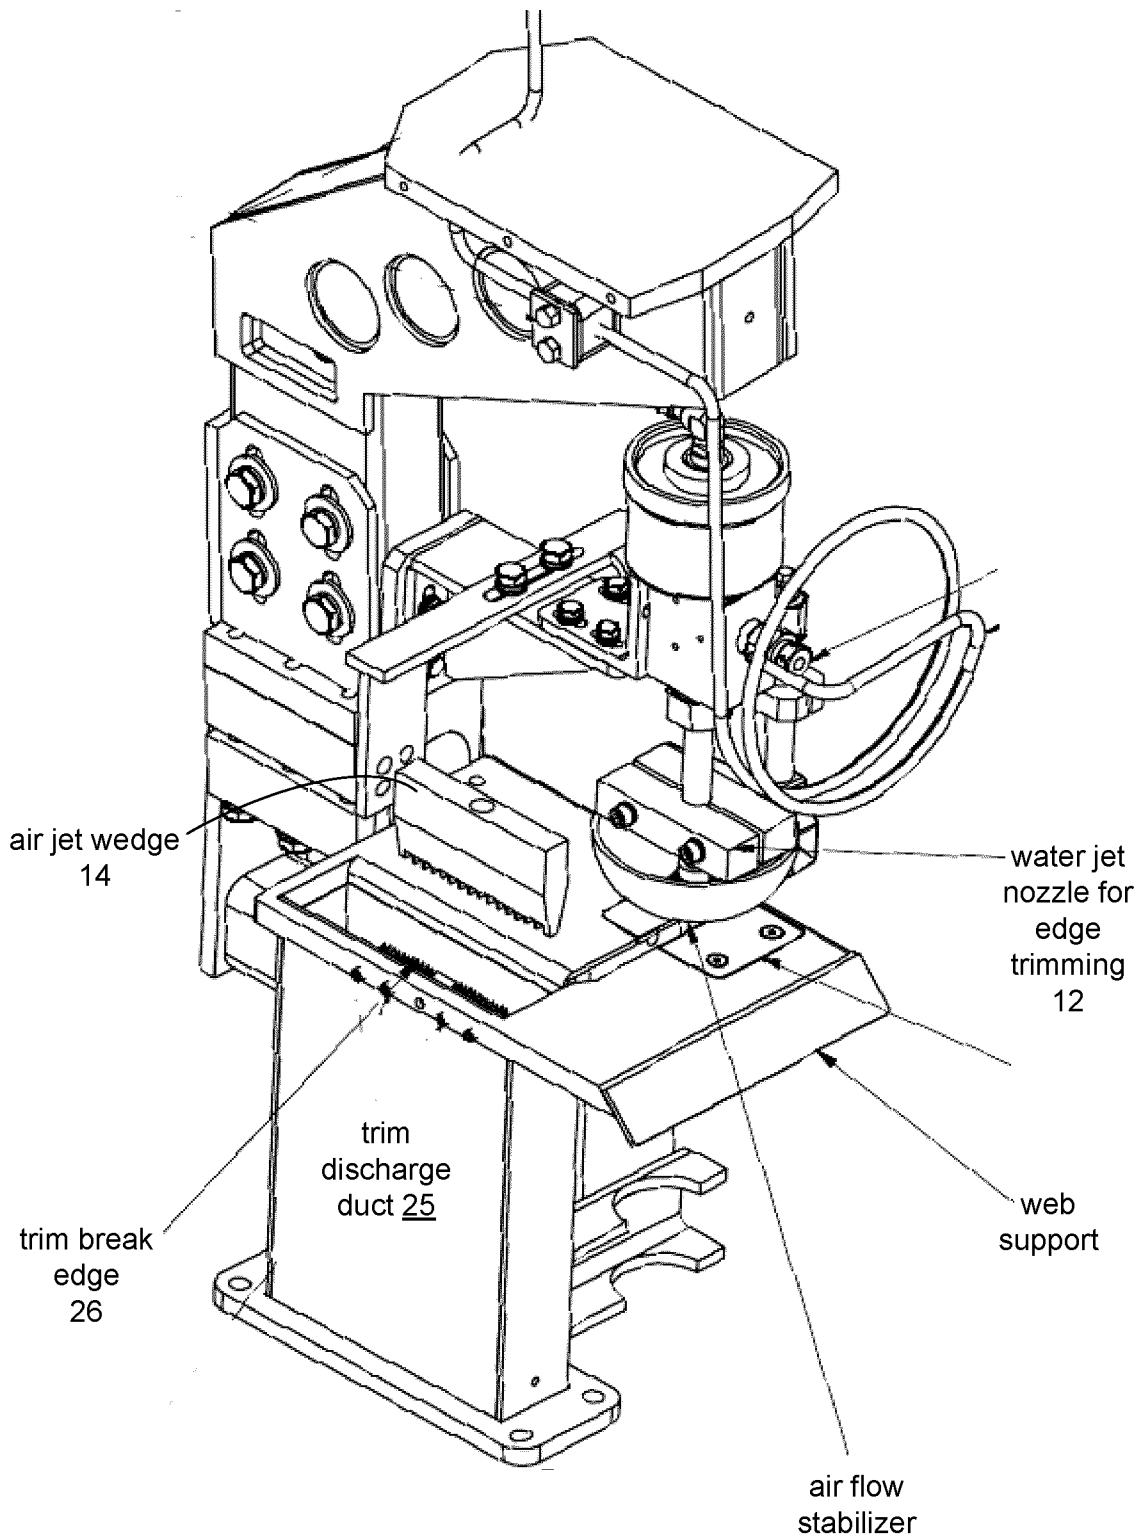


Figure 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2013/050141

A. CLASSIFICATION OF SUBJECT MATTER
 IPC: **B65H 35/02** (2006.01) , **B26D 7/18** (2006.01)
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 ECLA and IPC: B65H 35/02, B26D 7/18, D21G 9/00, D21F 7/00
 ECLA: D21F 7/00E, B26D 7/18E2, B26F 3/00C USPC: 162/189, 194, 264

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)
 Epoque (EPODOC), Total Patent
 Keywords: trim*, cut*, edge, paper, web, etc.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	FR 840930 A (IMPRIMERIE CRÉTÉ) 08 May 1939 (08-05-1939) - The Whole Document -	1, 4, 8, 10-13 6, 7, 9
X	US 7166194 B2 (STRAUB, K. et al.) 23 January 2007 (23-01-2007) - The Whole Document -	1, 2, 4, 5, 8, 10, 11, 13
X	GB 391708 A (DAVID CARLAW & SONS LIMITED et al.) 04 May 1933 (04-05-1933) - The Whole Document -	1, 4, 8, 10, 11, 13
X	EP 0870583 A2 (CASPAR, R.C.) 14 October 1998 (14-10-1998) - The Whole Document -	1-3, 10, 12
Y	WO 2009/022053 A1 (RUHANEN, J.) 19 February 2009 (19-02-2009) - The Whole Document -	6, 7, 9
Y	US 4231272 A (CROUSE, J.W.) 04 November 1980 (04-11-1980) - The Whole Document -	6, 7, 9

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 01 May 2013 (01-05-2013)	Date of mailing of the international search report 03 May 2013 (03-05-2013)
---	--

Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001-819-953-2476	Authorized officer Jean-François Desrosiers (819) 934-6358
---	--

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2013/050141

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
FR840930A	08 May 1939 (08-05-1939)	None	
US7166194B2	23 January 2007 (23-01-2007)	AT370822T CA2425682A1 DE10217723A1 DE50307989D1 EP1354677A2 EP1354677A3 EP1354677B1 US2003196531A1	15 September 2007 (15-09-2007) 20 October 2003 (20-10-2003) 30 October 2003 (30-10-2003) 04 October 2007 (04-10-2007) 22 October 2003 (22-10-2003) 23 February 2005 (23-02-2005) 22 August 2007 (22-08-2007) 23 October 2003 (23-10-2003)
GB391708A	04 May 1933 (04-05-1933)	None	
EP0870583A2	14 October 1998 (14-10-1998)	AT220364T CA2201990A1 CA2201990C DE69806428D1 DE69806428T2 EP0870583A3 EP0870583B1	15 July 2002 (15-07-2002) 07 October 1998 (07-10-1998) 18 October 2005 (18-10-2005) 14 August 2002 (14-08-2002) 16 January 2003 (16-01-2003) 13 January 1999 (13-01-1999) 10 July 2002 (10-07-2002)
WO2009022053A1	19 February 2009 (19-02-2009)	DE112008002133T5 FI20075568A	08 July 2010 (08-07-2010) 11 February 2009 (11-02-2009)
US4231272A	04 November 1980 (04-11-1980)	BR7906336A CA1101779A1 ES484304A1 GB2035244A GB2035244B IN150752A1 IT7926282D0 IT1124570B JPS5552849A JPS5638497B2 MX150603A PH16067A PL218814A1 PL123960B1 SU1003746A3	17 June 1980 (17-06-1980) 26 May 1981 (26-05-1981) 01 April 1980 (01-04-1980) 18 June 1980 (18-06-1980) 24 November 1982 (24-11-1982) 04 December 1982 (04-12-1982) 05 October 1979 (05-10-1979) 07 May 1986 (07-05-1986) 17 April 1980 (17-04-1980) 07 September 1981 (07-09-1981) 06 June 1984 (06-06-1984) 16 June 1983 (16-06-1983) 01 July 1980 (01-07-1980) 31 December 1982 (31-12-1982) 07 March 1983 (07-03-1983)