

(19) **DANMARK**

(10) **DK/EP 3129743 T3**



(12)

Oversættelse af europæisk patentskrift

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **F 42 C 15/24 (2006.01)** **F 42 C 15/18 (2006.01)** **F 42 C 15/32 (2006.01)**
F 42 C 15/36 (2006.01)
- (45) Oversættelsen bekendtgjort den: **2019-01-21**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2018-11-07**
- (86) Europæisk ansøgning nr.: **14888956.1**
- (86) Europæisk indleveringsdag: **2014-04-11**
- (87) Den europæiske ansøgnings publiceringsdag: **2017-02-15**
- (86) International ansøgning nr.: **SE2014000046**
- (87) Internationalt publikationsnr.: **WO2015156710**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **SAAB AB, Bröderna Ugglas gata, 581 88 Linköping, Sverige**
- (72) Opfinder: **ANDERSSON, Bengt, Humlevägen 2, 667 33 Forshaga, Sverige**
KARLSSON, Per, Hälsogränd 44, 702 28 Örebro, Sverige
STRAND, Filip, Dianavägen 15, 691 54 Karlskoga, Sverige
- (74) Fuldmægtig i Danmark: **Nobeli Business Support AB, Hyttåsvägen 10, 691 80 Karlskoga, Sverige**
- (54) Benævnelse: **ARRANGEMENT TIL BLOKERING AF ARMERINGSTILSTANDE**
- (56) Fremdragne publikationer:
WO-A1-02/03019
DE-A1- 4 034 630
FR-A1- 2 685 079
FR-A1- 2 686 410
GB-A- 2 103 340
SU-A1- 1 323 116
US-A- 5 735 114
US-A1- 2004 244 358
US-A1- 2008 307 951
US-A1- 2010 251 881
US-A1- 2011 192 312

DESCRIPTION

Technical field

[0001] The present invention relates to an arrangement for locking arming conditions to prevent unintentional arming of SAI-units of ammunition units, such as projectiles, when the ammunition unit is subjected to external threats. In this connection SAI stands for Safety, Arming and Ignition and is a well-known component in the ammunition field.

Background

[0002] Within the Insensitive Munitions (IM) field there are activities going on to find efficient solutions to protect weapon systems from external threats. In order to measure the IM-ability of a weapon system there are a number of standardized tests and threats available. The solution proposed is intended to prevent arming of an ammunition unit such as a projectile when subjected to a selected such standardized test to test "Slow cook-off".

[0003] The invention is primary intended to be used for preventing arming of projectiles of disposable one-man carried weapons. However, the invention could also be used in other existing ammunition types or ammunition types to come.

Summary of the invention

[0004] The main objects of the invention is to obtain an arrangement for locking arming conditions that is non-complicated in construction, reliable, cost effective, applicable to different types of SAI-units and fulfils the requirements of standardized heating tests.

[0005] The objects are obtained by an arrangement according to the first paragraph characterized in that an essentially ring shaped shape memory alloy is provided in cooperation with a recess in a plunger comprised in connection to the SAI-unit and a fixed recess to prevent the plunger from axial movement when subjected to heating by changing the shape of the essentially ring shaped shape memory alloy to lock the plunger relative to the fixed recess. The use of shape memory alloy to lock arming in connection to a SAI-unit when the ammunition unit is subjected to heating effectively fulfils the objects mentioned in the previous paragraph.

[0006] In this connection it can per se be observed that it is known to use shape memory alloys (SMA:s) to prevent undesired reactions within the insensitive munition field. One such example is known from FR 2 742 221 A1 disclosing ejection of a cap when a retaining member made from a material with shape memory effect is actuated by an excessive temperature.

Another example is known from SE 519561 C2 disclosing a shape memory alloy designed to open up different parts of a casing when the surrounding temperature approaches the ignition temperature of an explosive.

[0007] It is also referred to US 5 445 077 A disclosing an ignition device for a pyrotechnic system. The device provides an arming condition or fuse activated by a shape memory alloy when the temperature reaches a sufficiently high temperature. It is now a requirement that the fuse has been activated before the device can initiate (set fire to) the pyro technic. On the contrary our invention prevents an arming condition from being DE4034630 discloses a reversed mechanism, effectively aiming after heating up of a projectile.

[0008] According to a favourable embodiment of the invention the arrangement is characterized in that the essentially ring shaped shape memory alloy is provided in cooperation with a pressure plunger controlling the pressure condition when arming the SAI-unit. Arranging the ring shaped shape memory alloy admits a compact construction and involves few reconstructions of constructions on the market.

[0009] In particular in a further embodiment according to the invention it is proposed that the pressure plunger is provided with a first and a second circular recesses provided in the envelope surface of the pressure plunger, the first circular recess accommodating a sealing ring and the second circular recess cooperating with the ring shaped shape memory alloy.

[0010] According to another favourable embodiment of the invention the arrangement is characterized in that the essentially ring shaped shape memory alloy and the plunger are provided inside the SAI-unit, the essentially ring shaped shape memory alloy in cooperation with the recess in the plunger and the fixed recess preventing the plunger from movement when subjected to heating by changing the shape of the essentially ring shaped shape memory alloy to lock the plunger relative to the fixed recess preventing activation of an external pressure plunger. This embodiment offers a complete and competent SAI-unit easy to accommodate in ammunition units.

[0011] The ring shaped shape memory alloy can be designed in different ways. According to one embodiment of the arrangement, the essentially ring shaped memory alloy is designed to expand radially when subjected to heating. According to another embodiment of the arrangement, the essentially ring shaped shape memory alloy is designed to contract radially when subjected to heating.

[0012] Furthermore the cross section of the essentially ring shaped shape memory alloy comprised in the arrangement can vary. In particular it is proposed that the essentially ring shaped shape memory alloy comprised in the arrangement originally has an essentially rectangular cross section, an essentially square cross section and/or an essentially round cross section.

[0013] According to still another favourable embodiment, the essentially ring shaped shape

memory alloy comprised in the arrangement is provided with a break. Such a break can facilitate the expansion and contraction of the shape memory alloy.

[0014] In a common embodiment the essentially ring shaped shape memory alloy has a closed formation.

Brief description of the drawings

[0015] The invention will now be described in more detail with reference to the accompanying drawings in which:

Figure 1 schematically, partly in cross section, shows a known arrangement with a pressure plunger.

Figure 2a schematically, partly in cross section, shows a first arrangement in accordance with the invention with a shape memory alloy in cooperation with a pressure plunger in an initial position.

Figure 2b schematically, partly in cross section, shows the arrangement of figure 2a following the normal function to fulfil the arming pressure conditions.

Figure 2c schematically, partly in cross section, shows the arrangement of figure 2a when the arrangement has been subjected to heating.

Figure 3a schematically, partly in cross section, shows a second arrangement in accordance with the invention accommodating the shape memory alloy and plunger inside an SAI-unit.

Figure 3b schematically, partly in cross section, shows the arrangement of figure 3a when the arrangement has been subjected to heating.

Figure 4a schematically shows an example of a ring shaped shape memory alloy with a break and suitable for the arrangement in a constricted condition.

Figure 4b schematically shows the ring shaped shape memory alloy of figure 4a in an expanded position.

Figure 4c schematically shows the ring shaped shape memory alloy in a closed formation in a constricted condition.

Figure 4d schematically shows the ring shaped shape memory alloy of figure 4c in a closed formation in an expanded condition.

Figures 5a-5c schematically shows three examples of cross sections of the shape memory alloy suitable for the arrangement according to the invention.

Detailed description

[0016] In the prior art arrangement shown in figure 1 there is a pressure plunger 1 provided in a SAI-holder, such as a fin holder 2. The pressure plunger is arranged to be moved further into the SAI- holder 2 by a pressure generated by propellant and indicated by an arrow 17. Within the SAI- holder 2 a SAI-unit has been indicated by dashed lines given reference number 10. The pressure plunger comprises a circular recess 3 accommodating a sealing O-ring 4. Under normal function, the pressure plunger 1 moves in a space 5 under control of a bearing 6 to a position fulfilling the arming pressure conditions.

[0017] According to a first arrangement according to the invention and shown in figures 2a-2c a further circular recess 7 is provided to accommodate at least parts of a ring shaped shape memory alloy 8. There is also a circular recess 9 in the SAI-holder 2 initially at the same level as the recess 7 in the pressure plunger 1. Components described with reference to figure 1 and found in figures 2a-2c have been given the same reference numbers. In comparison with the prior art arrangement described with reference to figure 1, the first arrangement according to the invention, has an extended plunger height and the space 5 has been adapted to the extended height of the plunger.

[0018] The operation of the arrangement is as follows.

[0019] Starting from figure 2a the pressure plunger is in its initial position with a sealing O-ring 4 to obtain a sealing between the pressure plunger 1 and the space 5. The ring shaped shape memory alloy 8 is in position in the recess 7 and does not prevent movement of the pressure plunger 1.

[0020] When subjecting the pressure plunger 1 to pressure generated by propellant, the pressure plunger 1 under normal function strikes a SAI-unit 10 indicated by dashed lines inside the SAI-holder 2 to fulfil the arming pressure conditions. It could be observed that the position of the shape memory alloy 8 don't have any noticeable effect on the movement of the pressure plunger 1, see figure 2b.

[0021] When subjected to heating according to a standardized test for example by raising the temperature around the arrangement by for example 3.3 °C/h up to about 100°C, or by a comparable unintended temperature raise, the ring shaped shape memory alloy 8 will expand and assume a position as shown in figure 2c resulting in that the pressure plunger 1 is locked to a recess 9 in the SAI-holder 2 by the shape memory alloy 8.

[0022] Above a shape memory alloy 8 has been described that expands radially when subjected to heating. It is however also possible to use a shape memory alloy that initially is in an expanded condition outside the recess 7 of the pressure plunger 1 and that partly contracts into the recess 7 of the pressure plunger 1 when subjected to heating.

[0023] A second arrangement is shown in figures 3a-3b. In this case the plunger 1 is built in in the SAI-unit 10. In accordance with the first arrangement the plunger 1 is provided with a recess 7 accommodating a ring shaped shape memory alloy 8.

[0024] Figure 3a shows the SAI-unit 10 in its initial position, the shape memory alloy being totally within the recess 7 so that the plunger 1 is free to move downwards in the shown figure if other arming requirements are fulfilled inter alia involving the component 11 to be set aside. If however the SAI-unit 10 is subjected to heating above levels set, the shape memory alloy 8 will expand into a recess 9, locking the pressure plunger 1 to the recess 9.

[0025] Figure 4a and 4b schematically show a ring shaped shape memory alloy 8 provided with a break 12 in two different conditions illustrating how the shape memory alloy can be expanded or contradicted.

[0026] Figure 4c and 4d schematically show a ring shaped shape memory alloy 8 as a closed component in constricted condition, figure 4c, and in expanded condition, figure 4d.

[0027] In figure 5a-5c three different cross sections for a ring shaped shape memory alloy 8 are shown. In figure 5a a rectangular cross section 13 is proposed. In figure 5b a square cross section 14 is shown and in figure 5c a circular cross section 15 is shown.

[0028] The arrangement for locking arming conditions is not limited to the examples described above but may be modified within the scope of the attached claims.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description









- [FR2742221A1](#) **[0006]**
- [SE519561C2](#) **[0006]**
- [US5445077A](#) **[0007]**
- [DE4034630](#) **[0007]**




PATENTKRAV

1. Arrangement til blokering af armeringstilstande til hindring af utilsigtet armering af sikkerheds-, armerings- og tændsatser i ammunitionsenheder, når ammunitionsenheden udsættes for ydre trusler, hvor en hovedsageligt ringformet
5 formhukommelseslegering (8) er tilvejebragt i samvirke med en reces (9) i et stempel (1), der indgår i forbindelse med SAT-enheden, og en fast reces til at hindre stemplet i aksial bevægelse, når det udsættes for opvarmning ved ændring af formen af den hovedsageligt ringformede formhukommelseslegering til blokering af stemplet i forhold til den faste reces.
- 10 2. Arrangement ifølge krav 1, hvor den hovedsageligt ringformede formhukommelseslegering er tilvejebragt samvirkende med et trykstempel til styring af tryktilstanden, når SAT-enheden armeres.
3. Arrangement ifølge krav 1 eller 2, hvor trykstemplet er tilvejebragt med første og anden cirkulære recesser anbragt i en indhylningsflade af trykstemplet,
15 hvor den første cirkulære reces rummer en tætningsring, og den anden cirkulære reces samvirker med den ringformede formhukommelseslegering.
4. Arrangement ifølge krav 1, hvor den hovedsageligt ringformede formhukommelseslegering og stemplet er anbragt indvendigt i SAT-enheden, og den hovedsageligt ringformede formhukommelseslegering i samvirke med recessen i
20 stemplet og den faste reces hindrer stemplet i at bevæge sig, når det udsættes for opvarmning ved ændring af formen af den hovedsageligt ringformede formhukommelseslegering til blokering af stemplet i forhold til den faste reces og hindrer derved aktivering af et stempel under ydre tryk.
5. Arrangement ifølge ethvert af de foregående krav, hvor den hovedsageligt
25 ringformede formhukommelseslegering er indrettet til at ekspandere radialt, når den udsættes for opvarmning.
6. Arrangement ifølge ethvert af de foregående krav 1 - 4, hvor den hovedsageligt ringformede formhukommelseslegering er indrettet til at sammentrækkes radialt, når den udsættes for opvarmning.

7. Arrangement ifølge ethvert af de foregående krav 1 - 4, hvor den hovedsageligt ringformede formhukommelseslegering oprindeligt har et hovedsageligt rektangulært tværsnit.
8. Arrangement ifølge krav 1, hvor den hovedsageligt ringformede formhukommelseslegering oprindeligt har et hovedsageligt kvadratisk tværsnit.
9. Arrangement ifølge ethvert af kravene 1 – 8, hvor den hovedsageligt ringformede formhukommelseslegering oprindeligt har et hovedsageligt rundt tværsnit.
10. Arrangement ifølge ethvert af de foregående krav, hvor den hovedsageligt ringformede formhukommelseslegering er tilvejebragt med en afbrydelse.
- 10 11. Arrangement ifølge ethvert af kravene 1 – 10, hvor den hovedsageligt ringformede formhukommelseslegering har en lukket form.
-

DRAWINGS

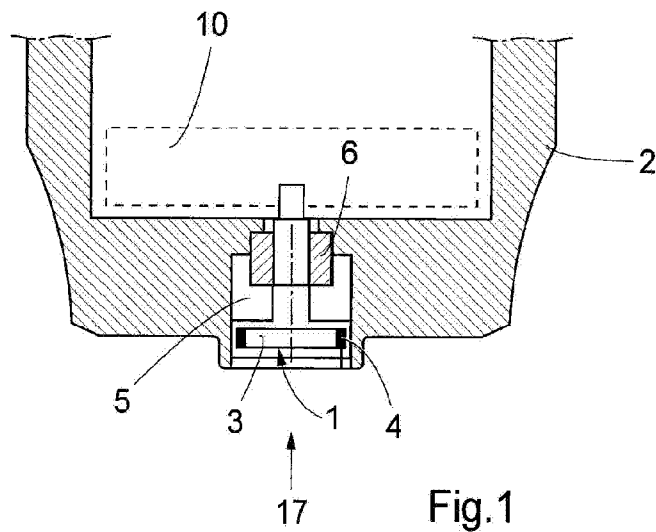

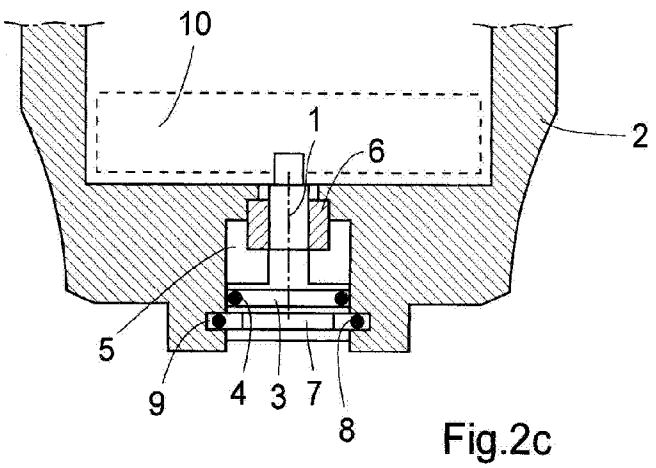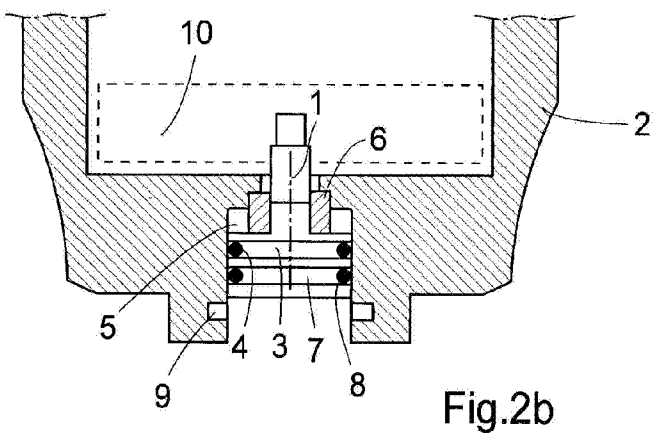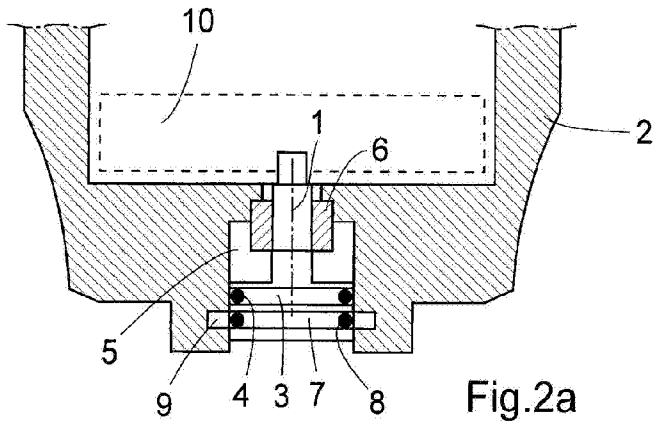

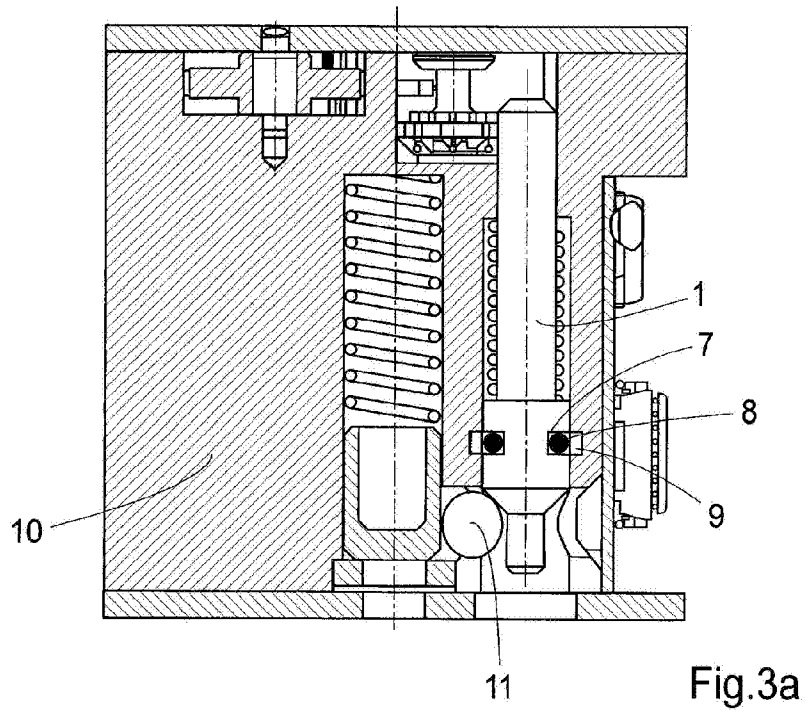


Fig.3a

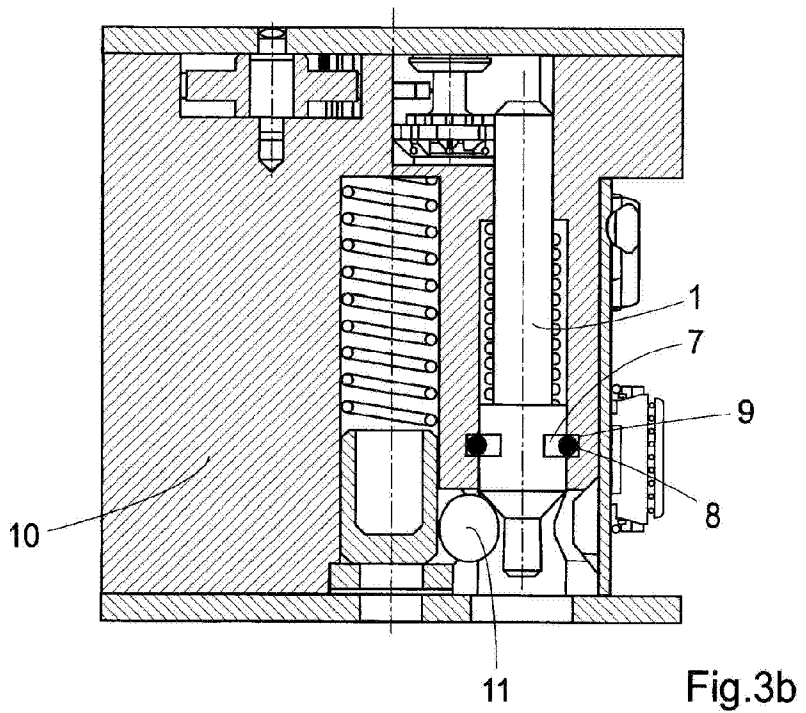


Fig.3b