



US009994393B2

(12) **United States Patent**  
**Dunn et al.**

(10) **Patent No.:** **US 9,994,393 B2**  
(45) **Date of Patent:** **Jun. 12, 2018**

(54) **CONTAINER FOR RECEIVING MULTIPLE FLEXIBLE BAG ASSEMBLIES**

2210/1675; B65F 1/08; B65F 1/1415; B65D 85/04; B65B 67/1277; B65B 67/1266; B65B 67/1233

(71) Applicant: **Munchkin, Inc.**, Van Nuys, CA (US)

USPC ..... 220/495.05, 495.08, 495.06, 495.09, 220/495.01; 53/567; 221/46; 206/303; 383/33, 34, 70

(72) Inventors: **Steven Bryan Dunn**, Beverly Hills, CA (US); **Mark A. Hatherill**, Beverly Hills, CA (US); **Kevin D. Johnson**, Tarzana, CA (US); **Matthew Joseph Saxton**, Agoura, CA (US)

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,633 A 6/1840 Sellers et al.  
18,046 A 8/1857 Hinckley  
111,521 A 2/1871 Dodge  
293,459 A 2/1884 Hawn  
428,228 A 5/1890 Price

(Continued)

FOREIGN PATENT DOCUMENTS

CA 2366384 A1 6/2003  
CA 2486136 A1 5/2005

(Continued)

OTHER PUBLICATIONS

International Search Report, dated Mar. 2, 2016, pp. 1-5.

(Continued)

*Primary Examiner* — J. Gregory Pickett

*Assistant Examiner* — Gideon Weinerth

(74) *Attorney, Agent, or Firm* — Robert Z. Evora, Esq.; Christian Lek

(57) **ABSTRACT**

Containers are described which can accommodate a variety of flexible bag assemblies used for containing waste. Internal accommodating structures are designed to accommodate and secure various types of bag assemblies, including single bag assemblies and cassettes.

**17 Claims, 40 Drawing Sheets**

(73) Assignee: **Munchkin, Inc.**, Van Nuys, CA (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days. days.

(21) Appl. No.: **14/967,255**

(22) Filed: **Dec. 11, 2015**

(65) **Prior Publication Data**

US 2016/0167874 A1 Jun. 16, 2016

**Related U.S. Application Data**

(60) Provisional application No. 62/090,558, filed on Dec. 11, 2014.

(51) **Int. Cl.**


**B65F 1/06** (2006.01)  
**B65B 9/15** (2006.01)  
**B65F 1/16** (2006.01)

(52) **U.S. Cl.**

CPC ..... **B65F 1/062** (2013.01); **B65F 1/163** (2013.01); **B65F 1/1615** (2013.01); **B65F 2001/1669** (2013.01); **B65F 2210/129** (2013.01); **B65F 2210/1675** (2013.01); **B65F 2240/132** (2013.01)

(58) **Field of Classification Search**

CPC ..... B65F 1/062; B65F 1/1615; B65F 1/163; B65F 1/1646; B65F 1/12; B65F 1/0006; B65F 2240/132; B65F 2210/129; B65F

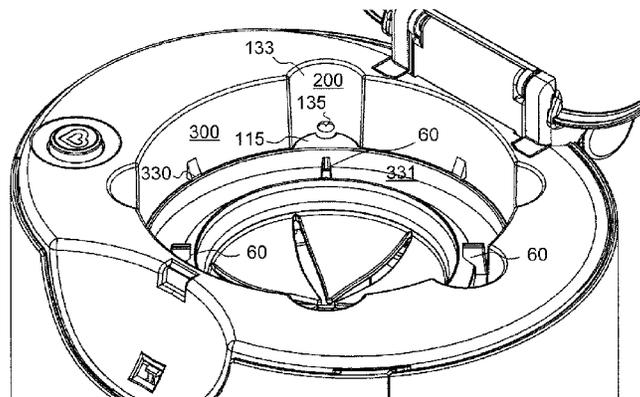

(56)

References Cited

U.S. PATENT DOCUMENTS

459,875	A	9/1891	Locke	4,946,720	A	8/1990	Oishi et al.
471,433	A	3/1892	Rice	4,948,266	A	8/1990	Bencic
486,128	A	11/1892	Scheuer	4,948,639	A	8/1990	Brooker et al.
503,113	A	8/1893	Osterloh	4,983,171	A	1/1991	Schirmer
627,434	A	6/1899	Miller	4,996,727	A	3/1991	Wyatt
685,179	A	10/1901	Seebers	5,022,553	A	6/1991	Pontius
859,497	A	7/1907	Hood	5,024,327	A	6/1991	Shillington
860,183	A	7/1907	Barr	5,045,020	A	9/1991	Neeff et al.
1,719,185	A	7/1929	Lowy	5,046,219	A	9/1991	Stanley
1,774,589	A	9/1930	Raymond	5,056,293	A	10/1991	Richard et al.
2,080,402	A	5/1937	Herman	D321,572	S	11/1991	Laden
2,271,918	A	2/1942	Glowka	5,115,935	A	5/1992	Lemongelli
2,352,503	A	* 6/1944	Walton .....	5,116,139	A	5/1992	Young et al.
			B65D 5/5059	5,120,454	A	6/1992	Wieties
			206/525	5,125,526	A	6/1992	Sumanis
2,610,432	A	9/1952	Ambrose	5,129,735	A	7/1992	Neal et al.
2,671,906	A	11/1952	Potts	5,147,055	A	9/1992	Samson et al.
2,989,828	A	6/1961	Warp	5,158,199	A	10/1992	Pontius
3,086,674	A	4/1963	Scheuerman	5,174,462	A	12/1992	Hames
3,152,576	A	10/1964	Faurot	5,183,157	A	2/1993	Darden
D201,670	S	7/1965	Moore	5,184,575	A	2/1993	Reinartz
3,214,065	A	10/1965	Thornton	D334,975	S	4/1993	Bunce et al.
3,220,601	A	11/1965	Kasting	5,222,620	A	6/1993	Lima et al.
3,310,224	A	3/1967	Laguerre	5,230,651	A	7/1993	Farkonas et al.
3,321,103	A	5/1967	Phillips	5,278,282	A	1/1994	Nauman et al.
3,322,477	A	5/1967	Armijo	5,294,017	A	3/1994	Li
3,376,046	A	4/1968	Kivett et al.	D351,606	S	10/1994	Markusson et al.
3,401,409	A	9/1968	Ekrut	5,370,940	A	12/1994	Hazlitt et al.
3,452,368	A	7/1969	Couper	5,382,631	A	1/1995	Stehling et al.
3,478,922	A	11/1969	Mole	5,385,259	A	1/1995	Bernstein et al.
3,536,192	A	* 10/1970	Couper .....	5,391,423	A	2/1995	Wnuk et al.
			A47K 17/003	5,405,041	A	4/1995	Van Brackle
			206/303	5,437,376	A	8/1995	Buku
3,587,843	A	6/1971	Wing	5,520,303	A	5/1996	Bernstein et al.
3,602,924	A	9/1971	Kneisley	5,535,913	A	7/1996	Asbach et al.
3,619,822	A	11/1971	Carmichael	5,582,820	A	12/1996	Yamamoto et al.
3,746,159	A	7/1973	May	5,590,512	A	1/1997	Richards et al.
3,772,712	A	11/1973	Renn et al.	5,637,366	A	6/1997	Davis et al.
3,779,157	A	12/1973	Ross, Jr. et al.	D380,538	S	7/1997	Muller et al.
3,908,336	A	9/1975	Forslund	D381,472	S	7/1997	Catalano et al.
3,938,300	A	2/1976	Lovqvist	5,642,810	A	7/1997	Warner et al.
3,956,510	A	5/1976	Molnar	5,651,231	A	7/1997	Garland
3,959,947	A	6/1976	Sonnino	5,655,680	A	8/1997	Asbach et al.
4,085,706	A	4/1978	Evans	D383,864	S	9/1997	Billings
4,132,047	A	1/1979	Gerigk et al.	5,671,847	A	9/1997	Pederson et al.
4,162,602	A	7/1979	Achelpohl et al.	5,692,837	A	12/1997	Beer
4,175,603	A	11/1979	Iaboni et al.	5,699,925	A	12/1997	Petruzzi
4,216,762	A	8/1980	Klaila	D391,725	S	3/1998	Triglia
4,303,710	A	12/1981	Bullard et al.	5,752,658	A	5/1998	Gibbs et al.
4,316,762	A	2/1982	Martin	5,759,648	A	6/1998	Idlas
4,331,254	A	5/1982	Haggerty	5,762,421	A	6/1998	Ross
4,343,053	A	8/1982	O'Connor	5,765,339	A	6/1998	Garland
4,349,123	A	9/1982	Yang	5,799,909	A	9/1998	Ziegler
4,408,692	A	10/1983	Sigel et al.	5,813,200	A	9/1998	Jacoby et al.
4,420,093	A	12/1983	Von Holdt	5,816,431	A	10/1998	Giannopoulos
4,427,110	A	1/1984	Shaw, Jr.	5,852,114	A	12/1998	Loomis et al.
4,437,575	A	3/1984	Hahn	5,884,556	A	3/1999	Klepacki et al.
D274,462	S	6/1984	Rakocy et al.	5,886,078	A	3/1999	Sullivan et al.
4,505,003	A	3/1985	Becker et al.	5,897,084	A	4/1999	Judge
4,528,719	A	7/1985	Frey	5,962,598	A	10/1999	Mack et al.
D279,949	S	8/1985	Rossin	5,988,520	A	11/1999	Bitner
4,561,563	A	12/1985	Woods	6,000,323	A	12/1999	Schlegel
4,600,112	A	7/1986	Shillington et al.	6,007,030	A	12/1999	Judge
4,617,230	A	10/1986	Shah et al.	D424,677	S	5/2000	Chen
4,637,061	A	1/1987	Riese	6,065,272	A	5/2000	Lecomte
4,687,711	A	8/1987	Vietto et al.	6,071,451	A	6/2000	Wang et al.
4,721,226	A	1/1988	Yurko	D427,825	S	7/2000	Mooney
4,724,185	A	2/1988	Shah	6,082,898	A	7/2000	Capy et al.
4,760,784	A	8/1988	Whiteside	6,096,420	A	8/2000	Wilhoit et al.
4,786,192	A	11/1988	Graves et al.	6,116,780	A	9/2000	Young et al.
D302,753	S	8/1989	Zelinger	6,120,743	A	9/2000	Papari
4,868,024	A	9/1989	Cross et al.	D432,224	S	10/2000	Hautmann et al.
4,869,049	A	9/1989	Richards et al.	6,128,890	A	10/2000	Firth
4,880,852	A	11/1989	Hoshino et al.	6,129,716	A	10/2000	Steer
4,890,934	A	1/1990	Feaver et al.	6,141,945	A	11/2000	Becher
4,906,495	A	3/1990	Martini et al.	6,147,167	A	11/2000	Mack et al.
4,934,529	A	6/1990	Richards et al.	6,164,442	A	12/2000	Stravitz
				6,164,821	A	12/2000	Randall
				6,170,240	B1	1/2001	Jacoby et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

6,173,851 B1	1/2001	Hague et al.	7,434,377 B2	10/2008	Stravitz et al.	
6,174,990 B1	1/2001	Noda	7,459,191 B2	12/2008	Sleight et al.	
6,199,220 B1	3/2001	Smith	D585,129 S	1/2009	Huang	
6,202,877 B1	3/2001	La Torre et al.	7,490,734 B2	2/2009	Carr	
6,254,273 B1	7/2001	Galomb et al.	7,500,339 B2	3/2009	Knuth et al.	
6,258,423 B1	7/2001	Giori	7,503,152 B2 *	3/2009	Stravitz	B65B 9/15
6,296,388 B1	10/2001	Galomb et al.				53/211
6,303,220 B1	10/2001	Minamoto et al.	7,503,159 B2	3/2009	Stravitz et al.	
6,316,067 B1	11/2001	Edwards et al.	D591,415 S	4/2009	Wu	
6,345,911 B1	2/2002	Young et al.	D591,509 S	5/2009	Lowen et al.	
6,354,062 B1	3/2002	Haughton et al.	7,607,911 B2	10/2009	Sperry et al.	
D455,485 S	4/2002	Hensel	7,629,036 B2	12/2009	Chomik et al.	
6,370,847 B1	4/2002	Jensen et al.	D609,008 S	2/2010	Diamant	
D458,359 S	6/2002	Blanchette	D614,897 S	5/2010	Morand et al.	
6,453,640 B1	9/2002	Hayashi	D615,786 S *	5/2010	Morand	D6/515
6,494,619 B1	12/2002	Sulpizio	7,707,808 B2	5/2010	Chomik et al.	
6,516,588 B2	2/2003	Jensen et al.	7,712,285 B2 *	5/2010	Stravitz	B65F 1/12
6,532,605 B1	3/2003	Howell				200/61.62
6,540,103 B2	4/2003	Silvers	7,743,588 B2	6/2010	Webb et al.	
D475,444 S	6/2003	Laferriere et al.	7,757,467 B2	7/2010	Chomik et al.	
6,585,153 B2	7/2003	Ryan	7,931,150 B2	4/2011	Morand	
6,596,814 B2	7/2003	Kim et al.	D639,002 S *	5/2011	Dunn	D32/37
6,612,099 B2	9/2003	Stravitz et al.	D639,003 S *	5/2011	Dunn	D32/37
D482,109 S	11/2003	Woods	D639,004 S *	5/2011	Dunn	D32/37
D482,110 S	11/2003	Laferriere et al.	7,950,246 B1	5/2011	Mayer et al.	
D482,111 S	11/2003	Laferriere et al.	7,958,704 B2 *	6/2011	Stravitz	B65B 9/15
6,647,697 B1	11/2003	Zarrow et al.				206/303
6,656,514 B1	12/2003	Tubbs	7,963,414 B1	6/2011	Stravitz	
6,719,194 B2	4/2004	Richards	8,091,325 B2	1/2012	Stravitz et al.	
6,722,107 B2	4/2004	Morand	8,127,519 B2	3/2012	Stravitz	
D491,257 S	6/2004	Picken, Jr.	8,215,089 B2	7/2012	Stravitz	
D492,018 S	6/2004	Schroder	8,235,237 B1	8/2012	Stravitz	
6,804,930 B2	10/2004	Stravitz	8,266,870 B1 *	9/2012	Stravitz	B65B 51/00
6,817,164 B2	11/2004	Maufette et al.				53/370
D500,590 S	1/2005	Sachen	8,440,316 B2	5/2013	Chomik et al.	
D501,602 S	2/2005	Karlsson et al.	8,484,936 B2	7/2013	Tannock	
6,851,251 B2	2/2005	Stravitz	D695,541 S *	12/2013	Dunn	B65F 1/062
6,894,085 B2	5/2005	Beaverson et al.				D6/515
6,901,974 B2	6/2005	Chomik et al.	8,899,420 B2	12/2014	Morand	
6,914,091 B2	7/2005	Donald et al.	8,910,821 B1 *	12/2014	Stravitz	B65F 1/06
6,921,581 B2	7/2005	Van Gelder et al.				220/495.04
6,925,781 B1	8/2005	Knuth et al.	9,056,716 B1 *	6/2015	Stravitz	B65F 1/06
6,931,684 B1	8/2005	Henegar	D777,394 S *	1/2017	Stravitz	D34/10
6,941,733 B2	9/2005	Chomik et al.	9,555,962 B1 *	1/2017	Stravitz	B65F 1/06
6,956,088 B2	10/2005	Farley et al.	9,573,757 B1 *	2/2017	Stravitz	B65F 1/06
6,974,029 B2	12/2005	Morand et al.	2001/0037627 A1	11/2001	Haussein	
D515,683 S	2/2006	LaBlaine	2002/0162304 A1	11/2002	Stravitz	
6,993,891 B2	2/2006	Richardson et al.	2003/0078552 A1	4/2003	Tepper et al.	
6,994,247 B2	2/2006	Richards	2003/0121923 A1	7/2003	Morand et al.	
7,004,632 B2	2/2006	Hamilton et al.	2003/0190097 A1	10/2003	Hajianpour	
D517,673 S	3/2006	Yamamoto et al.	2004/0020175 A1 *	2/2004	Stravitz	B09B 3/0025
D523,632 S	6/2006	Handley				53/567
7,073,311 B2	7/2006	Chomik et al.	2004/0083681 A1	5/2004	Stravitz	
7,086,569 B2	8/2006	Stravitz	2004/0141663 A1 *	7/2004	Gillis	B65D 33/14
7,100,767 B2	9/2006	Chomik et al.				383/42
7,114,314 B2	10/2006	Stravitz	2004/0191438 A1	9/2004	Cosentino et al.	
7,114,534 B2	10/2006	Chomik et al.	2004/0217122 A1	11/2004	Trinko et al.	
7,146,785 B2	12/2006	Stravitz	2005/0016890 A1 *	1/2005	Tannock	B65B 9/18
7,168,591 B1	1/2007	Miller				206/497
7,175,918 B2	2/2007	Saraf et al.	2005/0033259 A1	2/2005	Stravitz	
7,178,314 B2	2/2007	Chomik et al.	2005/0044819 A1	3/2005	Richard et al.	
7,241,493 B2	7/2007	Zhou	2005/0079372 A1	4/2005	Schmal et al.	
D550,345 S	9/2007	Weggelaar	2005/0131368 A2	6/2005	Snell	
D551,333 S	9/2007	Wu	2005/0183400 A1	8/2005	Stravitz et al.	
7,279,198 B1	10/2007	Knauf	2005/0188661 A1	9/2005	Stravitz et al.	
7,288,593 B2	10/2007	Yang et al.	2005/0193691 A1	9/2005	Stravitz et al.	
7,300,207 B2	11/2007	Linneweil	2005/0193692 A1	9/2005	Stravitz et al.	
7,303,075 B2	12/2007	Herbert et al.	2005/0217214 A1	10/2005	Richardson et al.	
7,316,100 B2	1/2008	Stravitz et al.	2005/0228354 A1	10/2005	Scholer	
7,328,547 B2	2/2008	Mehta et al.	2005/0274093 A1	12/2005	Stravitz et al.	
7,347,624 B2	3/2008	Savicki, Sr. et al.	2006/0013512 A1	1/2006	Shaw	
D565,715 S	4/2008	Wu	2006/0021301 A1	2/2006	Stravitz et al.	
7,350,663 B2	4/2008	Chomik et al.	2006/0130438 A1	6/2006	Stravitz et al.	
7,377,203 B2	5/2008	Chomik	2006/0130439 A1 *	6/2006	Stravitz	B65B 9/15
7,395,646 B2	7/2008	Salman et al.				53/567
			2006/0237461 A1	10/2006	Chomik et al.	
			2006/0249418 A1	11/2006	Chomik et al.	
			2006/0251842 A1	11/2006	Chomik et al.	

(56)

References Cited

U.S. PATENT DOCUMENTS

2007/0031068 A1\* 2/2007 Gillis ..... A61J 19/00  
383/33

2007/0045324 A1 3/2007 Mitchell et al.

2007/0053616 A1 3/2007 Plouff

2007/0157581 A1 7/2007 Stravitz et al.

2007/0175182 A1 8/2007 Stravitz et al.

2007/0180798 A1 8/2007 Stravitz et al.

2007/0189643 A1 8/2007 Tresenfeld

2007/0246465 A1\* 10/2007 Stravitz ..... B65B 67/1277  
220/200

2008/0019618 A1\* 1/2008 Dayton ..... B65D 33/25  
383/61.1

2008/0078762 A1 4/2008 Iyer

2008/0134644 A1 6/2008 Knuth et al.

2008/0179330 A1 7/2008 Brooks et al.

2008/0199643 A1 8/2008 Withers

2008/0247679 A1 10/2008 Dayton et al.

2008/0272140 A1\* 11/2008 Mowers ..... B65F 1/062  
221/69

2008/0310772 A1\* 12/2008 Dayton ..... A41D 19/0075  
383/61.1

2009/0065521 A1 3/2009 Admundson et al.

2009/0100806 A1\* 4/2009 Morand ..... B65B 67/1277  
53/567

2010/0005759 A1\* 1/2010 Stravitz ..... B65B 67/1277  
53/118

2010/0005762 A1\* 1/2010 Stravitz ..... B65F 1/0006  
53/567

2010/0006712 A1\* 1/2010 Stravitz ..... B65F 1/0006  
248/99

2010/0089926 A1\* 4/2010 Lacy ..... B65F 1/062  
220/521

2011/0000172 A1 1/2011 Morand

2011/0099945 A1\* 5/2011 Dunn ..... B65F 1/0006  
53/211

2011/0099950 A1\* 5/2011 Dunn ..... B65F 1/062  
53/459

2011/0099954 A1\* 5/2011 Cudworth ..... B65F 1/062  
53/510

2011/0100995 A1 5/2011 Dunn et al.

2012/0073250 A1\* 3/2012 Cudworth ..... B65F 1/062  
53/545

2012/0080352 A1 4/2012 Morand

2012/0091295 A1\* 4/2012 Morand ..... B65B 67/1222  
248/99

2014/0183193 A1\* 7/2014 Hammond ..... B65F 1/002  
220/87.2

2015/0052858 A1 2/2015 Morand

2016/0060025 A1\* 3/2016 Dunn ..... B65F 1/062  
206/409

2016/0060027 A1\* 3/2016 McConnell ..... B65F 1/06  
434/236

2016/0060028 A1\* 3/2016 McConnell ..... B65F 1/06  
434/236

2016/0060029 A1\* 3/2016 McConnell ..... B65F 1/002  
383/34.1

2016/0083182 A1\* 3/2016 Dunn ..... B65F 1/062  
206/409

2016/0167874 A1\* 6/2016 Dunn ..... B65F 1/062  
220/495.05

2016/0221750 A1\* 8/2016 Cavaletti ..... B65F 1/1415

2016/0244256 A1 8/2016 Morand

2016/0244257 A1 8/2016 Morand

2016/0244258 A1 8/2016 Morand

FOREIGN PATENT DOCUMENTS

CA 2686128 C 11/2008

CA 2936420 A1 4/2009

CA 2387183 C 5/2009

CA 2640384 C 9/2014

CA 2855159 C 11/2016

CA 2936415 C 4/2017

CA 2936421 C 4/2017

CA 2937312 C 4/2017

DE 9319683 U1 6/1994

DE 202005015117 2/2007

DE 202005015117 3/2007

EP 303517 A1 2/1989

EP 699584 A2 6/1996

EP 0913344 5/1999

EP 2045197 A1 4/2009

EP 2818430 A1 12/2014

GB 399031 9/1933

GB 772538 4/1957

GB 2206094 12/1988

GB 2221889 A 2/1990

JP 5429272 3/1979

JP 63123701 A 5/1988

JP 2002226003 8/2002

JP 2004175508 A 6/2004

JP 3134078 U9 7/2007

JP 3134078 8/2007

JP 5331205 10/2013

WO 199817536 A1 4/1998

WO 99/39675 A1 8/1999

WO 0220354 A 3/2002

WO 200220354 A1 3/2002

WO 02/42364 A2 5/2002

WO 02/051788 A1 7/2002

WO 2003059748 A2 7/2003

WO 2003068635 A1 8/2003

WO 2003-089312 10/2003

WO 2005/042381 5/2005

WO 2005/042381 A2 5/2005

WO 2005042381 A3 5/2005

WO 2007/130889 A2 11/2007

WO 2007130889 A2 11/2007

WO 2008/059282 5/2008

WO 2009007723 A 1/2009

OTHER PUBLICATIONS

Written Opinion of International Search Authority, dated Mar. 2, 2016, pp. 1-11.

International Search Report and Written Opinion for PCT/US2013/029555 dated Jul. 9, 2013 (pp. 1-10).

PCT/US2010/053768, Preliminary Search Report and Written Opinion (8 pages) dated May 10, 2012.

International Search Report for International Application No. PCT/US2010/053768.

Copending U.S. Appl. No. 12/172,715, filed Jul. 14, 2008 entitled "Waste Disposal Devices".

Copending U.S. Appl. No. 12/172,758, filed Jul. 14, 2008 entitled "Tubing Assembly for Waste Disposal Devices".

Copending U.S. Appl. No. 12/172,793, filed Jul. 14, 2008 entitled "Waste Disposal Devices".

\* cited by examiner

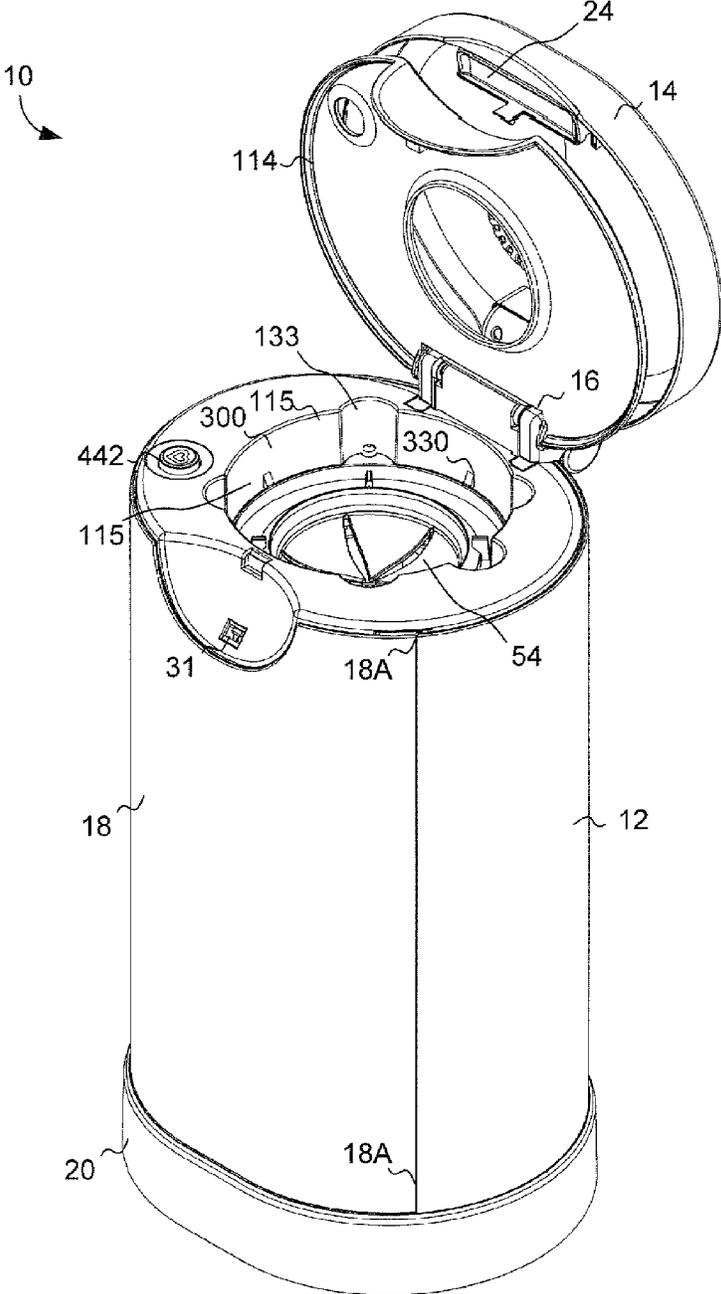


FIG. 1A

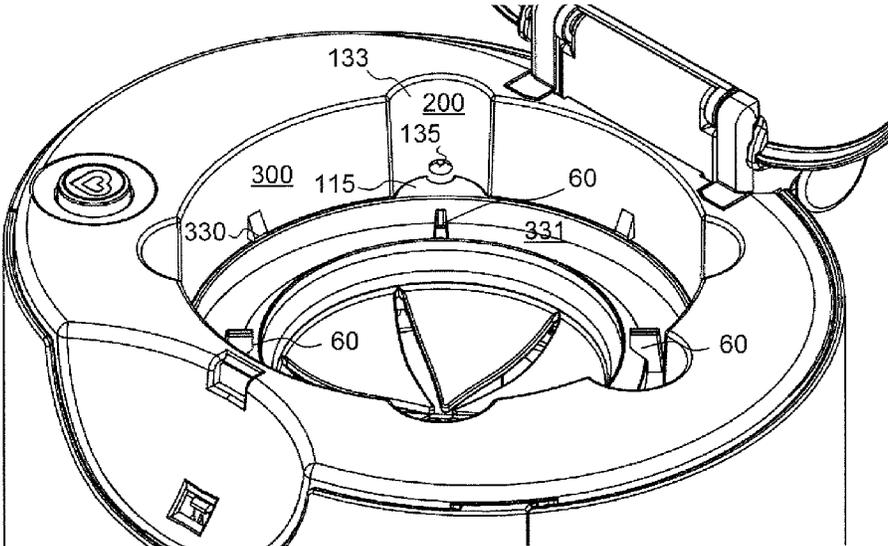


FIG. 1B

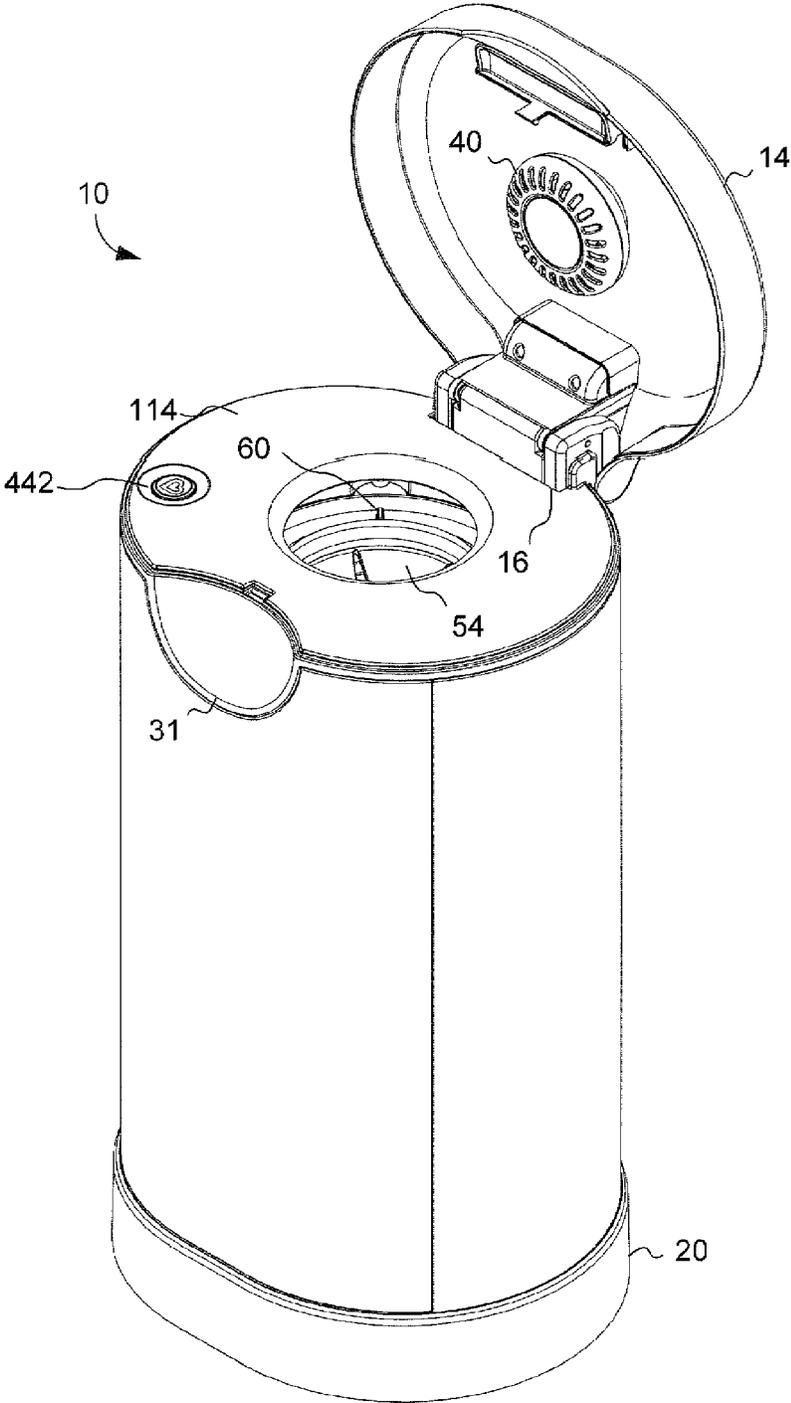


FIG. 2

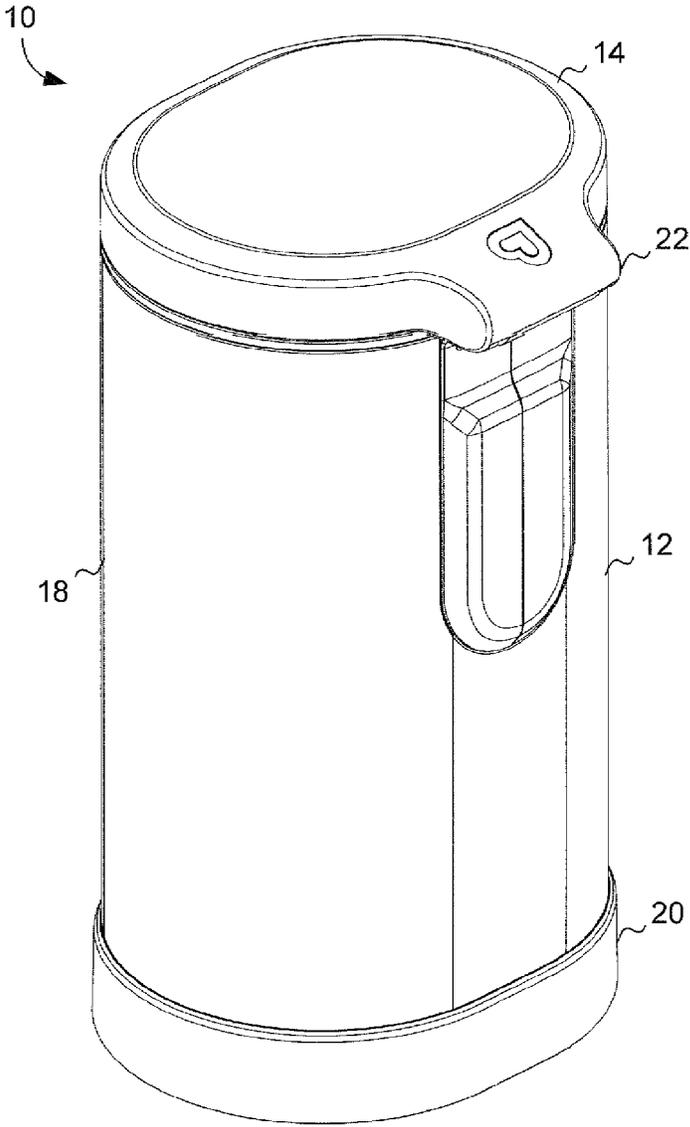


FIG. 3

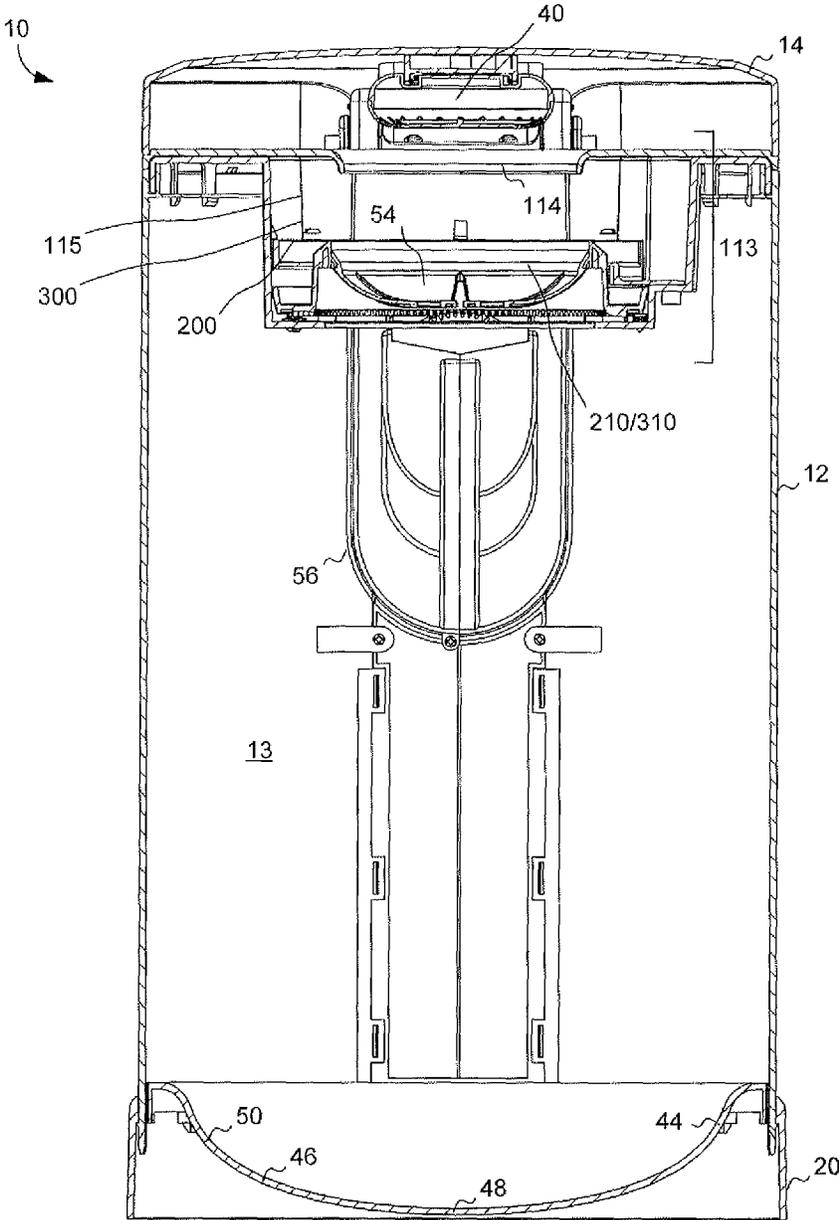


FIG. 4

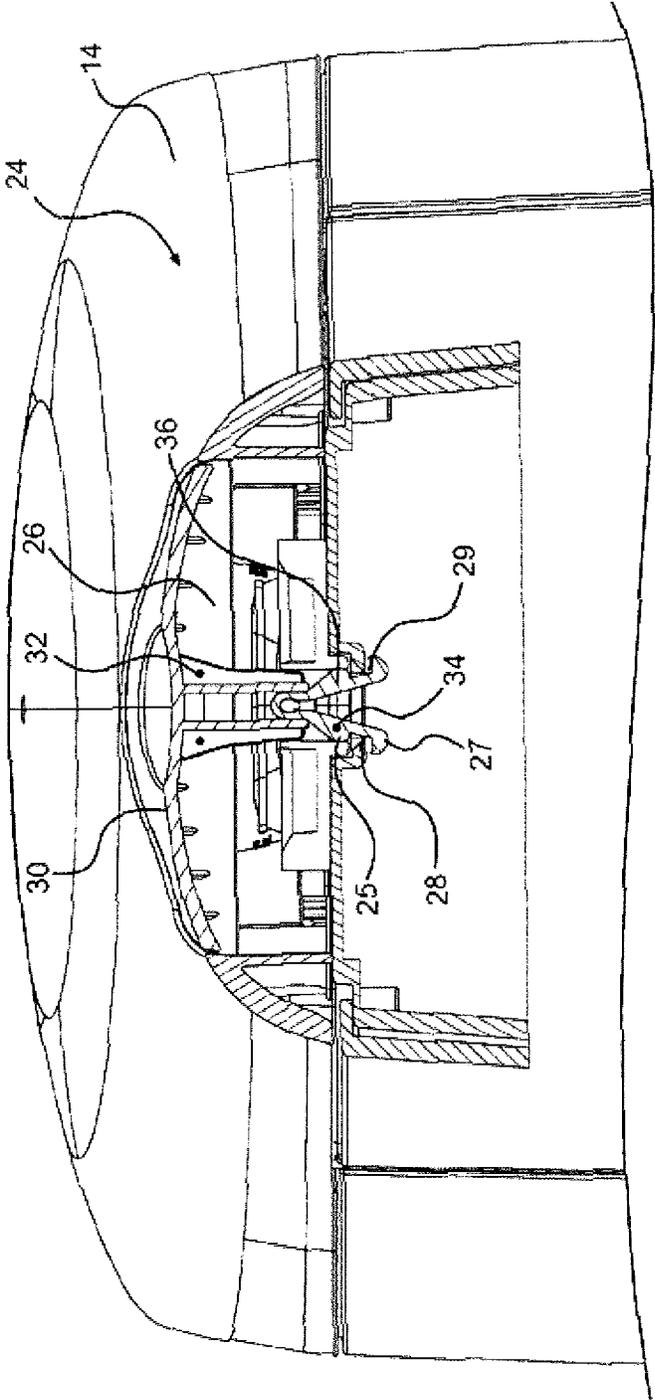


FIG. 5

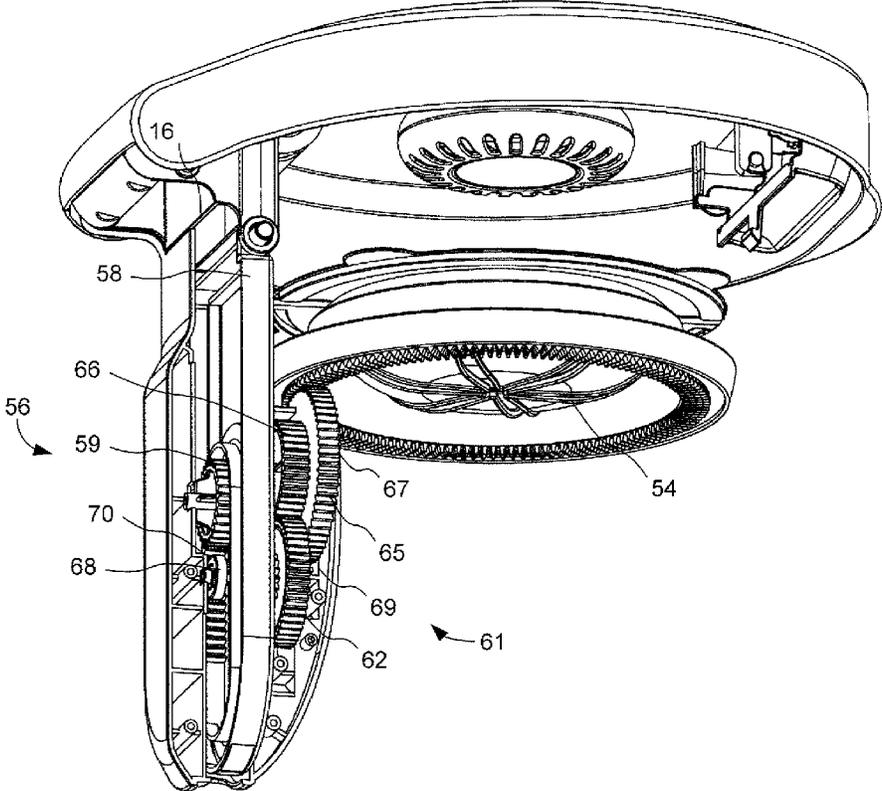


FIG. 6

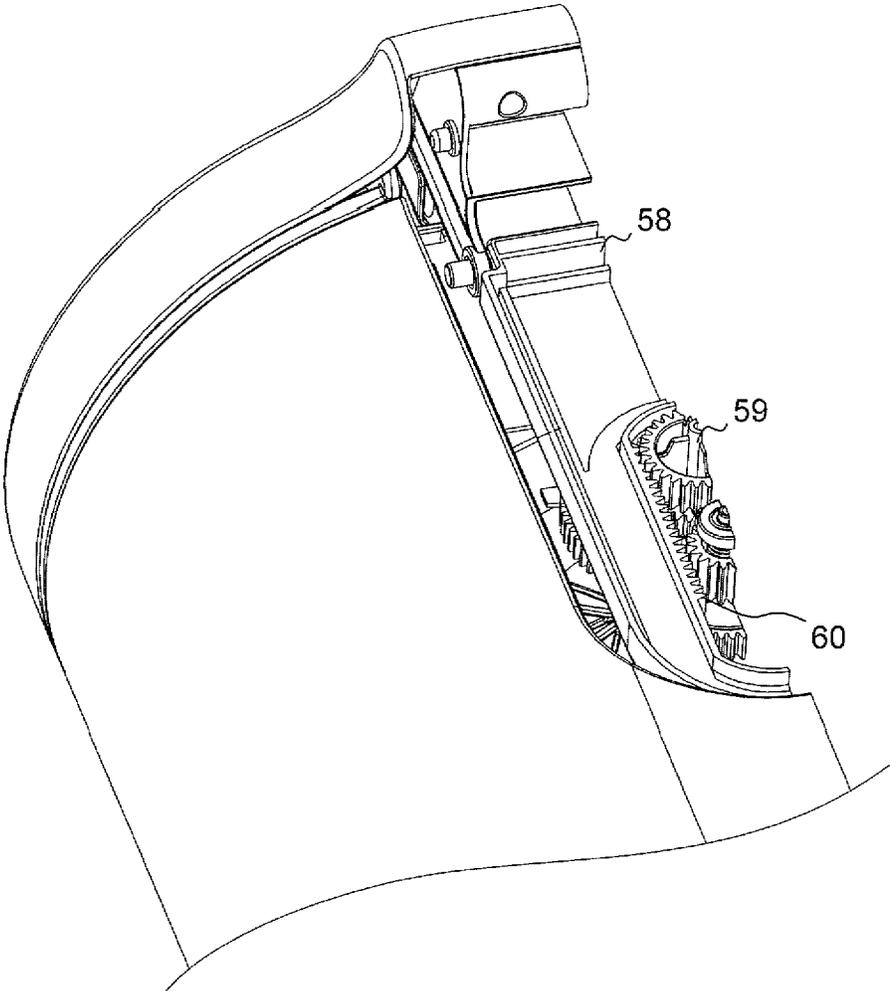


FIG. 7

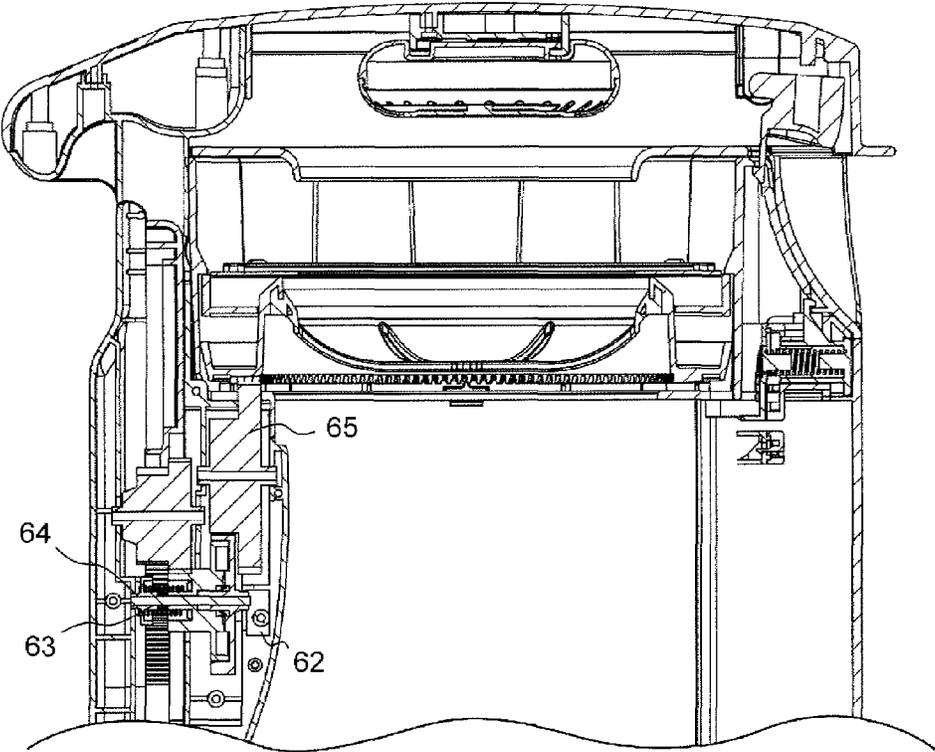


FIG. 8

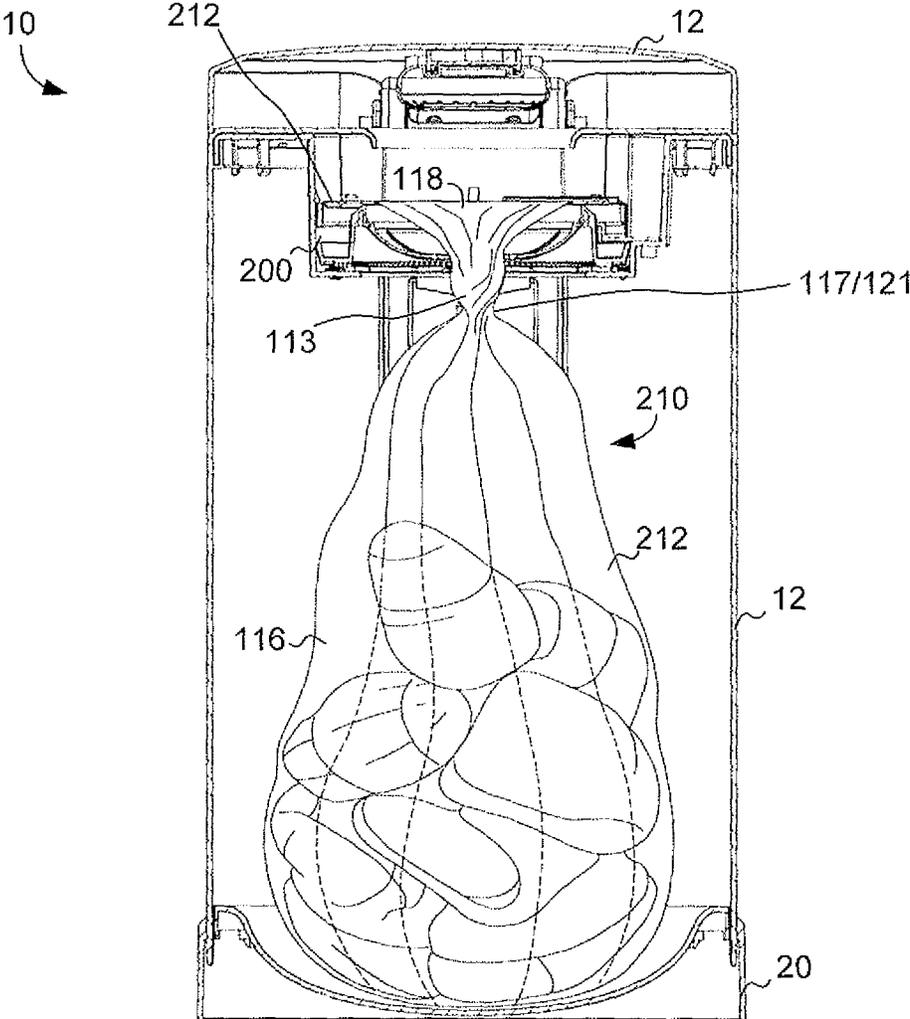


FIG. 9

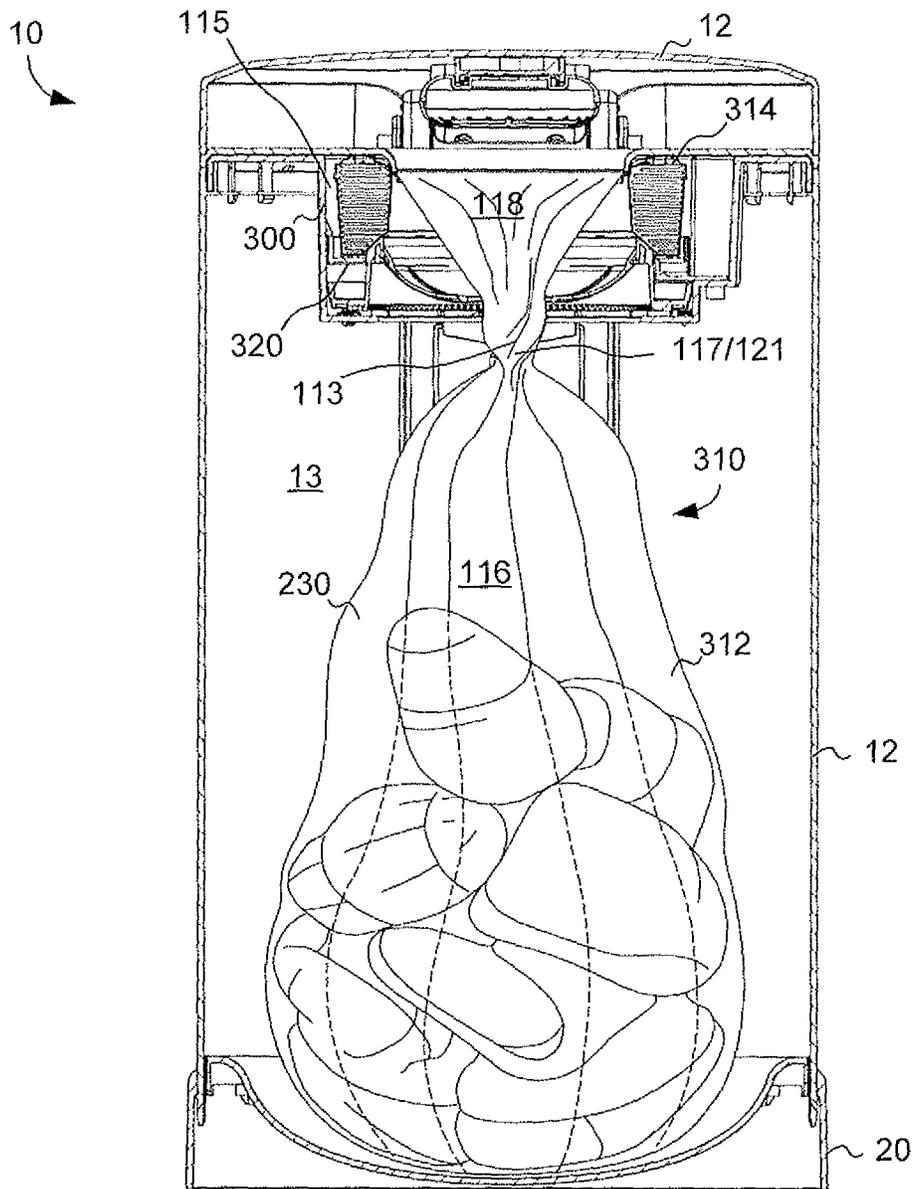


FIG. 10

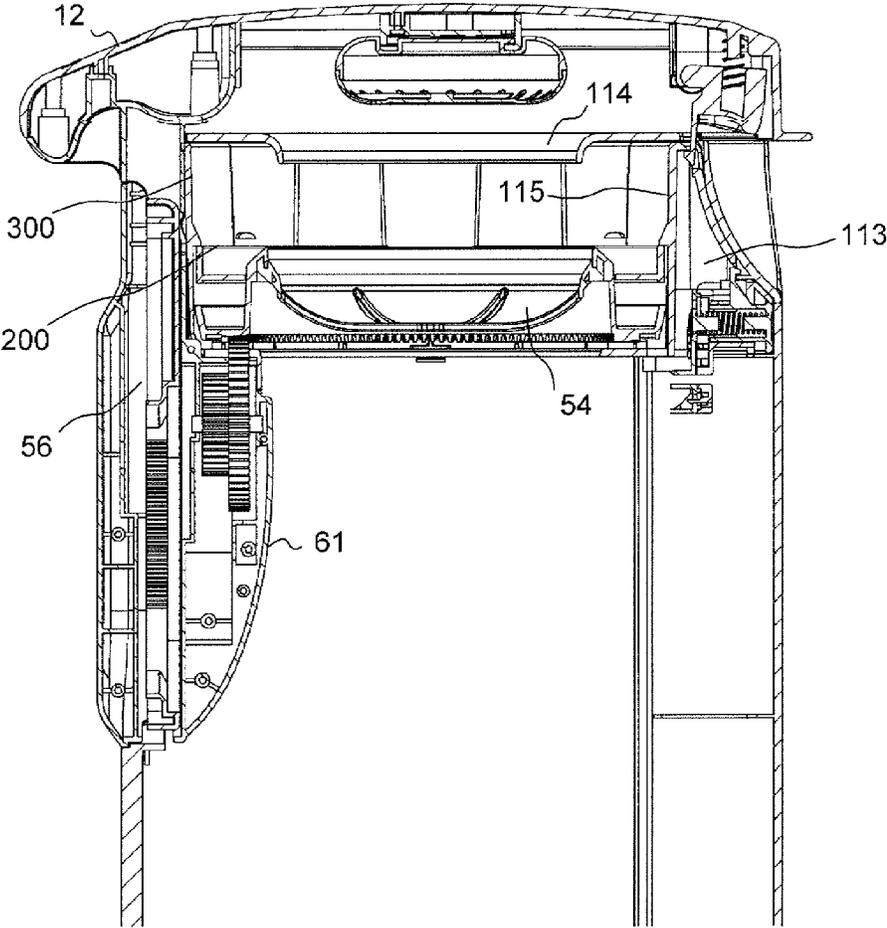


FIG. 11

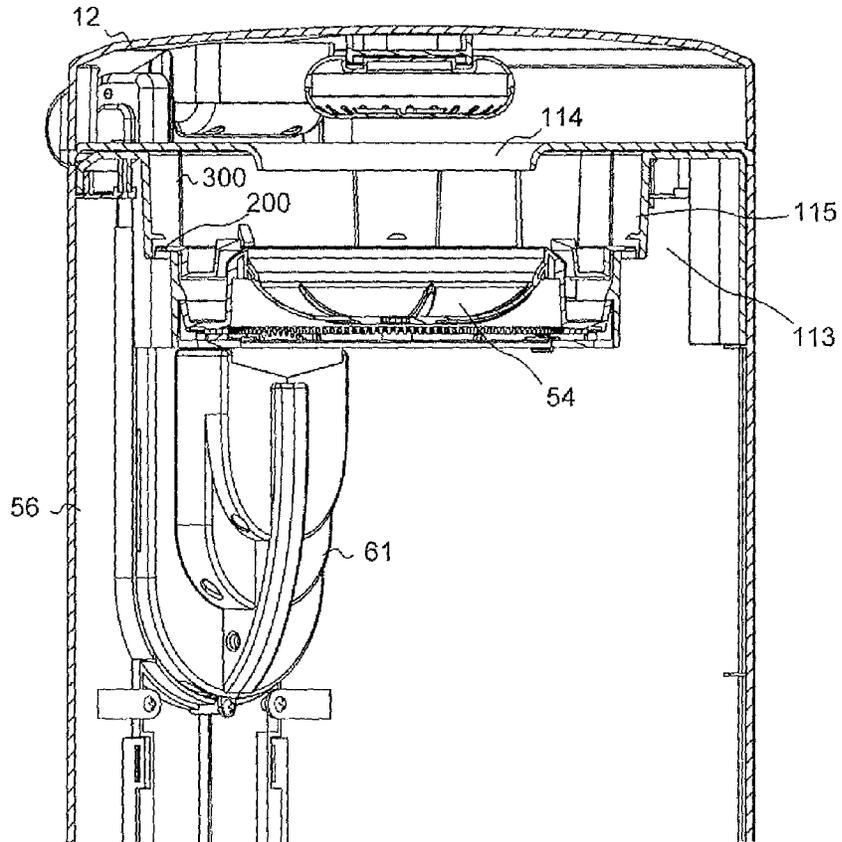


FIG. 12A

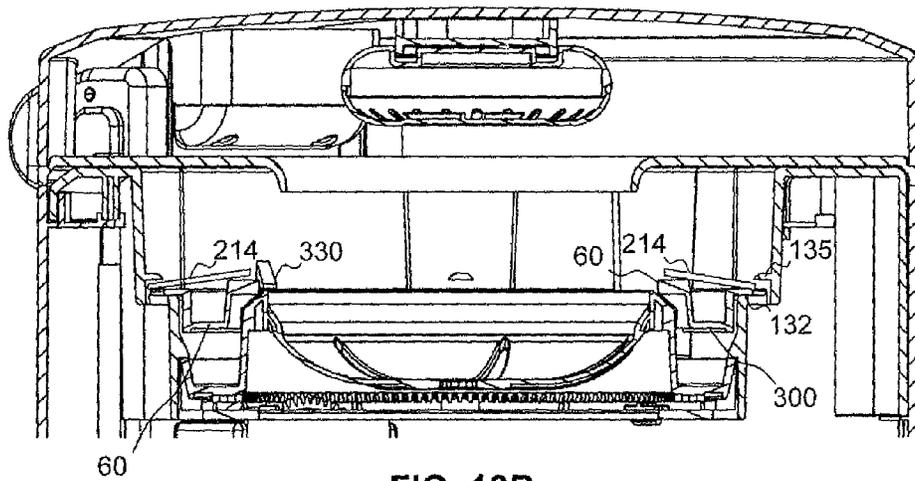


FIG. 12B

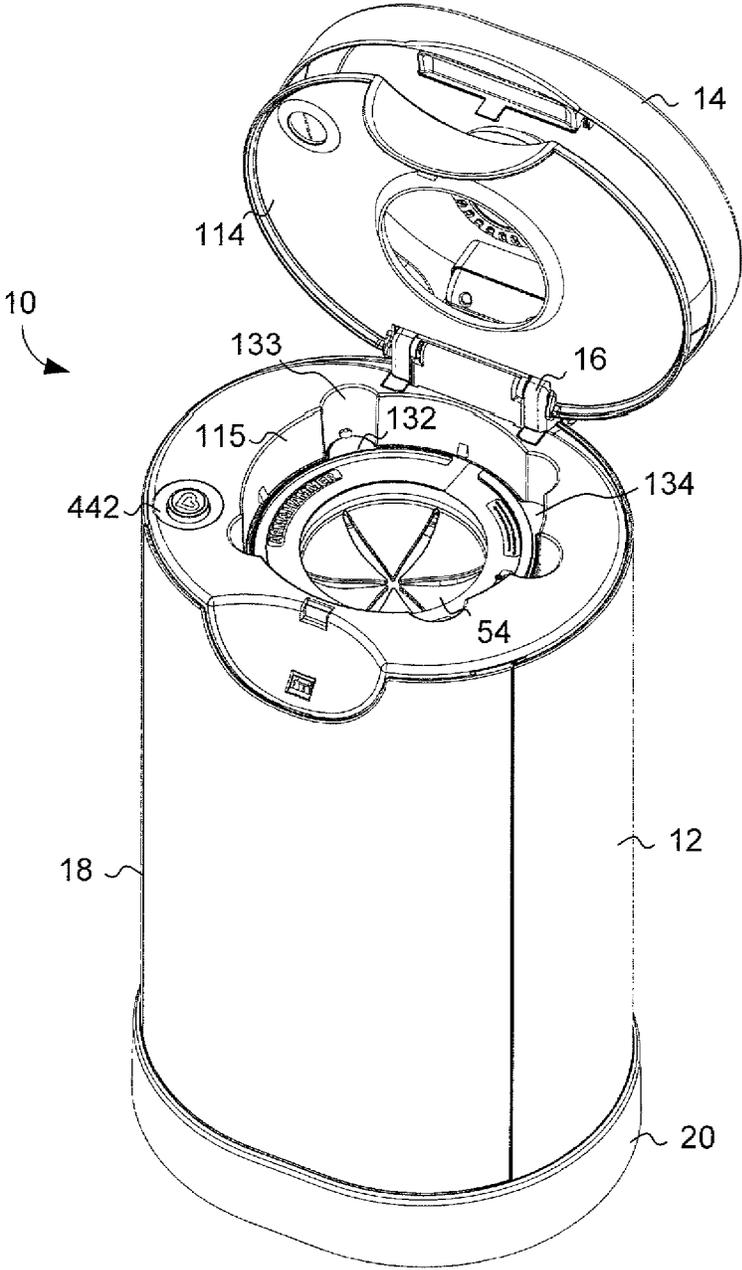


FIG. 13

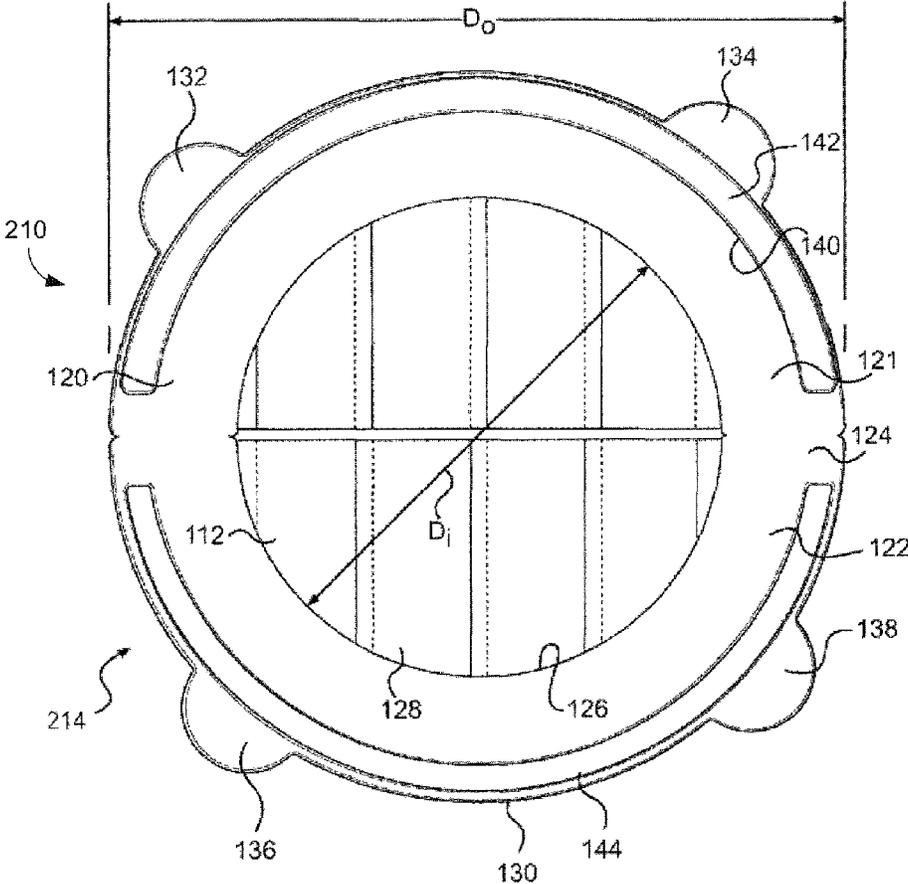


FIG. 14

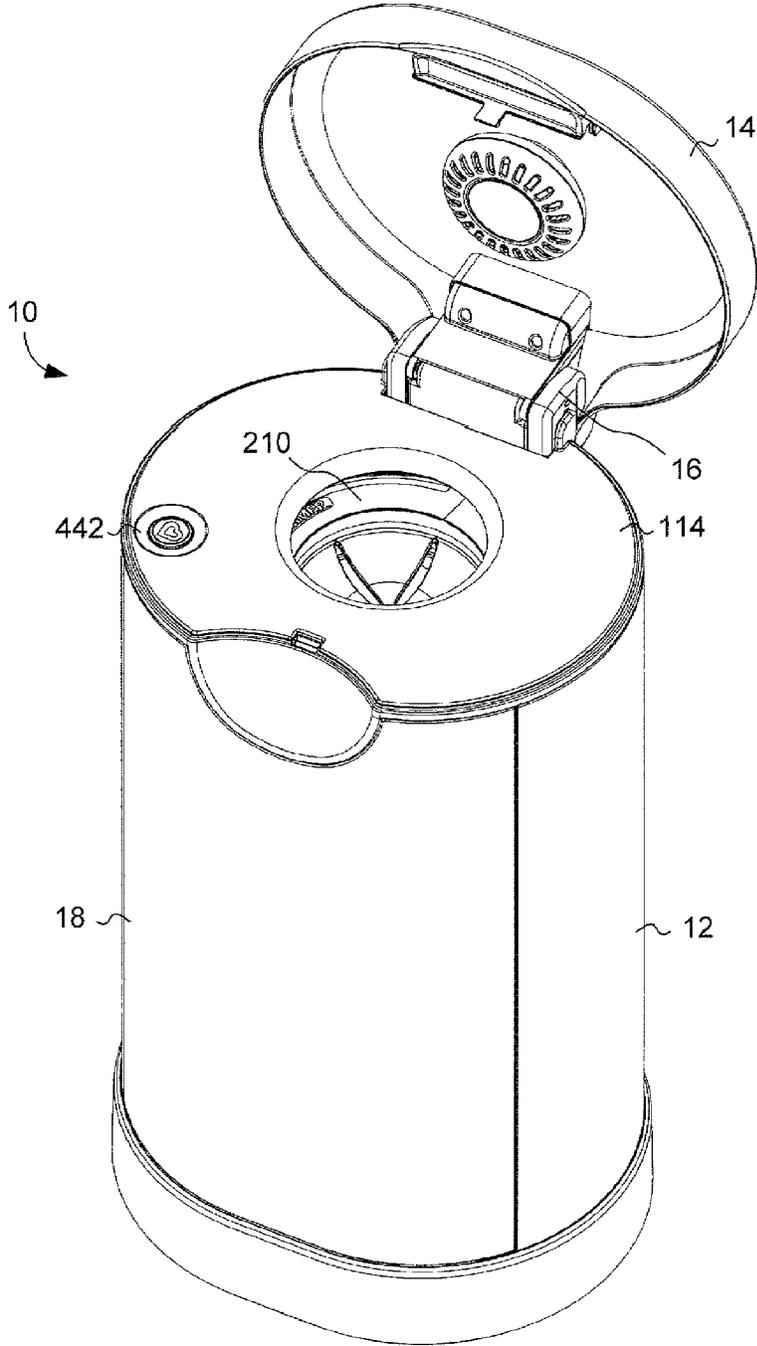


FIG. 15

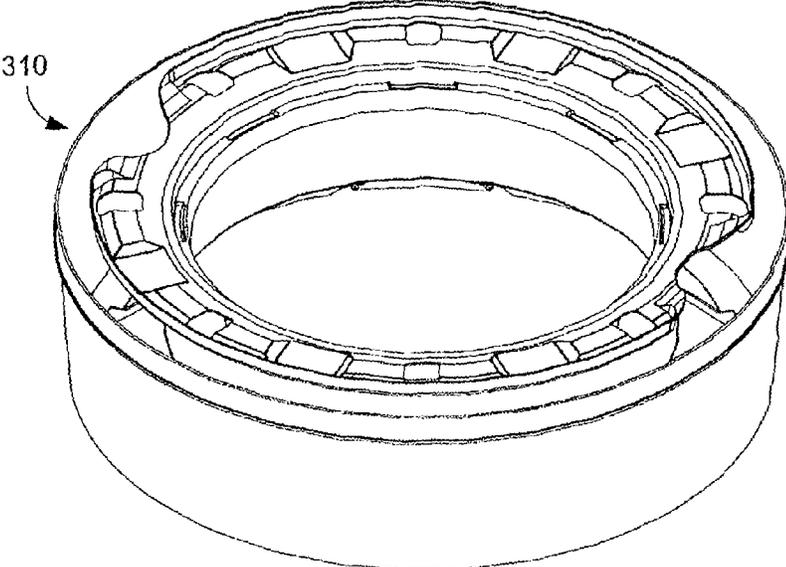


FIG. 16

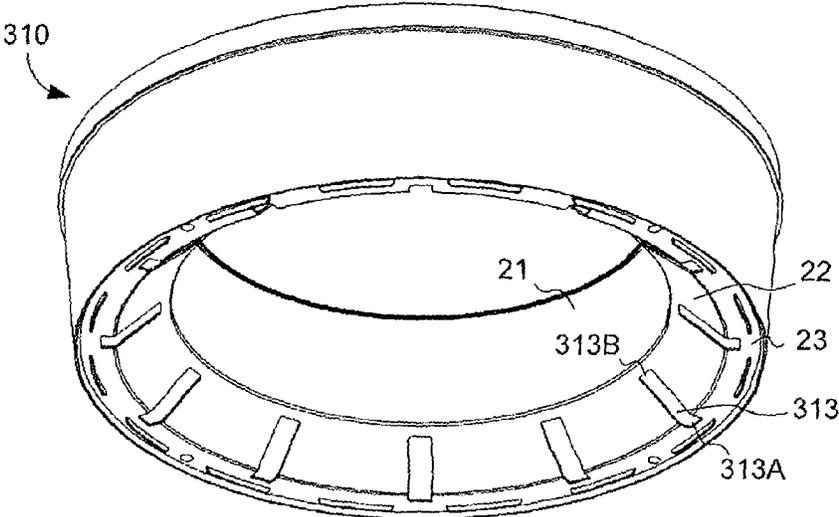


FIG. 17

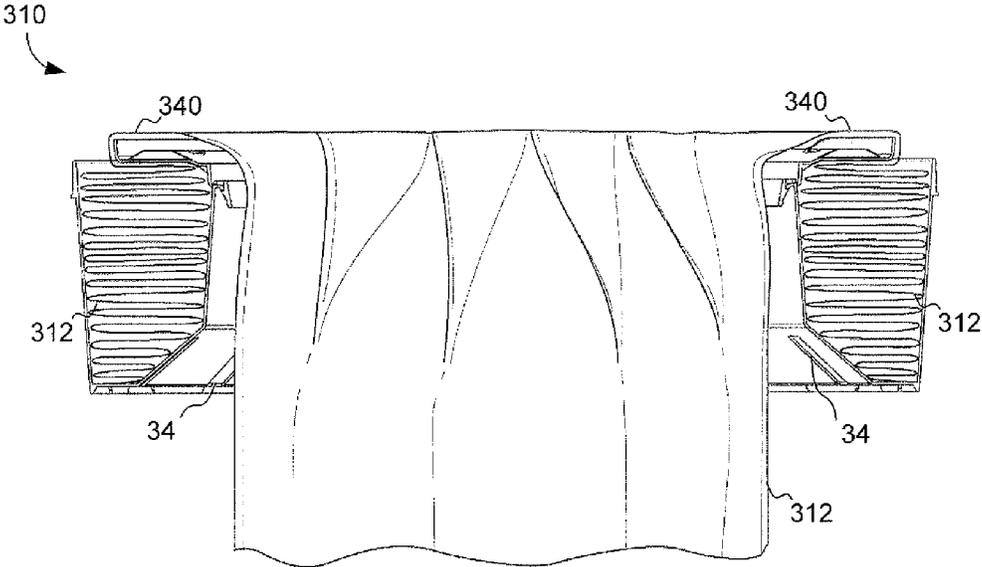


FIG. 18

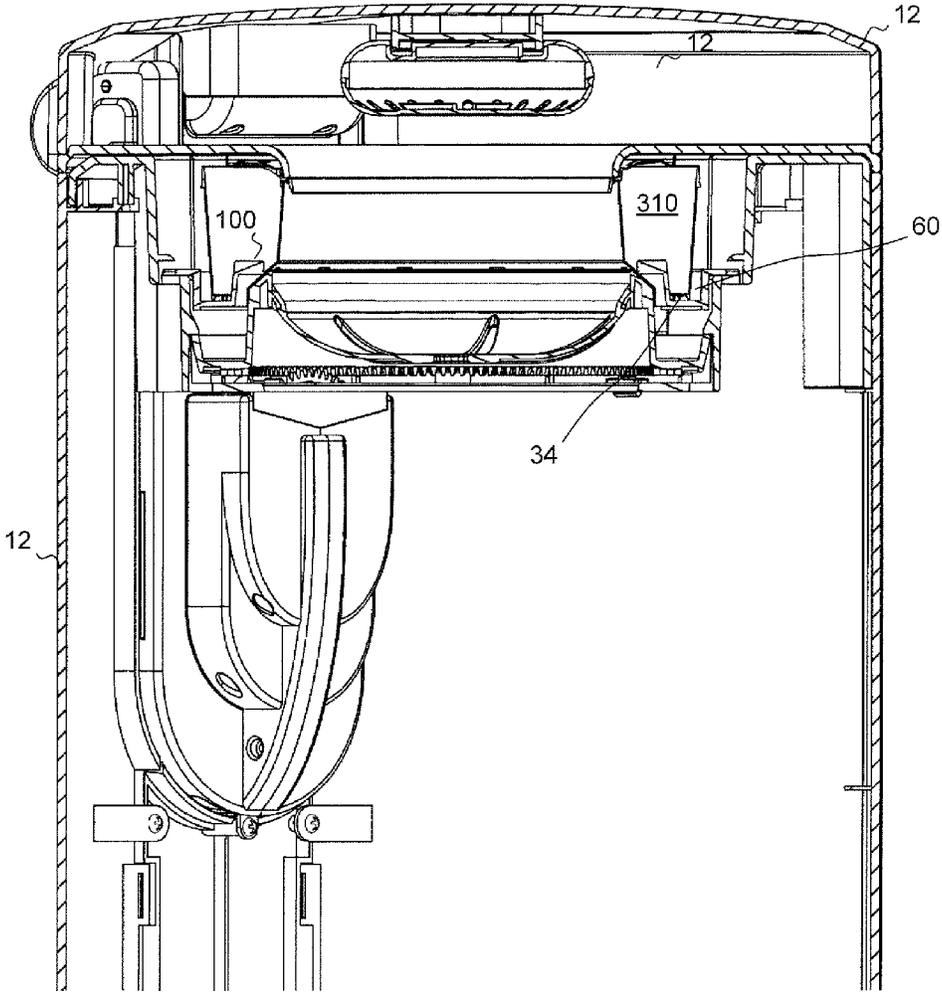


FIG. 19A

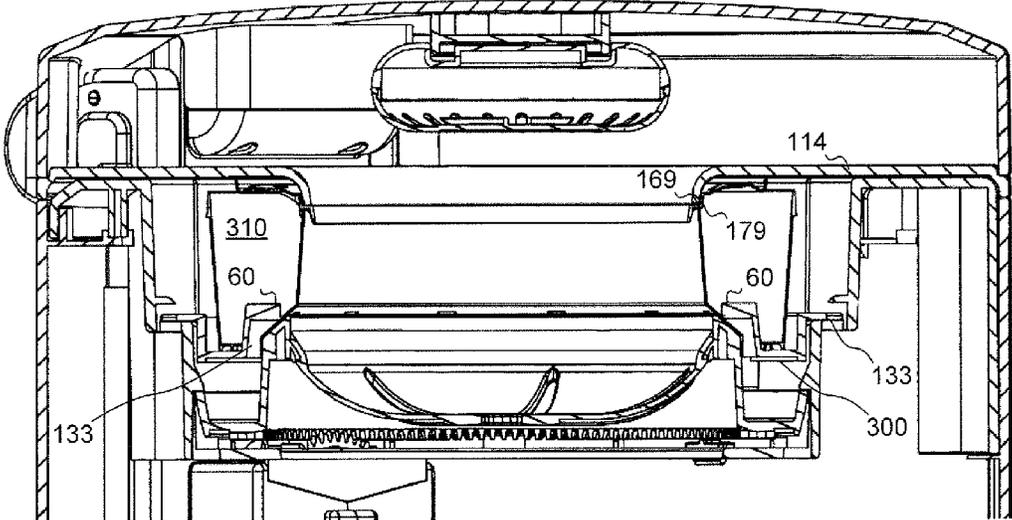


FIG. 19B

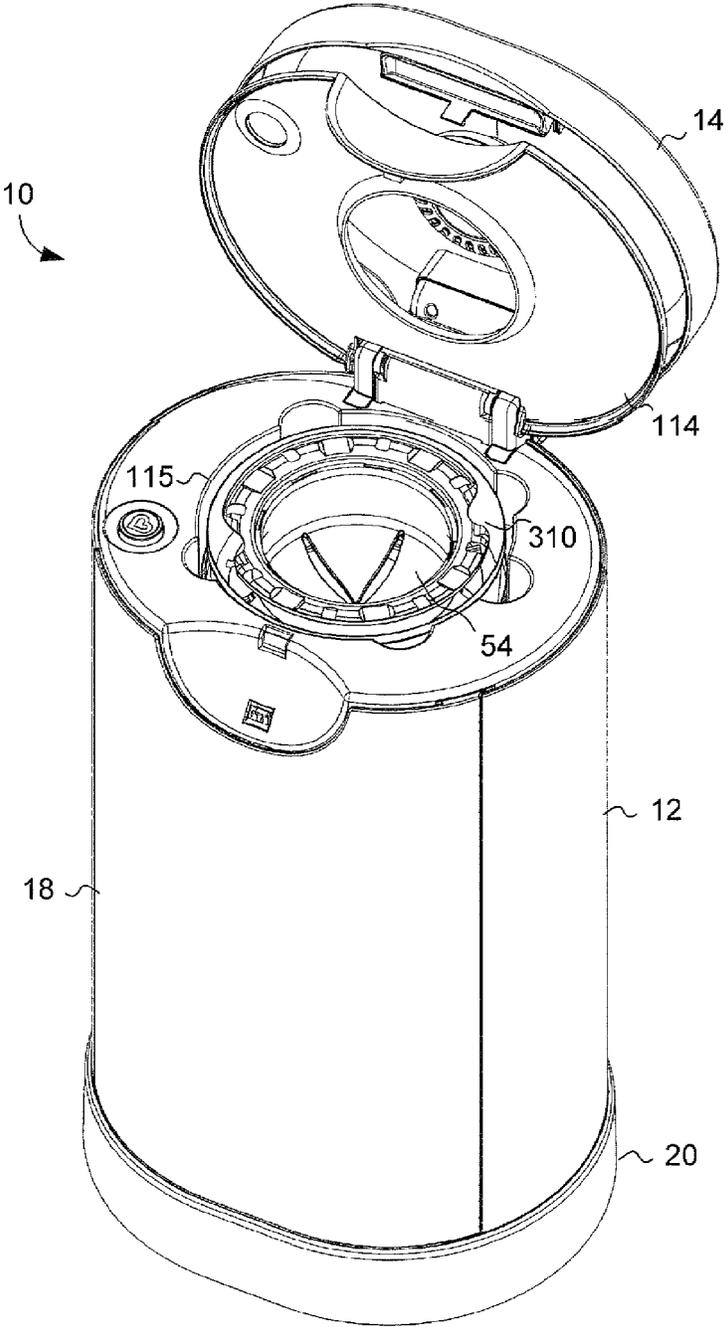


FIG. 20

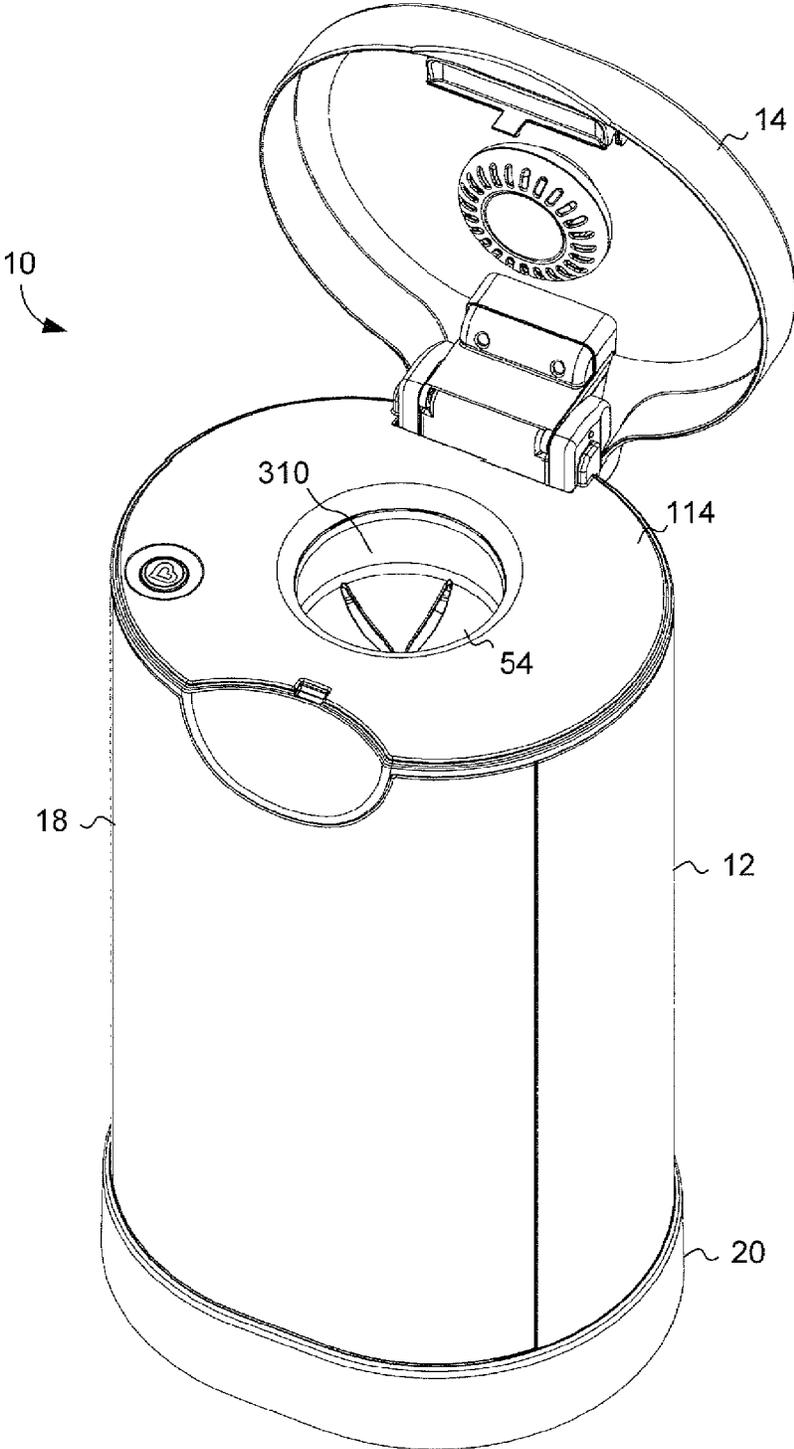


FIG. 21

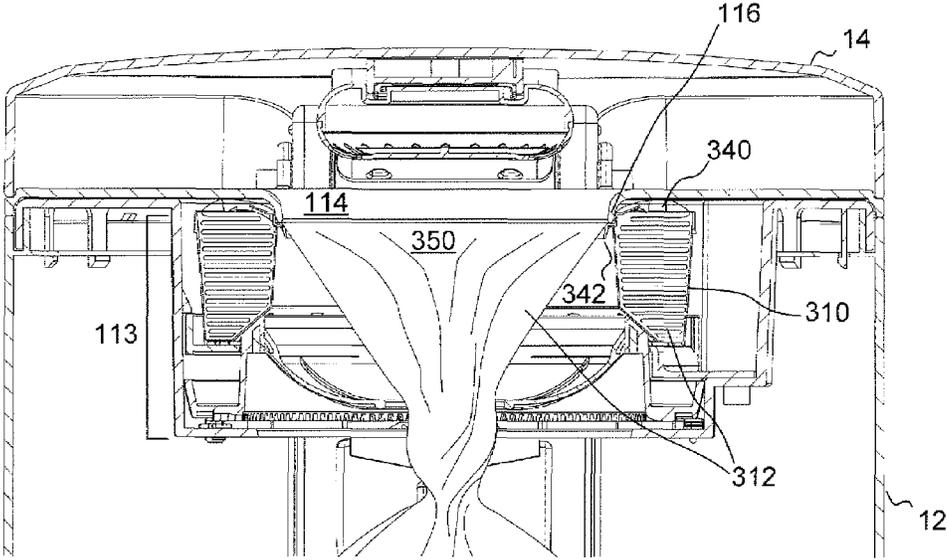


FIG. 22

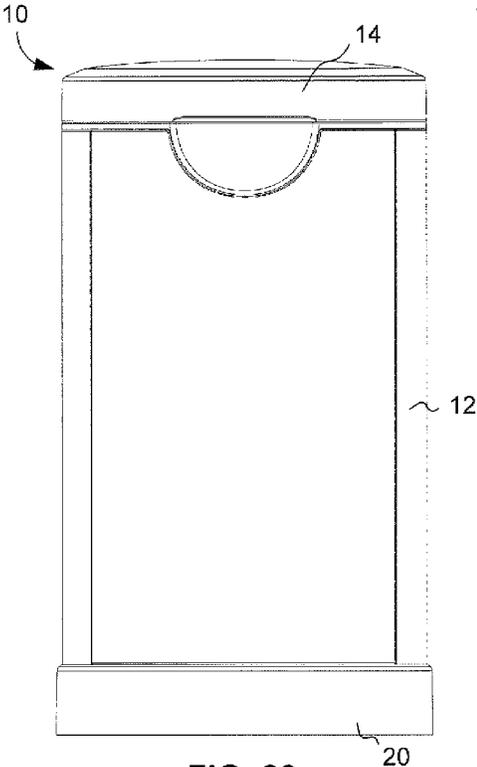


FIG. 23

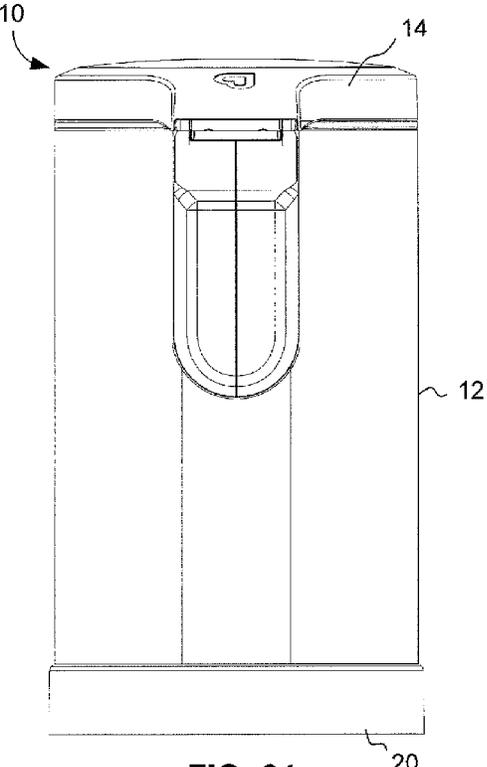


FIG. 24

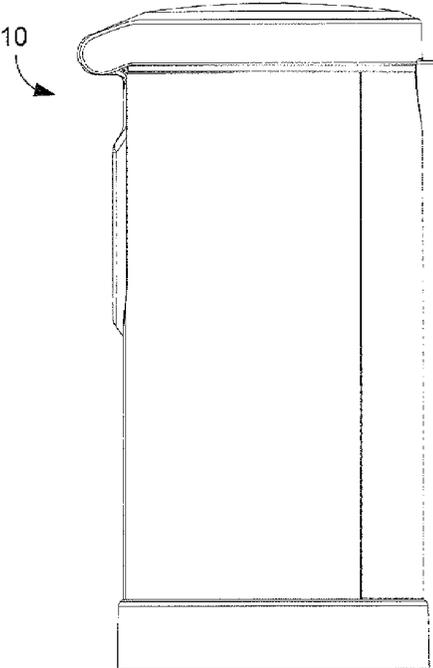


FIG. 25

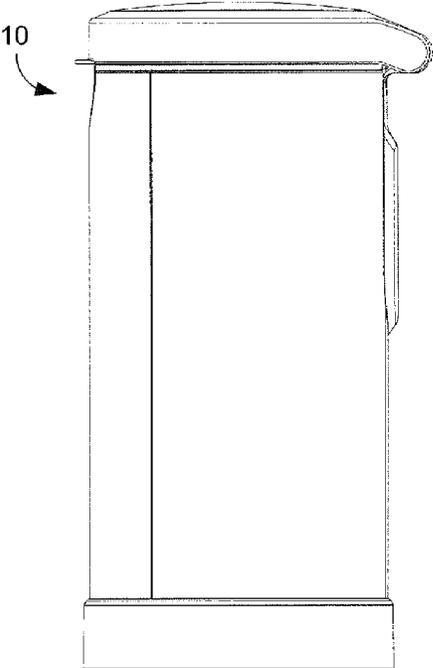


FIG. 26

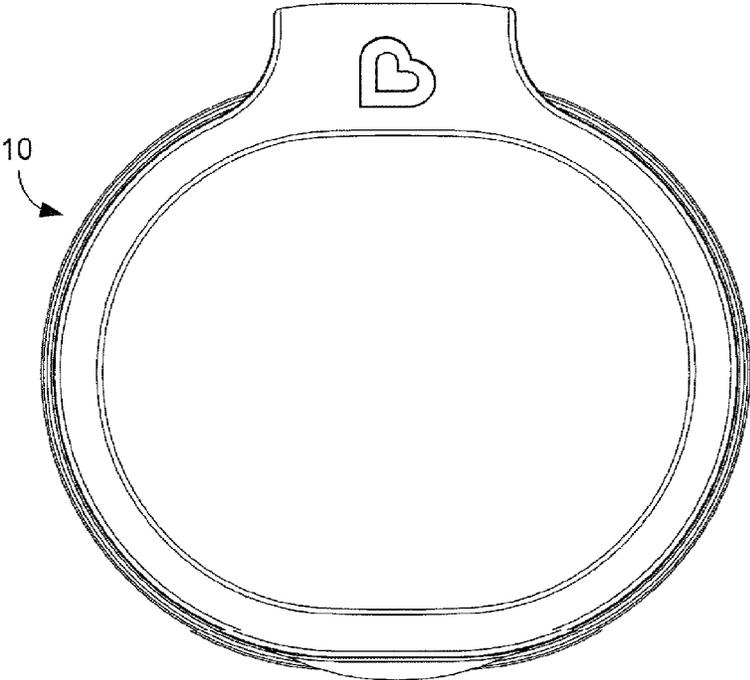


FIG. 27

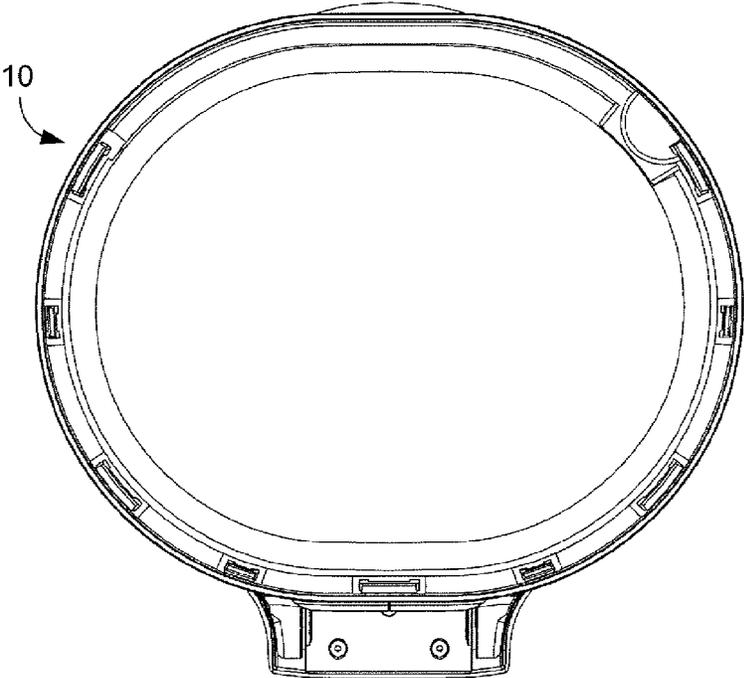


FIG. 28

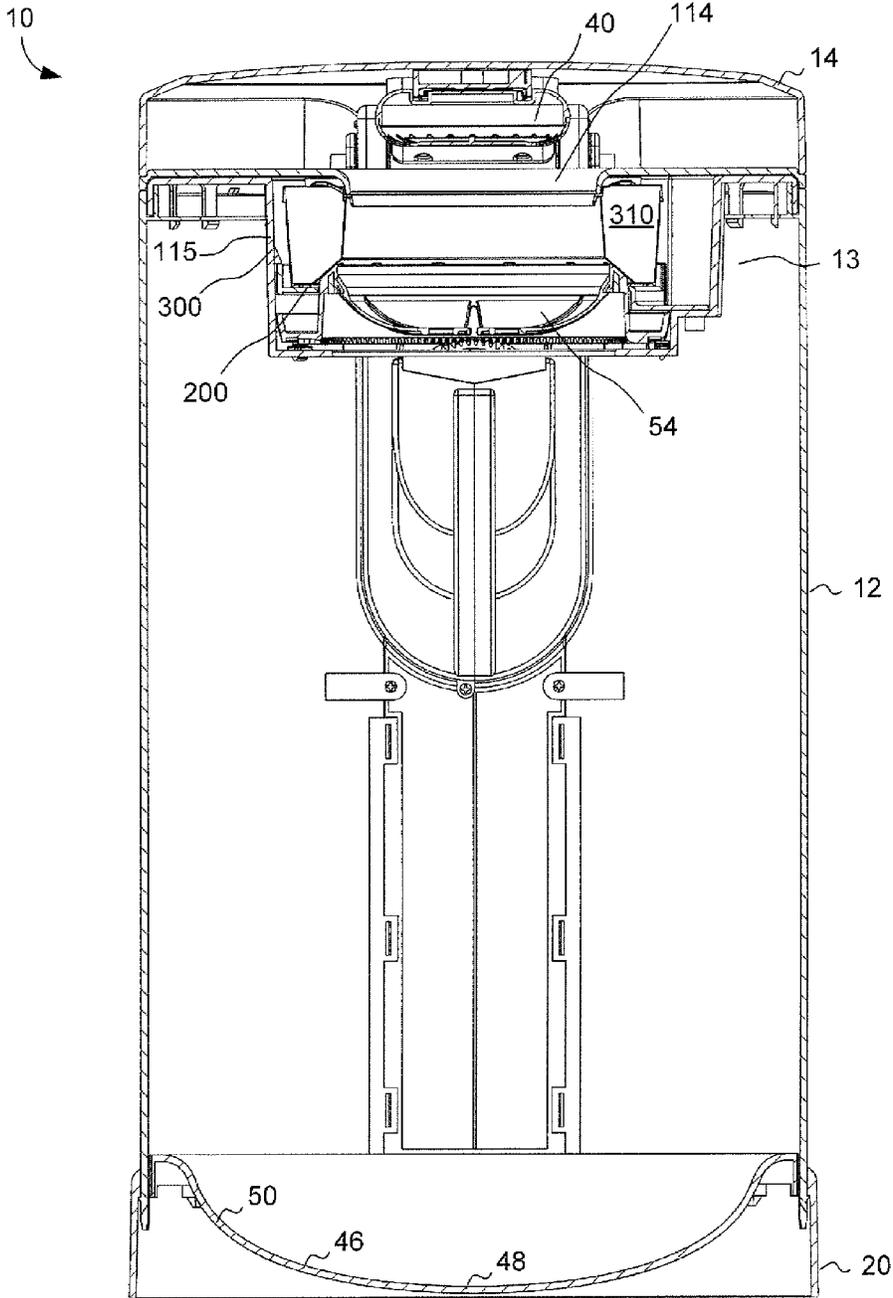


FIG. 29

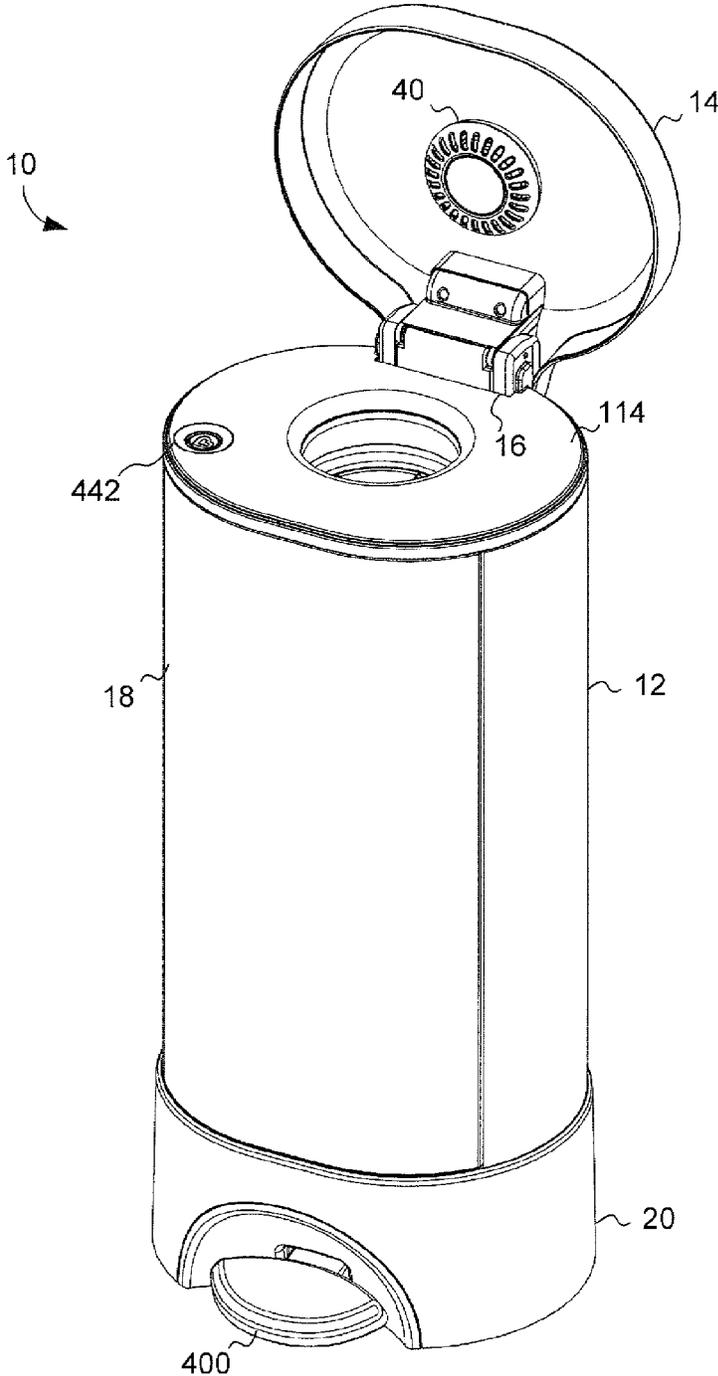


FIG. 30

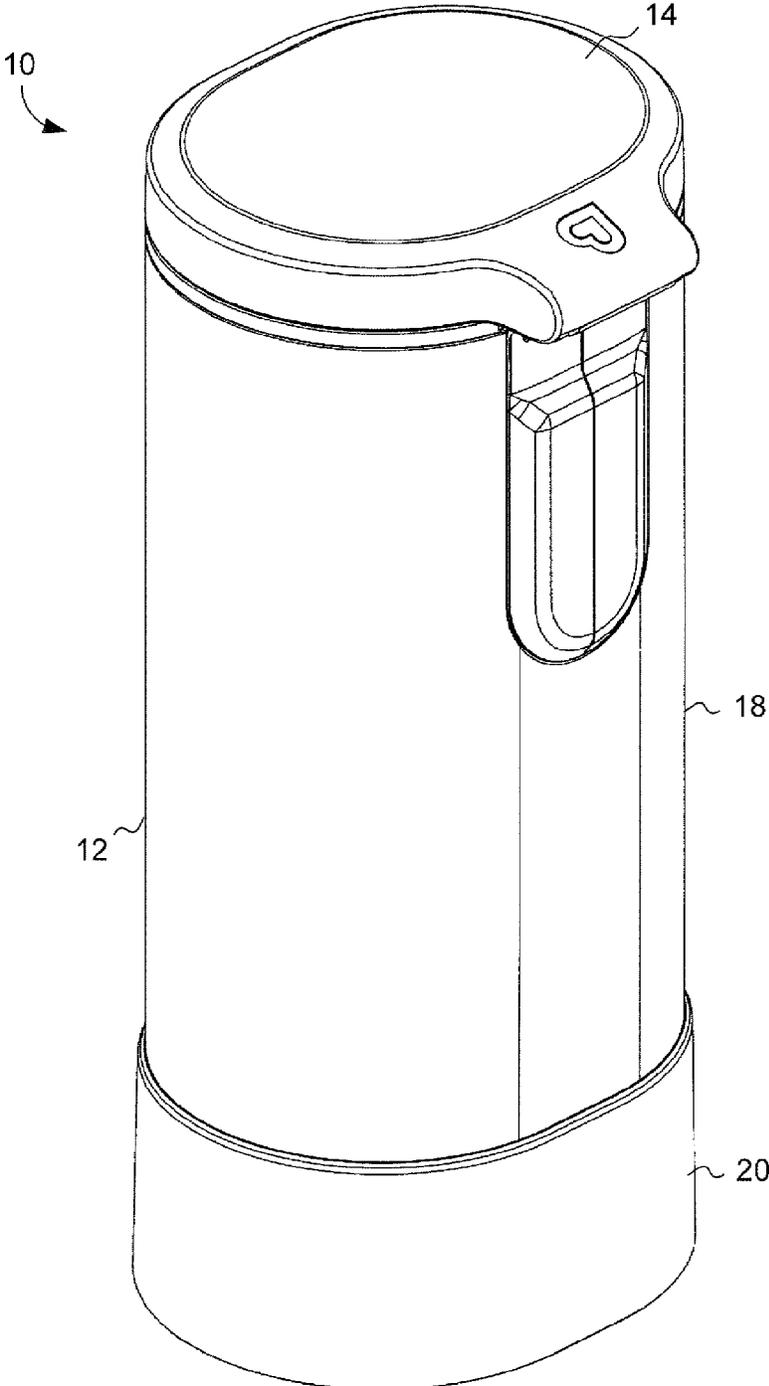


FIG. 31

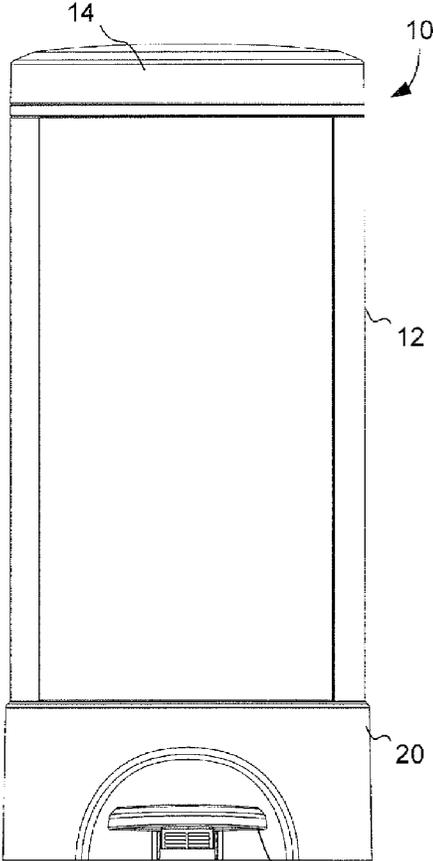


FIG. 32 400

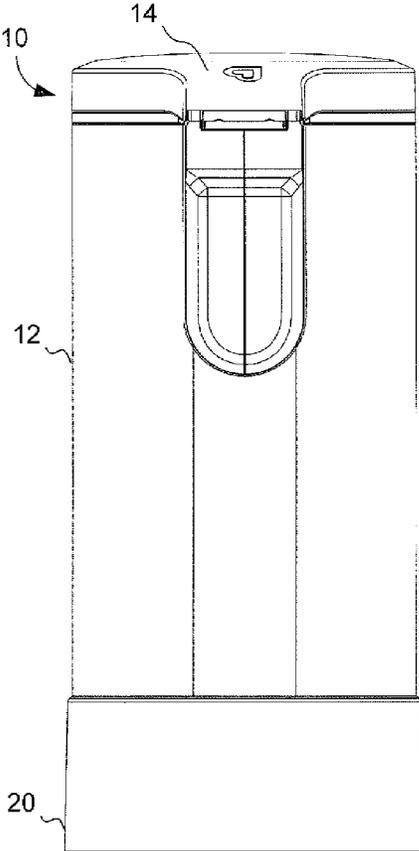


FIG. 33

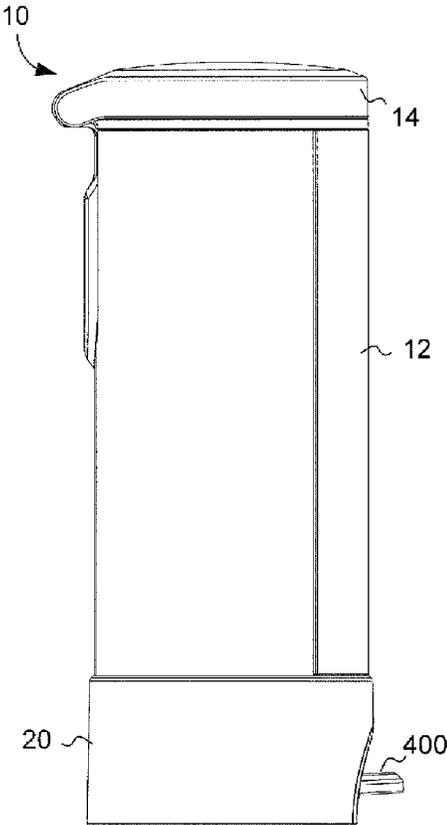


FIG. 34

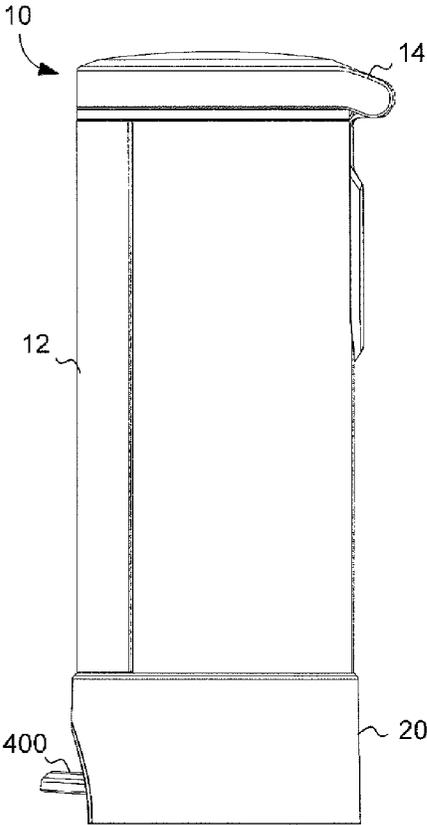


FIG. 35

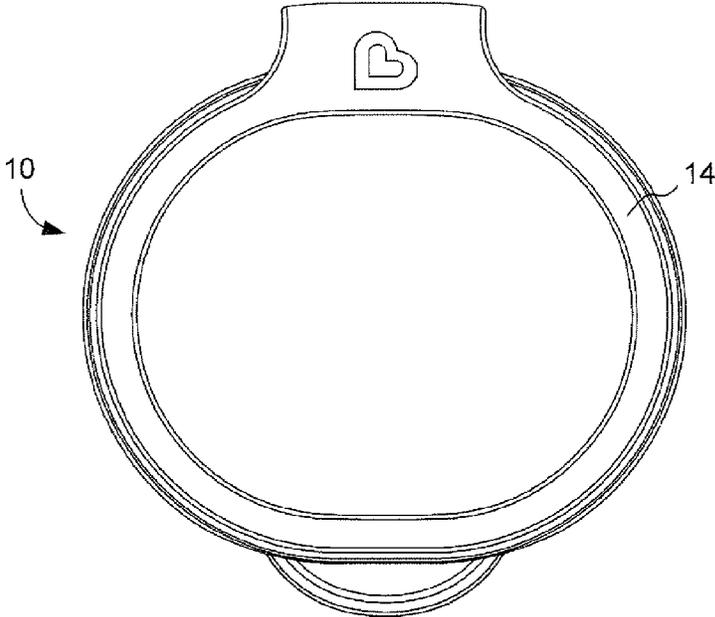


FIG. 36

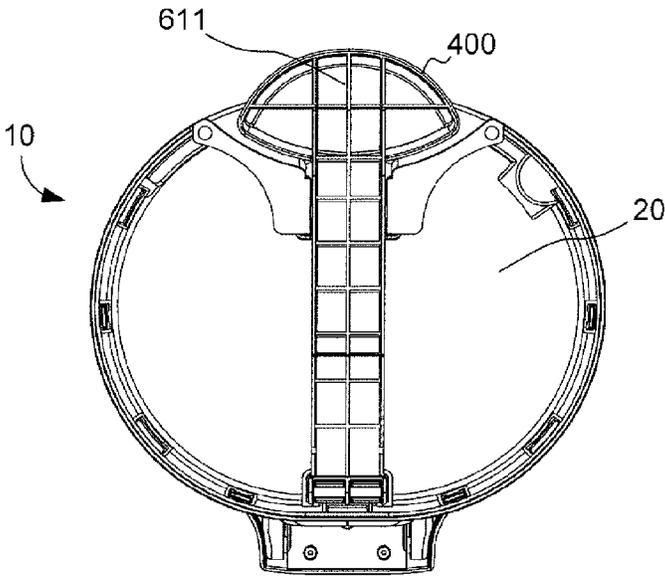


FIG. 37

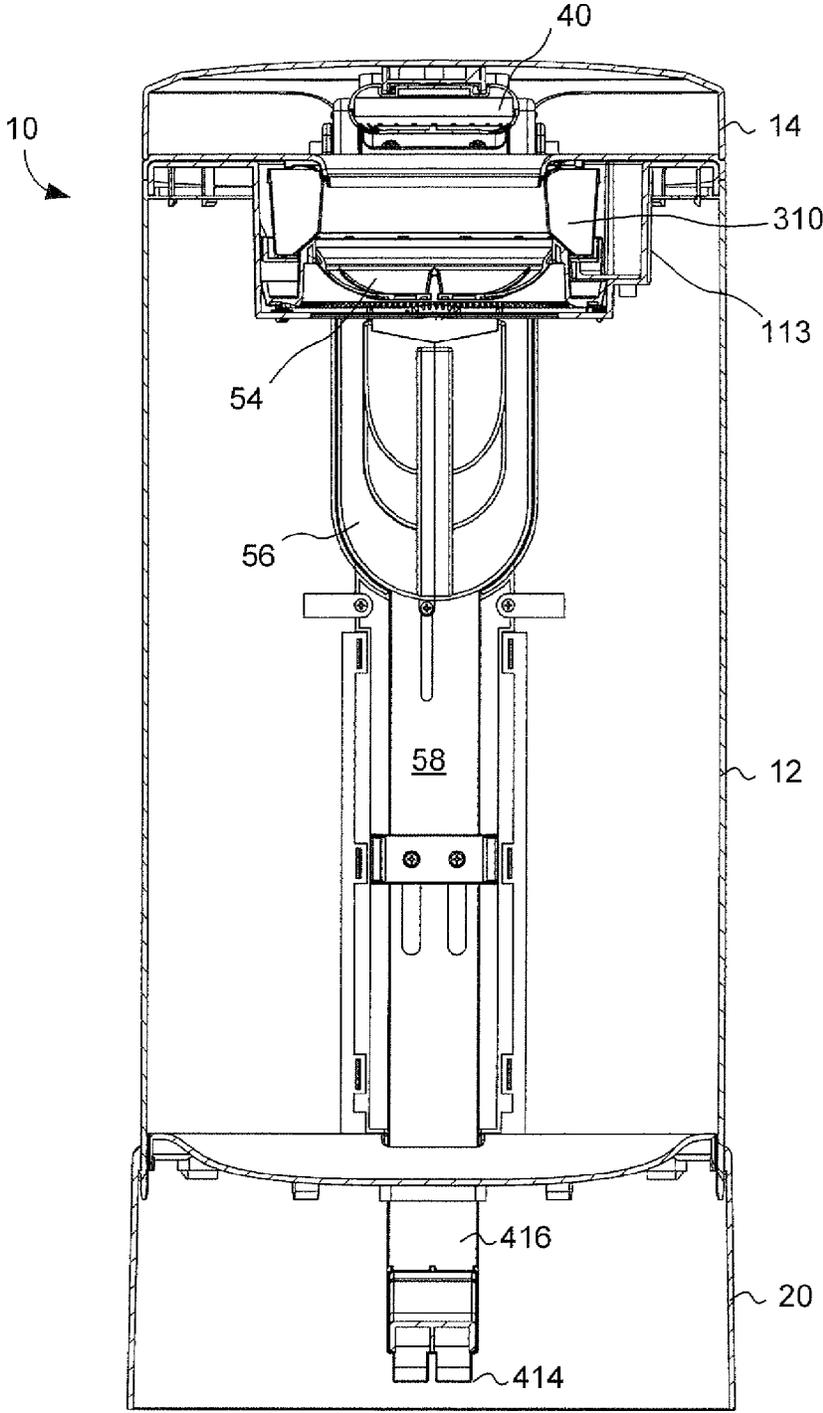


FIG. 38


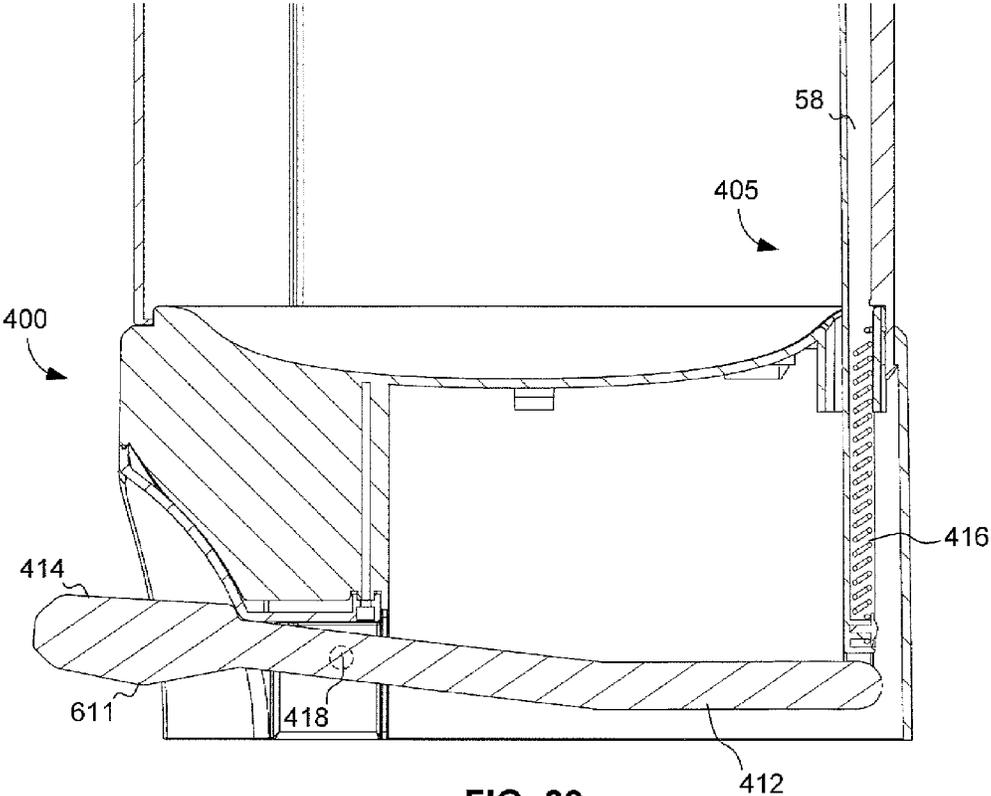


FIG. 39

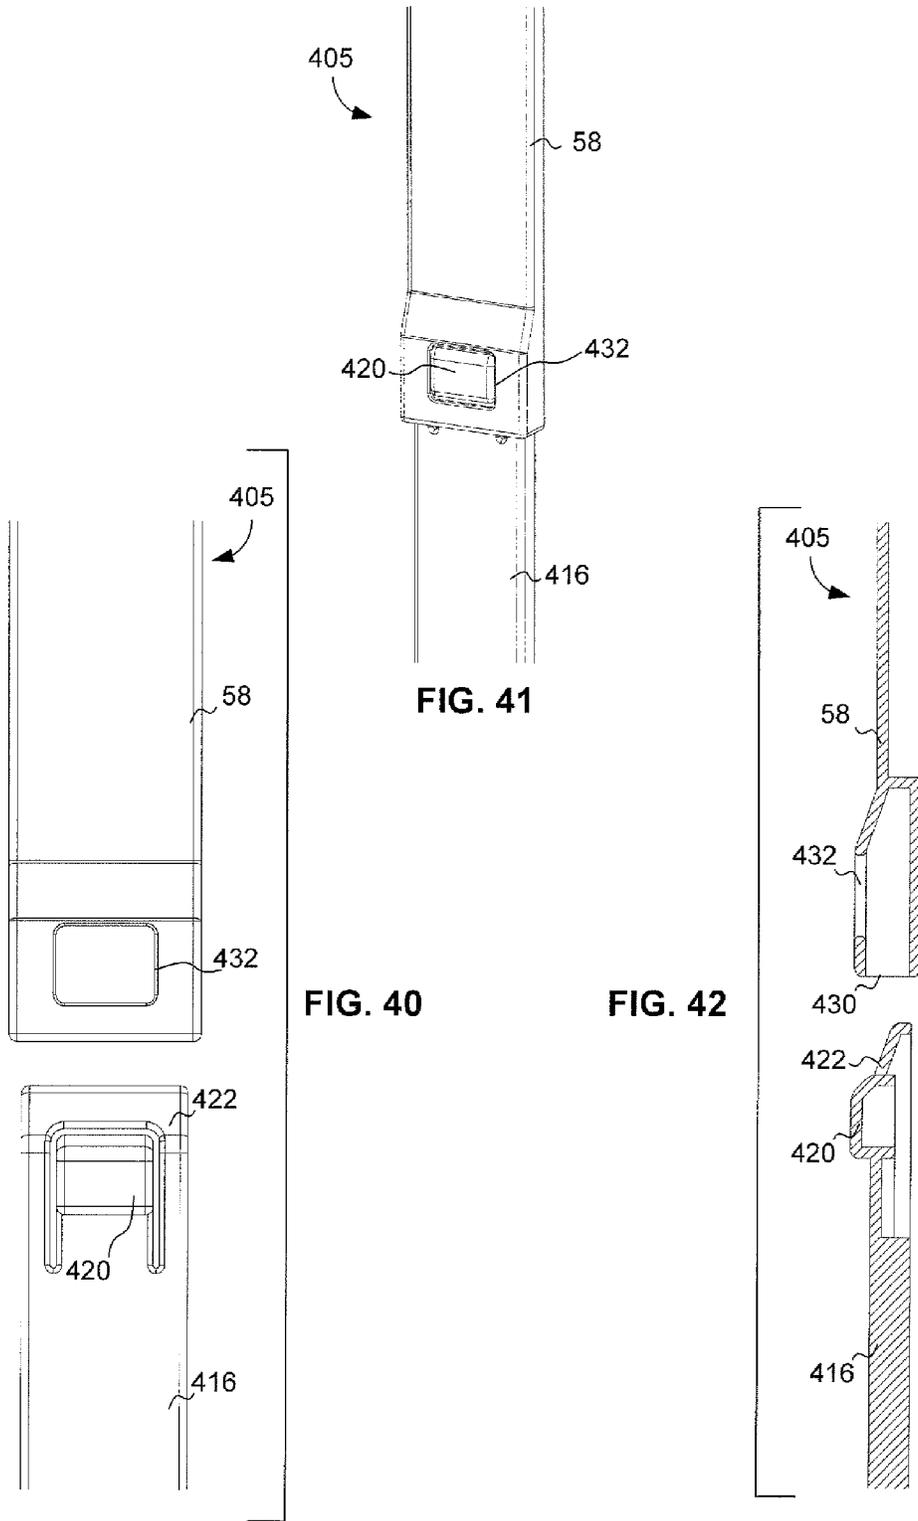

405

58

420

432

416

FIG. 41

405

58

432

FIG. 40

422

420

416

405

58

432

430

422

420

416

FIG. 42

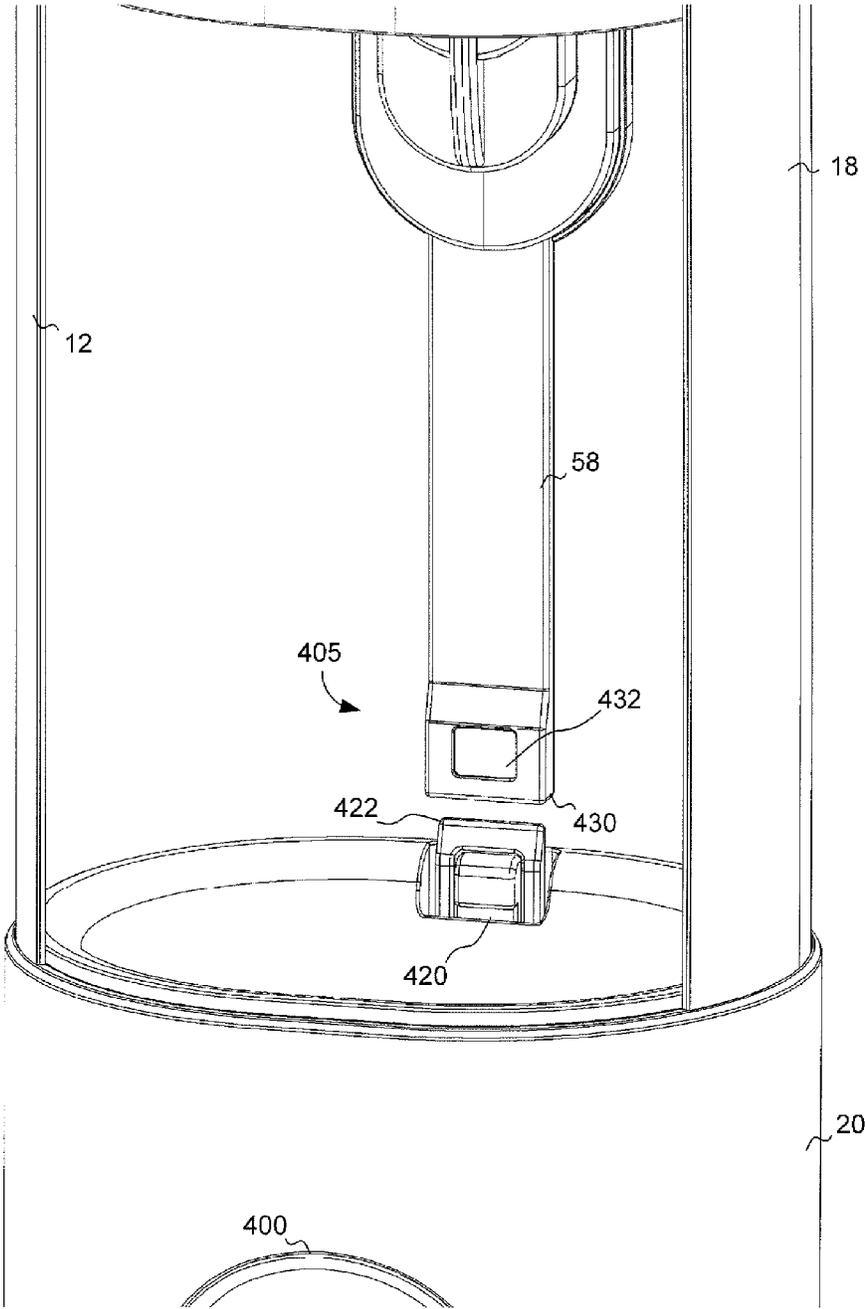


FIG. 43

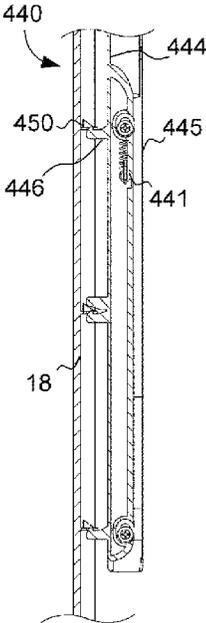


FIG. 44

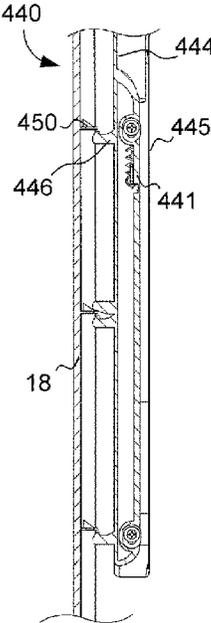


FIG. 45

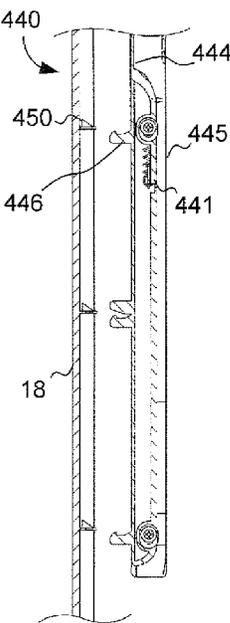


FIG. 46

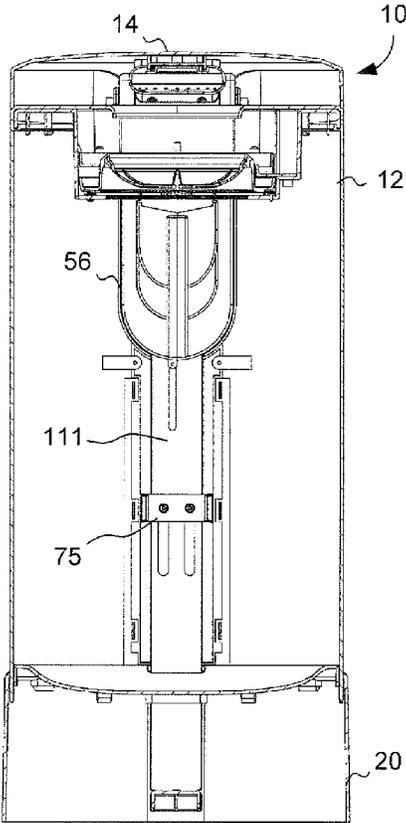


FIG. 47

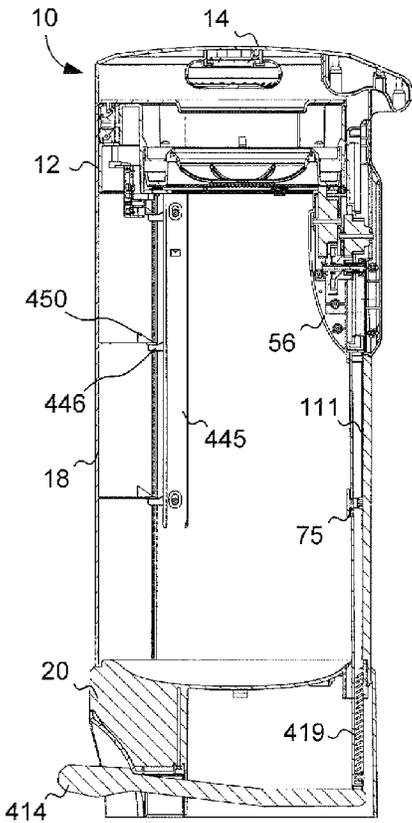


FIG. 48

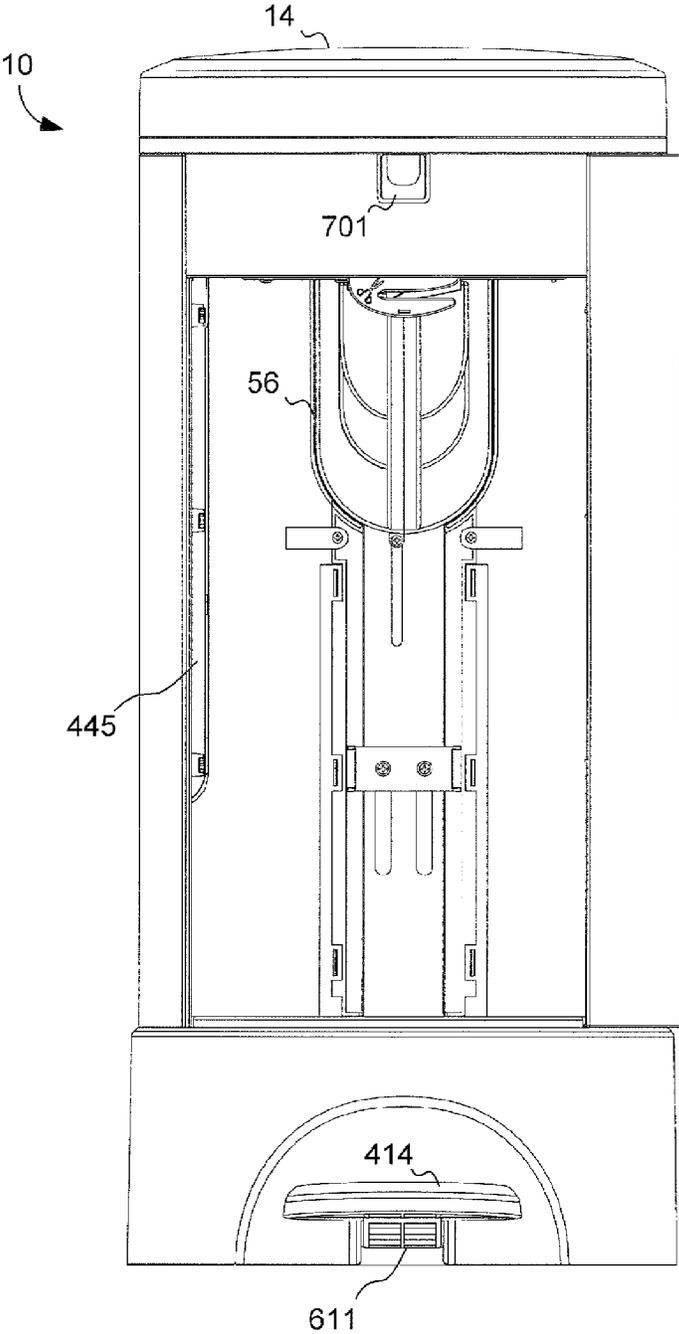


FIG. 49

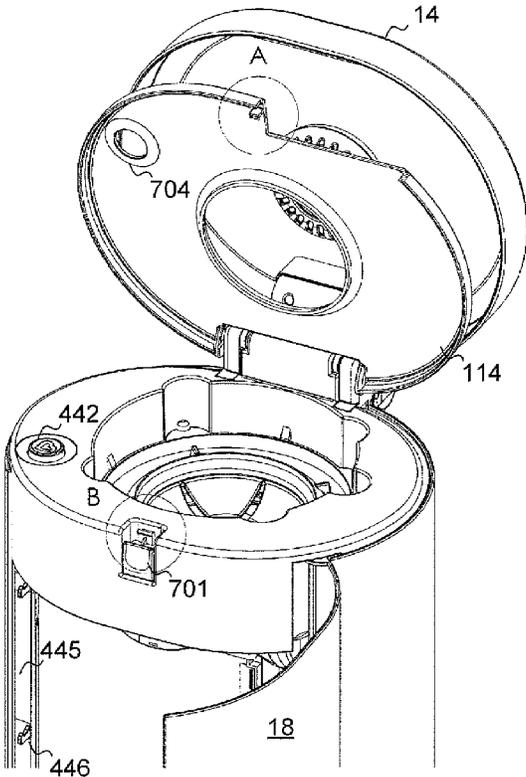


FIG. 50




FIG. 51 DETAIL A




FIG. 52 DETAIL B

1

## CONTAINER FOR RECEIVING MULTIPLE FLEXIBLE BAG ASSEMBLIES

### CROSS REFERENCE TO RELATED APPLICATIONS

This application claims priority to U.S. Provisional Patent Application Ser. No. 62/090,558, filed Dec. 11, 2014, the contents of which are hereby incorporated by reference herein in their entirety into this disclosure.

### TECHNICAL FIELD

The subject disclosure relates to a waste disposal and system. More specifically, to a multi-component container system, such as a pail assembly, being configured for use with various bag assemblies, including a single use bag and/or a cassette having a resilient flexible tubing packed therein.

### BRIEF DESCRIPTION OF THE DRAWINGS

Various exemplary embodiments of this disclosure will be described in detail, wherein like reference numerals refer to identical or similar components or steps, with reference to the following figures, wherein:

FIGS. 1A-1B illustrate top and detailed perspective views, respectively, of a pail assembly according to the subject disclosure.

FIG. 2 depicts a top perspective view of the pail assembly with the internal lid closed.

FIG. 3 shows a top perspective view of the pail assembly with the lid closed.

FIG. 4 illustrates a cross section view of the pail assembly.

FIG. 5 depicts a cross section of a lid latching mechanism for the lid.

FIG. 6 shows a partial perspective cut away view of the transmission mechanism of the pail assembly.

FIG. 7 illustrates another partial perspective cut away view of the transmission mechanism of the pail assembly.

FIG. 8 depicts a partial cross section cut away view of the transmission mechanism of the pail assembly.

FIG. 9 shows a cross section view of the flexible bag used in the pail assembly.

FIG. 10 illustrates a cross section view of the cassette used in the pail assembly.

FIG. 11 depicts an enlarged cross section view of the first and second support structure and transmission assembly in the pail assembly.

FIGS. 12A and 12B show enlarged cross section and detailed views, respectively, of the first and second support structure in the pail assembly.

FIG. 13 illustrates a top perspective view of the flexible bag used in the first support structure of the pail assembly.

FIG. 14 depicts a top view of the frame structure of the flexible bag used in the pail assembly.

FIG. 15 shows a top perspective view of the pail assembly with the internal lid disposed over the housing.

FIGS. 16-18 illustrate a top, bottom and cross section view of an exemplary cassette.

FIGS. 19A-19B show cross section and detailed views, respectively, of the cassette used in the second support structure of the pail assembly.

FIG. 20 shows a top perspective view of the cassette positioned within the second support structure of the pail assembly.

2

FIG. 21 illustrates a top perspective view of the cassette positioned within the second support structure and the internal lid of the pail assembly.

FIG. 22 depicts an enlarged cross section view of the cassette positioned within the second support structure of the pail assembly.

FIG. 23 shows a front view of the pail assembly.

FIG. 24 illustrates a rear view of the pail assembly.

FIGS. 25-28 depict a left, a right, a top and bottom view of the pail assembly.

FIG. 29 shows a front cross section view of the pail assembly with the cassette disposed therein.

FIG. 30 depicts a front top perspective view of the pail assembly with foot pedal and lid open.

FIG. 31 depicts a back top perspective view of the pail assembly with foot pedal.

FIG. 32 shows a front view of the pail assembly with the foot pedal assembly.

FIG. 33 illustrates a rear view of the pail assembly with the foot pedal assembly.

FIGS. 34-37 depict a left, a right, a top and bottom view of the pail assembly.

FIG. 38 shows a front cross section view of the pail assembly with the cassette and foot pedal disposed therein.

FIG. 39 illustrates a lower cross section view of the foot pedal assembly disposed in the pail assembly.

FIGS. 40-43 depict various views of an upper and lower push rod of a push rod connection in the pail assembly.

FIGS. 44-46 show various views the door latching mechanism in the pail assembly.

FIGS. 47-48 show a back and side cross section view of the pail assembly with the cassette and foot pedal disposed therein.

FIG. 49 shows a front cross section view of the pail assembly with the foot pedal mechanism disposed therein.

FIGS. 50-52 show a front perspective view and detailed views, of an exemplary latching mechanism for the internal lid of the pail assembly.

### DETAILED DESCRIPTION

Particular embodiments of the present invention will now be described in greater detail with reference to the figures.

FIGS. 1-4 illustrate a container, such as a diaper pail assembly or system, 10 adapted to receive multiple flexible bag assemblies. The diaper pail assembly or system 10 includes a housing 12 enclosed by a lid member 14. As shown in FIG. 4, a waste chamber 113 is positioned within the housing 12 above an interior storage space 13 and is configured to receive an article of waste within a flexible bag assembly 210/310.

As shown in FIG. 1B, a first support structure 200 and a second support structure 300 accommodate various style of bag inserts, whether they are single use bags or a cassette having a roll of tubing, as will be described in more detail below. A first support structure 200 includes recesses 133 having a semi-circular shape are used to accommodate single use bags by receiving their external tabs, and securing those tabs in place by use of tab clip 135. A second support structure 300 includes key projections, protruding keys, or mating keys 60 that project upward a predetermined distance so that they mate with apertures at a bottom portion of an insertable cassette. A circular bottom receiving plate 331 is held into location by tabs 330 located on the interior wall of annular cylindrical recess 115 and is used to serve as the

3

base for all types of receiving bag assemblies. The mechanisms for these exemplary bag assemblies will be described in more detail below.

The lid member 14 is connected to the housing 12 by a hinge mechanism 16 so that the lid member 14 can be moved by a user, such as a parent or caregiver, between an open position that is shown in FIGS. 1-2 and a closed position that is shown in FIG. 3.

The flexible bag assembly may come in various embodiments. In a first embodiment, the flexible bag assembly may be embodied as a flexible bag frame 214, such as a single use bag shown in FIGS. 9 and 14 and described in more detail below. In a second embodiment, the flexible bag assembly 310 may be embodied as a length of a packed flexible tubing 312 drawn from within a cassette 314, such as the cassette 314 and tubing 312 as shown in FIGS. 10 and 18 and described in more detail below.

The waste chamber 113 shown in FIG. 4 is constructed to include a first support structure 200 to secure the flexible bag 212. The waste chamber 113 is further constructed to include a second support structure 300 to secure and support a cassette 314 from which the flexible tubing 312 is drawn from the cassette 310. The waste chamber 113 is resilient enough to accommodate various designs of bag assemblies and bag assemblies may be designed to accommodate the accommodating structure of waste chamber 113.

A first support structure 200 is configured to receive the flexible bag assembly being constructed as a single-use bag 212 of a flexible material 212 attached to a frame 214 such as shown in FIG. 14. The frame 214 may be releasably mounted to the first support structure 200 in the housing 12. In position, the first support structure 200 may be constructed to prevent the frame 214 of the flexible bag 212 from rotating inside of the housing 12. The single use bag is described in further detail as FIG. 21 in U.S. Pat. No. 8,833,592, which is incorporated by reference herein in its entirety into this disclosure. For sake of brevity, the physical description of the single use bag will not be repeated again here.

As shown in FIGS. 12A and B, when the single use bag assembly 210 is inserted into the system, an outer edge of the single use bag frame 214 is tucked underneath tabs clips 135 positioned around the annular ring of the waste chamber 113. Only the outer edge of the single use bag frame 214 of the single use bag assembly 210 is shown in FIG. 12 B without further detail of the structure and bag of the single use bag assembly 210 for sake of simplicity in order to show the positioning of the assembly 210 within the tab clips 135. Key projections 60 primarily used in the second support structure 300 serve to lift the outer edge 214 of the single bag assembly 210 such that the top of the key projections 60 act as the seat for bag assembly 210. The frame 214 is secured between in the recess formed underneath tab clips 135. This positioning gives the single use bag assembly 210 a more secure position within the waste chamber 113 and ensures that the bag assembly 210 remains firmly in place whenever further waste is deposited into the bag assembly.

A second support structure 300 is configured to receive the cassette 314 including the packed length of a flexible tubing 312 as shown in FIG. 10. As shown in FIGS. 10 and 18, the flexible tubing 312 is drawn from within the cassette 314 and fed out of the cassette 314 and through the waste chamber 113 and into the storage space 13 while in use. A knot (not shown) may be tied at the lower end of the flexible tubing 312 to construct a closed lower end bag enclosure.

An internal lid 114 is provided between the lid 14 and the housing 12 that opens and closes over the waste chamber

4

113 as shown in FIGS. 1-2. The internal lid 114 may also utilize the hinge mechanism 16 used to secure the lid member 14 to the housing 12. The internal lid 114 is provided to prevent the flexible tubing 312 of the cassette 314 from being drawn outward from within the cassette 314 and feeding more tubing 312 when an article of waste is pushed into the flexible tubing 312 within the waste chamber 113.

As shown in FIGS. 10, 19A and 19B, the second support structure 300 accommodates the cassette 314 such that the internal apertures 133 on the bottom portion of the cassette 314 receive key projections 60 and essentially lock the cassette 314 in place within the waste chamber 113. Further, when the internal lid 114 is closed, an internal downward projection 169 on the internal lid serves to press down and essentially lock the cassette 314 in position to a degree such that the corresponding interior upper portion 179 of the cassette 314 receives the downward force of the downward projection 169, and secures the cassette in place and presses down on the tube 312 with enough force as to prevent the downward movement of the tube 312 each time further waste is disposed within the container. Upon release of the internal lid 114, the tubing 312 may be pulled out and cut to tie and dispose of the used tubing, as needed. The tubing 312 is then pulled down further to tie a knot and start a subsequent bag 312.

An odor remediating insert 40 may be attached to the lid 14 of the diaper pail assembly 10 as shown in FIG. 2. The odor remediating insert 40 is used to reduce and eliminate foul odors from emanating from within the housing 12 of the diaper pail assembly 10.

A rotatable sealing and gripping mechanism 54 is provided in the waste chamber 113 as shown in FIG. 1. The rotatable sealing and gripping mechanism 54 has a resilient opening in a flexible material is provided through which the flexible bag may pass through a passage therein.

A transmission mechanism 56 is provided and adapted to rotate the rotatable sealing and gripping mechanism 54. In use, the rotatable sealing and gripping mechanism 54 is rotated by the transmission mechanism 56 causing the rotatable sealing and gripping mechanism 54 to twist a portion of the flexible material to seal the passage of the flexible bag closed. As will be shown in a later embodiment, a foot pedal may be configured and adapted to open or close the lid 14, and/or to engage the transmission mechanism 56 to rotate the rotatable member.

As shown in FIG. 4, the housing 12 defines an interior storage space 13 into which various waste packages are placed and stored in use. The housing 12 can be accessed by a parent or a caregiver by opening a door 18. The door 18 is hingedly mounted at hinge 18A with respect to the housing 12.

The diaper pail assembly 10 includes a base portion 20 that is constructed and arranged to support the housing 12 on an underlying horizontal surface such as a floor or a carpet. The base portion 20 encircles the bottom of the housing 12 and provides the bottom surface for the interior storage space 13.

The base portion 20 includes structure 44 for aligning and centering a diaper pail bag within the interior storage space 13 of the housing 12. The aligning and centering structure 44 includes a bottom surface 46 defining a lowermost extent of the interior storage space 13 that includes a central, substantially flat portion 48 and an annular curved portion 50 surrounding the substantially flat portion 48.

A door latching mechanism may be provided on the door 18 for permitting the consumer to open and close the door

5

18. The door latching mechanism selectively locks the door 18 in a closed position as shown in FIG. 1A.

FIG. 5 shows a lid latching mechanism 24 integrated into the lid 14. The lid latching mechanism 24 includes a laterally expandable latch member 26 that is movably mounted on the lid member 14 and a mating recess 28 that is defined in the housing 12. A button or actuating surface 30 is movably mounted on a side of the lid member 14 that is opposite the hinge mechanism 16 so as to permit substantially vertically upward and downward movement with respect to the lid member 14. A slotted plunger member 32 is integral with an underside of the actuating surface 30 and arranged to cam against outer cam surfaces 25 of an opposed pair of pivotally mounted laterally expandable latch members 34, 36 when the actuating surface 30 is depressed by a consumer. Latch members 34, 36 are biased by an internal spring towards the open position that is shown in FIG. 5. The lid latching mechanism 24 is described in further detail as FIG. 4 in U.S. Pat. No. 8,833,592 (hereinafter "'592 patent'"), which is incorporated by reference herein in its entirety into this disclosure. For sake of brevity, the physical description of the lid latching mechanism will not be repeated again here.

As shown in FIG. 2, the odor remediating insert 40 is provided on an underside of the lid member 14. The odor remediating insert 40 or a powder dispensing assembly may be incorporated. An exemplary powder dispensing assembly may incorporate the method of operation described in U.S. patent application Ser. No. 12/609,136, filed Oct. 30, 2009, the entire disclosure of which is hereby incorporated by reference as if set forth fully herein.

When a user desires to open the lid member 14 of the diaper pail assembly 10 in order to install a diaper pail bag or dispose an odiferous waste package such as a used disposable diaper, the user may depress an actuator button 30 (such as shown in the '592 patent), which will drive the plunger 32 downwardly, causing the plunger 32 to contact the outer cam surfaces 25 of the respective latch members 34, 36. This will cause the latch members 34, 36 to disengage from the recess 28 and enable the lid member 14 to be lifted upwardly.

As shown in FIG. 1A, an undercut 31 or recess is preferably defined in the housing 12 on an opposite side of housing 12 from the hinge mechanism 16 in order to give the consumer space to be able to exert lifting pressure on a lifting surface of the lid member 14. This will enable a user to easily lift the lid member 14 after the lid latching mechanism 24 has been disengaged.

FIGS. 1-2 depict the internal lid 114 that pivots about the hinge mechanism 16. FIG. 1 depicts the internal lid 114 in an open position and FIG. 2 depicts the internal lid 114 in a closed position. In the closed position, the internal lid 114 is adapted to secure the flexible tubing 312 from extending into the interior storage space 13 within the housing 12. The internal lid 114 does this by pressing down onto the tubing 312 of a flexible diaper pail bag 312 and preventing the flexible tubing 312 from being drawn from within the cassette 314 when a user pushes a waste article into the flexible diaper pail bag 312 as discussed elsewhere.

A rotatable sealing and gripping member 54 is provided in the diaper pail assembly 10. The rotatable sealing and gripping member 54 is constructed and arranged to create a restricted portion within the flexible diaper pail bag 212/312 in order to provide a temporary odor seal. This is accomplished by gripping and twisting the flexible diaper pail bag 212/312 in order to provide a temporary seal, as will be described in greater detail below. Alternatively, the restricted portion 121 as shown in FIG. 9 of the flexible diaper pail bag

6

212/312 could be created by pinching or folding a portion of the flexible bag 212/312 instead of by twisting it.

A transmission mechanism 56 is provided for causing rotation of the rotatable sealing member 54 for a predetermined rotational distance when the lid member 14 is moved from the open position shown in FIG. 1 to the closed position shown in FIG. 3. The transmission mechanism 56 includes a push rod member or vertical bar 58, visible in FIGS. 1-2 and 5-7, that is caused and constrained to slide linearly downwardly when the lid member 14 is closed and linearly upwardly when it is opened. The transmission mechanism 56 is designed so as not to cause any movement of the rotatable sealing member 54 when the lid member 14 is pivoted upwardly from the closed position to the open position.

The push rod member 58 of the transmission mechanism 56 includes a toothed rack portion 68 as shown in FIG. 6. The push rod member 58 permits vertical movement thereof with respect to the housing 12 by a slotted channel within the internal housing frame 70. A rack engaging gear 59 is mounted for rotation with respect to the internal housing frame 70 in such a manner that it is permitted a limited amount of vertical movement with respect to the internal housing frame 70. Rack engaging gear 59 has teeth that are operatively engaged with corresponding teeth on the toothed rack portion 60 when the rack engaging gear 59 is in its lowermost vertical position. The transmission mechanism 56 is described in further detail as FIG. 12 in the '592 patent, which is incorporated by reference herein in its entirety into this disclosure. For sake of brevity, a detailed physical description of the transmission mechanism will not be repeated again here. However, such a mechanism is used herein for the movement of the sealing member 54.

As shown in FIG. 9, when the lid member 14 is pivoted downwardly by a user from the open position that is shown in FIG. 1 to the closed position that is shown in FIG. 3, the push rod member 58 will be driven downwardly and the rotatable flexible bag retaining and sealing member 54 will be driven by the gear train mechanism 61 to rotate for the predetermined angular distance, thereby creating a twisted portion 121 in an intermediate portion 117 of the flexible bag 212/312 that is between a lower or bottom portion 116 and an upper portion 118. This is diagrammatically shown in FIGS. 9 and 10 for the use with the flexible bag 212 in the first support structure 200, or for use with the flexible tubing 312 drawn from the cassette 314 provided in the second support structure 300.

FIGS. 6, 11 and 12 show the interconnection between the rotatable sealing and gripping member 54, the transmission mechanism 56 and the gear train mechanism 61. The gear train mechanism 61 is operatively interconnected when the push rod member 58 moves downwardly, because the rack engaging gear 59 is in its lowermost vertical position and operatively engaged with the second compound gear 62. However, when the lid member 14 is pivoted upwardly from the closed position to the open position, the rack engaging gear 59 is lifted upwardly out of engagement with the second compound gear 62. Accordingly the gear train mechanism 61 will be disengaged and there will be no rotation of the flexible bag retaining and sealing member 54 when the lid member 14 is opened, which allows the twisted portion 121 of the flexible bag 212/312 to remain closed.

A clutch mechanism is provided in the event that the gear train mechanism becomes jammed. Internal forces within the gear train mechanism will cause the clutch mechanism to permit a relative amount of relative movement between the first gear portion and the second gear portion of the second

compound gear. The clutch mechanism may include two relatively slidable components that are biased together by a spring member which is operatively interposed between the second compound gear and the internal housing frame.

The diaper pail assembly **10** is versatile in that various flexible bag assemblies **210**, **310**, etc. may be used therein. That is, at least shown herein, a single-use flexible bag **212** may be used in combination with the first support structure **200** as shown in FIG. **9**. Alternatively, a cassette **314** including a length of flexible tubing **312** may be used in combination with the second support structure **300** as shown in FIG. **10**.

The first support structure **200** is constructed within the waste chamber **113** as shown in FIGS. **1**, **9** and **13-14**. Within the waste chamber **113**, a cylindrical recess **115** is provided within the housing **12** to define an inner housing into which the flexible bag **212** or the cassette **314** may be disposed. The cylindrical recess **115** includes a plurality of recesses **133** into which radially outwardly extending projections **132**, **134**, **136**, **138** of the frame **214** of the flexible bag **212** may be registered and secured during use. The outwardly extending projections **132**, **134**, **136**, **138** of the frame **214** are shown in FIG. **14**. The plurality of recesses **133** in the housing **12** receive the respective projections **132**, **134**, **136**, **138** in such a manner that the bag frame **214** is secured against rotation relative to the cylindrical recess **115** within the housing **12**. The bag frame **214** is securely oriented and aligned in a horizontal position, such as shown in FIG. **9**, when the projections **132**, **134**, **136**, **138** are received within the respective recesses **133**.

The first support structure **200** is positioned at the lower end of the cylindrical recess **115** and includes retaining projections **135** in each of the respective recesses **133** for releasably locking the respective projection **132**, **134**, **136**, **138** within the respective recess **133**. The retaining projections **135** may be fabricated from a substantially rigid plastic material and are integral with the housing **12** of the diaper pail assembly **10**.

In use, the bag frame **214** of the flexible bag **212** is sufficiently flexible to permit the user to manipulate the bag frame **214** into and out of the secured position. Each of the projections **132**, **134**, **136**, **138** on the bag frame **214** are positioned beneath the respective retaining projections **135** and secured in place. The flexible bag **212** of the flexible bag assembly **210** is pushed through the rotatable sealing and gripping mechanism **54** such that the majority of its volume is disposed in the interior storage space **13** within the chamber **12** as shown in FIG. **9**. As shown in FIG. **15**, the internal lid **114** is closed over the waste chamber **113** and an item of waste can be pushed through the twisted portion **121** formed in the flexible bag **212** of the flexible bag assembly **210**.

The second support structure **300** is also defined by the cylindrical recess **115** within the waste chamber **113**. The walls of the cylindrical recess **115** define the outer boundary for the cassette **314** such as shown in FIG. **10**. As shown in FIGS. **10** and **18**, the flexible tubing **312** is drawn from within the cassette **314** and fed out of the cassette **314** and through the rotatable sealing and gripping mechanism **54** while in use. A knot may be tied at the lower end of the flexible tubing **312** to construct a closed lower end bag enclosure to seal off the lower end of the flexible tubing **312** to form a container.

An exemplary cassette **314** that may be used in the diaper pail assembly **10** is shown in top and bottom perspective view in FIGS. **16-17**, and side cross section view in FIG. **18**. The cassette for dispensing pleated tubing may be provided

as described in U.S. patent application Ser. No. 62/078,915, filed Nov. 12, 2014, or the cassette as described in co-pending U.S. patent application Ser. No. 13/688,139, filed Nov. 28, 2014, the entire disclosure of which are hereby incorporated by reference as if set forth fully herein.

FIGS. **16-18** depict upper and lower perspective views of the cassette **314** into which a pleated flexible tubing **312** is received, as shown in FIG. **18**. A plurality of apertures **313** is disposed in a radial configuration at the lower end of the cassette **314**. As shown, the apertures **313** may be elongated, radially extending inwardly lengthwise from a first end **313a** disposed in a bottom wall **23**, to a second end **313b** inwardly extending adjacent to the intersection of the angular wall **22** and the inner wall **21**. The apertures **313** may be cut into the angular wall **22** and the bottom wall **23** and disposed concentrically about in a radial pattern.

The apertures **313** provide various advantages. First, during installation of the air-tight packing of the flexible packed tubing **312** into the U-shaped lower annular body of the cassette **314**, the various apertures **313** serve as vent holes allowing air trapped below the packed tubing to vent out of the lower annular body through the apertures **133**.

Alternatively, another significant advantage to the apertures **313** is the ability to control the rotation of the cassette **314**. For example, FIG. **17** shows the apertures **313** functioning as key holes into which a mating key **60** may be aligned and disposed. The key **60** is attached to a portion of the housing **12**. As shown, a laterally extending portion of a support structure attached to the housing **12** includes an upwardly projecting key **60** that mates with at least one of the apertures **133**. In position within the second support structure **300**, the key **60** positioned within one of the apertures **133** prevents the cassette **314** from being rotated while in use. The key **60** is constructed to be aligned to mate with at least one of the apertures **133**. The key **60** may engage any portion of the aperture **133** and cause the cassette **314** to rotate, or prevent the cassette **314** from rotating by arresting the movement of the cassette **314**.

In use, the cassette **314** is positioned within the cylindrical recess **115** of the housing **12** such as shown in FIG. **20**. In position, the protruding key **60** of is aligned with and inserted into at least one aperture **133**. The internal lid **114** is locked into position over the cassette **314** and the flexible tubing **312** is secured in position as shown in FIG. **21**.

In detail, FIG. **22** depicts the interconnection between the internal lid **114**, the cassette **314** and the flexible tubing **312** drawn from within the cassette **314**. When the internal lid **114** is locked over the cassette **314** and the flexible tubing **312** is also secured in position, a slight compression force acts on the flexible tubing **312** to hold it in position at a junction where an inner curved portion **169** of the internal lid **114** is biased against an outer surface of the annular cover **340**. In this manner, when a user pushes an article of waste through the opening **350** in the flexible tubing **312**, the downward pressure of pushing the article of waste into the opening **350** in the flexible tubing **312** does not overcome the compression gripping force on the flexible tubing **312** between the inner curved portion **169** of the internal lid **114** and the outer surface **342** of the annular cover **340** thereby preventing any further tubing **312** from being pulled out of the cassette **314** while the internal lid **114** is closed shut.

The diaper pail assembly **10** may be constructed in a variety of different shapes and or sizes. FIGS. **23-29** illustrate front, rear, right, left side, top, bottom and a cross section view of one exemplary embodiment for the diaper pail assembly **10**. In an alternative construction, the diaper pail assembly **10** may be embodied with a foot pedal

mechanism **400**. FIGS. **30-38** perspective, illustrate front, rear, right, left side, top, bottom and a cross section view of another exemplary embodiment for the diaper pail assembly **10** including the foot pedal mechanism **400**.

The foot pedal mechanism **400** may be used in the diaper pail assembly **10** such as shown in FIG. **39**. The foot pedal mechanism **400** may utilize the basic structure of the lower end of the foot pedal mechanism such as shown in U.S. Pat. No. 2,910,206 (expired), the entire disclosure of which is hereby incorporated by reference as if set forth fully herein.

As shown in FIG. **39**, the pedal bar **412** has a fulcrum **418** at a midpoint to pivot the pedal bar **412** in a seesaw motion when the foot pedal **414** disposed at a first end of the foot pedal mechanism **400** is depressed. A push rod connection mechanism **405** includes a secure mating connection between a first vertical bar **416** and the second vertical bar **58**. The push rod connection mechanism **405** is attached to a second end of the foot pedal bar **412** and translates upward when the first end of the foot pedal mechanism **400** is depressed. The upward motion of the first vertical bar **416** is attached by the secure mating connection to the upper second vertical bar **58**. The upper end of the second vertical bar **58** engages the lid **14** and forces the lid **14** open when the foot pedal **414** is depressed.

FIGS. **38-43** depict various images of the push rod connection **405** between the first vertical bar **416** and the second vertical bar **58**. The lower first vertical bar **416** is in communication with a depressible projection **414**. The peripheral end of the lower first vertical bar **416** has a tapered end **422**.

The second vertical bar **58** includes a lower open end **430** adapted to receive the tapered end **422** of the first vertical bar **416**. The second vertical bar **58** includes an opening **432** into which the projection **420** may slide into such as shown in FIG. **41**.

The embodiment show in FIGS. **40-43** allow for the housing **12** and base portion **20** to be separately manufactured and shipped disconnected. They may easily be connected using the seat belt locking mechanism shown in these figures. Disconnection is simply initiated by depressing the projection **420** from the opening **432** to disengage the connection between **58** and **416**, thereby separating the body portion **12** from base portion **20**.

FIGS. **1-2** and **44-46** illustrate a button **442** for an exemplary door latching mechanism **440**. When the button **442** is depressed, the door latching mechanism **440** is engaged and the door **18** on the housing **12** may be released for access into the interior storage space **13** portion of the housing **12**.

As shown in FIGS. **44-46**, the door latching mechanism **440** includes a vertical post **444** connected to the button **442** that translates along a guide **445**. The vertical post **444** includes at least one male latch **446** that can be removably latched to a female locking opening **450** disposed on the door **18** of the housing **12**. In use, the vertical post **444** moves downward when the button **442** is depressed a predetermined distance so that the latch **446** can clear the catch **450**. Spring **441** maintains the guide **445** in an upward position until the button **442** is pressed, thereby releasing the door latching mechanism **440** from the door **18**.

As shown in FIGS. **47-48**, a single vertical foot pedal arm **111** may be used instead of the mechanism shown in FIGS. **40-43**. In this embodiment, depressing of the foot pedal portion **414** serves to act against a downward force of spring **419** and push the foot pedal arm **111** in a vertical manner for

a limited distance as determined by guide **11**, which translates to the turning of the transmission mechanism **56** to open the lid **14**.

As shown in FIGS. **37**, **39** and **48**, foot pedal **414** has raised ribs **611** underneath it, which serve as a hard stop to ensure a limit to the downward movement of foot pedal **414**. The extent of the ribs underneath the foot pedal **414** is only so much as to allow for the opening of the lid **14**, but not so much as to flip the lid over and possibly tip the container **12**. The raised ribs also serve to provide a stable constant surface with the floor upon full downward press of the foot pedal **414** such that the raised ribs are flush against a hard surface, or are buried into a soft surface, such as carpet. This feature allows for the activation of the opening of the lid **14** without tipping over the container **12**.

As shown in FIGS. **49-52**, the internal lid **114** may be released from its downward locked position upon depressing a latch button **701**. Pushing the latch button **701** disengages its attached catch mechanism **702** from a receiving latch hook **703** on the interior lid **114**. Further, the internal lid **114** contains a button accommodating orifice **704** which is designed to allow the user access to button **442** that releases the door **18**, without having to open the internal lid **114**.

The illustrations and examples provided herein are for explanatory purposes and are not intended to limit the scope of the appended claims. It will be recognized by those skilled in the art that changes or modifications may be made to the above described embodiment without departing from the broad inventive concepts of the invention. It is understood therefore that the invention is not limited to the particular embodiment which is described, but is intended to cover all modifications and changes within the scope and spirit of the invention.

What is claimed is:

1. A container, comprising:

- a housing having a waste chamber configured to receive a waste disposal unit, the waste chamber comprising: protruding keys positioned in a base portion of the waste chamber;
- a first stationary support member adapted to receive a bag of a flexible material attached to a frame, wherein the frame is releasably mounted to the housing and rotationally fixed with respect to the housing, and wherein the bag is a single-use bag and the frame of the single-use bag has a first inner edge and a second outer edge, wherein the first inner edge is disposed on top of the protruding keys and the second outer edge is disposed under tab clips to secure the single-use bag in place, wherein the tab clips are positioned within recesses on the first stationary member; and
- a second stationary support member adapted to securely receive a cassette having a tubing of the flexible material packed therein;
- a top lid attached to the housing through a lid hinge;
- an internal lid attached to the housing through the lid hinge, and which provides access to the waste chamber; the internal lid includes an open aperture with access to the waste chamber when the internal lid is closed; and
- a rotatable member having a resilient opening through which a passage of the flexible material is provided, where in use the rotatable member twists a portion of the flexible material to seal the passage closed.

2. The container of claim 1, further comprising recesses on the first stationary support member to accommodate specifically positioned tabs on a peripheral edge of the frame of a single-use bag.

## 11

3. The container of claim 2, further comprising tab clips positioned within the recesses to secure the tabs on the peripheral edge of the frame of the single-use bags.

4. The container of claim 1, further comprising a receiving well with a depth such that the cassette can be received in its entirety within the receiving well.

5. The container of claim 1, wherein the protruding keys are configured to mate with apertures located on an underside of the cassette to prevent the cassette from moving once placed into the waste chamber.

6. The container of claim 1, wherein the top lid is openable upon pressing of a pedal in connection to the housing.

7. The container of claim 6, wherein the pedal includes ribs on its underside which fully contact a ground surface upon complete pressing of the pedal and provide structural stability to the housing when the top lid is opened.

8. The container of claim 1, wherein the top lid includes a deodorizing chamber for housing a deodorizer.

9. The container of claim 1, further comprising a transmission mechanism adapted to rotate the rotatable member.

10. The container of claim 9, wherein the transmission mechanism is initiated by closing the top lid.

11. The container of claim 1, wherein the internal lid is openable upon pressing of a latch in the housing.

12. The container of claim 1, wherein the open aperture of the internal lid has a curved edge directed internally to the waste chamber, the curved edge contacts a portion of the cassette such that the cassette is securely positioned in place when the internal lid is closed.

13. The container of claim 12, wherein the curved edge of the internal lid applies enough pressure to the cassette that the tubing of flexible material remains in place when waste material is inserted into the rotatable member.

14. A container, comprising:

a housing having a waste chamber configured to receive a waste disposal unit, the waste chamber comprising: protruding keys positioned in a base portion of the waste chamber;

a first stationary support member adapted to receive a bag of a flexible material attached to a frame, wherein the frame is releasably mounted to the housing and rotationally secured with respect to the housing, and wherein the bag is a single-use bag and the frame of the single-use bag has a first inner edge and a second outer edge, wherein the first inner edge is disposed on top of the protruding keys and the second outer edge is disposed under tab clips to secure the single-use bag in place, wherein the tab clips are positioned within recesses on the first stationary member; and

## 12

a second stationary support member adapted to securely receive a cassette having a tubing of the flexible material packed therein;

a top lid attached to the housing through a lid hinge; and an intermediate lid hingedly attached to the housing, and which provides access to the waste chamber; the intermediate lid includes an open aperture with access to the waste chamber when the internal lid is closed.

15. The container of claim 14, wherein the open aperture has a curved edge of the intermediate lid that applies enough pressure to the cassette such that the tubing of flexible material remains secured in place when waste material is inserted through the rotatable member.

16. The container of claim 14, further comprising a rotatable member having a resilient opening through which a passage of the flexible material is provided, where in use the rotatable member twists a portion of the flexible material to seal the passage closed.

17. A container, comprising:

a housing having a waste chamber configured to receive a waste disposal unit, the waste chamber comprising: protruding keys positioned in a base portion of the waste chamber;

a first stationary support member adapted to receive a bag of a flexible material attached to a frame, wherein the frame is releasably mounted to the housing and rotationally secured with respect to the housing, and wherein the bag is a single-use bag and the frame of the single-use bag has a first inner edge and a second outer edge, wherein the first inner edge is disposed on top of the protruding keys and the second outer edge is disposed under tab clips to secure the single-use bag in place, wherein the tab clips are positioned within recesses on the first stationary member; and

a second stationary support member adapted to securely receive a cassette having a tubing of the flexible material packed therein; and

an intermediate lid hingedly attached to the housing, and which provides access to the waste chamber; the intermediate lid includes an open aperture with access to the waste chamber when the internal lid is closed

wherein the open aperture has a concentric curved edge that applies sufficient pressure to the cassette and the tubing such that the tubing of flexible material remains secured in the cassette when waste material is inserted through the rotatable member.

\* \* \* \* \*