




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A61B 17/70	A1	(11) International Publication Number: WO 00/15125 (43) International Publication Date: 23 March 2000 (23.03.00)
(21) International Application Number: PCT/CH99/00414 (22) International Filing Date: 7 September 1999 (07.09.99) (30) Priority Data: 60/099,976 11 September 1998 (11.09.98) US (71) Applicant (for all designated States except CA US): SYNTHES AG CHUR [CH/CH]; Grabenstrasse 8, CH-7002 Chur (CH). (71) Applicant (for CA only): SYNTHES (U.S.A.) [US/US]; 1690 Russell Road, P.O. Box 1766, Paoli, PA 19301-1222 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): BRACE, Michael [US/US]; 1611 Bridle Path Drive, Lansdale, PA 19446 (US). LANGE, Eric [US/US]; 2457 Calkins Road, Germantown, TN 38139 (US). (74) Agent: LUSUARDI, Werther; Dr. Lusuardi AG, Kreuzbühlstrasse 8, CH-8008 Zürich (CH).		(81) Designated States: AU, CA, JP, US, ZA, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.
(54) Title: VARIABLE ANGLE SPINAL FIXATION SYSTEM (57) Abstract		

A variable angle spinal fixation system is disclosed. The system includes a longitudinal member positionable along a spinal column, a fastener (14) having a threaded end for engaging a vertebra, and a connector member (12) for connecting the fastener (14) and the longitudinal member. The connector member (12) has a channel (26) extending through side surfaces of the connector member (12) for receiving the longitudinal member, an opening (32) laterally displaced from the channel (26) and extending through top and bottom surfaces of the connector member (12) for receiving the fastener (14), and a fastener clamping element for securing the fastener (14) in the opening (32) at a surgeon selected angle relative to the connector member (12) and longitudinal member. The system according to the present invention allows angulation of the fastener (14) to accommodate complex pathologies.

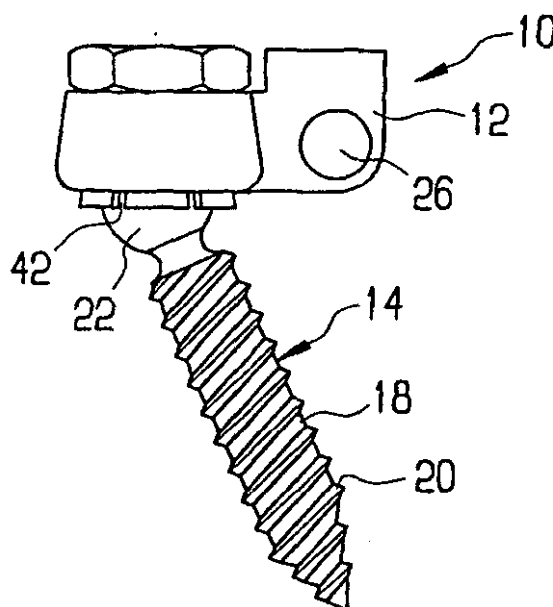

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

VARIABLE ANGLE SPINAL FIXATION SYSTEM

The present invention is directed to a spinal fixation system, and in particular one which includes a variable angle spinal fixation device according to the definition of claim 1. —

Stabilization of the spine is often required following trauma, tumor, or degenerative pathologies. Although each region of the spine presents unique clinical challenges, posterior fixation of the cervical spine is particularly troublesome. The anatomy of the cervical spine makes it a technically challenging area to instrument. Specifically, several vital neural and vascular structures including the vertebral arteries, nerve roots, and spinal cord must be avoided during surgery.

Current methods of posterior cervical stabilization include the use of metallic wire or cable and plate/screw systems. Both wire and plating systems suffer from limitations. For example, in certain clinical applications such as occipital-cervical and cervical-thoracic pathologies, the fixed location of the plate screw holes makes alignment of the screws difficult and may compromise the achieved stabilization.

In order to alleviate the problems associated with fixed screw hole location, devices allowing variability in screw placement are available. For example, U.S. Patent No. 5,735,852 discloses a clamp that can be placed anywhere along the length of a rod. One problem with this and similar designs is that the clamp has a screw hole surface oriented at a fixed angle with respect to the rod. As a result, these systems often do not provide sufficient angulation of the screw to accommodate complex degenerative pathologies.

Variable angle screw systems are also currently available. U.S. Patent No. 5,549,608 discloses a polyaxial locking screw and coupling element device for use with a rod fixation apparatus. Because the rod is located on top of the screw after the device is assembled, the device disclosed in the '608 patent has a high profile and does not allow independent screw and rod fixation. Without independent screw and rod fixation, some adjustability is lost along with the ability to compress or distract along the rod. Furthermore, should one of the components loosen, the entire construct also loosens.

The osteosynthetic fixation device disclosed in U.S. Patent No. 5,501,684 requires that the rod be threaded through a channel rather than simply slipping the rod through an opening on the side or top of the device. It should also be noted that the devices of the '684 and '608 patents were designed for use in the lumbar and sacral regions of the spine.

U.S. Patent No. 5,643,259 discloses spine fixation instrumentation for the cervical spine. Because the instrumentation disclosed in the '259 patent relies on a sleeve mechanism to secure the rod and the screw to the connector, it is difficult to align both sleeves with the connector. Furthermore, when several connectors are used, alignment is even more difficult and unintended distraction between levels may occur when joining the rod sleeves to the connectors. Due to the limited space between adjacent vertebrae in the cervical region of the spine, there may not be sufficient room between connectors to allow placement of the sleeves. In addition, optimal orientation of the '259 patent system is limited by the inability to rotate the screw about an axis parallel to the rod, i.e. the system only provides for two degrees of freedom, possibly resulting in the need to bend the rod in order for it to fit within the connector. Since the system of the '259 patent depends on the ability to slide the sleeve mechanism along the rod when securing the rod to the connector, the fact that the rod may have to be bent to account for the missing third degree of freedom may prohibit the proper functioning of this sleeve mechanism, and the rod may not lock securely. Finally, the assembly and disassembly processes are tedious and require complicated instruments.

As the discussion above illustrates, there is a need for an improved fixation apparatus for stabilizing the cervical spine.

The invention solves the posed problem with a spinal fixation system, and in particular one which includes a variable angle spinal fixation device that has the features of claim 1.

The spinal fixation system according to the present invention comprises a longitudinal member positionable along a spinal column; a fastener having a threaded end for engaging a vertebra; and a connector member for connecting the fastener and the longitudinal member. The connector member includes a channel extending through

side surfaces of the connector member for receiving the longitudinal member; an opening laterally displaced from the channel and extending through top and bottom surfaces of the connector member for receiving the fastener; and a fastener clamping element for securing the fastener in the opening at a surgeon selected angle relative to the connector member and longitudinal member. Preferably, the system further comprises a longitudinal member clamping element for securing the longitudinal member in the channel.

In one embodiment, the channel has a substantially oval-shaped cross section to allow positioning of the longitudinal member in the channel at discrete locations. In another embodiment, the channel is open on top to allow insertion of the longitudinal member in the channel. Alternatively, the channel is open on a side to allow insertion of the longitudinal member in the channel.

FIG. 1 is a side view of a first embodiment of the spinal fixation system according to the present invention;

FIG. 2 is an exploded side view of the system of FIG. 1;

FIG. 3 is a side view of the connector member of FIGS. 1 and 2;

FIG. 4 is a side view of a connector member that allows a rod to be placed at two different positions in the connector member;

FIG. 5 is a side view of a top loading connector member;

FIG. 6 is a cross sectional view of another embodiment of the spinal fixation system according to the present invention;

FIG. 7 is a side view of a different embodiment of the spinal fixation system according to the present invention;

FIG. 8 is a cross sectional view of the system of FIG. 7;

FIG. 9 is a side view of another embodiment of the spinal fixation system according to the present invention with a partial cross section;

FIG. 10 is a plan view of the system of FIG. 9;

FIG. 11 is an exploded plan view of another embodiment of the spinal fixation system according to the present invention;

FIG. 12 is a side view of a side loading connector member;

FIG. 13 is an exploded side view of the connector member of FIG. 12;

FIG. 14 is a plan view of a final embodiment of the spinal fixation system according to the present invention; and

FIG. 15 is another plan view of the system of FIG. 14.

FIGS. 1 and 2 show a first embodiment of the spinal fixation system according to the present invention. Although the discussion of this and the other embodiments focusses on cervical fixation, it should be noted that the present invention can be used in other areas of the spine. System 10 includes a connector member 12 for connecting a fastener 14 to a rod 16 (seen best in FIG. 10). Usually at least two fasteners 14 and at least two corresponding connector members 12 are used with one rod 16. Fastener 14 has a stem 18 with a plurality of threads 20 and a hemispherical head 22 with a coupling 24 for attachment to a driver or other device for screwing fastener 14 into a vertebra. As described in more detail below, fastener 14 can be placed in the bone before the other components of system 10. This results in independent and optimal placement of fastener 14 according to the clinical situation, patient anatomy, and surgeon preference.

Connector member 12 has a channel 26 configured and dimensioned to receive rod 16. A threaded hole 28 (FIG. 3) intersects channel 26 so that when a set screw 30 is screwed into threaded hole 28, rod 16 is secured in channel 26. Connector member 12 has a tapered opening 32 (FIG. 3) for receiving cap 34. Cap 34 has a skirt 36 that has

an exterior surface 38 tapered to closely match in size and shape tapered opening 32. An interior surface 40 of cap 34 is hemispherical to closely match in size and shape head 22 of fastener 14. Exterior surface 38 includes a plurality of slots 42 so that when head 22 is inserted into skirt 36, skirt 36 can flex outward until head 22 is flush with interior surface 40 at which point skirt 36 flexes back. Typically, correct insertion of head 22 into skirt 36 is determined by audible (*i.e.* a "click") and/or tactile feedback. Once head 22 is seated in skirt 36, head 22 and interior surface 40 function like a ball and socket joint so that fastener 14 can rotate about skirt 36.

The rotation freedom of fastener 14 allows for three dimensional variability of fastener 14 with respect to connector member 12 and rod 16. Thus, system 10 can be placed in any orientation that the surgeon desires to conform system 10 to patient anatomy. Another advantage of the rotation freedom is that fasteners 14 and connector members 12 can be connected without the need to contour, *i.e.* bend, rod 16. This simplifies the surgical procedure, reduces operating time, and prevents undue stress or damage to rod 16 caused by the bending.

Cap 34 also has a threaded segment 44. When a nut 46 is screwed onto threaded segment 44, cap 34 is drawn into tapered opening 32. As cap 34 is drawn into tapered opening 32, the size of slots 42 is reduced and skirt 36 is compressed. The compression of skirt 36 secures head 22 in skirt 36 at a fixed position. Because fastener 14 and rod 16 are secured to connector member 12 by two separate mechanisms, fastener 14 can first be fixed to the vertebra at the desired location and angulation and then secured to connector member 12 before rod 16 is secured to connector member 12. The tightening of fastener 14 to connector member 12 prior to securing rod 16 allows compression or distraction of the vertebrae along rod 16 without sacrificing the optimal orientation of connector member 12 and fastener 14 already achieved. The separate tightening of fastener 14 to connector member 12 and rod 16 to connector member 12 also adds significant safety to system 10. This is due to the fact that both set screw 30 and nut 46 would have to loosen to completely destabilize system 10. In designs in which the rod sits on top of the screw, loosening of any of the stacked elements can result in failure of the entire implant. In further comparison to designs with the rod situated superior to the screw, laterally displacing fastener 14 with respect to rod 16 reduces the profile of system 10.

FIG. 4 shows another connector member 48 that can be used with system 10. Connector member 48 has two channels 50 and 52. Depending on the clinical application, rod 16 can be inserted in channel 50 or channel 52.

FIG. 5 shows another connector member 54 that can be used with system 10. A channel 56 on connector member 54 is open on the top so that rod 16 can be inserted into channel 56 from the top. As was the case with connector member 12, a set screw (not shown) threaded into threaded hole 28 secures rod 16 to channel 56. The top loading design of connector member 54 facilitates inserting rod 16 into channel 56 after connector member 54 and fastener 14 are properly positioned. Because rod 16 is not obstructing the area around connector member 54, the top loading design also allows the surgeon to more easily pack the area around connector member 54 with bone graft or other osteoconductive material to enhance the formation of new bone.

FIG. 6 shows another embodiment of a system 58 according to the present invention. System 58 has a connector member 60 which, like connector member 54, provides for top loading of rod 16. Connector member 60 includes a yoke 62 sized to receive a sleeve 64. As sleeve 64 is configured and dimensioned to cradle a portion of rod 16, inserted sleeve 64 into yoke 62 secures rod 16 to connector member 60. Any suitable sleeve design which securely fits in yoke 62 and tightly cradles rod 16 to connector member 60 can be used. An example of such a sleeve is the one disclosed in U.S. Patent No. 5,643,259, the disclosure of which is incorporated herein by reference. A cap 66 of system 58 also differs from cap 34 of system 10. Cap 66 has internal threads 68 (rather than threaded segment 44) that mate with screw top 70 (rather than nut 46) to draw cap 66 into tapered opening 32.

FIGS. 7 and 8 show another embodiment of a top loading system 72 according to the present invention. A connector member 74 has a yoke 76 sized to accommodate rod 16. In order to secure rod 16 within channel 26, and in contrast to system 10 in which set screw 30 secures rod 16 in channel 26, in this embodiment a threaded top 80 mates with threaded walls 82 of yoke 76 to push an apron 78 against rod 16.

FIGS. 9 and 10 show another embodiment of a system 84 according to the present invention. System 84 is a side loading design, i.e. rod 16 slides into a connector member 86 from a side. Set screw 30 secures rod 16 to a yoke 88. The side loading design of connector member 86 facilitates inserting rod 16 to yoke 88 after connector member 86 and fastener 14 are properly positioned. Because rod 16 is not obstructing the area around connector member 86, the side loading design also allows the surgeon to more easily pack the area around connector member 86 with bone graft or other osteoconductive material to enhance the formation of new bone.

Another side loading system 90 with a connector member 92 is shown in FIG. 11. Rod 16, yoke 88, and the manner in which set screw 30 secures rod 16 to connector member 92 are identical to system 84 of FIGS. 9 and 10. However, fastener 94 is secured to connector member 92 using a ball clamp mechanism. Such a ball clamp mechanism is disclosed in U.S. Patent No. 5,501,684, the disclosure of which is incorporated herein by reference. Fastener 94 has a stem 18 with a plurality of threads 20, and intermediate conical section 96, and a threaded cylindrical head 98. Ball clamp 100 has a conical bore hole 102 for receiving intermediate conical section 96 of fastener 94. Ball clamp 100 is shaped like a spherical shell and is provided with slits 104 to allow bore hole 102 to compress against intermediate section 96 upon the application of a compressive force. As a result, when a nut 106 is tightened on the threads of cylindrical head 98 with ball clamp 100 and intermediate section 96 inserted in a through hole 108, fastener 94 is secured to connector member 92.

FIGS. 12 and 13 show another embodiment of a side loading system 110 according to the present invention. Connector member 112 is provided with a threaded stem 114 onto which an apron 116 slides to retain rod 16 in channel 26. A nut 118 fixes apron 116 to threaded stem 114.

In all the embodiments described above and shown in FIGS. 1-13, the channel for the rod runs perpendicular to the opening for the fastener. However, as shown in FIGS. 14 and 15, channel 26 for rod 16 can be oriented at a non-orthogonal angle to opening 32 for fastener 14. This configuration is useful if angulation greater than that provided for by the fastener securing mechanism is desired. This is particularly useful for transarticular screw angulation requirements.

While it is apparent that the illustrative embodiments of the invention herein disclosed fulfil the objectives stated above, it will be appreciated that numerous modifications and other embodiments may be devised by those skilled in the art. Therefore, it will be understood that the appended claims are intended to cover all such modifications and embodiments which come within the scope of the present invention.

CLAIMS

1. A spinal fixation system comprising:

A) a longitudinal member positionable along a spinal column;

B) a fastener (14) having a threaded end for engaging a vertebra; and

C) a connector member (12) for connecting the fastener (14) and the longitudinal member, said connector member (12) having:

D) a channel (26) extending through side surfaces of the connector member (12) for receiving the longitudinal member;

characterized in that the connector member (12) further comprises

E) an opening (32) laterally displaced from the channel (26) and extending through top and bottom surfaces of the connector member (12) for receiving the fastener (14); and

F) a fastener clamping element for securing the fastener (14) in the opening (32) at a surgeon selected angle relative to the connector member (12) and longitudinal member.

2. System according to claim 1, wherein the connecting member (12) further comprises a longitudinal member clamping element for securing the longitudinal member in the channel (26).

3. System according to claim 1 or 2, wherein the channel (26) has a substantially oval-shaped cross section to allow positioning of the longitudinal member in the channel (26) at discrete locations.

4. System according to claim 1 or 2, wherein the channel (26) is open on top to allow insertion of the longitudinal member in the channel (26).

5. System according to claim 4, wherein the longitudinal member clamping element comprises a sleeve (64) with an interior surface configured and dimensioned to receive the longitudinal member and an exterior surface configured and dimensioned to fit securely within the channel (26).

6. System according to claim 4, further comprising:

a yoke (76) defining the channel (26) and having walls with threads;

an apron (78) slidable over the yoke walls for retaining the longitudinal member in the channel (26); and

a screw top (80) having threads which mate with the yoke wall threads to secure the apron (78) to the yoke walls.

7. System according claim 1, wherein the channel (26) is open on a side to allow insertion of the longitudinal member in the channel (26).

8. System according to one of the claims 1 to 7, wherein the opening (32) is tapered such that its width increases toward the bottom surface of the connector member (12).

9. System according to claim 8, wherein the fastener clamping element comprises a cap (34) with a skirt (36) that has a tapered exterior surface (38) which closely matches in size and shape the tapered opening (32).

10. System according to one of the claims 1 to 9, wherein the fastener (14) has a hemispherical head (22).

11. System according to claim 10, wherein the interior surface (40) of the cap (34) is hemispherical matching closely in size and shape with the spherical head (22).

12. System according to claim 11, wherein the cap (34) is provided with a plurality of slots (42) so that when the head (22) is inserted into skirt (36), the skirt (36) can flex outward until head (22) is flush with the interior surface (40) at which point the skirt (36) flexes back.

13. System according to one of the claims 7 to 12, wherein the system further comprises a set screw (30) in order to secure a longitudinal member to a yoke (88).

14. System according to one of the claims 5 to 13, wherein the yoke (88) defining the channel (26) has walls extending at a non-orthogonal angle to the opening (32) for the fastener (14).

FIG 1

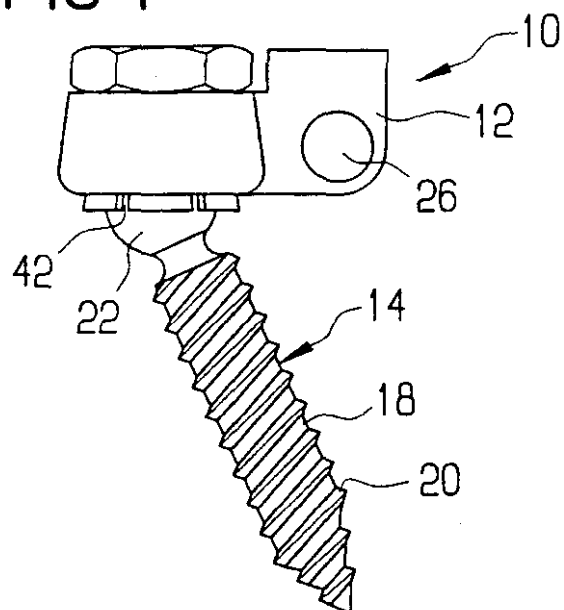


FIG 2

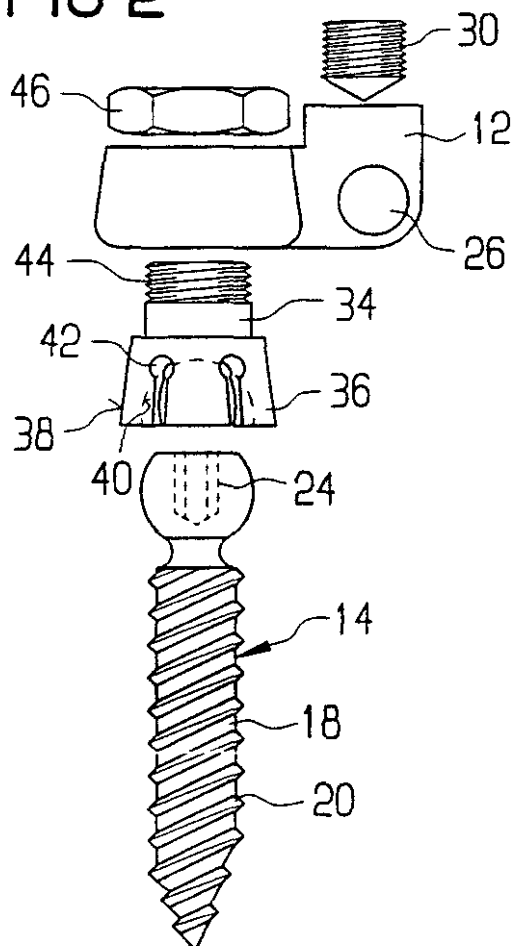


FIG 3

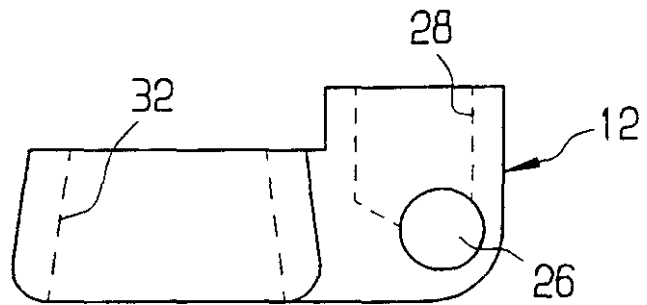


FIG 4

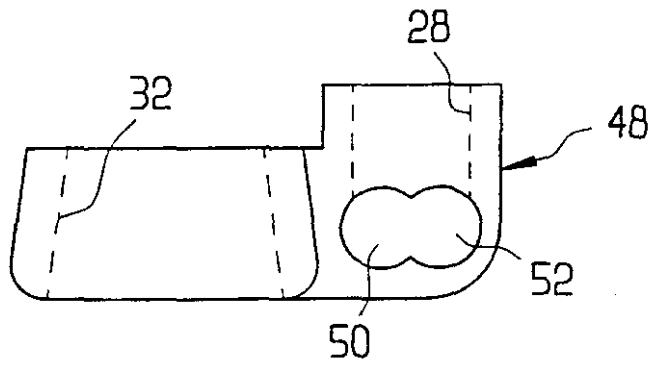


FIG 5

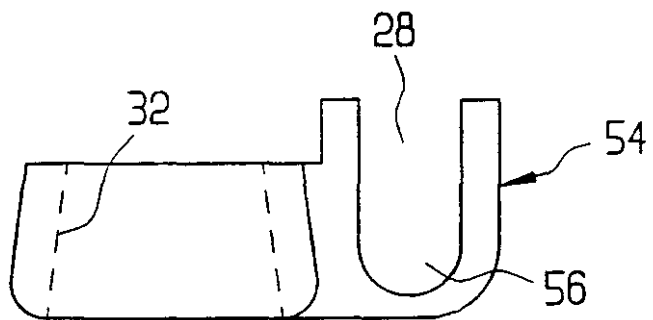


FIG 6

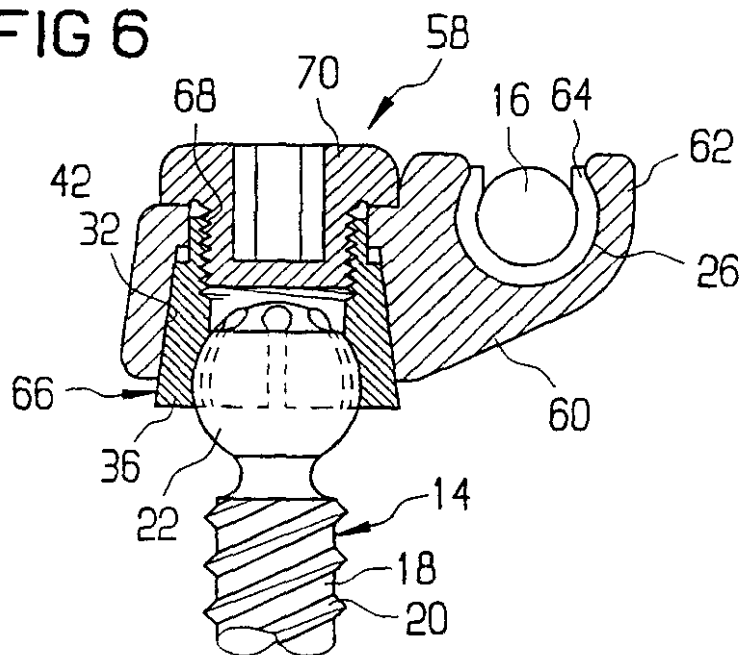


FIG 7

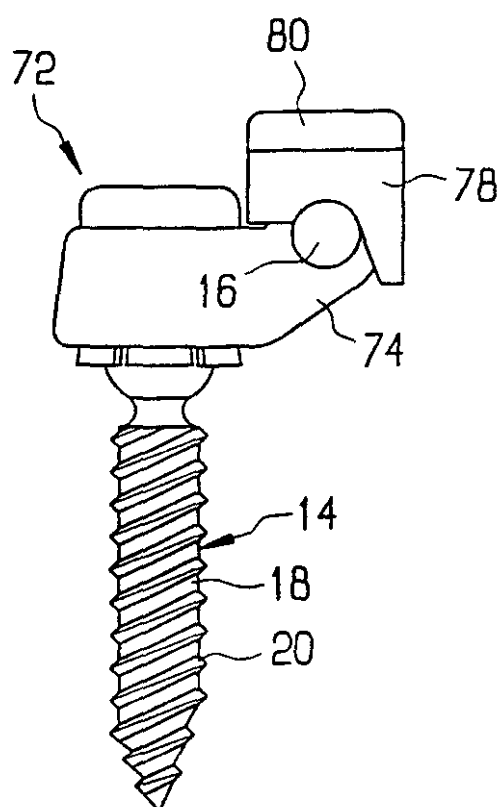


FIG 8

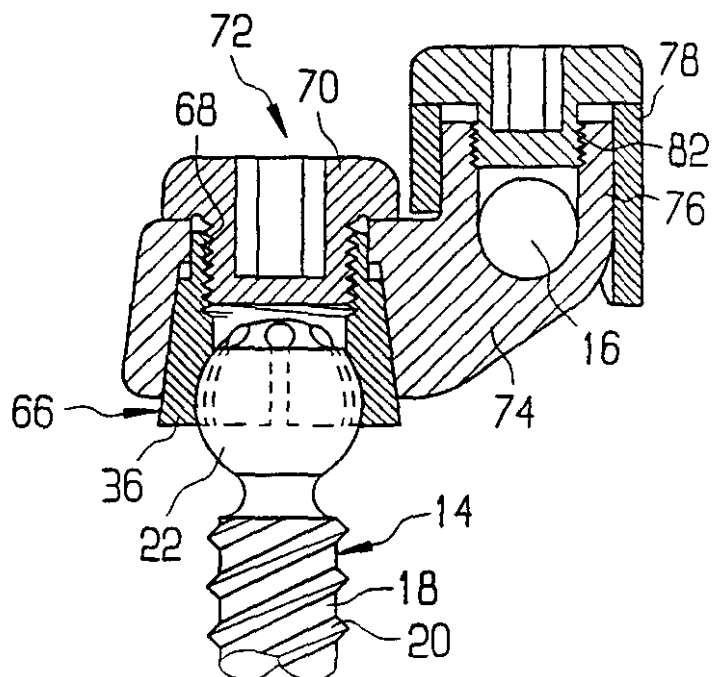


FIG 9

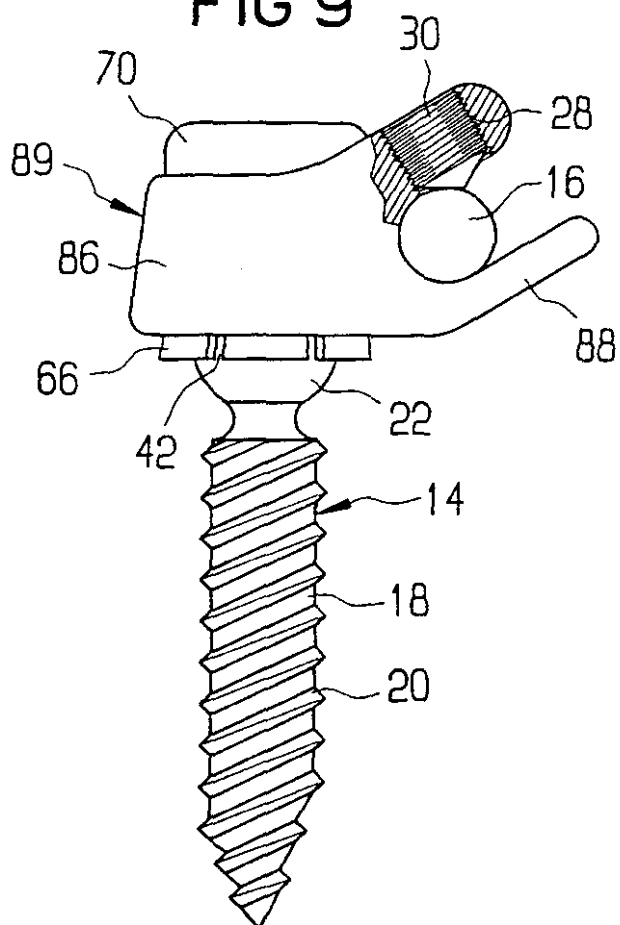


FIG 10

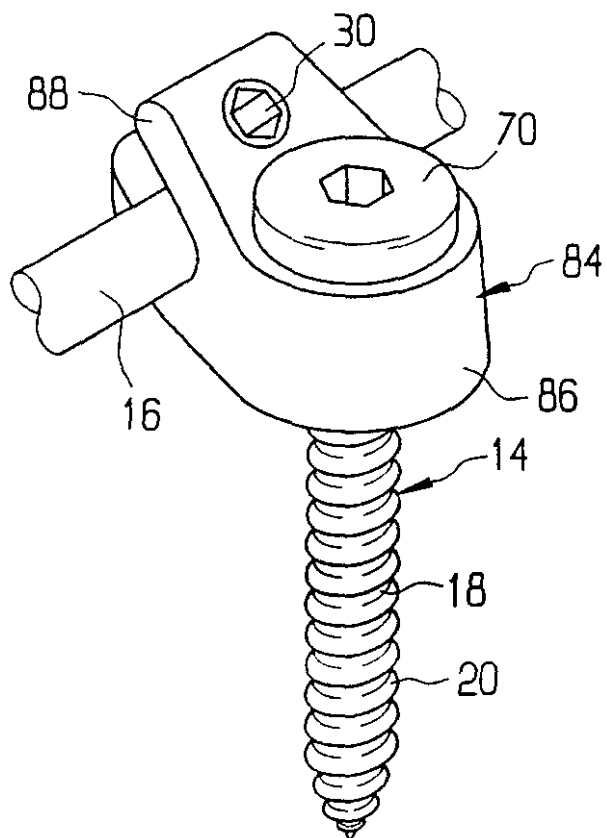


FIG 11

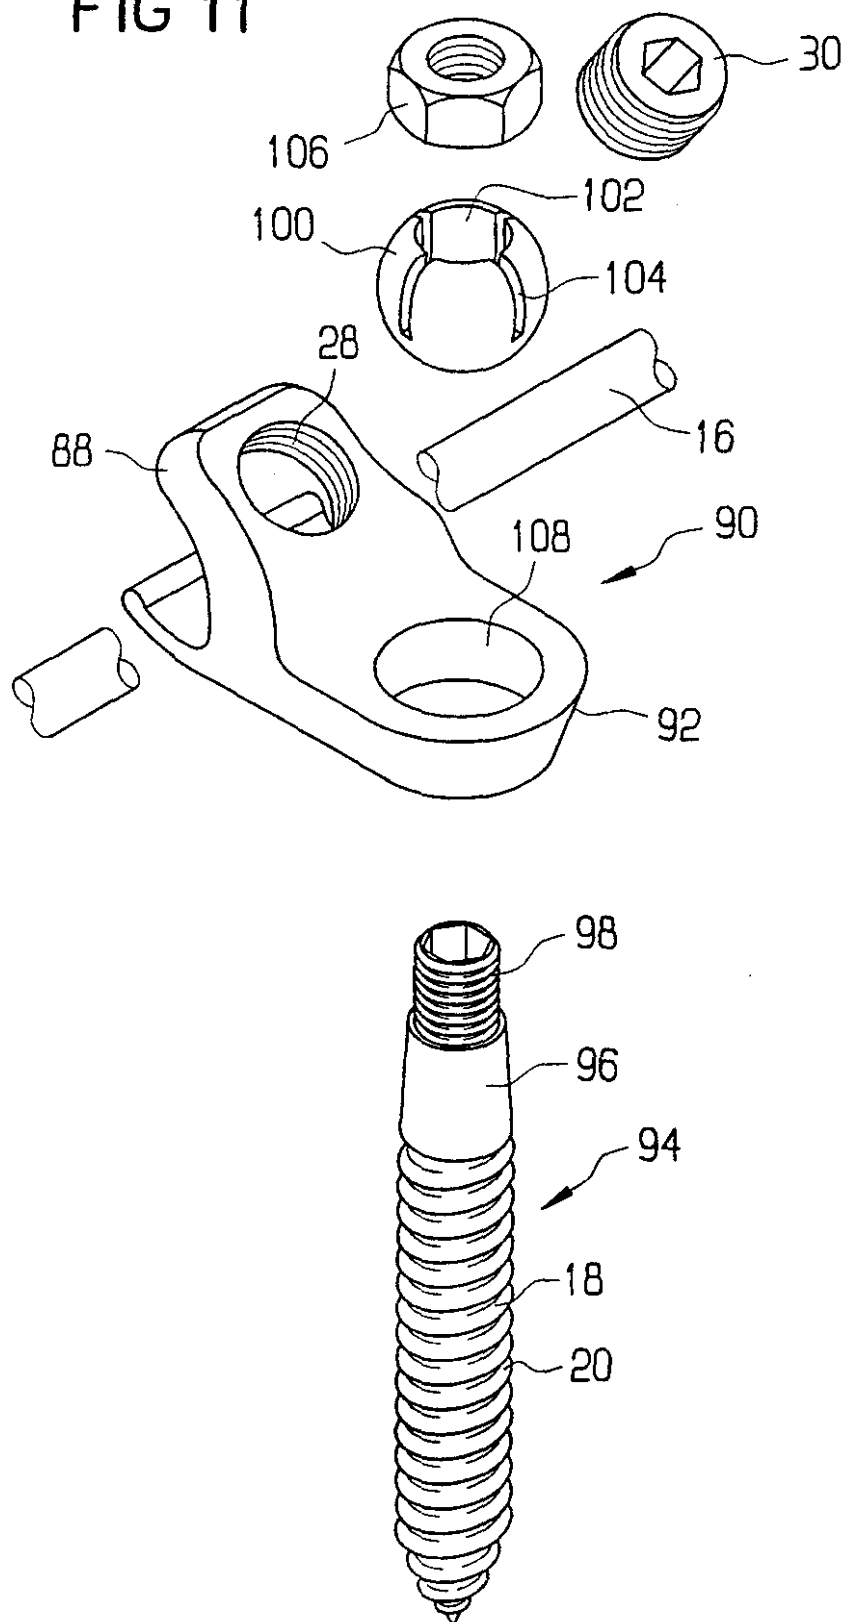


FIG 12

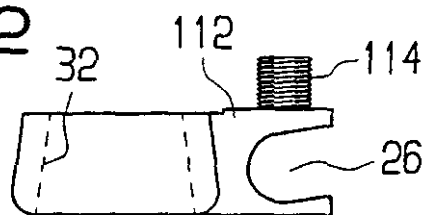


FIG 13

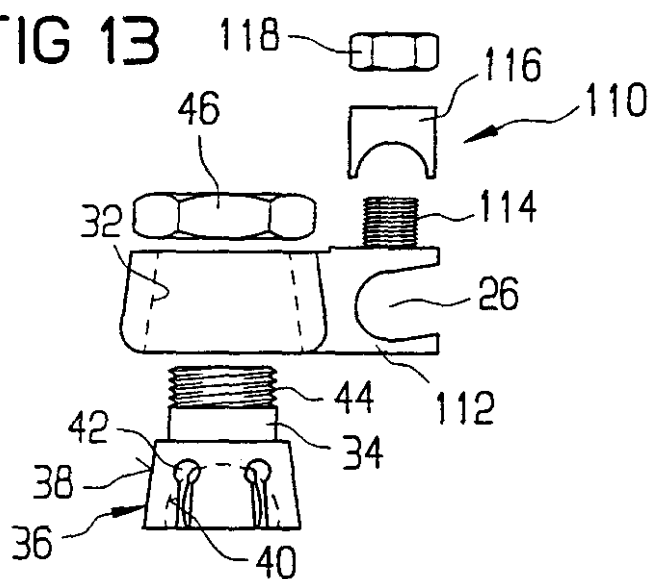


FIG 14


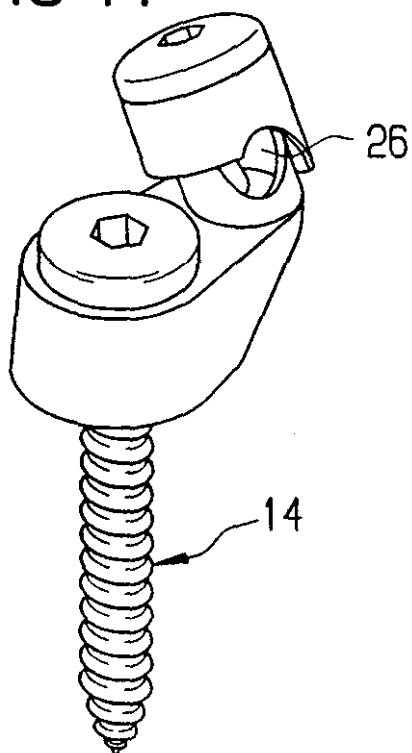


FIG 15

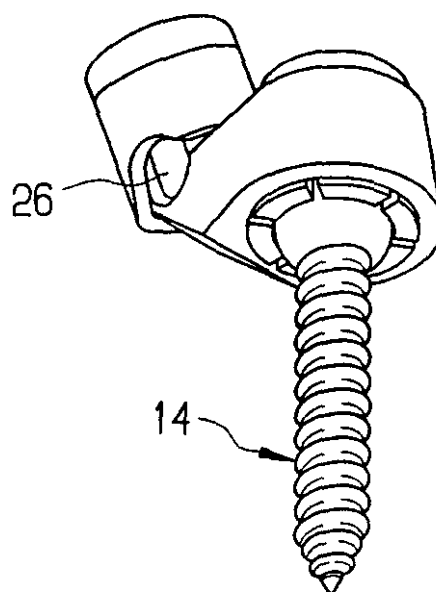

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CH 99/00414

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61B17/70

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbol(s))

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 501 684 A (J.P.SCHLAPFER AND M.HESS) 26 March 1996 (1996-03-26) cited in the application	1,2
Y	column 4, line 24 -column 5, line 2 column 5, line 30 - line 41 figures 1-3,7	4,5,7, 13,14
X	US 5 047 029 A (M.AEBI AND R.MATTHYS) 10 September 1991 (1991-09-10) column 2, line 53 -column 3, line 18 figures 3-6	1,2,8,9
X	WO 96 28104 A (ALPHATEC MANUFACTURING) 19 September 1996 (1996-09-19) figures 3,4	1,2
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

1 December 1999

Date of mailing of the international search report

08/12/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Nice, P

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/CH 99/00414

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 613 968 A (C.-I.LIN) 25 March 1997 (1997-03-25) figures 1A-1B,2 ---	I
Y	US 5 643 259 A (R.C.SASSO AND D.F.JUSTIN) 1 July 1997 (1997-07-01) cited in the application abstract; figures 1-3 ---	4,5,14
Y	FR 2 759 894 A (K.KHARRAT ET AL.) 28 August 1998 (1998-08-28) figure 7A ---	7,13
A	EP 0 465 158 A (S.M.H.MEHDIAN) 8 January 1992 (1992-01-08) figure 5 ---	6
A	US 5 575 792 A (J.P.ERRICO ET AL.) 19 November 1996 (1996-11-19) column 9, line 47 -column 10, line 37 figure 10 -----	8-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CH 99/00414

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5501684 A	26-03-1996	WO 9400066 A DE 59208301 D EP 0599847 A JP 6509950 T	06-01-1994 07-05-1997 08-06-1994 10-11-1994
US 5047029 A	10-09-1991	CH 683963 A CA 1306914 A DE 3878685 A EP 0348581 A	30-06-1994 01-09-1992 01-04-1993 03-01-1990
WO 9628104 A	19-09-1996	US 5562661 A AU 5364496 A EP 0814713 A JP 11502134 T	08-10-1996 02-10-1996 07-01-1998 23-02-1999
US 5613968 A	25-03-1997	NONE	
US 5643259 A	01-07-1997	AU 2277095 A WO 9526687 A	23-10-1995 12-10-1995
FR 2759894 A	28-08-1998	NONE	
EP 0465158 A	08-01-1992	CA 2046152 A,C DE 69124293 D DE 69124293 T US 5217497 A	05-01-1992 06-03-1997 12-06-1997 08-06-1993
US 5575792 A	19-11-1996	US 5586984 A AU 6459496 A CA 2225044 A EP 0837656 A WO 9702786 A US 5609593 A	24-12-1996 10-02-1997 30-01-1997 29-04-1998 30-01-1997 11-03-1997

摘要

可變角度的脊柱固定系統

本發明揭示了一種可變角度的脊柱固定系統。該系統包括一可沿脊柱定位的縱向件，一具有接合脊椎骨螺紋端的固定件(14)，以及一連接所說固定件(14)和縱向件的連接件(12)。所說連接件(12)有一貫通連接件(12)的側表面以接納所說縱向件的通道(26)，一從所說通道(26)作橫向移位並貫穿連接件(12)的上下表面以接納固定件(14)的開口(32)，以及一固定件夾緊件，其以一外科醫生選定的相對於連接件(12)和縱向件的角度將固定件(14)固定在所說開口(32)中。本發明的系統能夠改變固定件(14)的角度以適應複雜的病理學。