

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 905 348 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
26.01.2005 Bulletin 2005/04

(51) Int Cl.7: **E21B 10/32**, E21B 10/56,
E21B 47/18

(21) Application number: **98122696.2**

(22) Date of filing: **31.10.1995**

(54) **Underreamer blade**

Schneidarm für Räumer

Lame de coupe pour élargisseur

(84) Designated Contracting States:
FR NL

(30) Priority: **31.10.1994 GB 9422022**
17.03.1995 GB 9505430

(43) Date of publication of application:
31.03.1999 Bulletin 1999/13

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
95935506.6 / 0 788 578

(73) Proprietor: **SMITH INTERNATIONAL, INC.**
Houston, TX 77205-0068 (US)

(72) Inventors:
• **McGarian, Bruce**
Stonehaven, Aberdeen AB3 2HW (GB)

• **Armell, Richard Alvin**
Montrose, Angus DD10 0BW (GB)

(74) Representative: **Goodenough, Nigel et al**
A.A. Thornton & Co.
235 High Holborn
London WC1V 7LE (GB)

(56) References cited:
EP-A- 0 058 061 EP-A- 0 325 271
EP-A- 0 391 683 EP-A- 0 522 553
GB-A- 1 464 464 US-A- 2 644 673
US-A- 3 851 719 US-A- 4 586 574
US-A- 4 809 793 US-A- 5 036 921
US-A- 5 242 017

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 905 348 B1

Description

[0001] This invention relates to a blade for an underreamer, that is to say a blade for a reaming tool for use in subterranean well bore. 2-stage underreamers have been proposed in which the bodies of the upper and lower stages are releasably secured to each other by way of a threaded interconnection. Whilst such an arrangement considerably assists the manufacture of the tools it suffers from the disadvantage that very close manufacturing tolerances are necessary if, when the upper and lower body parts are screwed together, the blades on the upper and lower parts are to end up at exactly the correct angular position relative to each other. Further, the presence of a screw-threaded joint between the upper and lower stages of the tool reduces the strength of the body as compared with the strength of a unitary body.

[0002] A prior art cutting blade is disclosed in document GB 1 464 464 as comprising a gauge face and cutting face arranged on a single base insert at a relatively small angle to one another.

[0003] A 2-stage underreamer is also disclosed in prior art document US 5,036,921. The underreamer described in this prior art document incorporates two pairs of blades mounted in a unitary supporting body and operable by the action of hydraulic fluid on the circular faces of the two pistons. A blade according to the preamble of the appended claim 1 is disclosed in both prior art documents US 2,644,673 and US 5,242,017.

[0004] According to one aspect of the present invention there is provided a blade for an underreamer, the blade comprising: an arm; a pivot mount by which the arm is, in use, pivotally mounted on an underreamer body for pivotal movement about a pivot axis between a retracted position and an extended position; a plurality of wear resistant members forming a first cutting face which, when the blade is in its extended position, extends transversely to the longitudinal axis of the underreamer for cutting in a downhole direction into material surrounding the underreamer body; a plurality of wear resistant members which form a gauge cutting face which, when the arm is in its extended position, defines the maximum diameter of the underreamer, and a plurality of wear resistant members which define an upper cutting face which extends inwardly from the upper end of the gauge cutting face for cutting in an upward direction into material surrounding the underreamer body; the blade being characterised in that the first cutting face is arranged so as to lie in a plane perpendicular to the plane in which the gauge face lies, and in that the wear resistant members which form the gauge and first cutting faces are embedded in a common base which is secured to the arm by welding or brazing.

[0005] A blade comprising further desirable features is defined in any of the appended claims 2 to 8.

[0006] The invention will be better understood from the following description of a preferred embodiment

thereof, given by way of example only in the context of a 2-stage reamer, reference being had to the accompanying drawings wherein:

Figure 1 is a pictorial representation showing the general configuration of an embodiment of the present invention mounted in an extended position within a reaming tool;

Figure 2A illustrates a portion of a preferred reaming tool from the upper end thereof to a plane A-A; Figure 2B illustrates a portion of the reaming tool of Figure 2 from the plane of A-A of Figure 2A to the plane B-B;

Figure 2C illustrates a portion of the reaming tool of Figure 2 from the plane B-B of Figure 2B to the plane C-C;

Figure 2D illustrates a portion of the reaming tool of Figure 2 from the plane C-C of Figure 2C to the bottom end thereof;

Figure 3 is a schematic cross-sectional view on the line III-III of Figure 2B;

Figure 4 is a cross-section on the line IV-IV of Figure 2C;

Figure 5 is a view substantially of the portion of the tool illustrated in Figure 2C, but with blades according to the present invention in the fully extended position;

Figure 6 illustrates schematically a wear resistant member for use in forming a blade in accordance with the present invention;

Figure 7 is a bottom plane view of the wear resistant member of Figure 6;

Figure 8 is a view in the direction of the arrow VIII of Figure 6; and

Figure 9 illustrates an alternative wear resistant member.

[0007] Referring firstly to Figure 1 the general configuration of a 2-stage reamer 1 is illustrated. The reamer 1 comprises a unitary body 2 in which is formed an upper slot 3 and a lower slot 4. The slots extend completely through the body to provide respective upper and lower pockets. A pair of upper blades 5A and 5B according to the present invention are mounted in the slot 3 and a pair of lower blades 6A and 6B according to the present invention are mounted in the lower slot 4. The blades 5A,5B,6A,6B are pivotally connected to the body by means of pivot pins 7,8. The central longitudinal planes of the slots 3,4 are mutually perpendicular to each other.

[0008] A practical configuration is illustrated in Figures 2A-2D, 3 and 4.

[0009] Referring firstly to Figures 2A and 2B an adapter 9 is screw threadedly engaged with a screw thread 10 provided on the upper end of the body 2. The adapter 9 has a conventional tapered connecting thread 11 at the upper end thereof for engagement with tools or a drill string to which the 2-stage underreamer is connected. In a typical application the 2-stage underreamer will

be connected via suitable subs to a downhole motor to provide for rotation of the 2-stage underreamer to effect reaming of a body located within a well bore.

[0010] The adapter 9 includes a through bore 12 for communicating fluid to the interior of the body 10.

[0011] Immediately below the adapter 9 the body 2 defines a cylinder portion 13 in which an upper piston 14 is slidably mounted. A seal 15 provided on the piston 14 sealingly engages the cylinder 13. The zone of the cylinder 13 below the seal 15 is vented to the exterior of the tool via a vent passage 16. A spring 17 biases the piston 14 upwardly as viewed in Figure 2B.

[0012] The piston 14 includes a central passage 18 which communicates at the upper end of the piston with the space above the piston and, at the lower end of the passage 18, with a multiplicity of slots 19 which connect the passage 18 to the exterior of the piston. In the absence of fluid pressure within the cylinder 13 the piston 14 will adopt the position illustrated in Figure 2B under the influence of the spring 17. In this position the slots 19 overlap slightly with an annular groove 20 formed in the bore 21 of the body 2 thereat. The groove 20 in turn communicates via generally radially extending passages (not shown) with bypass passages 22 provided for communicating fluid flow past the blades 5A,5B. As the piston 14 is forced downwardly in use by fluid pressure within the cylinder 13 the degree of overlap between the slots 19 and the groove 20 increases and accordingly, for a given applied pressure, the flow rate through the tool will increase. Thus, movement of the piston 14 downwardly (to effect movement of the blades as described below) will result in an increased flow rate through the tool thereby indicating that the blades have moved from their normal retracted position to their extended use position.

[0013] The piston 14 engages the blades via a cam member 23 which is secured to the lower end of the piston 14 by a pin 24. The arrangement of the cam member 23 and the blades 5A,5B is substantially the same as the arrangement of the cam member 25 and the blades 6A,6B of the lower reaming stage. Reference should accordingly be had to Figure 2C which illustrates in more detail the arrangement of the cam member 25 and the lower blades 6A and 6B.

[0014] The blades 5A,5B and 6A,6B are pivotally mounted within respective slots 3,4 by means of pivot pins 8 which extends through and are secured to the body 2. The blades 5A,5B and 6A,6B are acted on by respective common torsion springs which tend to maintain the blades in the configuration illustrated in Figure 2. In this configuration, cam surfaces 26 at the upper extremities of the blades are presented to the lower faces 27 of the cam member 23,25. Downward movement of the cam members will force the blade 6B to rotate clockwise as viewed in Figure 2C and will simultaneously force the blade 6A to rotate anti-clockwise as viewed in Figure 2C. Continued downward movement of the cam member 25 will produce continued rotation of the

blades 6A,6B until they assume the configuration illustrated in Figure 5.

[0015] Preferably, a stop shoulder 28 is provided on the body 2 for each blade 6A,6B (only the stop shoulder 28 for the blade 6A is illustrated in Figure 2C) to be engaged by respective corresponding shoulders 29 on the blades when the blades are in the fully extended position as illustrated in Figure 5. Referring now to Figure 3 it will be noted that the flow passages 22 are provided by machining appropriate grooves in the outer surface of the body 2 and then closing the machined grooves by means of cover plates 30 which are welded in position. By this means, flow passages can be established from the groove 20 to passages 31 (Figure 2C) which extend radially inwardly from the passages 22 to a central cylinder 32 formed in the body 2. The passages 22 continue downwardly of the tool beyond the passages 31, past the blades 6A,6B and terminate close to the lower end of the tool. Radially extending slots 33 extend from the lower end of each passage 22 into the interior bore 34 of the body adjacent the lower end thereof. Intermediate the passages 31 and the passages 33 a further set of passages 35 (Figure 2C) extend radially inwardly from the passages 22 to the bore 32.

[0016] The passages 31 allow fluid pressure from the passages 22 to be communicated to the cylinder 32 to act on the full circular cross-sectional area of the upper face 45 of the lower piston 36. Fluid pressure acting on the piston 36 produces a downward force on the cam member 25 to shift the blades 6A,6B as described above. A spring 37 is provided to act on the piston 36 to bias the piston 36 into its upper position (corresponding to retraction of the blades) in the absence of fluid pressure within the cylinder 32. The space in which the spring 37 is housed is vented to the exterior of the tool via a vent passage 38.

[0017] Fluid pressure from the passages 22 is admitted via the passages 35 to the annular chamber 39 located between a sleeve 40 and an annular portion 41 of the piston 36. The annular piston portion 41 is connected to the upper face portion 45 by means of a rod 70. The sleeve 40 is fixed relative to the body 2 by means of pins 42 and is sealed to the bore of the body by an O-ring 43 and to the piston by an O-ring 44. Pressure in the chamber 39 acts over the annular area of the piston portion 41 to provide a force which supplements that produced by pressure acting over the full circular area of the upper face 45 of the piston.

[0018] Referring now to Figure 2D the lower end of the tool is fitted with a plug 46 which is secured to the body by means of pins 47. An O-ring 48 seals between the plug 46 and the bore 34 of the body to close the bore 34 at the upper end of the plug 46. The lower end of the plug 46 is fitted with a nozzle 49 to provide a restricted outlet 50 from the chamber 51 into which the passages 33 discharge. In use, when fluid is pumped downwardly through the tool from a suitable source the nozzle 50 restricts outward flow of the fluid and thereby provides

a back pressure to effect movement of the pistons as described above. The lower extremity of the body 2 is provided with a screw-thread connection 52 enabling the tool to be connected to other components located therebelow.

[0019] The pivot pins 7,8 which rotatably mount the blades 5A,5B and 6A,6B respectively are substantially identical. The pivot pin 7 is shown in more detail in Figure 3 and comprises a body 53 having a head portion 54 and a shaft portion 55. The head portion 54 includes a drive socket 56 to enable a tool to be applied to the pin for the purpose of rotating the pin during insertion and removal thereof. The exterior surface of the head portion 54 is formed with screw-threads which engage mating screw-threads provided in the body 2.

[0020] The end of the shaft 55 remote from the head 54 is formed with a locking arrangement 57 to prevent accidental loosening of the pin. In the illustrated locking arrangement the end of the pin is split longitudinally to form a multiplicity, for example four, individual fingers 58. The pin end is also counterbored and threaded so that the fingers 58 define a threaded socket 59.

[0021] The exterior of the fingers 58 lie on a circular cylinder which is an extension of the cylindrical profile of the main part of the shaft 55. The socket 59 is formed with an NPT tapered thread. After the pin 7 has been screwed home by use of a suitable tool an NPT tapered plug 60 is screwed into the threaded socket 59 and, by virtue of the cooperating tapered threads, expands the fingers 58 into tight locking engagement with the wall 61 of the bore in which the pin is located.

[0022] In an alternative arrangement, the fingers 58 splay outwardly somewhat from the base of the fingers - i.e. the exterior surfaces of the fingers lie on a cone which diverges away from the head 54. The wall 61 of the pin receiving bore tapers at a mating angle so that when the pin is in position the exterior of the fingers 58 lie against the corresponding tapered portion of the wall 61. In this case, the end of the pin is formed with a parallel threaded socket into which an appropriate locking screw is inserted after the pin has been fully screwed home in order to prevent radially inward movement of the fingers and thereby prevent accidental loosening of the pin. The locking screw is preferably of a relatively soft metal, for example brass, and is somewhat oversized relative to the screw-thread provided in the socket. Accordingly, as the screw is driven home the socket in the pin will act as a die to cut a tight thread on the screw.

[0023] Regardless of whether the pins have a generally parallel exterior surface which is cammed outwardly by an NPT taper screw or whether they have a tapered exterior surface which is locked by a parallel screw, a groove is preferably provided adjacent the mouth of the socket 59 to receive a circlip which will prevent accidental slackening of the locking screw. Thus, in both cases, the pin is locked tight in position by means of a screw which itself is prevented from accidental backing off by a circlip located within a groove formed at the mouth of

the screw-threaded socket 59.

[0024] It should be noted that the body 2 is, as illustrated in the drawings, unitary. In order to assist manufacture the body may be fabricated from several parts, but these parts are preferably permanently joined together (as by welding) to form the unitary structure described above. The upper piston 14 and its associated seals together with the spring 17 are loaded into the bore of the tool via the open upper end of the body 2 before the adapter 9 is connected. The components of the lower piston assembly are inserted via the lower end of the tool before the closure plug 46 is positioned.

[0025] In accordance with the present invention, the blades 5A,5B and 6A,6B comprise bodies of alloy steel having secured thereto a multiplicity of wear resistant assemblies preferably of diamond and/or tungsten carbide. The diamond/tungsten carbide material is secured to a base e.g. of a tungsten nickel cobalt matrix, which is itself then secured to a steel base arm as by brazing. One possible embodiment of a wear resistant member for securing to a base arm in order to form a blade according to the present invention is illustrated in Figures 6-8. The illustrated member comprises a body 51 of a tungsten nickel cobalt matrix having embedded therein hard and wear resistant materials in the critical zones A,B,C and D. In use, the body 51 is secured as by brazing to a steel base arm in order to form a blade assembly according to the present invention.

[0026] Referring to Figure 6 it will be noted that the wear resistant member 52 is generally C-shaped to present a lower drilling face A which, during downward movement of the tool will act to drill material contacted by the drilling face A; a back reaming face C which, during upward movement of the tool will ream material coming into contact with the back reaming face C; a gauge face D to maintain the gauge diameter of the hole through which the tool passes and a transition face B which connects the drilling face A to the gauge face D and is effective to remove material close to the gauge diameter during downward drilling with the tool.

[0027] The body 51 is substantially C-shaped and underlies the hardwearing material in all the above described zones. The profile of the body 51 is designed to mate with the steel base arm and to provide satisfactory surfaces for brazing. In addition, the body 51 includes any necessary reinforcing, e.g. in the form of a web 53 to prevent thermal distortion of the body during manufacturing.

[0028] The zones A,B,C and D are provided with appropriate wear resistant materials designed to optimize the particular functions which the surfaces in use perform. In the illustrated embodiment of the invention zone A, the drilling face, is set with diamonds regularly spaced and offset to give full area coverage as the tool rotates. The transition zone B is also set with diamonds regularly spaced and off-set to give full coverage, but these diamonds are longer in relation to diameter to give better bonding and/or wear life. For example, the diamonds in

the transition zone B may have a length to diameter ratio of 2:1. In location C, the back reaming face, the surface is set with diamonds regularly spaced and off-set to give complete coverage. These diamonds need not be set as densely as in locations A and B as, under normal conditions, the back reaming face encounters less arduous conditions than the drilling face or the transition zone. The gauge face is provided with elongate bars 54 of suitable material, for example thermally stable polycrystalline diamond or tungsten carbide. The bars are set proud of the gauge face to ensure a cutting or cleaning action and the bars are spaced apart by slots 55 to allow material removed by the bars to be cleared from the cutting faces of the bars by drilling mud flowing upwardly past the tool. At the lower edge of the bars 54 the surfaces thereof taper to blend into the radius of the transition face B. Preferably, in transverse cross-section the bars 54 are of a dovetail shape in order to assist bonding of the bars to the body 51.

[0029] It should be understood that references herein to "diamond" include natural diamond materials, thermally stable diamond materials and polycrystalline diamond materials and that references to wear resistant material include diamond materials, tungsten carbide and other hard abrasion resistant materials.

[0030] The above described wear resistant member may conveniently be formed by a moulding process in which a mould is formed from carbon to provide the desired profile for the wear resistant member.

[0031] Referring now to Figure 9, an alternative wear resistant member 56 is illustrated. The alternative wear resistant member exhibits the same general zones A, B, C and D as the wear resistant member 52 illustrated in Figures 6-8. The zones A, B and C are provided with natural diamond inserts 57 which are suitably spaced and offset to give full area coverage as the tool rotates. The diamonds in the transition zone B may have the preferred length: diameter ratio 2:1 as with the inserts of the arrangements of Figures 6-8. In the gauge face D tungsten carbide inserts 58 in the form of rectangular blocks are provided to ensure wear resistance in the gauge area. The tungsten carbide inserts 58 alternate with rows of natural diamond inserts 57 in the gauge face D. Both tungsten carbide inserts 58 and diamond inserts 57 in the gauge face D are set proud of the metal in which they are embedded to provide raised cutting and wear resistant surfaces. At the lower end of each tungsten carbide insert 58 in the region of the junction between the gauge face D and the transition face B thermally stable diamond inserts 59 are provided.

[0032] It will be appreciated that whilst Figures 6-8 and Figure 9 provide alternative arrangements for wear resistant members, many other arrangements are possible. In general, combinations of tungsten carbide and diamond are used to provide optimum wear resisting characteristics, and in particular, in the gauge face D the inserts are arranged proud of the material in which they are embedded to provide optimum cutting action and

wear resistance.

[0033] Whilst the wear resistant blades described above are particularly suitable for use in the 2-stage underreamer described it will be appreciated that the blade arrangement may have alternative uses and, in particular, may be used in downhole tools other than 2-stage underreamers.

10 Claims

1. A blade (5A,5B,6A,6B) for an underreamer, the blade comprising: an arm; a pivot mount by which the arm is, in use, pivotally mounted on an underreamer body for pivotal movement about a pivot axis between a retracted position and an extended position; a plurality of wear resistant members forming a first cutting face (A) which, when the blade is in its extended position, extends transversely to the longitudinally axis of the underreamer for cutting in a downhole direction into material surrounding the underreamer body; a plurality of wear resistant members which form a gauge cutting face (D) which, when the arm is in its extended position, defines the maximum diameter of the underreamer, and a plurality of wear resistant members which define an upper cutting face (C) which extends inwardly from the upper end of the gauge cutting face for cutting in an upward direction into material surrounding the underreamer body; the blade being **characterised in that** the first cutting face (A) is arranged so as to lie in a plane perpendicular to the plane in which the gauge face (D) lies, and **in that** the wear resistant members which form the gauge and first cutting faces are embedded in a common base (51) which is secured to the arm by welding or brazing.
2. A blade according to claim 1, wherein the wear resistant members (54) provided on the gauge face (D) are set proud of said face.
3. A blade according to claim 1 or 2, wherein the wear resistant members (54) provided on the gauge face (D) are spaced apart from one another so as to provide a path (55) for fluid flowing past the blade when in use.
4. A blade according to any preceding claim, wherein the wear resistant members (54) provided on the gauge face (D) are elongated bars of diamond or tungsten carbide.
5. A blade according to any preceding claim, wherein the wear resistant members on the cutting face (A) are diamond inserts.
6. A blade according to any preceding claim, wherein

the nature and/or packing density of the wear resistant members varies according to their position on the base (51).

7. A blade according to any preceding claim, wherein the base (51) is of a tungsten nickel cobalt matrix. 5
8. A blade according to any preceding claim, wherein the wear resistant members which form the upper cutting face (C) are embedded in the base (51). 10

Patentansprüche

1. Messer (5A, 5B, 6A, 6B) für einen Unterschneider, wobei das Messer umfasst: einen Arm, eine Schwenkanbringung, mit der der Arm in Funktion funktionell an einem Unterschneider-Körper zur Schwenkbewegung um eine Schwenkachse herum zwischen einer eingezogenen Position und einer ausgefahrenen Position angebracht ist, eine Vielzahl verschleißfester Elemente, die eine erste Schneidfläche (A) bilden, die sich, wenn sich das Messer in seiner ausgefahrenen Position befindet, quer zur Längsachse des Unterschneiders erstreckt, um in einer Abwärtsbohrlochrichtung in Material zu schneiden, das den Unterschneider-Körper umgibt, eine Vielzahl verschleißfester Elemente, die eine Außenschneidfläche (D) bilden, die, wenn sich der Arm in seiner ausgefahrenen Position befindet, den maximalen Durchmesser des Unterschneiders definiert, sowie eine Vielzahl verschleißfester Elemente, die eine obere Schneidfläche (C) definieren, die sich vom oberen Ende der Außenschneidfläche nach innen erstreckt, um in einer Aufwärtsrichtung in Material zu schneiden, das den Unterschneider-Körper umgibt, wobei das Messer **dadurch gekennzeichnet ist, dass** die erste Schneidfläche (A) so angeordnet ist, dass sie in einer Ebene senkrecht zu der Ebene liegt, in der die Außenfläche (D) liegt, und dass die verschleißfesten Elemente, die die Außen- und die erste Schneidfläche bilden, in einem gemeinsamen Träger (51) eingebettet sind, der durch Schweißen oder Hartlöten an dem Arm befestigt wird. 25
2. Messer nach Anspruch 1, wobei die verschleißfesten Elemente (54), die an der Außenfläche (D) vorhanden sind, über die Fläche hinaus ragen. 30
3. Messer nach Anspruch 1 oder 2, wobei die verschleißfesten Elemente (54), die an der Außenfläche (D) vorhanden sind, voneinander so beabstandet sind, dass ein Weg (55) für Fluid entsteht, das in Funktion an dem Messer vorbeifließt. 35
4. Messer nach einem der vorangehenden Ansprüche, wobei die verschleißfesten Elemente (54), die 40

an der Außenfläche (D) vorhanden sind, längliche Stäbe aus Diamant oder Wolframkarbid sind.

5. Messer nach einem der vorangehenden Ansprüche, wobei die verschleißfesten Elemente an der Schneidfläche (A) Diamanteinsätze sind.
6. Messer nach einem der vorangehenden Ansprüche, wobei die Eigenschaften und/oder die Anordnungsichte der verschleißfesten Elemente entsprechend ihrer Position an dem Träger (51) variieren.
7. Messer nach einem der vorangehenden Ansprüche, wobei der Träger (51) aus einer Wolfram-Nickel-Kobalt-Matrix besteht.
8. Messer nach einem der vorangehenden Ansprüche, wobei die verschleißfesten Elemente, die die obere Schneidfläche (C) bilden, in dem Träger (51) eingebettet sind. 45

Revendications

1. Lame (5A, 5B, 6A, 6B) destinée à un élargisseur, la lame comprenant : un bras ; un support de pivot grâce auquel le bras est, lors de son utilisation, monté de manière pivotante sur un corps d'élargisseur pour permettre un mouvement pivotant autour d'un axe de pivot entre une position rentrée et une position sortie ; plusieurs éléments résistants à l'usure formant une première surface d'attaque (A) qui, lorsque la lame est en position sortie, s'étend transversalement à l'axe longitudinal de l'élargisseur pour découper, dans une direction de forage, un matériau entourant le corps de l'élargisseur ; plusieurs éléments résistants à l'usure formant une surface d'attaque de calibrage (D) qui, lorsque le bras est en position sortie, définit le diamètre maximal de l'élargisseur, et plusieurs éléments résistants à l'usure définissant une surface d'attaque supérieure (C) qui s'étend vers l'intérieur depuis l'extrémité supérieure de la surface d'attaque de calibrage pour découper, dans une direction ascendante, un matériau entourant le corps de l'élargisseur ; la lame étant **caractérisée en ce que** la première surface d'attaque (A) est disposée de manière à être située dans un plan perpendiculaire au plan dans lequel se situe la surface de calibrage (D), et **en ce que** les éléments résistants à l'usure formant la surface d'attaque de calibrage et la première surface d'attaque sont encastrés dans une base commune (51), qui est fixée au bras par soudage ou brasage. 50
2. Lame selon la revendication 1 dans laquelle les éléments résistants à l'usure (54) disposés sur la sur- 55

face de calibrage (D) sont montés de manière pro-
éminente par rapport à ladite surface.

3. Lame selon la revendication 1 ou 2 dans laquelle
les éléments résistants à l'usure (54) disposés sur
la surface de calibrage (D) sont espacés les uns des
autres de manière à fournir une voie (55) destinée
à un fluide circulant devant la lame lorsque celle-ci
est utilisée. 5
4. Lame selon l'une quelconque des revendications
précédentes dans laquelle les éléments résistants
à l'usure (54) disposés sur la surface de calibrage
(D) sont des barres allongées en diamant ou en car-
bure de tungstène. 10 15
5. Lame selon l'une quelconque des revendications
précédentes dans laquelle les éléments résistants
à l'usure sur la surface d'attaque (A) sont des in-
serts en diamant. 20
6. Lame selon l'une quelconque des revendications
précédentes dans laquelle la nature et/ou la densité
de chargement des éléments résistants à l'usure
varie(nt) selon leur position sur la base (51). 25
7. Lame selon l'une quelconque des revendications
précédentes dans laquelle la base (51) est en une
matrice de tungstène nickel cobalt. 30
8. Lame selon l'une quelconque des revendications
précédentes dans laquelle les éléments résistants
à l'usure formant la surface d'attaque supérieure
(C) sont encastrés dans la base (51). 35

40

45

50

55

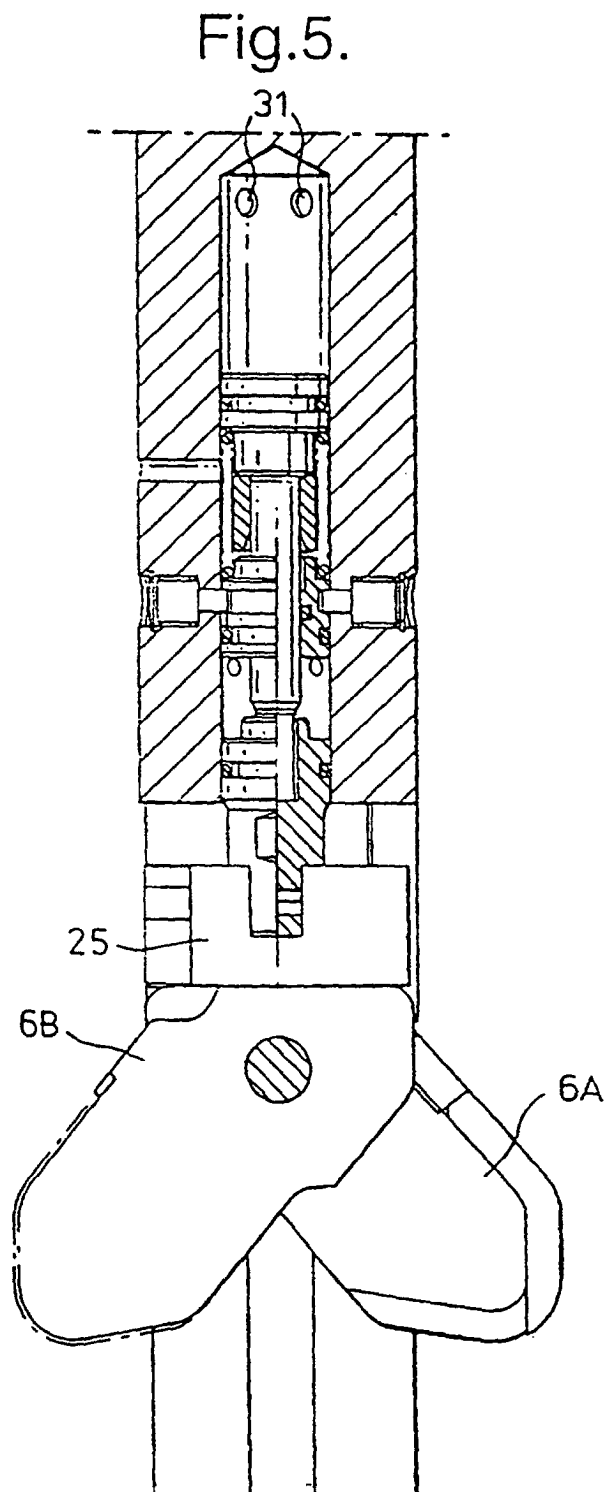
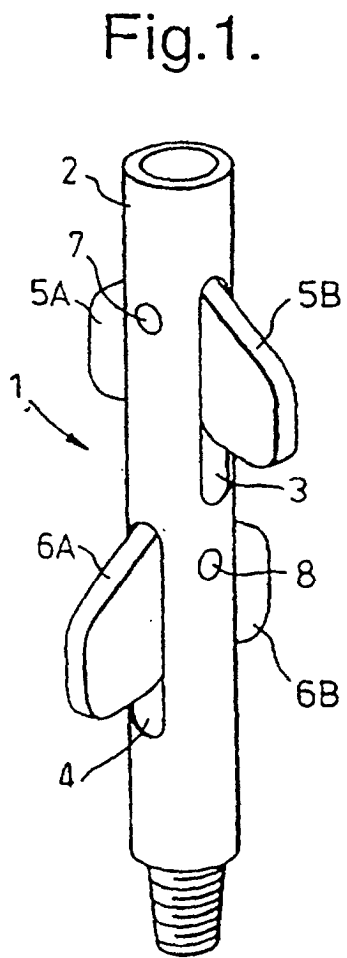


Fig.2A.

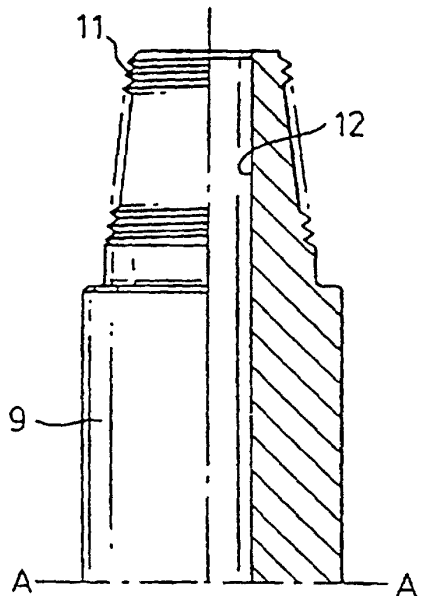


Fig.2B.

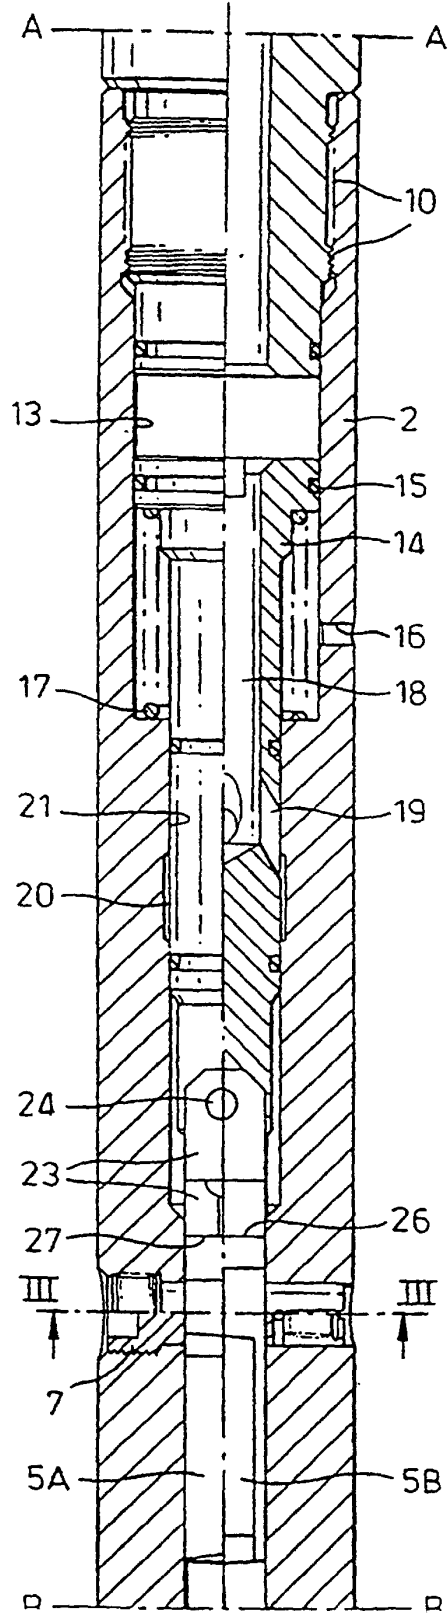


Fig.3.

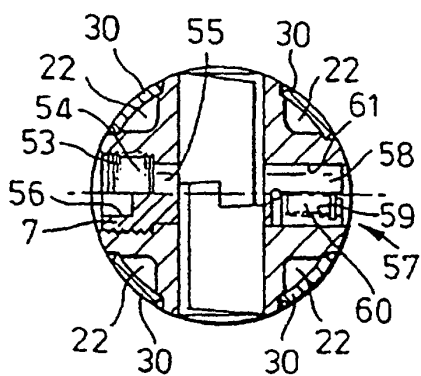


Fig.2C.

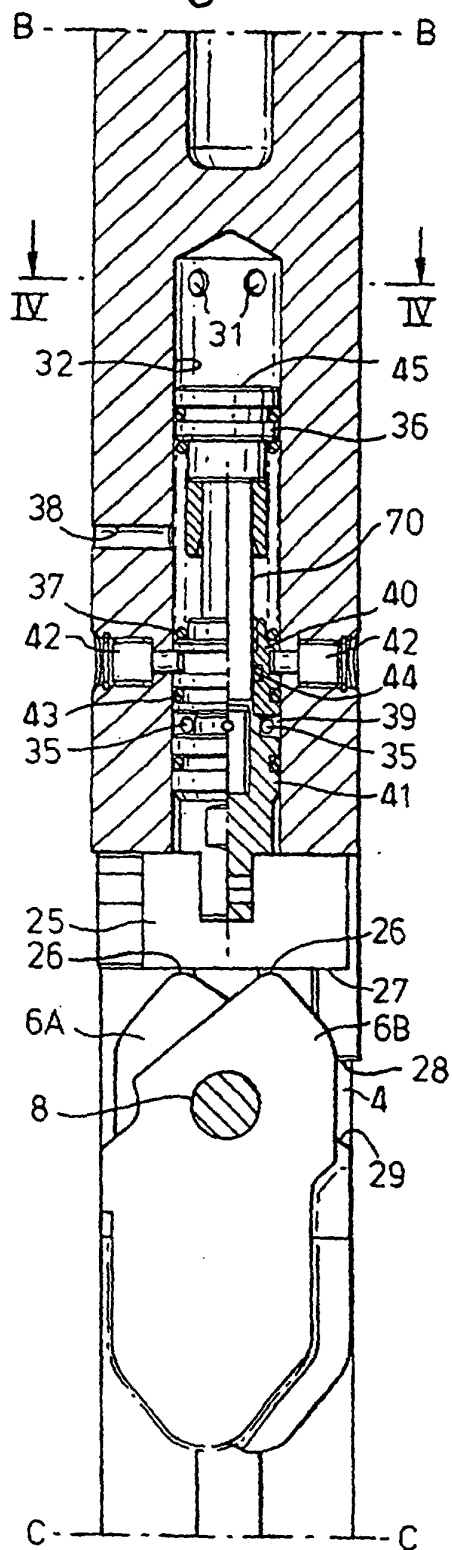


Fig.2D.

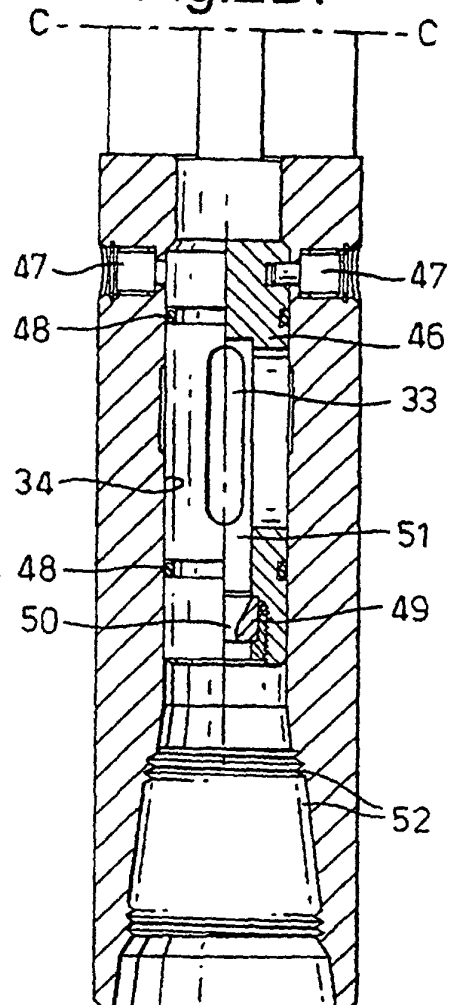


Fig.4.

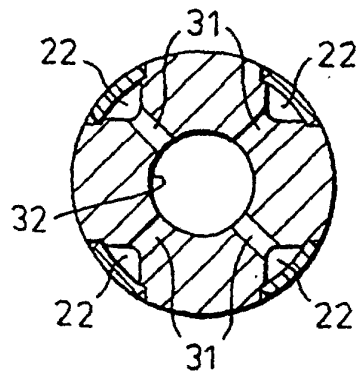


Fig.6.

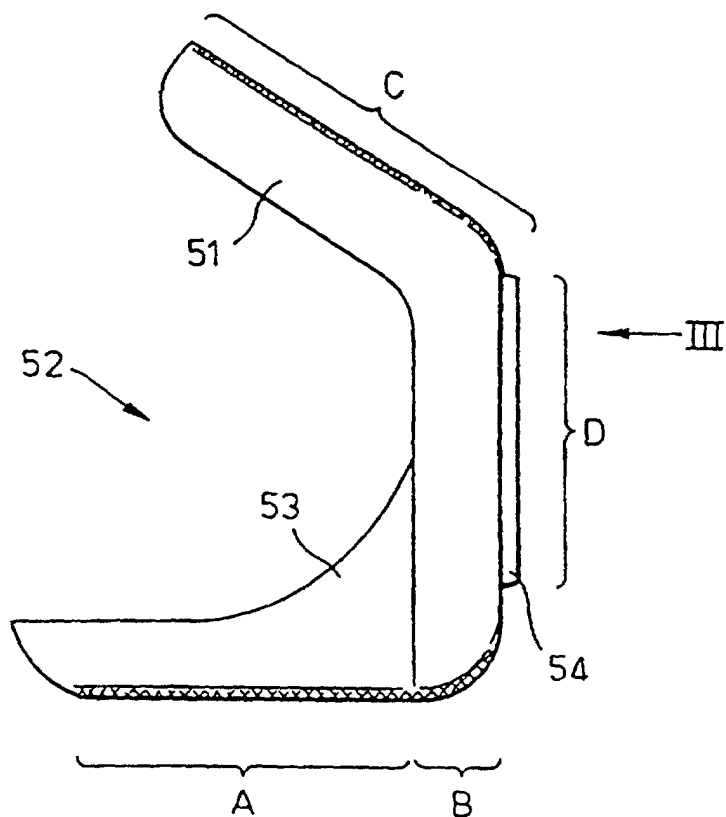


Fig.7.

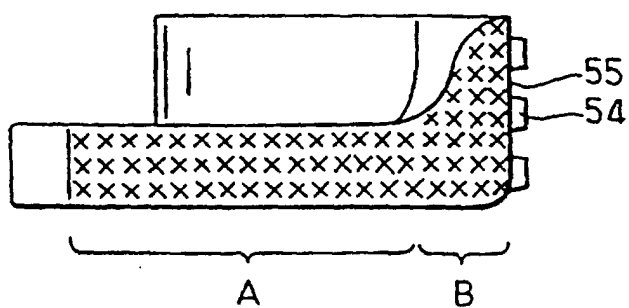


Fig.8.

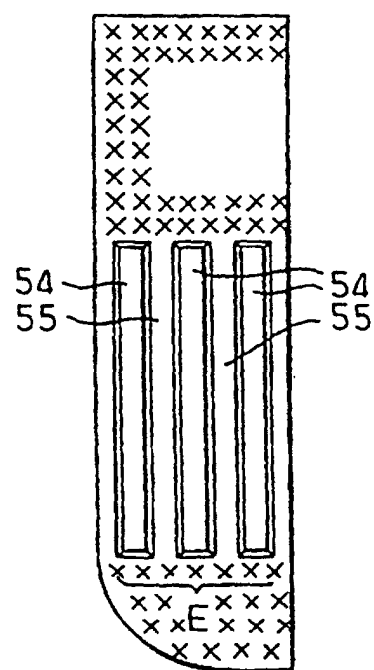


Fig.9.

