



(51) International Patent Classification:

B05B 17/06 (2006.01) A61L 9/14 (2006.01)
B05B 9/04 (2006.01) B05B 17/00 (2006.01)

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(21) International Application Number:

PCT/EP2019/078298

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

(22) International Filing Date:

17 October 2019 (17.10.2019)

Published:

— with international search report (Art. 21(3))
— with amended claims and statement (Art. 19(1))

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1816922.7 17 October 2018 (17.10.2018) GB

(71) Applicant: VECTAIR SYSTEMS LIMITED [GB/GB];
Unit 3, Trident Centre, Armstrong Road, Basingstoke
Hampshire RG24 8NU (GB).

(72) Inventors: DIX, Robert; c/o Vectair Systems Limited,
Unit 3, Trident Centre, Armstrong Road, Basingstoke
Hampshire RG24 8NU (GB). NELSON, Rebecca; 112
Kingston Road, Bristol Bristol BS3 1DP (GB). WALLER,
Jonathan; Flat 16 Jubilee Court, 225 Wick Road, Bristol
Bristol BS4 4QD (GB). GRAY, Michael; 23 Elizabeth
Crescent, Stoke Gifford Bristol BS34 8NY (GB). RIDOUT,
Frederick; Flat 10, 106 Broadmead, Bristol Bristol BS1
3DN (GB).

(74) Agent: MACLEAN, Martin; Grosvenor House, 7 Horse-
shoe Crescent, Beaconsfield Buckinghamshire HP9 1LJ
(GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: FLUID DISPENSER

(57) Abstract: A dispenser capable of dispensing a fluid via a vertically-oriented piezo device comprises a reservoir in the form of a replaceable cartridge containing a fluid to be dispensed, a planar piezo element having front and rear surfaces and which in use is oriented with its plane vertical and which is drivable to vibrate and thereby dispense fluid from the front surface, and a pump to draw a predetermined amount, or dose, of fluid from the reservoir and to drive the dose of fluid at a predetermined above-atmospheric pressure to the rear surface of the piezo element for dispensing.



FIELD OF THE INVENTION

The present invention relates to a dispenser which can be used to dispense any of a variety of materials, mainly liquids, into an aerosol form, such as (but not limited to) air freshening compositions or other chemicals requiring automatic dosing.

BACKGROUND ART

Dispensers are commonly provided in washrooms and similar facilities, in order to improve their overall environmental condition. In the past, various solid materials were utilized which sublimated, thereby dispersing a substitute odour for the odour found in public facilities. In order to enhance the dispersion of such sublimating materials, many suppliers developed powered fan devices which assisted in the dispersal of the sublimated material. Such devices are well known in the art, and an example is shown in US4830791, which discloses a solid dispensing device.

More recently, odour control devices where a pressurized aerosol container is utilized have become well known in the art. Aerosol-type dispensing devices typically include a battery-powered motor that actuates the nozzle on the aerosol container on a periodic basis. These conventional dispensing devices have significant disadvantages. Aerosol cans require propellant gases, and whilst CFC-free propellants have been identified, these tend to require volatile organic compounds (VOCs), propanol, isobutanes and the like which are coming under increasing scrutiny. Several jurisdictions have introduced legislation aimed at reducing or elimination the unnecessary use of such chemicals.

It would therefore be desirable to deliver the scent directly, i.e. by evaporation or other dispersion of the scent composition itself, avoiding the need for carrier and propellant chemicals. This has been achieved for the home environment by SC Johnson, Inc. with the Glade® Wisp device, which uses a piezo element to disperse a scent formulation into the air by vibrating at high frequency while in contact with a small volume of the formulation. This aerosolises the formulation, dispersing it as required. However, such devices are problematic in that the volume of formulation that is in contact with the piezo must be closely controlled; if too large, the piezo does not resonate and the formulation is not dispensed. This requires the formulation to be delivered to a horizontally-disposed piezo element via a wick. This is acceptable for home use, where the device will be mounted at a low location within the room. Thus, the fragrance is dispensed upwards into the room. However, it is unsuitable for use in corporate or communal washrooms, where the dispenser must be fitted high up to limit vandalism or other tampering. The use of a Wisp-type device in such a location would not result in an effective dispensing of the fragrance into the room, as most of the fragrance would be captured by the ceiling panel above the device.

We created a device which controls the rate of flow of a fragrance formulation onto a vertically-oriented piezo device, as described in EP2564878 and US9636431; this provides an effective fragrance dispenser that can be mounted in an elevated location (typically more than 6 feet or 2 metres from the floor) and that can dispense a fragrance at regular intervals without the use of excessive propellant compositions and the like. This dispenser is a battery-operated piezo-based dispenser suitable for use in corporate and communal environments (it is preferable for the device to be battery-operated, rather than a plug-in device requiring a mains electrical supply, as there is rarely a mains electrical supply at the required location), which avoids all propellant gases and reducing the VOC usage dramatically. This dispenser includes a reservoir located in use generally above the porous piezo element, so that the effective fluid column extending above the element exerts pressure to the rear of the piezo element. The earlier invention was directed to reducing this pressure, in line with the common understanding that the pressure on the rear of the piezo element should be limited, particularly during dispensing, because such piezo elements are sensitive to the pressure of fluid behind them; if the pressure is too high the piezo element will be too heavily damped to be able to vibrate in the correct manner. The earlier design provided means to reduce the fluid pressure behind the piezo element and ensured that an acceptably low pressure was maintained in combination with a useful flow rate; however,

we now wish to improve the accuracy with which fluid is dispensed. This need for accuracy relates to the amount of fluid which is dispensed (or "dose") each time the dispenser is actuated and also the characteristics of the plume of dispensed material are optimised (the plume angle and its length are important for ensuring the dispensed fluid is dispensed as intended into the space in which the dispenser is located). Dispensers are commonly fitted with a refillable and/or replaceable container, or reservoir, containing the fluid to be dispensed; it is also important that the accuracy with which fluid is dispensed can be reliably maintained over time, so that the refill/replacement of the reservoir (which is usually carried out according to a predetermined timetable) does not take place too soon, before the reservoir is empty (which would lead to a waste of fluid), and also that it does not take place too late, after the reservoir has been empty for some time (which would mean that the dispenser had not been capable of performing its function for some time). We have also found that ambient factors, such as temperature, humidity, air pressure and the like, can have a significant effect on the amount of fluid which is dispensed and, where these ambient factors are changeable, this too affects the amount of fluid which is dispensed. In addition, although the fluid behind the porous piezo element tends to be retained by the effects of surface tension, over prolonged periods there can be fluid leakage, which not only wastes fluid but also adversely affects the predictability of the reservoir refill/replace interval.

SUMMARY OF THE INVENTION

The present invention is predicated on the realisation that an improved dispenser can be designed if the generally accepted preconception that piezo dispensers should not have any significant fluid pressure behind them during the dispensing operation is not followed. Accordingly the present invention provides a dispensing apparatus comprising a reservoir containing a fluid to be dispensed, a planar piezo element having front and rear surfaces and which in use is oriented with its plane vertical and which is drivable to vibrate and thereby dispense fluid from the front surface, and a pump to draw a predetermined amount, or dose, of fluid from the reservoir and to drive the predetermined amount of fluid at a predetermined above-atmospheric pressure to the rear surface of the piezo element for dispensing.

When it is desired to dispense fluid, such an arrangement allows an accurately measured dose of fluid to be drawn into an intermediate chamber and then to dispense the fluid through the piezo element so that it is atomised and dispersed in a precisely controlled manner. This enables reliably accurate dispensing of the fluid over time, allowing the life of the reservoir to be predicted with greater accuracy than with conventional dispensers. The piezo element may be porous, thereby to permit dispensing from the front surface of the element of fluid contacting the rear surface of the element. Preferably the dispenser is arranged so that there is no fluid pressure acting on the rear surface of the piezo element at times when the dispenser is not dispensing fluid, which reduces leakage of fluid. The predetermined above-atmospheric pressure is set according to the shape, dimensions, hole size or porosity of the piezo element and the rate at which it is caused to vibrate, so that the fluid is driven with a substantially constant pressure which is a matter of design so that it works in concert with the vibrations of the piezo element to produce an optimised plume of atomised fluid. We intend that the term "vertical" used herein be interpreted broadly, so as to accommodate a tolerance of 5°, 10° or up to 15° away from the vertical.

The pump can be a reciprocating piston pump, the drawing of the fluid from the reservoir and the driving of the fluid for dispensing defining a single cycle of the pump, so that the pump cycle can consist of two separate strokes of the reciprocating piston – for simplicity and economy these two strokes can be successive movements of the reciprocating piston in opposite directions, a filling stroke in one direction of piston movement and a dispensing stroke in the next subsequent movement of the piston in the opposite direction. The dispenser may include two one-way valves, so that the apparatus can include a pumping chamber, one one-way valve adapted to allow fluid to flow into the pumping chamber from the reservoir and the other one-way valve adapted to allow fluid to flow out of the pumping chamber into a dispensing chamber at the rear surface of the piezo element, the reciprocating piston being effective to vary the volume of the pumping chamber, thereby selectively to draw fluid from the reservoir into the pumping chamber or to drive fluid from the pumping chamber into the dispensing chamber. In this way the drawing of a precise amount of fluid into the pumping chamber and the accurate driving of the fluid dose at the predetermined above-atmospheric pressure for dispensing can be achieved by accurate control of the movement of the piston pump.

The one-way valve allowing fluid to flow out of the pumping chamber into the dispensing chamber may be located closely adjacent to the rear surface of the piezo element, so as to allow the volume of the dispensing chamber to be minimised relative to the volume of the pumping chamber. This means that, at the end of each dispensing operation only a very small amount of fluid remains behind the piezo element and this is retained in place by surface tension and/or gravity and thus reduces wasteful leakage of fluid when the dispenser is not operating.

The reciprocating piston pump could be driven by a rotary motor which is connected to the reciprocating piston by a linkage, the motor and the linkage being adapted to cause the piston to move through a dispensing stroke at a set rate so that the fluid in the pumping chamber is made to flow to the dispensing chamber at a substantially constant flow rate throughout the dispensing stroke as the pump drives the predetermined amount of fluid at above-atmospheric pressure to the rear surface of the piezo element. The motor and the linkage are preferably adapted to cause the piston to move through a filling stroke at a predetermined rate, so that the predetermined amount of fluid is drawn from the reservoir into the dispensing chamber. A relatively simple and inexpensive linkage can be in the form of a cam and/or a scotch yoke.

In use the piezo element is preferably positioned vertically above the level of the top surface of the fluid in the reservoir. This ensures that during operation of the dispenser during the dispensing stroke the only pressure acting on the rear surface of the piezo element is the predetermined above-atmospheric pressure caused by the pump, and that other than during operation of the dispenser during the filling stroke and after the dispensing stroke there is no fluid pressure acting on the rear surface of the piezo element; this adds to dispensing accuracy and reduces leakage.

There may be a controller arranged to actuate the pump in concert with the piezo element, and the controller can be arranged to as to actuate the piezo element before actuating the pump, and/or to cause the piezo element to vibrate throughout the time the pump is driving the predetermined amount of fluid at above-atmospheric pressure to the rear surface of the piezo element and for a period after the pump has stopped driving fluid to the rear surface of the piezo element. The reservoir can be a replaceable/refillable cartridge which is removably mounted in the apparatus.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described by way of example and with reference to the accompanying figures, in which;

5 Figure 1 is a schematic side view in cross-section showing how a dispenser in accordance with the invention would operate;

Figure 2 is a schematic illustration of an alternative pump arrangement for use with the dispenser of Figure 1, and

10 Figure 3 is a schematic side view of a linkage arrangement for use with the dispenser of Figure 1.

DETAILED DESCRIPTION OF THE EMBODIMENTS

Figure 1 shows a dispensing apparatus 2 comprising a reservoir 4 containing a liquid 6 which is to be dispensed. A dip tube 8 for drawing the liquid out of the reservoir 4 extends
15 downwardly into the reservoir 4, reaching almost to its bottom so as to ensure that nearly all of the fluid 6 can be dispensed before the reservoir 4 has to be refilled or exchanged for a full replacement.

The dip tube 8 is in fluid communication with a pumping chamber 10, which in turn is in fluid communication with a dispensing chamber 12. Between the dip tube 8 and the
20 pumping chamber 10 is a first one-way valve 14, and between the pumping chamber 10 and the dispensing chamber 12 is a second one-way valve 16; one-way valves 14, 16 are spring-loaded ball valves as ball arranged to work in opposition for reasons described below. The dispensing chamber is closed by a commercially-available planar piezo plate 18, which is porous and in use vibrates so as to atomise the fluid and disperse it in a plume 20. The
25 pumping chamber 10 is closed by a reciprocating piston 22 which can reciprocate in a vertical direction (in use and as shown in the drawing), driven by a rotary motor 24 acting through linkage 26 (described in more detail below with reference to Figure 3). It will be

noted that the piezo element 18 is positioned above the highest level of the top surface 28 of the fluid 6 in the reservoir 4.

In operation, the piston 22 is drawn upwardly by motor 24 acting through linkage 26; this causes a drop in pressure in pumping chamber 10, which causes the balls to move to the right, and one-way valve 14 to open and one-way valve 16 to close. Continued movement of piston 22 in the same direction draws fluid 6 from the reservoir 4 through the dip tube 8 and fills the pumping chamber. When piston 22 reaches its highest level and reverses direction downwardly, this causes the fluid pressure within pumping chamber 10 to increase, which moves the balls to the left, and closes one-way valve 14 and opens one-way valve 16. Further downward movement of the piston 22 drives the fluid from the pumping chamber 10 into the dispensing chamber 12; here the fluid pressure, in combination with the vibration of the piezo plate 18 causes the fluid to pass through the plate and be atomised and dispersed in a plume 20. Dispensing of the fluid in plume 20 continues until piston 22 reaches the limit of its downward motion, at which point the pumping cycle is completed and the dispenser 2 is ready to begin another dispensing operation, without delay if desired. It should be noted that the relative sizes of the pumping chamber 10 and the dispensing chamber 12 as shown in the drawings is purely schematic, in practice the volume of the dispensing chamber 12 is much smaller than that of the pumping chamber, and dispensing chamber 12 is shaped and the one-way valve 16 located relative to piezo element 18 so as to allow the volume of dispensing chamber 12 to be made as small as possible. This ensures that when the dispensing stroke is completed and one-way valve 16 closes, the amount of liquid remaining in dispensing chamber 12 is small enough to be atomised and dispensed by the vibrating action of the piezo element 18 alone, meaning that there is little fluid left which can leak from dispensing chamber 12 when the dispenser 2 is in standby mode, between dispensing operations.

The pump and valve arrangement can be any which utilises the strokes of a reciprocating piston; an alternative arrangement is shown in Figure 2, in which one one-way valve 214 is located as in Figure 1, but the second one-way valve 216 is located in the piston 222. This arrangement operates so that fluid flows into and out of the pumping chamber 210 in the general direction indicated by the arrows A. Downwards motion of piston 222 closes one-way valve 214 and opens one way valve 216; fluid in the pumping chamber 210 below the piston 222 flows through the one-way valve 216 so that it is above

the piston 222. When the piston changes direction, one-way valve 214 opens and one-way valve 216 closes; continued upwards movement of the piston 222 causes fluid to be drawn into the pumping chamber 210 beneath the piston 222, whilst the fluid already in the pumping chamber 210 above the piston is driven away to be dispensed. When the piston reaches the end of its upwards motion the pumping cycle is complete, and ready to be repeated.

Figure 3 shows a linkage mechanism 3 suitable for controlling the movement of the reciprocating piston 322 on both directional strokes, to ensure a sufficiently constant fluid pressure and flow rate on the dispensing stroke so that a metered dose of fluid is passed to the piezo element to be efficiently atomised and dispersed, and to draw in an accurately metered dose of fluid into the pumping chamber 310 on the pumping stroke. The mechanism 3 illustrated is intended to operate in the same way as that shown in Figure 1, but here only one one-way valve 314 and a shortened dip tube are shown, and there is no dispensing chamber or piezo element shown. The end of the piston 322 distant from the dispensing chamber 310 is enlarged in a flat yoke 330; this yoke is provided with a yoke slot 332 and two guide slots 344 which engage with tabs (not shown) to ensure that both ends of the piston 322 can only reciprocate along one axis (which is parallel to the slots 334). Rotary motor 324 drives a spindle 336 about an axis perpendicular to the plane of the drawing, and an off-centre circular cam 338 is fixed to the end of the spindle 336 so as to engage with the inside of yoke slot 332, forming a modified scotch yoke. The amount of offset between the centre of the spindle 336 and the centre of the circular cam 338, the radius of the circular cam 338 and the rate of rotation are all significant in ensuring that the movement of the piston 322 is controlled as required (as described above). The surface area of the end of the piston in the dispensing chamber and the length of the piston stroke are relevant to the volume of each dose of fluid dispensed in one pumping cycle.

In our presently preferred embodiment, each metered dose is about 0.05ml, and is drawn from a replaceable cartridge containing 100ml when full with a dose accuracy of 6%. A controller such as a suitably programmed microprocessor is included in the dispenser (along with a suitable power source, such as a battery) to actuate the dispenser at regular intervals, which may be varied by the user, usually at any frequency between every 14 minutes and every hour. The controller may switch off the dispenser completely for a prolonged and user-selectable period (overnight, for example) and turn it on for one or

more different user-selectable periods at certain times (for the hours around mealtimes, for example). The controller can also be set to control the piezo element so as to have a duty cycle of anything between about 1 second and about 6 seconds and the motor so as to have a duty cycle of between about 10 seconds and about 25 seconds, and at each dispense
5 stroke the controller causes the piezo element to vibrate at about 123kHz, starting just before the dispensing stroke begins and continuing for a short period after the dispensing stroke has ended. A particular configuration we have used delivers a dose for a piezo element cycle of about 3.5 seconds every 20 minutes or so for 2222 cycles (about 30 days) at which point the dispenser stops for the cartridge containing the fluid to be
10 replaced/refilled.

It will of course be understood that many variations may be made to the above-described embodiment without departing from the scope of the present invention. For example, the circular cam could be replaced with a non-circular cam, with the shape of the cam being chosen to give a specific profile to the movement of the piston over time. There
15 may be a button or switch on the dispenser to actuate a single dispensing cycle. There may be a light or some other indicator to show when dispensing is in progress, and/or about to start. The reservoir could be a stiff cartridge, a flexible pouch, or it could be a flexible pouch within a rigid outer cartridge. The controller could be provided with means such as a radio receiver so as to be remotely manually operable or so that any setting could be varied
20 remotely, and it could have a transmitter so it could signal if it is not operating properly or if it is empty and the cartridge needs changing. Although described with fragrance dispensers in mind, the invention could be used in any application where frequent doses of atomised fluid need to be dispersed, such as in greenhouses or in agricultural applications where the fluid could be a selective poison (e.g. weed or pest killer) or a beneficial growth agent (e.g.
25 a fertilising compound), or in particular atmospheric conditions (such as a fungicide in a particularly humid atmosphere). The dispenser may be programmed to prime itself before a dispense stroke, should the particular fluid, dispenser or ambient conditions make this necessary.

Where different variations or alternative arrangements are described above, it should
30 be understood that embodiments of the invention may incorporate such variations and/or alternatives in any suitable combination.

CLAIMS

1. A dispensing apparatus comprising a reservoir containing a fluid to be dispensed, a planar piezo element having front and rear surfaces and which in use is oriented with its plane vertical and which is drivable to vibrate and thereby dispense fluid from the front surface, and a pump to draw a predetermined amount of fluid from the reservoir and to drive the predetermined amount of fluid at a predetermined above-atmospheric pressure to the rear surface of the piezo element for dispensing.
2. A dispensing apparatus according to Claim 1 in which the piezo element is porous, thereby to permit dispensing from the front surface of the element of fluid contacting the rear surface of the element.
3. A dispensing apparatus according to Claim 1 or Claim 2 in which the pump is a reciprocating piston pump.
4. A dispensing apparatus according to Claim 3 in which the drawing of the fluid from the reservoir and the driving of the fluid for dispensing is a single cycle of the pump, the pump cycle consisting of two separate strokes of the reciprocating piston.
5. A dispensing apparatus according to Claim 3 or Claim 4 further comprising two one-way valves.
6. A dispensing apparatus according to claim 4 comprising a pumping chamber, one one-way valve allowing fluid to flow into the pumping chamber from the reservoir and the other one-way valve allowing fluid to flow out of the pumping chamber into a dispensing chamber at the rear surface of the piezo element, the reciprocating piston being effective to vary the volume of the pumping chamber, thereby selectively to draw fluid from the reservoir into the pumping chamber or to drive fluid from the pumping chamber into the dispensing chamber.
7. A dispensing apparatus according to Claim 6, in which the one-way valve allowing fluid to flow out of the pumping chamber into the dispensing chamber is located closely adjacent to the rear surface of the piezo element, so as to minimise the volume of the dispensing chamber relative to the volume of the pumping chamber.

8. A dispensing apparatus according to any one of Claims 3 to 7, in which the reciprocating piston pump is driven by a rotary motor which is connected to the reciprocating piston by a linkage, the motor and the linkage being adapted to cause the piston to move through a dispensing stroke at a set rate so that the fluid in the pumping chamber is made to flow to the dispensing chamber at a substantially constant flow rate throughout the dispensing stroke as the pump drives the predetermined amount of fluid at above-atmospheric pressure to the rear surface of the piezo element.
9. A dispensing apparatus according to Claim 8, in which the motor and the linkage are adapted to cause the piston to move through a filling stroke at a predetermined rate so that the predetermined amount of fluid is drawn from the reservoir into the dispensing chamber.
10. A dispensing apparatus according to Claim 8 or Claim 9 in which the linkage comprises a cam and/or a scotch yoke.
11. A dispensing apparatus according to any preceding claim, in which the piezo element is in use positioned vertically above the level of the top surface of the fluid in the reservoir.
12. A dispensing apparatus according to any preceding claim, further comprising a controller to actuate the pump in concert with the piezo element so as to dispense fluid.
13. A dispensing apparatus according to Claim 11, in which the controller is adapted to actuate the piezo element before actuating the pump.
14. A dispensing apparatus according to Claim 11 or Claim 12, in which the controller is adapted to cause the piezo element to vibrate throughout the time the pump is driving the predetermined amount of fluid at above-atmospheric pressure to the rear surface of the piezo element and for a period after the pump has stopped driving fluid to the rear surface of the piezo element.
15. A dispensing apparatus according to any preceding claim in which the reservoir is removably mounted in the apparatus.

AMENDED CLAIMS

received by the International Bureau on 13 January 2020 (13.01.2020)

1. A dispensing apparatus comprising a reservoir containing a fluid to be dispensed, a planar piezo element having front and rear surfaces and which in use is oriented with its plane vertical and which is drivable to vibrate and thereby dispense fluid from the front surface, and a pump to draw a predetermined amount of fluid from the reservoir into an intermediate chamber and to drive the predetermined amount of fluid at a predetermined above-atmospheric pressure from the intermediate chamber to a dispensing chamber at the rear surface of the piezo element for dispensing.
2. A dispensing apparatus according to Claim 1 in which the piezo element is porous, thereby to permit dispensing from the front surface of the element of fluid contacting the rear surface of the element.
3. A dispensing apparatus according to Claim 1 or Claim 2 in which the pump is a reciprocating piston pump.
4. A dispensing apparatus according to Claim 3 in which the drawing of the fluid from the reservoir and the driving of the fluid for dispensing is a single cycle of the pump, the pump cycle consisting of two separate strokes of the reciprocating piston.
5. A dispensing apparatus according to Claim 3 or Claim 4 further comprising two one-way valves.
6. A dispensing apparatus according to claim 5 comprising a pumping chamber, one one-way valve allowing fluid to flow into the pumping chamber from the reservoir and the other one-way valve allowing fluid to flow out of the pumping chamber into a dispensing chamber at the rear surface of the piezo element, the reciprocating piston being effective to vary the volume of the pumping chamber, thereby selectively to draw fluid from the reservoir into the pumping chamber or to drive fluid from the pumping chamber into the dispensing chamber.
7. A dispensing apparatus according to Claim 6, in which the one-way valve allowing fluid to flow out of the pumping chamber into the dispensing chamber is located closely adjacent to the rear surface of the piezo element, so as to minimise the volume of the dispensing chamber relative to the volume of the pumping chamber.

8. A dispensing apparatus according to any one of Claims 3 to 7, in which the reciprocating piston pump is driven by a rotary motor which is connected to the reciprocating piston by a linkage, the motor and the linkage being adapted to cause the piston to move through a dispensing stroke at a set rate so that the fluid in the pumping chamber is made to flow to the dispensing chamber at a substantially constant flow rate throughout the dispensing stroke as the pump drives the predetermined amount of fluid at above-atmospheric pressure to the rear surface of the piezo element.
9. A dispensing apparatus according to Claim 8, in which the motor and the linkage are adapted to cause the piston to move through a filling stroke at a predetermined rate so that the predetermined amount of fluid is drawn from the reservoir into the dispensing chamber.
10. A dispensing apparatus according to Claim 8 or Claim 9 in which the linkage comprises a cam and/or a scotch yoke.
11. A dispensing apparatus according to any preceding claim, in which the piezo element is in use positioned vertically above the level of the top surface of the fluid in the reservoir.
12. A dispensing apparatus according to any preceding claim, further comprising a controller to actuate the pump in concert with the piezo element so as to dispense fluid.
13. A dispensing apparatus according to Claim 12, in which the controller is adapted to actuate the piezo element before actuating the pump.
14. A dispensing apparatus according to Claim 12 or Claim 13, in which the controller is adapted to cause the piezo element to vibrate throughout the time the pump is driving the predetermined amount of fluid at above-atmospheric pressure to the rear surface of the piezo element and for a period after the pump has stopped driving fluid to the rear surface of the piezo element.
15. A dispensing apparatus according to any preceding claim in which the reservoir is removably mounted in the apparatus.

STATEMENT UNDER ARTICLE 19 (1)

Claim 1 has been amended:

1. So as to recite that the pump draws “a predetermined amount of fluid from the reservoir into an intermediate chamber”; this amendment is supported by the description at page 4, line 2 and at page 7, lines 6 to 7.
2. So as to state that the pump drives “the predetermined amount of fluid at a predetermined above-atmospheric pressure from the intermediate chamber to a dispensing chamber at the rear surface of the piezo element” environmental sensor is a “plug-in” sensor; this amendment is supported by the passages of description at page 4, lines 24 to 25 and page 7 lines 10 to 11, and by original Claim 6.

The dependencies of Claims 6, 13 and 14 have been corrected on the basis that the original dependencies were obviously erroneous

1/2

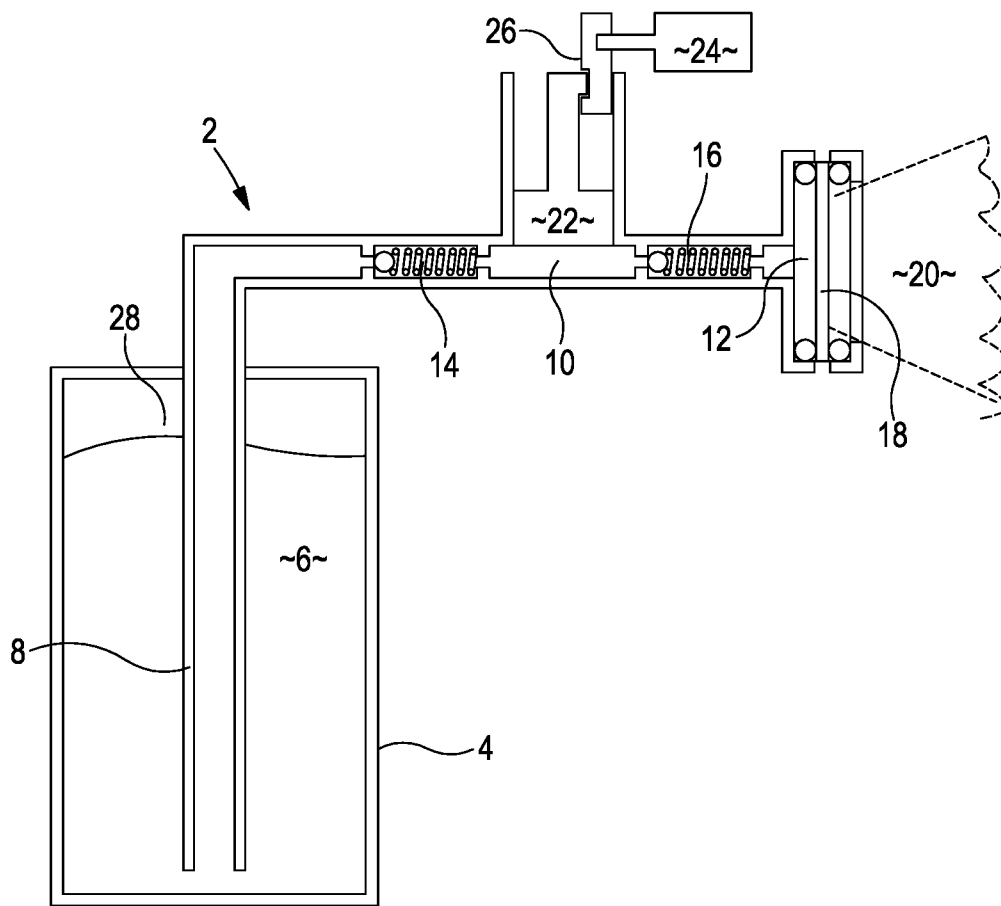


Fig. 1

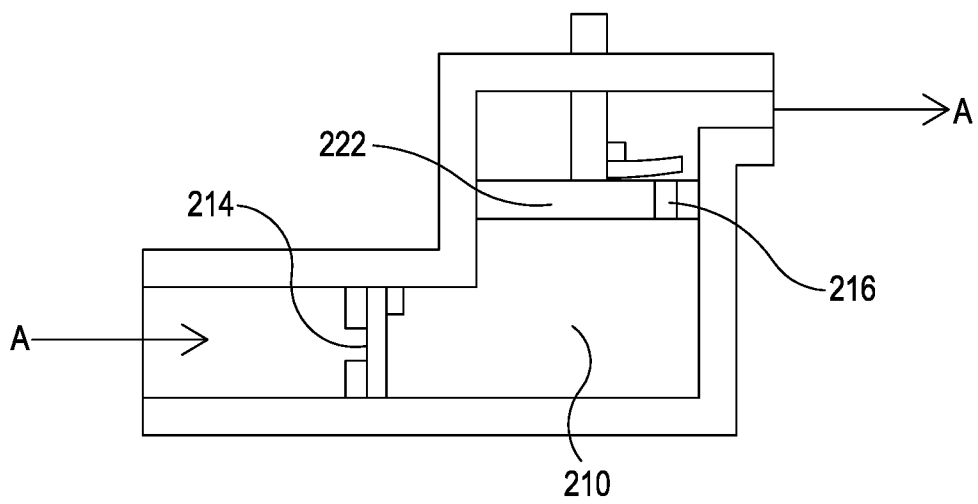


Fig. 2

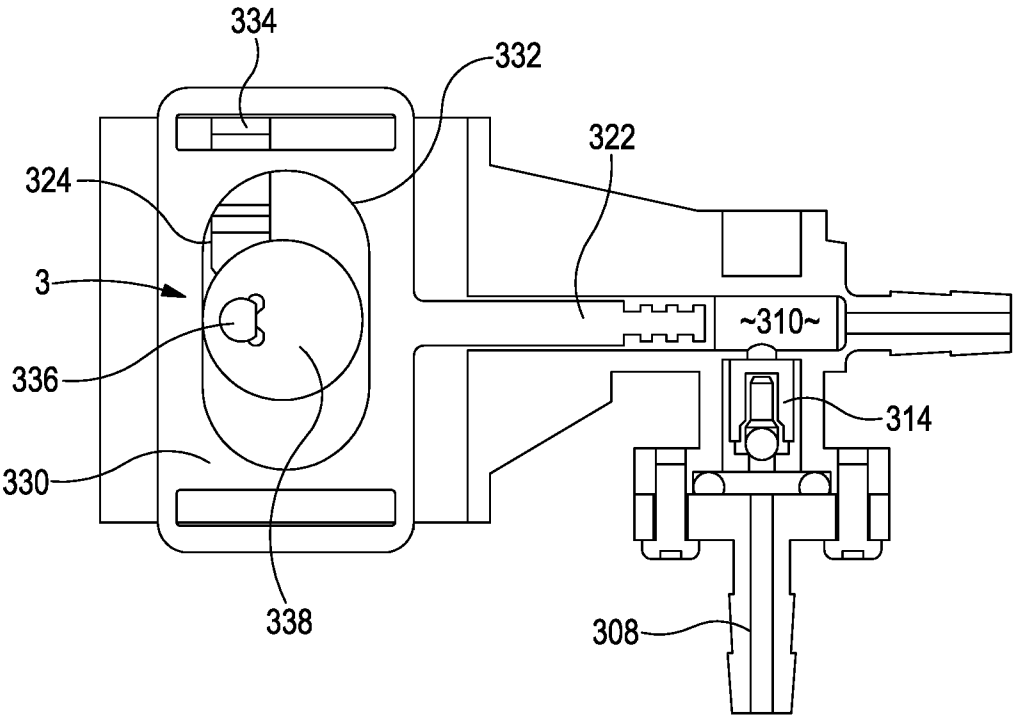


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/078298

A. CLASSIFICATION OF SUBJECT MATTER INV. B05B17/06 B05B9/04 A61L9/14 B05B17/00 ADD.																	
According to International Patent Classification (IPC) or to both national classification and IPC																	
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) B05B A61L A61M Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data																	
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>X</td> <td>US 2008/290185 A1 (DURU NICOLAS [FR]) 27 November 2008 (2008-11-27) figures 1-11; examples 3,20,26,12 -----</td> <td>1-15</td> </tr> <tr> <td>X</td> <td>WO 2015/033214 A2 (OMNIMIST LTD [NZ]) 12 March 2015 (2015-03-12) paragraphs [0047], [0061], [0065]; figures 1,2,5,6; examples 106,112,110,104,132,102 -----</td> <td>1-12,14</td> </tr> <tr> <td>X</td> <td>US 2004/139963 A1 (IVRI YEHUDA [US] ET AL) 22 July 2004 (2004-07-22) paragraph [0086]; figures 9,10,13, 13a; examples 102,104,68,116,114,118,124,163,66,168 -----</td> <td>1-7,15</td> </tr> <tr> <td>A</td> <td>-/-</td> <td>8-10, 12-14</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	US 2008/290185 A1 (DURU NICOLAS [FR]) 27 November 2008 (2008-11-27) figures 1-11; examples 3,20,26,12 -----	1-15	X	WO 2015/033214 A2 (OMNIMIST LTD [NZ]) 12 March 2015 (2015-03-12) paragraphs [0047], [0061], [0065]; figures 1,2,5,6; examples 106,112,110,104,132,102 -----	1-12,14	X	US 2004/139963 A1 (IVRI YEHUDA [US] ET AL) 22 July 2004 (2004-07-22) paragraph [0086]; figures 9,10,13, 13a; examples 102,104,68,116,114,118,124,163,66,168 -----	1-7,15	A	-/-	8-10, 12-14
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.															
X	US 2008/290185 A1 (DURU NICOLAS [FR]) 27 November 2008 (2008-11-27) figures 1-11; examples 3,20,26,12 -----	1-15															
X	WO 2015/033214 A2 (OMNIMIST LTD [NZ]) 12 March 2015 (2015-03-12) paragraphs [0047], [0061], [0065]; figures 1,2,5,6; examples 106,112,110,104,132,102 -----	1-12,14															
X	US 2004/139963 A1 (IVRI YEHUDA [US] ET AL) 22 July 2004 (2004-07-22) paragraph [0086]; figures 9,10,13, 13a; examples 102,104,68,116,114,118,124,163,66,168 -----	1-7,15															
A	-/-	8-10, 12-14															
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.																	
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family																	
Date of the actual completion of the international search		Date of mailing of the international search report															
3 December 2019		12/12/2019															
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Deligiannidis, N															

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/078298

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2018/172561 A1 (STAMFORD DEVICES LTD [IE]) 27 September 2018 (2018-09-27)	1,2,12,15
A	paragraph [0031]; figures 1,3; examples 86,88,24,26,20	3-11,13
A	----- JP 2010 023875 A (MITANI VALVE CO LTD) 4 February 2010 (2010-02-04)	3-10
A	paragraphs [0025] - [0028]; figures 1-3; examples 4,4a,2b,5,7,6,6a,6b,A	
A	----- US 2006/289679 A1 (JOHNSON KAJ A [US] ET AL) 28 December 2006 (2006-12-28)	3-10
	par. 0064 "operative discharge check valve"; figures 2-3; examples 40,52,71,104,106	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/078298

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008290185	A1	27-11-2008	AT 446031 T 15-11-2009
		EP 1935280 A1	25-06-2008
		ES 2334276 T3	08-03-2010
		FR 2910253 A1	27-06-2008
		JP 2008246468 A	16-10-2008
		US 2008290185 A1	27-11-2008
WO 2015033214	A2	12-03-2015	AU 2014316769 A1 05-05-2016
		CN 105764616 A	13-07-2016
		EP 3043927 A2	20-07-2016
		US 2015069146 A1	12-03-2015
		WO 2015033214 A2	12-03-2015
US 2004139963	A1	22-07-2004	US 6085740 A 11-07-2000
		US 6467476 B1	22-10-2002
		US 2003000520 A1	02-01-2003
		US 2004139963 A1	22-07-2004
WO 2018172561	A1	27-09-2018	AU 2018240520 A1 07-11-2019
		CA 3057403 A1	27-09-2018
		WO 2018172561 A1	27-09-2018
JP 2010023875	A	04-02-2010	JP 5177526 B2 03-04-2013
		JP 2010023875 A	04-02-2010
US 2006289679	A1	28-12-2006	US 2006289679 A1 28-12-2006
		US 2008093476 A1	24-04-2008