




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : D04H 1/42, 1/54, 3/14, 13/00, A61F 13/15	A1	(11) International Publication Number: <b>WO 00/28122</b> (43) International Publication Date: 18 May 2000 (18.05.00)
<p>(21) International Application Number: PCT/US99/25740</p> <p>(22) International Filing Date: 29 October 1999 (29.10.99)</p> <p>(30) Priority Data: 09/187,677 6 November 1998 (06.11.98) US</p> <p>(71) Applicant (for all designated States except US): BBA NON-WOVENS SIMPSONVILLE, INC. [US/US]; 840 S.E. Main Street, Simpsonville, SC 29681 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): MEECE, Barry, DeWayne [US/US]; 639 Slatton Schoals Road, Pelzer, SC 29669 (US). QUANTRILLE, Thomas, Edward [US/US]; 304 Walker Way, Simpsonville, SC 29681 (US).</p> <p>(74) Agents: LINKER, Raymond, O., Jr. et al.; Alston &amp; Bird LLP, P.O. Drawer 34009, Charlotte, NC 28234-4009 (US).</p>	<p>(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>	

(54) Title: UNIDIRECTIONALLY COLD STRETCHED NONWOVEN WEBS OF MULTIPOLYMER FIBERS FOR STRETCH FABRICS AND DISPOSABLE ABSORBENT ARTICLES CONTAINING THEM

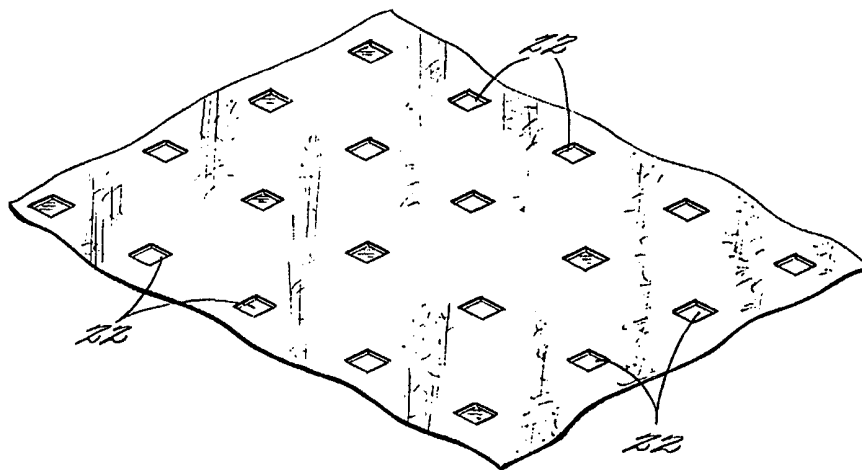

## (57) Abstract

A nonwoven web of multipolymer fibers is described that is unidirectionally stretched and permanently elongated at ambient conditions and exhibits a substantial increase in tensile strength in the stretch direction. The ratio of tensile strength of the web in the direction of fiber orientation to the tensile strength in the other direction is at least about 10:1. The ratio of elongation at peak load in a direction transverse to the direction of fiber orientation is at least about 6:1. The multipolymer fibers normally are a blend of polyethylene and a polypropylene homopolymer or copolymer, one of which is a dominant phase and one of which is a disperse phase. A third component having elastomeric properties that is at least partially miscible with one or both of the other components is included in some blends. The nonwoven webs are stretchable well beyond their initial dimensions in the direction perpendicular to the stretch direction and are especially useful in laminates with elastomeric members for use in disposable absorbent articles to impart elasticity thereto.

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

UNIDIRECTIONALLY COLD STRETCHED NONWOVEN WEBS  
OF MULTIPOLYMER FIBERS FOR STRETCH FABRICS AND  
DISPOSABLE ABSORBENT ARTICLES  
CONTAINING THEM

Field of the Invention

The invention relates to elasticized composite fabrics for use in disposable absorbent articles and to the components of these fabrics.

5                   Background of the Invention

Disposable diapers are composite absorbent articles that are designed to be worn about the lower torso as undergarments by incontinent persons and by infants and young children prior to toilet training.  
10 Disposable diapers typically include a liquid impervious back sheet as the outer surface of the diaper, a liquid pervious topsheet as the inner surface of the diaper for placing adjacent the skin of the wearer, and an absorbent core placed between the  
15 topsheet and the back sheet for absorbing urine and other liquids.

One area of concern in the development and construction of the modern disposable diaper has been maintaining the wearer's comfort and the fit of the  
20 diaper throughout the period of use of the diaper, especially on active infants and young children.

To improve the fit and comfort of the diaper and to assist in precluding leakage from the diaper, disposable diapers may include elasticized components,  
25 such as elasticized waist bands, leg cuffs and side panels. Examples of elasticized components useful in disposable diapers are described in U.S. Patent Nos. 5,242,436; 4,981,747; 5,114,781 and 5,244,482

It would be desirable to provide alternative  
30 composite elastic laminates that have improved properties, are more versatile, or require less effort

-2-

to prepare. It would be desirable to develop nonwoven webs for composite elastic laminates that are strong enough to withstand the rigors of incremental mechanical stretching in diaper construction where it is desirable to use elastomeric strands or scrim for breathability, rather than films.

#### Summary of the Invention

The invention provides a nonwoven web of multipolymer fibers, a method for making the web, a composite elastic laminate that includes the web and an elastic component, and a disposable absorbent article that includes the composite elastic laminate of the invention. The laminate is suitable for use in disposable absorbent articles, including use as elasticized side panels in diapers that are subjected to incremental mechanical stretching to activate the topsheet and the back sheet. The laminate is also suitable for use as a discrete stretchable member that is attached to the side edges of the main body of a garment, including a diaper, and has exceptional cloth like hand.

The nonwoven web is made from multipolymer fibers that are substantially oriented in one direction. A plurality of discrete bond sites throughout the web bond the fibers together. The ratio of the tensile strength of the web in the direction of orientation of the fibers to the tensile strength of the web in the other direction is at least about 10:1.

The multipolymer fibers are highly elongatable. The web can be stretched to orient the fibers in one or the other of the machine direction or the cross machine direction to substantially increase the elongation of the web at peak load in a direction perpendicular to the elongation of the web and to also increase the tensile strength in the web in the

-3-

direction of elongation. The web can be stretched in the absence of heat treatment, which is to say that the web can be stretched at a temperature from about 35 to 150 degrees Fahrenheit. Normally, the web will be stretched at an ambient temperature from about 65 to 110 degrees Fahrenheit.

Prior to stretching, the web will typically have an elongation at peak load in at least one of the machine direction or the cross machine direction of at least 70 percent. Mechanical stretching permanently elongates the web and develops a high degree of stretchability in the direction perpendicular to the elongation of the web. The elongation at peak load in the direction perpendicular to the direction of stretch is increased by a factor of at least about 2:1, and in a more specific aspect of the invention, by a factor of more than 4:1. Composite elastic fabrics made with the nonwoven web of the invention can typically be stretched to the elastic limit of the elastic component since the web is usually capable of stretching farther. The web is substantially strengthened and does not undergo thinning and damage during incremental mechanical stretching.

The multipolymer fibers can be formed with the different polymers in discrete structural domains or from a blend of polymers that are miscible, immiscible, or a blend of miscible and immiscible polymers. A blend can also be used as one component in a multipolymer fiber formed of discrete structural domains. In one embodiment, the polymers are immiscible and are blended to form a dominant continuous phase and at least one dispersed phase. Exemplary immiscible polymers include polyethylene, including linear low density polyethylene and polypropylene. These polymers are normally considered to be inelastic. Either polymer can be the dominant

continuous phase. The blend can also include an elastic component. The preferred blend includes a third component that is at least partially miscible with the two phases and gives the blend highly  
5 elongatable characteristics.

An example of a suitable blend for forming multipolymer fibers is:

isotactic polypropylene present in an amount of about 65 to 80 percent by weight based upon the  
10 weight of the blend;

linear low density polyethylene present in an amount from about 1 to 5 percent by weight based upon the weight of the blend; and

a block or grafted polyolefin copolymer or  
15 terpolymer having at least a portion of the chain thereof miscible with the isotactic polypropylene and wherein the block or grafted polyolefin copolymer or terpolymer is present in an amount from about 15 to 30 percent by weight based upon the weight of the blend.

20 Examples of such a block or grafted polyolefin copolymer are the commercially available Catalloy™ copolymers available from Montell.

The multipolymer fibers can be spunbond continuous filaments, carded discontinuous staple  
25 fibers and meltblown fibers. Normally, the web will be prepared from continuous spunbond filaments.

In another embodiment, the invention comprises a composite fabric that has at least one layer of an elastomeric component bonded to at least  
30 one layer of the nonwoven web described above. The elastomeric component can be selected from elastic strands, scrim, elastic films, and breathable elastic films. The fabric can be gathered in the direction in which the nonwoven web component previously was  
35 permanently elongated by mounting the web to the stretched elastic component and then relaxing the

-5-

elastic component in the manner taught in U.S. Patent No. 5,114,781.

In yet another embodiment, the invention comprises a method for substantially increasing the elongation at peak load of a bonded nonwoven web wherein a web of multipolymer fibers is prepared and then stretched in one of the machine or cross machine directions at a temperature from about 35 to 150 degrees Fahrenheit to permanently elongate the web. The elongation at peak load of the web in the direction perpendicular to the stretch direction is substantially increased. The method can include the additional step, if desired, of stabilizing the web against retraction of the fibers by lightly bonding the stretched web, normally through the application of heat and pressure.

Thus, the invention provides a composite elastic fabric with cloth like hand and good cover characteristics that is suitable for use in disposable absorbent articles, especially as elastic side panels in diapers, either as discrete members attached to the main body of the garment or in laminates mounted between the topsheet and back sheet. The nonwoven web component of the composite fabric has the strength to perform well in incremental stretching. The web can be permanently elongated in one direction to impart substantial ability to stretch in a direction perpendicular to the direction of elongation, all in the absence of heat treatment.

#### Brief Description of the Drawings

Some of the objects and advantages of the invention have been stated. Others will appear when taken in connection with the accompanying drawings and photomicrographs, in which:

Figure 1 is a perspective view of a portion of a bonded nonwoven web of multipolymer fibers prior

-6-

to stretching in accordance with the invention;

Figure 2 is a perspective view of the nonwoven web of Figure 1 after the nonwoven web has been permanently elongated in accordance with the invention and stabilized by application of light bonding;

Figure 3 is a schematic of an exemplary process for permanently elongating in the machine direction a bonded nonwoven web of multipolymer fibers;

Figure 4 is a partially broken away top perspective view of a portion of the schematic of Figure 3 taken along line 4-4 and showing the reduction in the cross direction of the width of the web as the web is stretched;

Figure 5 is an exploded perspective view of a laminate of two nonwoven webs of the invention as shown in Figure 2 with elastomeric strands placed between the two webs;

Figure 6 is a plan view of the relevant structure of a disposable diaper of the invention having the outer surface back sheet facing the viewer;

Figure 7 is an exploded perspective view of a broken away portion of the diaper of Figure 6, showing the placement within the diaper of a composite fabric of the invention;

Figure 8 is a photomicrograph at 5X magnification of a pointbonded spunbond nonwoven web of multipolymer continuous filaments prior to stretching in accordance with the invention;

Figure 9 is a photomicrograph showing the web of Figure 8 at 20X magnification;

Figure 10 is a photomicrograph at 5X magnification showing a point bonded spunbond nonwoven web of multipolymer continuous filaments after stretching in the machine direction followed by light bonding to stabilize the stretched web against

retraction;

Figure 11 is a photomicrograph showing the web of Figure 10 at 20X magnification;

5 Figure 12 is a photomicrograph at 20X magnification of a section through a pointbonded spunbond nonwoven web of multipolymer continuous filaments prior to stretching in accordance with the invention and showing a pointbond horizontally oriented in the body of the fabric; and

10 Figure 13 is a photomicrograph at 20X magnification of a section through a pointbonded spunbond nonwoven web of multipolymer continuous filaments after the web has been stretched in accordance with the invention and showing a pointbond  
15 that has become vertically orientated in the fabric as a result of the stretching.

#### Detailed Description of the Invention

The invention will be described with particular reference to the drawings, in which  
20 illustrative embodiments of the invention are set forth. It should be understood that persons skilled in the art to which this invention pertains may modify the specific details described while still continuing to use the invention. The description should be  
25 understood as a broad teaching of the invention that is directed to the persons of skill in the applicable arts.

Figure 1 is a perspective view of a portion of a bonded nonwoven web 20 prepared from multipolymer  
30 fibers. The nonwoven fibrous web represented in Figure 1 should be considered in a generic sense to include generally planar structures that are relatively flat, flexible and porous and are comprised of multipolymer staple fibers or continuous filaments. The nonwovens  
35 may be carded, spunbonded, wet laid, air laid or

meltblown. Normally, prior to stretching, the web will have an elongation at peak load in at least one of the machine direction or the cross machine direction of at least 70 percent. In the embodiment illustrated, the nonwoven fibrous web is a spunbonded nonwoven comprising multipolymer spunbond continuous filaments. The filaments are bonded together at discrete bond sites 22 distributed throughout the fabric to form a unitary, coherent nonwoven web.

Figure 8 is a photomicrograph at 5X magnification showing a point bonded nonwoven fabric of spunbond continuous multipolymer filaments. This same web is shown in Figure 9 at a magnification of 20 times. The individual filaments and the consolidated areas of the point bonds are evident. As is evident from the photomicrographs, the point bonds are planar and lie in the plane of the web. The point bond sites 22 comprise discrete areas where the filaments have been fusion bonded by the application of heat and pressure. In the embodiment illustrated, the bond sites 22 are point bonds, but other known configurations or shapes could be employed, including lines or other patterns.

The multipolymer fibers of the invention are predominantly formed from polymers that normally are considered nonelastic. Useful polymer combinations for use in the practice of the invention are taught in published PCT International Patent Application PCT/US95/15257, filed November 22, 1995, and entitled Extensible Composite Nonwoven Fabrics. The contents of this application and the teachings contained therein are hereby incorporated by reference in their entirety.

The term "multipolymer fibers" includes staple and continuous filaments prepared from blends of two or more polymers and from two or more polymers

present in discrete structural domains in the fiber. For the purposes of the invention, the term "polymer" is used in a general sense, and is intended to include homopolymers, copolymers, grafted copolymers, and terpolymers. The term blend is also used generally herein, and is intended to include immiscible and miscible polymer blends. The polymers are considered to be "immiscible" if they exist in separate, distinct phases in the molten state; all other blends are considered to be "miscible." It is understood that varying levels of miscibility can exist, and are also intended to be within the scope of this invention.

Blends with more than two polymers may also be utilized, including those with three or more polymer components. Both immiscible and miscible polymers may be added to a two component blend to impart additional properties or benefits with respect to blend compatibility, viscosity, polymer crystallinity or phase domain size.

Since the polymers employed in the invention will undergo extrusion, stabilizers and antioxidants are conventionally added to the polymer. Other additives may also be added in accordance with the present invention. For example inorganic additives such as titanium dioxide, talc, fumed silica or carbon black. The polymer resin may also contain other additives, such as other polymers, diluents, compatibilizers, antiblocking agents, impact modifiers, plasticizers, UV stabilizers, pigments, delusterants, lubricants, wetting agents, antistatic agents, nucleating agents, rheology modifiers, water and alcohol repellents, and the like. It is also anticipated that additive materials which have an affect on processing or product properties, such as extrusion, quenching, drawing, laydown, static and/or electrical properties, bonding, wetting properties or

-10-

repellency properties may also be used in combination with the blend. In particular, polymeric additives may also be used that impart specific benefits to either processing and/or end use.

5           The multipolymer fibers are normally formed of a polymer blend composed of two or more polymers. The polymers of the blend can be miscible, immiscible, or a combination of miscible and immiscible polymers. In one embodiment in accordance with the invention, the  
10 polymers may exist as a dominant continuous phase and at least one substantially discontinuous dispersed phase. In the case where the blend exists as a dominant continuous phase and at least one discontinuous phase, other polymers may also be present  
15 which are either miscible in one, or the other, or both polymer phases.

          According to a further aspect of the invention, the multipolymer fibers are formed of a polymer blend including a relatively low modulus  
20 polymer and at least one higher modulus polymer. It is believed that this combination is particularly valuable when the low modulus polymer is the dominant phase and the higher modulus polymer is dispersed therein. It is theorized that the higher modulus polymer acts to  
25 'reinforce' the low modulus dominant phase, lending stability to spinning, and stiffening the web just enough to allow for higher bond temperatures while reducing the risk of the web sticking to and wrapping the calender. In the case of multipolymer fibers  
30 formed of an immiscible polymer blend it is believed that the small amount of the dispersed polymer may have the effect of wind up speed suppression (WUSS) on the dominant polymer phase as described by Brody in U.S. Patent 4,518,744. Wind up speed suppression occurs  
35 when a small amount of an immiscible additive effectively reduces the degree of molecular orientation

-11-

within the fiber at a given filament spinning velocity. The result is a filament with generally higher elongation and lower tenacity.

5 In yet another aspect of the invention, the multipolymer fibers are formed of a polymer blend composed of a dominant continuous phase, and at least one polymer, having low mutual affinity with the dominant phase, dispersed therein, and at least one additional polymer which is at least partially miscible  
10 in one or the other or both continuous and dispersed polymer phases. If the one additional polymer is miscible in the dominant phase, and effectively reduces its crystallinity, it is believed that the improved extensibility observed in the resulting composites may  
15 be due to an 'impact-modifying' effect. If the one additional polymer has an affinity for both polymers, or serves to lower the surface energies between the two phases, it is believed that the improvement observed in the composite extensibility is due to a  
20 compatibilization effect. Independent of theory, the blend must ultimately form filaments or fibers, which when formed into webs and composite structures exhibit the properties described by the invention, meaning low fuzz and good elongation.

25 In one embodiment, the multipolymer fibers may comprise from 1 to 50 percent by weight polyethylene and from 99 to 50 percent by weight polypropylene. Fabrics formed from such blends exhibit low fuzz and good elongation.

30 In applications where tensile strength is particularly important and high elasticity is of lesser concern, the composite fabric may include a coherent, extensible nonwoven web formed of fibers of a polyethylene and polypropylene blend where the  
35 polyethylene is present in the range of 1% to 10% and the polypropylene is present in the range of 90% to 99%

-12-

by weight. In still another embodiment, very substantial and surprising increases in elongation can be achieved by blending a third polymer component into the blend. For example, the multipolymer fibers may include a dominant amount of a polypropylene, such as isotactic polypropylene, a small amount of a polymer having low mutual affinity with the dominant polymer, such as polyethylene, and an additional third polymer which either reduces crystallinity and/or compatibilizes the blend. What results is a softer web, with extremely high extensibility. Preferred multipolymer fibers according to this embodiment may comprise greater than 50 percent by weight polypropylene, 1 to 10 percent polyethylene, and 10 to 40 percent of the third polymer. Suitable additional third polymers include polypropylene copolymers and terpolymers such as the commercially available Catalloy™ copolymers available from Montell. These resins are characterized by having the comonomer(s) exist to some degree in blocks, and wherein at least some portion of the polymer chain is miscible with one or the other, or both, dominant and dispersed polymer phases. Other suitable polymers are the Reflex™ flexible polyolefins from Rexene. These crystallinity reducing resins are characterized as having atactic segments present in the polymer chain, such that the "tacticity" of the polymer is affected.

Especially preferred multipolymer fibers according to this embodiment comprise 65 to 80 percent isotactic polypropylene, 1 to 5 percent polyethylene, and 15 to 30 percent of a polyolefin copolymer wherein at least a portion of the chain is miscible with isotactic polypropylene.

Another class of useful and advantageous products according to this aspect of the invention employ multipolymer fibers formed of a polymer blend

-13-

comprised of a soft, extensible polymer phase, and at least one additional polymer having low mutual affinity with the soft, extensible phase, such that it modifies either the rheological, mechanical, and/or thermal properties of the fibers in a way that improves processability (e.g. melt spinning), bonding and/or abrasion resistance while maintaining high extensibility. In a preferred embodiment the soft, extensible phase is present as a dominant, continuous phase. For example, polyethylene can be used as the soft, extensible dominant phase and a polypropylene as the additional modifying polymer. In a preferred embodiment the additional polymer is added in a small proportion relative to the dominant phase. In another preferred embodiment, the additional polymer exhibits higher viscosity relative to the dominant phase. Blending a relatively small proportion of the higher viscosity polypropylene with the soft, extensible polyethylene imparts greatly increased abrasion resistance to a nonwoven fabric formed from the polymer blend, without significant adverse effect upon other important fabric properties, such as extensibility, softness, tensile strength, etc. The spinnability of the polyethylene is also improved by the presence of the additional polypropylene. According to this embodiment, the fibers preferably comprise between 2 to 50 percent by weight of the propylene polymer, e.g. 3% ethylene-propylene copolymer, and 98 to 50 percent by weight of the soft, extensible polymer, e.g. polyethylene. In one particularly preferred embodiment, the fiber composition may range from 5 to 40 percent by weight propylene polymer, and most desirably between 5 to 25 percent by weight propylene polymer and 75 to 95 percent by weight polyethylene. Especially suited for applications requiring good extensibility, tensile strength and abrasion resistance

-14-

are fiber compositions of from 5 to 25 percent by weight propylene polymer. A most preferred embodiment contains 5 to 25 percent by weight of ethylene-propylene copolymer or terpolymer and 75 to 95 percent by weight linear low density polyethylene. In these 5  
embodiments, the lower melting polyethylene is present as a substantially continuous phase in the blend and the higher melting propylene polymer is present as a discontinuous phase dispersed in the polyethylene 10  
phase.

In producing the fibers, the polyethylene and polypropylene components are combined in appropriate proportional amounts and intimately blended before being melt-spun. In some cases sufficient mixing of 15  
the polymer components may be achieved in the extruder as the polymers are converted to the molten state. In other cases, more dynamic mixing may be required.

Various types of polyethylene may be employed. As an example, a branched (i.e., non-linear) 20  
low density polyethylene or a linear low density polyethylene (LLDPE) can be utilized and produced from any of the well known processes, including metallocene and Ziegler-Natta catalyst systems. LLDPE is typically produced by a catalytic solution or fluid bed process 25  
under conditions established in the art. The resulting polymers are characterized by an essentially linear backbone. Density is controlled by the level of comonomer incorporated into the otherwise linear polymer backbone. Various alpha-olefins are typically 30  
copolymerized with ethylene in producing LLDPE. The alpha-olefins which preferably have four to eight carbon atoms, are present in the polymer in an amount up to about 10 percent by weight. The most typical comonomers are butene, hexene, 4-methyl-1-pentene, and 35  
octene. In general, LLDPE can be produced such that various density and melt index properties are obtained

-15-

which make the polymer well suited for melt-spinning with polypropylene. In particular, preferred density values range from 0.87 to 0.95 g/cc (ASTM D-792) and melt index values usually range from 0.1 to about 150 g/10 min. (ASTM D1238-89, 190°C). Preferably, the LLDPE should have a melt index of greater than 10, and more preferably 15 or greater for spunbonded filaments. Particularly preferred are LLDPE polymers having a density of 0.90 to 0.945 g/cc and a melt index of greater than 25. Examples of suitable commercially available linear low density polyethylene polymers include those available from Dow Chemical Company, such as ASPUN Type 6811 (27 MI, density 0.923), Dow LLDPE 2500 (55 MI, 0.923 density), Dow LLDPE Type 6808A (36 MI, 0.940 density), and the Exact series of linear low density polyethylene polymers from Exxon Chemical Company, such as Exact 2003 (31 MI, density 0.921).

Various polypropylenes made by processes known to the skilled artisan may also be employed. In general, the polypropylene component can be an isotactic or syndiotactic propylene homopolymer, copolymer, or terpolymer. Examples of commercially available propylene homopolymers which can be used in the present invention include SOLTEX Type 3907 (35 MFR, CR grade), HIMONT Grade X10054-12-1 (65 MFR), Exxon Type 3445 (35 MFR), Exxon Type 3635 (35 MFR) AMOCO Type 10-7956F (35 MFR), and Aristech CP 350 J (melt flow rate approximately 35). Examples of commercially available copolymers of propylene include Exxon 9355 which is a random propylene copolymer with 3% ethylene, 35 melt flow rate; Rexene 13S10A, a 10 melt flow rate random propylene copolymer with 3% ethylene; Fina 7525MZ, an 11 melt flow rate 3% ethylene random propylene copolymer, Montel EPIX 30F, a 1.7% ethylene, 8 melt flow rate random copolymer of propylene. When the propylene polymer is the dominant continuous phase

-16-

of the blend, the preferred melt flow rate is greater than 20. When the propylene polymer exists as the dispersed phase of the blend, the preferred melt flow rate is less than 15 and most preferably less than 10.

5           In still another embodiment, the multipolymer fibers of the web may be bicomponent or multicomponent fibers or filaments. The term bicomponent or multicomponent refers to the existence of the polymer phases in discrete structured domains, as opposed to  
10 blends where the domains tend to be dispersed, random or unstructured. The polymer components can be configured into any number of configurations including sheath-core, side-by-side, segmented pie, islands-in-the-sea, or tipped multilobal. A coherent extensible  
15 nonwoven web can be made, for example, from a sheath-core bicomponent fiber having a polyester core and a polyethylene sheath, or the sheath or core can comprise a blend as discussed above. Alternatively, the extensible web can comprise a single web containing a  
20 combination of spunbonded filament and meltblown fibers or a combination of carded staple fibers and meltblown fibers.

The extensible nonwoven web, in all  
embodiments in accordance with the present invention,  
25 is characterized by having high surface abrasion resistance and high elongation. The surface abrasion resistance of the web may be conveniently measured objectively by physical tests which are standard in the industry, such as the Taber abrasion test as defined by  
30 ASTM Test Method D-3884-80. Extensible webs useful in the composite fabrics of the present invention are characterized by having a Taber abrasion value (rubber wheel) of greater than 10 cycles. The webs are further characterized by having an elongation at peak load  
35 (ASTM D-1682), prior to stretching, in either the machine direction (MD) or in the cross-machine

-17-

direction (CD) or both of at least 70 percent, more preferably at least 100 percent, and most desirably at least 150 percent. The multipolymer fibers of the web are of relatively fine diameter, typically 10 denier or less.

The web shown in Figure 1 has been bonded so that it can be stretched, but has not yet been stretched. The web shown in Figure 1 has been point bonded by passing the web through a calender nip in which one of the calender rolls is smooth and one of the calender rolls has a patterned surface for applying the bonding pattern. Intermittent point bond regions are formed wherein the web is bonded. The discrete bond sites comprise areas where the fibers have been fusion bonded together. It should still be possible to trace an individual filament through the bond site if the bond site is not overbonded. Preferably, the fused regions cover between 6 and 30 percent of the area of the web, more preferably 8 to 20 percent, and most preferably 12 to 18 percent of the web is covered. By bonding the web in accordance with these percentage ranges, the filaments are allowed to elongate throughout the full extent of stretching while the strength and integrity of the fabric is maintained.

The skilled artisan should recognize that there are myriad other ways to bond a web sufficiently to enable the web to be stretched. While thermal point bonding is most preferred for spunbond, carded, and other webs, any thermal, chemical, or mechanical bonding treatment may be used to form a coherent web structure.

Turning now to a discussion of the properties of the web after stretching, Figure 2 represents the nonwoven web 20 of Figure 1 that has been permanently elongated by mechanical stretching in either the machine direction or the cross direction. It should be

-18-

understood that the web can be subjected to stretching in either of the cross machine or machine direction to achieve the benefits of the invention, but not both. Normally, the web is stretched in a direction having an elongation at peak load of at least 70 percent. It should be recognized that this property could be met in one of or both the machine and cross machine directions.

The web has been stretched and permanently elongated by the stretching at a temperature of between about 35 to 150 degrees Fahrenheit. The web normally is elongated in the absence of heat treatment at an ambient temperature, which typically varies from about 65 degrees on a relatively cold day to about 110 degrees on a hot summer day, and most typically is on the order of about 65 to 85 degrees.

As a result of the "cold" stretching, the nonwoven web develops extraordinary elongation at peak load in the direction perpendicular to the direction of stretch. Elongation at peak load can be at least about 400 to 500% and values above 700% have been achieved. Typically, the ratio of elongation at peak load in the direction perpendicular to the direction of stretch to the elongation at peak load in the stretch direction is increased at least about 2:1 to more than 10:1. Increase by a factor of at least about 6:1 to 8:1 is typical. Thereafter, the fabric is capable of stretch well beyond the original dimension of the fabric in the direction perpendicular to the stretch direction. The tensile strength of the webs in the direction of orientation of the filaments, which is normally the stretch direction, is greatly increased. The ratio of tensile strength of the web in the direction of orientation of the fibers to the tensile strength of the web in the other direction is at least about 10:1 and can be increased to at least about 16:1.

A further characteristic of the web is high extensibility at low force. The nonwoven web has an elongation in one direction, which is the direction perpendicular to the stretch direction, of at least 70% when a load is applied to the web in that direction that is less than or equal to about 300 grams force per inch. A force of about 300 grams force per inch or less is about the force that the consumer feels on the wrist when using a fabric in accordance with the invention. The web can be prepared wherein the elongation of the web in the direction perpendicular to the stretch direction is at least 100% to 350% at a load of less than 300 grams force per inch. Table 2, below, shows examples at 100%, 200%, and 350% elongation at loads of less than 300 grams force per inch.

While not wishing to be bound by theory, it is believed that the filaments that are not oriented in the stretch direction prior to stretching become oriented in the stretch direction as a result of the stretching, but are either not elongated or are only partially elongated. This feature is graphically illustrated in the photomicrographs shown in Figures 10 and 11, which are at 5 and 10X magnification, respectively, and show a multipolymer continuous filament pointbonded spunbond nonwoven web that has been stretched in the machine direction. A substantial number of the filaments can be seen to be oriented in the machine direction, which is the direction of stretch. In any event, the fabric becomes stretchable in the direction perpendicular to the stretch direction to an extent beyond the prestretched dimension in that direction.

The fabric also develops a z-direction axis and becomes thicker as the fabric is stretched and the dimension in the direction perpendicular to the stretch

-20-

direction becomes smaller. The point bonds **22**, which initially are flat and lie in the plane of the web, become strained, and become oriented generally in the z-axis direction within the thickness dimension of the fabric and disposed between the opposing fabric surfaces. This detail is graphically illustrated in Figure 13, which shows in a photomicrograph at 20X magnification the distorted, deformed point bonds of a non-planar configuration embedded in the web between opposite surfaces of the web. These bond sites have been pulled into the body of the spunbond nonwoven web and extend in the Z-direction axis. Prior to stretching, the pointbond was horizontally oriented as shown in the photomicrograph of Figure 12, which is also at 20X magnification. Increase in the thickness of the nonwoven web due to stretching can also be seen by comparing Figures 12 and 13.

As shown in Figure 2, the fabric has been lightly bonded after stretching with a plurality of point bond sites **24** in a pattern reminiscent of cross laid bricks. The point bond sites **24** include film-like fused regions that are generally planar and are parallel to the surface of the web and lie at the web surface. The stretched fabric was bonded by passing through a calender nip at light pressure and low heat to stabilize the web and to substantially preclude retraction, since a small amount of elastomeric polymer is used in the fibers of which the fabric is made. The bonding is graphically illustrated in the photomicrographs of Figures 10 and 11. It should be recognized that a wide variety of suitable bonding patterns are available and should provide equivalent performance in the practice of the invention. The bonding should be enough to stabilize the web against retraction of the fibers after elongation to the

-21-

desired extent, but not so great as to preclude stretching in the direction perpendicular to the stretch direction, for which the fabric is designed.

It is usually advisable to lightly bond the web after stretching when the web will be rolled rather than supplied directly to a laminator for lamination with an elastomeric component. The elastomeric component of the web can cause the web to retract in the roll if the web is not lightly bonded.

The fabric illustrated in Figure 2 can be stretched in any of several ways known to the skilled artisan. The fibers normally are extruded, collected on a web forming surface, bonded, and stretched in line. Alternatively, for certain processes, the nonwoven web is rolled prior to stretching and stretching is accomplished as a separate operation.

Stretching in the cross machine direction normally is accomplished using a standard tenter frame. It should be recognized that other methods and apparatus can be used to stretch the nonwoven web in the cross direction, although not necessarily with equivalent results. For example, the web can be incrementally stretched in the cross direction using intermeshing or interdigitating rollers.

Typically, the web is stretched in the machine direction. One method of machine direction stretching is schematically represented in Figures 3 and 4. It should be recognized that other methods and apparatus can be used to stretch the nonwoven web in the machine direction, although not necessarily with equivalent results. For example, the web can be incrementally stretched in the machine direction using intermeshing or interdigitating rollers.

As shown in Figure 3, a nonwoven web of multipolymer fibers prepared from the polymer combinations discussed above is supplied from a roll

-22-

called the unwinder. The web passes around three rolls  
28, including a load cell and two idler rolls, arranged  
at the corners of a triangle for sensing and adjustment  
of web tension prior to stretching the web. The web is  
5 stretched by passing through a series of rolls in three  
successive S-wrap stations 30, 32, and 34. In each of  
the S-wrap stations shown, the bottom roller 36, 38, 40  
is driven and the top roller and bottom roller form a  
nip 42, 44, 46 that applies light pressure to the web  
10 that does not bond the web, but provides sufficient  
grip that the web can be stretched between the  
subsequent sets of S-wrap rollers. Subsequent S-wrap  
roll stations are driven at increasing speeds to apply  
increasing tension to the web between each set of  
15 rollers in the S-wrap station sufficient to stretch the  
web.

Figure 4 represents a partially broken away  
top perspective view of a portion of the schematic of  
Figure 3 taken along line 4-4. The reduction in the  
20 cross direction of the width of the web is shown as the  
web is stretched in the machine direction, first as the  
web passes between the first and second S-wrap stations  
30, 32, and second as the web passes between the second  
and third S-wrap stations 32, 34. The width of the web  
25 is the cross machine direction is considerably reduced  
between the first S-wrap station and the third. The  
web is permanently elongated.

It should be recognized that the filaments in  
the outer portions of the web tend to be elongated  
30 faster than the filaments located in the center of the  
web. For this reason, the distance between the first  
S-wrap station and the second should be sufficient to  
provide that the filaments in the center of the web are  
also permanently elongated to the desired extent.

35 It should be recognized that other

-23-

configurations of rollers can be used to stretch the web in the machine direction. Rollers can be used in the omega configuration to apply sufficient tension to the web to permanently elongate the web.

5           After stretching, the now permanently elongated web is treated in a manner believed to be known to the skilled artisan to improve its uniformity by passing over first and second bow rolls 48, 50 to flatten the web and take out wrinkles. The web is then  
10   lightly bonded to stabilize the web against retraction prior to tension adjustment 57 and rolling the web on a winder 58 for supply to a line for making disposable absorbent articles. The web can be bonded by passing through a calender nip 52 formed between two rollers  
15   54, 56. The calender nip should be operated at light pressure and low heat.

          The calender preferably is operated so as to take up the web at a lower speed than it is supplied by the third S-wrap station 34. Operating the calender at  
20   a lower speed than the third S-wrap station gives the filaments, which have been overstretched to some extent, an opportunity to retract slightly so that they do not retract against the light bond that is later applied. Alternatively, the lamination line could be  
25   in line, in which case bonding the web may no longer be necessary.

          Table 1 below shows two examples of nonwoven webs prepared in accordance with the invention and compares these webs with a the nonwoven web prior to stretching. The unstretched web is labelled "Control" in Table 1. The nonwoven control web and the two  
30   examples were all prepared from spunbond continuous filaments prepared from a blend of a dominant phase of isotactic polypropylene, a dispersed phase of linear low density polyethylene, and Catalloy™ polymer.  
35

Table 1

Example		Basis Wt. g/m <sup>2</sup>	CD tensile strength (g/in)	CD Elonga- -tion at peak load (%)	MD tensile strength (g/in)	MD Elonga- -tion at peak load (%)	MD/CD Tensile Ratio	MD/CD Elongation Ratio	CD/MD Tensile Ratio	CD/MD Elongation Ratio
Control	Avg.	25.063	908	184.2	2562	191.5	2.82	1.04	0.35	0.96
	S.D.	0.875	132.5719	25.8	351.4531	15.1				
Ex. 1	Avg.	62.07	498.67	750.70	8135.83	70.01	16.32	0.09	0.06	10.72
	S.D.	3.22	77.71	98.26	1250.15	27.02				
	% Change	148%	-45%	308%	218%	-63%	478%	-91%	-83%	1015%
Ex. 2	Avg.	64.61	517.53	707.35	8512.37	77.25	16.45	0.11	0.06	9.16
	S.D.	3.51	69.23	83.60	1075.78	29.67				
	% Change	158%	-43%	284%	232%	-60%	483%	-89%	-83%	852%

-25-

Examples 1 and 2 are were both prepared from the same control fabric at different line conditions. The relatively slight differences in the values obtained for the physical characteristics of these webs is due primarily to differences in line conditions.

The control fabric had similar physical characteristics in the machine direction as in the cross machine direction, as is reflected by the ratio of the tensile strength in the machine direction to the tensile strength in the cross direction of 2.82. A value of 2.82 means that the nonwoven control web was relatively square in its properties. The balance of properties is also reflected by the MD/CD elongation ratio, which reflects that the fabric is stretchable and permanently elongatable in either the cross direction or the machine direction.

Permanent elongation of the control fabric in the machine direction produced nonwoven webs having the characteristics recited in Table 1 for Examples 1 and 2. The basis weight more than doubled from about 25 g/m<sup>2</sup> to over 60 g/m<sup>2</sup>. The increase in basis weight reflects that the dimension of the fabric in the cross direction is greatly reduce by stretching in the machine direction.

Tensile strength in the cross direction, CD, in g/in, which is grams per one inch strip of material, is reduced by nearly half. Elongation at peak load in the cross direction, as a percentage based on the original width of the web, quadruples, indicating the high degree to which the web can be stretched in the cross direction, far exceeding the cross machine width of the web prior to stretching. Stretchability in the

-26-

cross direction is also reflected by the increase in the ratio of the cross direction elongation at peak load to that of the machine direction of about 10 times.

5                    Similar, but opposite, values are obtained in the machine direction. Tensile strength in the machine direction quadruples and elongation at peak load is reduced by about half, indicating that the web is permanently elongated in the machine direction. The  
10 properties of the fabric are no longer square.

                    Table 2, below, compares the extensibility of the control fabric of Table 1 with that of Example 1, Table 1. The force required to extend the web is determined at three different elongations. The control  
15 fabric requires a force of 420 grams per inch to elongate the fabric 100%. At 200 and 350% elongation, the control web breaks. In contrast, the web of Example 1 requires a force of only 260 grams per inch to elongate the web by 350%.

20

TABLE 2

Example	Load at 100% el. (g/in)	Load at 200% el. (g/in)	Load at 350% el. (g/in)
Control	420	Breaks	Breaks
Example 1	52	109	260

A nonwoven web stretched as shown in Figures 3 and 4 is illustrated in Figure 5 in an exploded view of an elastic fabric laminate of the invention **62**.  
25 Elastomeric strands **60** are placed between two nonwoven webs **20** (Figure 2) and the laminate is bonded, normally by application of a hot melt or other suitable adhesive. It should be recognized that the laminate can be prepared with a single nonwoven web on one side

-27-

to produce a two layer laminate rather than a three layer laminate, if desired. The fabric of the invention has sufficient cover provided by Z axis development to preclude substantial glue bleed-through.

5 The elastomeric strands are oriented to stretch in a direction perpendicular to the direction in which the nonwoven webs were permanently elongated. The webs were stretched in the machine direction as shown in Figures 3 and 4, and so the elastomeric fibers are  
10 oriented to stretch in the cross machine direction.

The fabric laminate is elastic in the cross machine direction and recovers substantially all of the distance it is stretched when stretched below the elastic limit of the elastomeric strands. The nonwoven  
15 webs of the invention can stretch in the cross machine direction to many times the distance of the initial width of the nonwoven web prior to elongation. Typically, the strands are bonded to the web directly, without being placed under tension or elongated.

20 If it is desired that the fabric laminate stretch in two directions, then the elastic component that is sandwiched between the nonwoven webs of the invention should provide for stretch in two directions. The nonwoven web can then be applied to the elastic  
25 component so as to form gathers when the elastic component is relaxed that can allow stretch in the direction in which the web was permanently elongated. For example, the web can be applied to tensioned elastomeric strands so that the gathers form when the  
30 strands are relaxed. The laminate can then be stretched and will exhibit recovery to the extent allowed by the gathers.

-28-

A wide variety of elastic components are suitable for use in the practice of the invention. Elastomeric strands, scrim, or elastomeric film, including perforated and nonperforated films and barrier or moisture vapor transmitting films, are all suitable for use, depending on the results desired. Elastomeric strands and scrim tend to produce fabrics with enhanced breathability as compared to films and are preferred in countries of high heat and humidity. Films are preferred in more arid climates since they are cheaper.

The elastic laminate of the invention is suitable for use as an elastic fabric having highly desirable cloth like characteristics. The laminate is suitable for use in a variety of disposable absorbent articles. The laminate is useful as a stretch side panel in diaper construction.

A disposable diaper **64** is represented in Figure 6 that incorporates a pair of elastic side panels **62** made from fabric laminate of the invention. The diaper is shown in plan view having the outer surface back sheet **66** facing the viewer. Internal structure is shown in outline by the dashed lines. The diaper includes a water pervious topsheet **65** (Figure 7), a water impervious back sheet **66**, and an absorbent core **68** that typically comprises wood pulp or other absorbent material and typically includes superabsorbent polymer powder. A surge layer, not shown, may be used to provide a holding area for urine in the front waist region for the time required for the superabsorbent polymer to take up the urine after strikethrough.

-29-

The diaper includes front and rear waist bands **70**, **72**, which typically are elasticized. Securing tabs **74** are provided on the back waist region on opposite sides of the waistband for securing the  
5 diaper back waist region to the front waist region about the waist of the wearer. The securing tabs typically are secured to a landing panel on the front waist region that includes decorative indicia. The tabs can be secured by pressure sensitive adhesive or a  
10 hook and loop fastening system similar to Velcro.

The front and rear waist regions are shown to flare outwardly from the body of the diaper to provide sufficient material to encircle the waist and to provide for secure attachment of the back waist region  
15 to the front about the waist of the wearer. These outwardly flared portions are often referred to as ears. The securing tabs extend outwardly from and are anchored to the ears **76** of the back waist region.

The elastic side panels of the invention **62**  
20 are laminated into the diaper structure between the back sheet and the topsheet. As shown, the anchored ends of the securing tabs overlap somewhat the elastic side panels. The side panels are oriented in the diaper to provide transverse stretch, which is in the  
25 direction of tension on the securing tab, to improve the fit of the diaper, even under conditions where the wearer is active. When made with elastic scrim or elastomeric fibers, the composite typically has good breathability, but also contributes to fluid barrier  
30 outside the strikethrough and absorbent region. Elastic film can also be used as described in Weil et al. U.S. Patent No. 5,242,436, which illustrates a

-30-

diaper construction having an elastic side panel therein.

Placement of the elastic side panel of the invention into the diaper is represented in Figure 7. As shown, the laminate is placed between the top sheet and the back sheet so as to provide some elasticity to the ear region in the direction of pull of the securing tab.

One of the advantages of the invention is that the fabric of the invention provides a soft, cloth like hand and excellent cover, and yet is exceptionally strong. In the diaper construction illustrated, the topsheet and the back sheet typically are constructed of inelastic materials that do not exhibit stretch and recovery and it normally is necessary to treat the diaper construction in the region of the elastic side panel so that the topsheet and back sheet will be activated to move with the elastic side panel. A suitable method for mechanically incrementally stretching in the cross direction the composite of the top sheet, elastic stretch laminate of the invention, and the back sheet is described in Weil et al. U.S. Patent No. 5,242,436.

The description of the method of U.S. Patent No. 5,242,436 is incorporated herein by reference in its entirety. The composite passes through meshing corrugated rolls as described. Incremental stretching in the cross direction permanently elongates the topsheet and back sheet components and destroys any light bonding of the elastomeric nonwoven web composite. The topsheet and the back sheet can now be stretched to provide for stretching of the elasticized

side panel. The fabric of the invention from which the elasticized side panel is made is sufficiently strong by virtue of having been already stretched in the machine direction to withstand the rigors of  
5 incremental stretching in the composite and to provide a desirable provide cover.

It should be recognized that the nonwoven fabric laminate of the invention can be used in the manner described in U.S. Patent Nos. 4,981,747 and  
10 5,114,781 as a fabric that is secured to the securing tab and mounted onto the diaper back sheet rather than laminated within the diaper between the topsheet and the back sheet.

Particular embodiments of the invention have  
15 been described in detail in the drawings, photomicrographs, and specification and specific terms have been used. These should be understood in a generic and descriptive sense and not for purposes of limitation. The scope of the invention is defined by  
20 the claims.

-32-

What is Claimed is:

1. A nonwoven web of multipolymer fibers, said fibers being substantially oriented in one direction, and said web having a plurality of discrete bond sites throughout the web bonding the fibers together, and wherein the ratio of the tensile strength of the web in the direction of orientation of the fibers to the tensile strength of the web in the other direction is at least about 10:1.
2. The web of Claim 1 wherein the ratio of the tensile strength of the web in the direction of orientation of the fibers to the tensile strength of the web in the other direction is at least about 16:1.
3. The web of Claim 1 or 2 wherein the ratio of the elongation at peak load of the web in the direction transverse to the direction of orientation of the fibers to the elongation at peak load in the direction of elongation is at least about 6:1.
4. The web of Claim 1 or 2 wherein the ratio of the elongation at peak load of the web in the direction transverse to the direction of orientation of the fibers to the elongation at peak load in the direction of elongation is at least about 8:1.
5. The web of any one of Claims 1 to 4 wherein said discrete bond sites comprise areas where the fibers have been fusion bonded together.
6. The web of Claim 5, wherein said bond sites are embedded within the web between opposite

-33-

surfaces of the web and are of a distorted, non-planar configuration extending generally in the z-axis direction of the web.

7. The web of Claim 6 additionally  
5 including a plurality of bond sites that are generally planar and extend parallel to the surface of the web.

8. The nonwoven web of any one of Claims 1 to 7 wherein said multipolymer fibers comprise a blend of polypropylene and polyethylene.

10 9. The nonwoven web of any one of Claims 1 to 7 wherein said multipolymer fibers comprise a blend of two immiscible polymer phases and a third component which is at least partially miscible with the two immiscible polymer phases.

15 10. The nonwoven web of any one of Claims 1 to 7 wherein said multipolymer fibers are formed from a blend comprising:

a) isotactic polypropylene present in an amount of from about 65 to 80 percent by weight based  
20 upon the weight of said blend;

b) linear low density polyethylene present in an amount of from about 1 to 5 percent by weight based upon the weight of said blend; and

c) a block or grafted polyolefin copolymer  
25 or terpolymer having at least a portion of the chain thereof miscible with said isotactic polypropylene and wherein said block or grafted polyolefin copolymer or terpolymer is present in an amount of from about 15 to 30 percent by weight based upon the weight of said

blend.

11. The nonwoven web of any preceding claim wherein the multicomponent fibers are selected from the group consisting of spunbond continuous filaments, 5 carded discontinuous staple fibers, and meltblown fibers.

12. A nonwoven web of multipolymer fibers, said fibers being substantially oriented in one direction, and said multipolymer fibers comprising a 10 blend of two immiscible polymer phases and a third component which is at least partially miscible with the two immiscible polymer phases, said web having a plurality of discrete point bond sites throughout the web bonding the fibers together, said point bond sites 15 comprising areas where the fibers have been fusion bonded together to form bond sites, said bond sites being of a distorted, non-planar configuration extending generally in the z-axis direction of the web.

13. A nonwoven web comprising a plurality of 20 spunbond continuous filaments formed of a blend of two immiscible polymer phases and a third component which is at least partially miscible with the two immiscible polymer phases, said web having a plurality of discrete point bond sites throughout the web bonding the 25 continuous filaments together, said web having an extensibility in one direction of at least 70 percent when a load of less than or equal to 300 grams per inch is applied to said composite fabric in said one direction.

30 14. The web of Claim 13 wherein said extensibility is at least 100 percent.

-35-

15. The web of Claim 13 wherein said extensibility is at least 200 percent.

16. The web of Claim 13 wherein said extensibility is at least 350 percent.

5 17. A composite fabric comprising at least one layer of an elastomeric component bonded to at least one layer comprising the nonwoven web of any preceding claim.

10 18. The composite fabric of Claim 17 wherein said elastomeric component is selected from the group consisting of elastic strands, elastic film, and scrim comprising elastomeric strands.

19. The composite fabric of Claim 18 wherein said elastic film is breathable.

15 20. A disposable absorbent article comprising as a component thereof, the composite fabric of any one of Claims 17 to 19.

20 21. A disposable absorbent article of Claim 20 wherein said composite fabric is a component of an elastic side panel for a disposable absorbent garment.

1/9

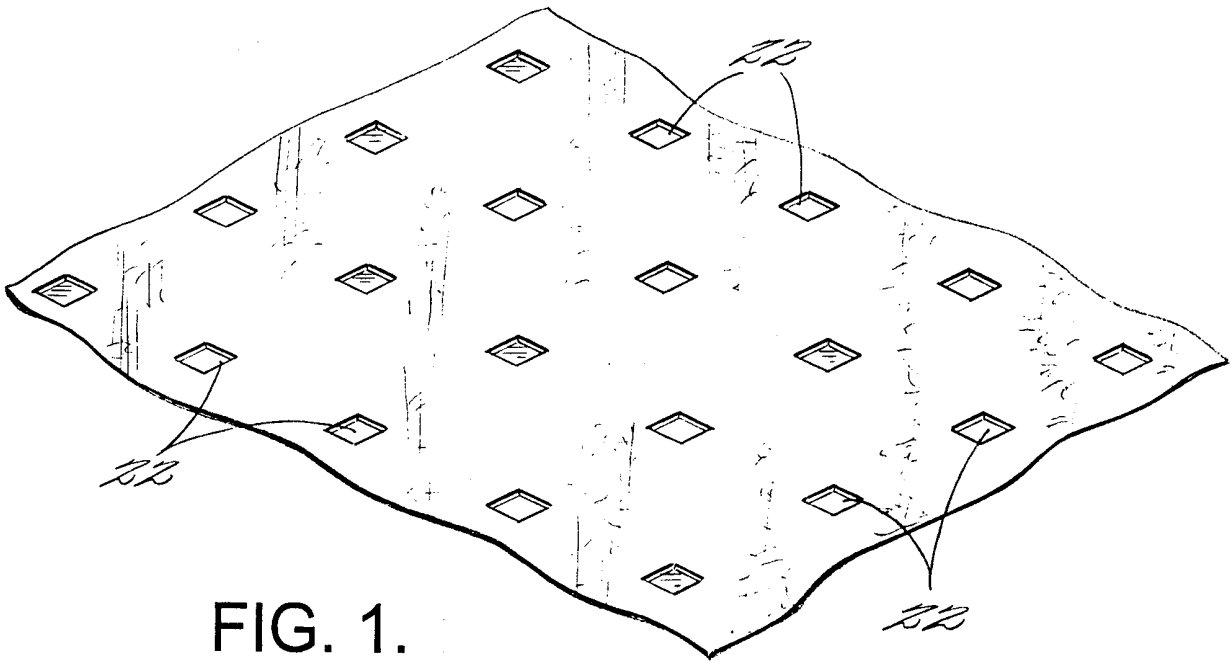


FIG. 1.

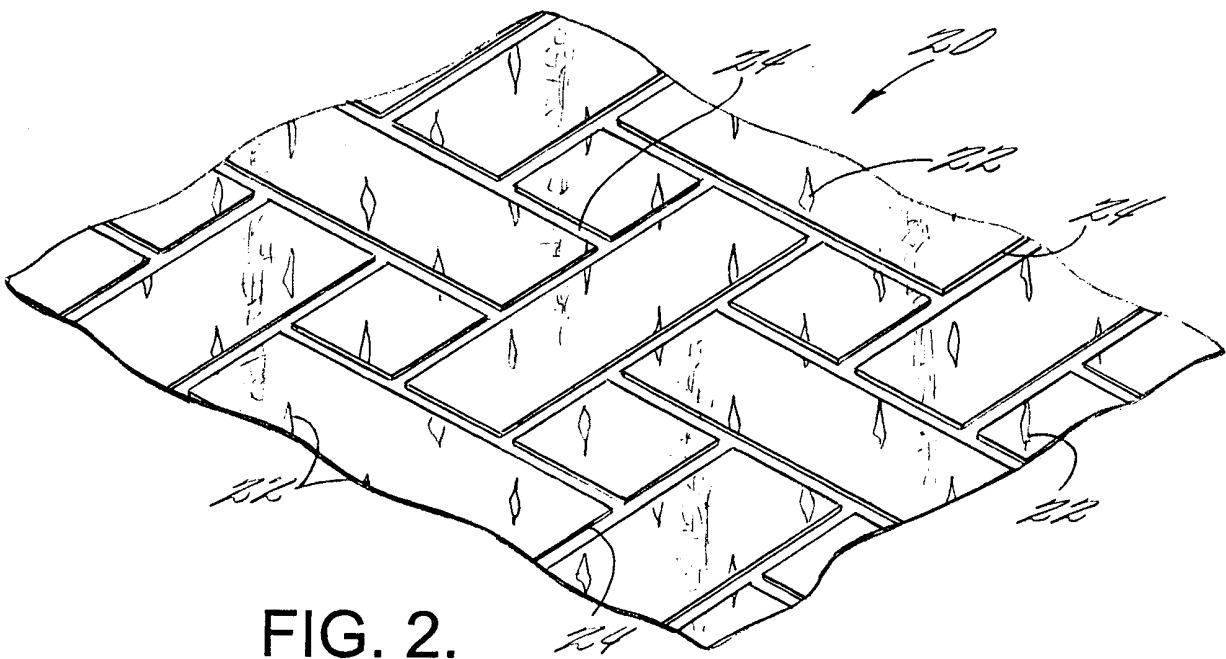


FIG. 2.

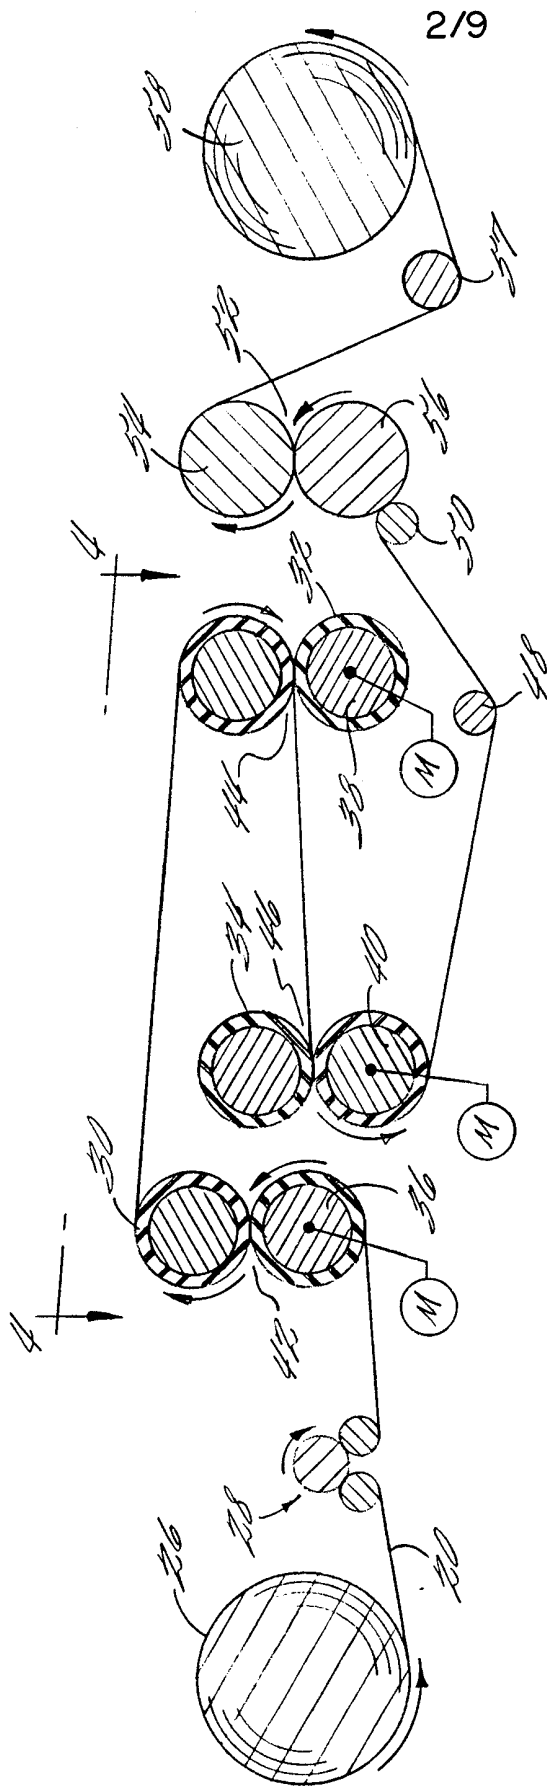


FIG. 3.


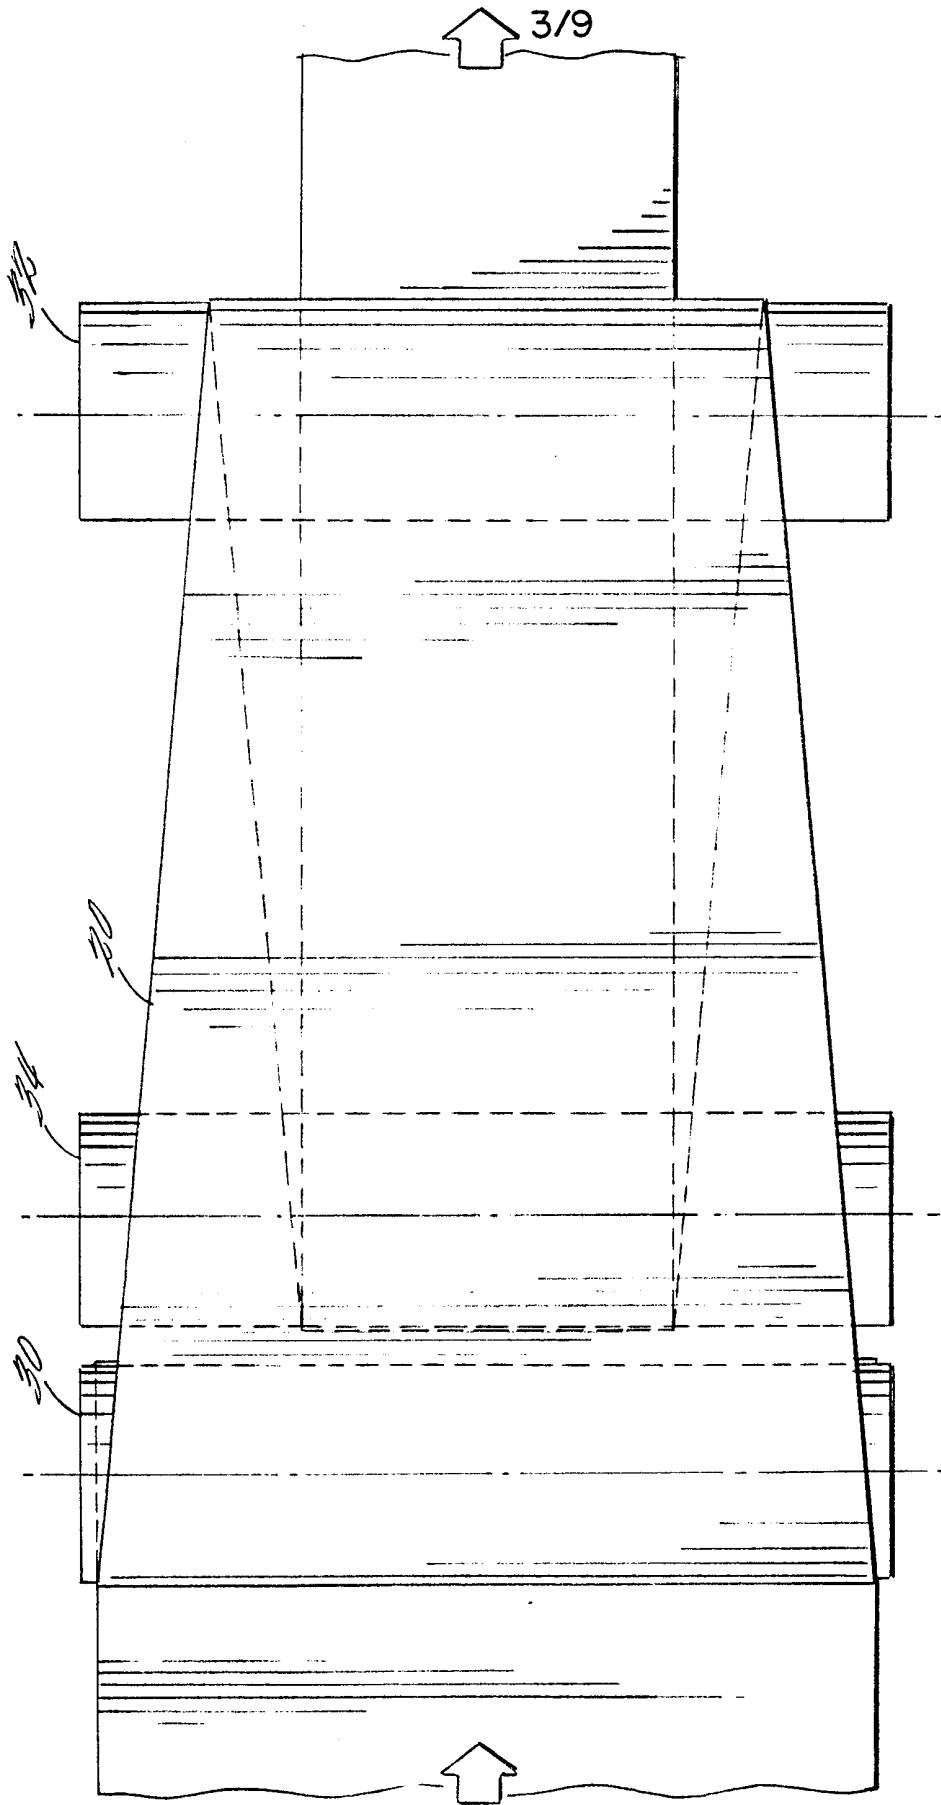


FIG. 4.

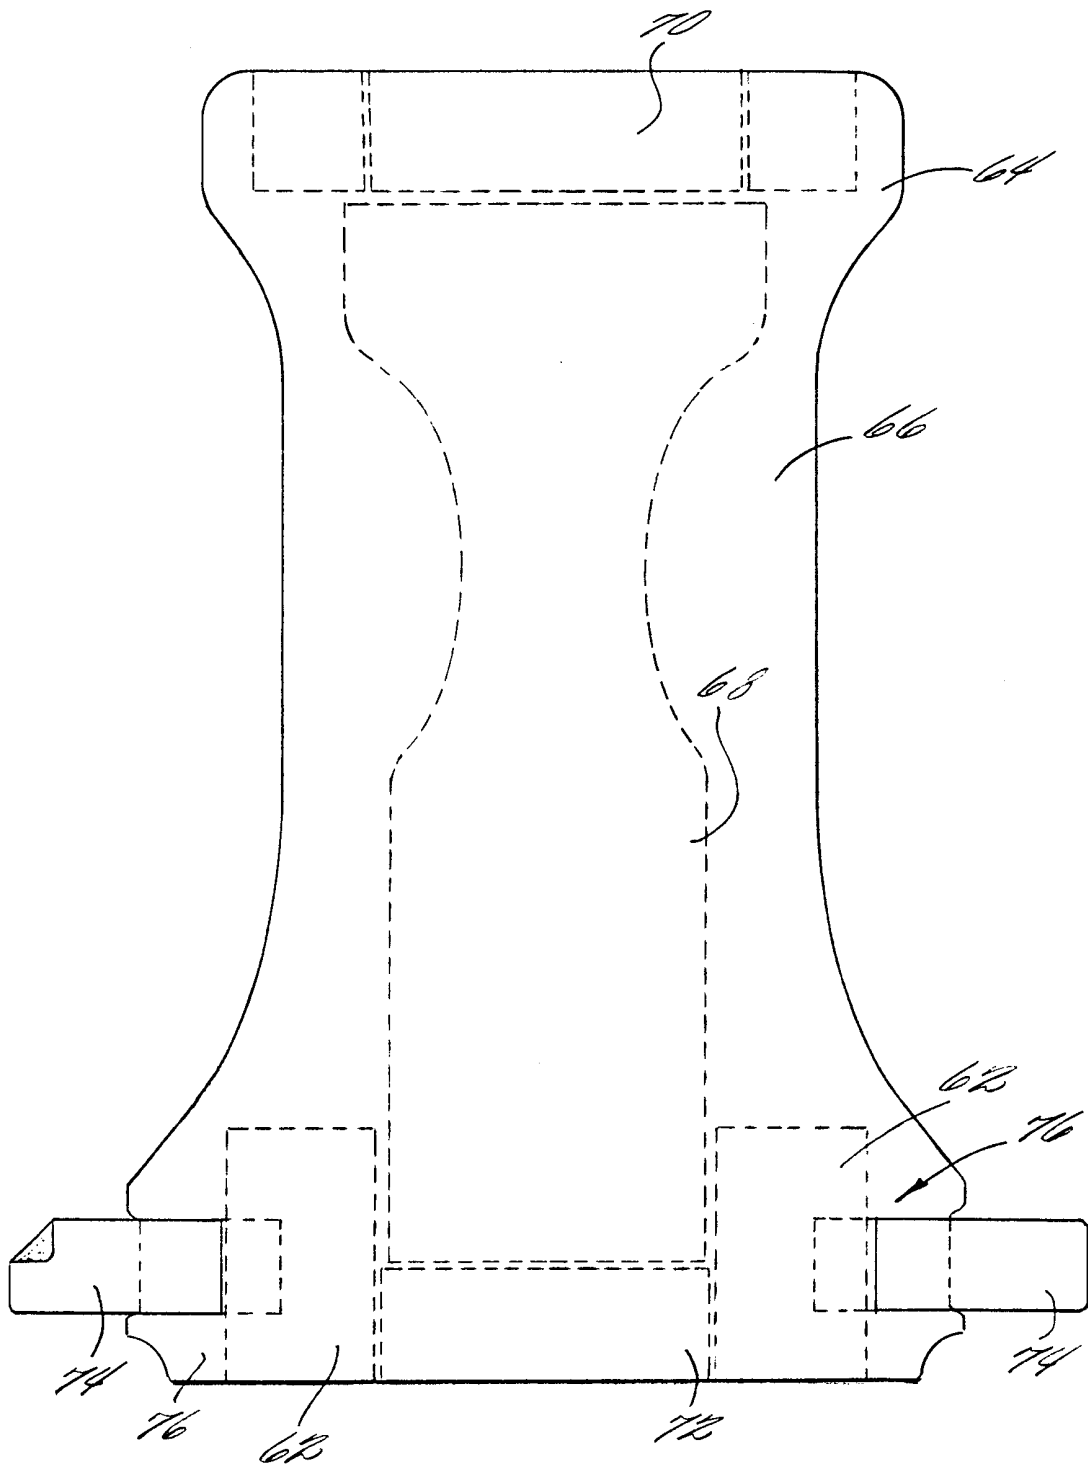

5/9



**FIG. 6.**

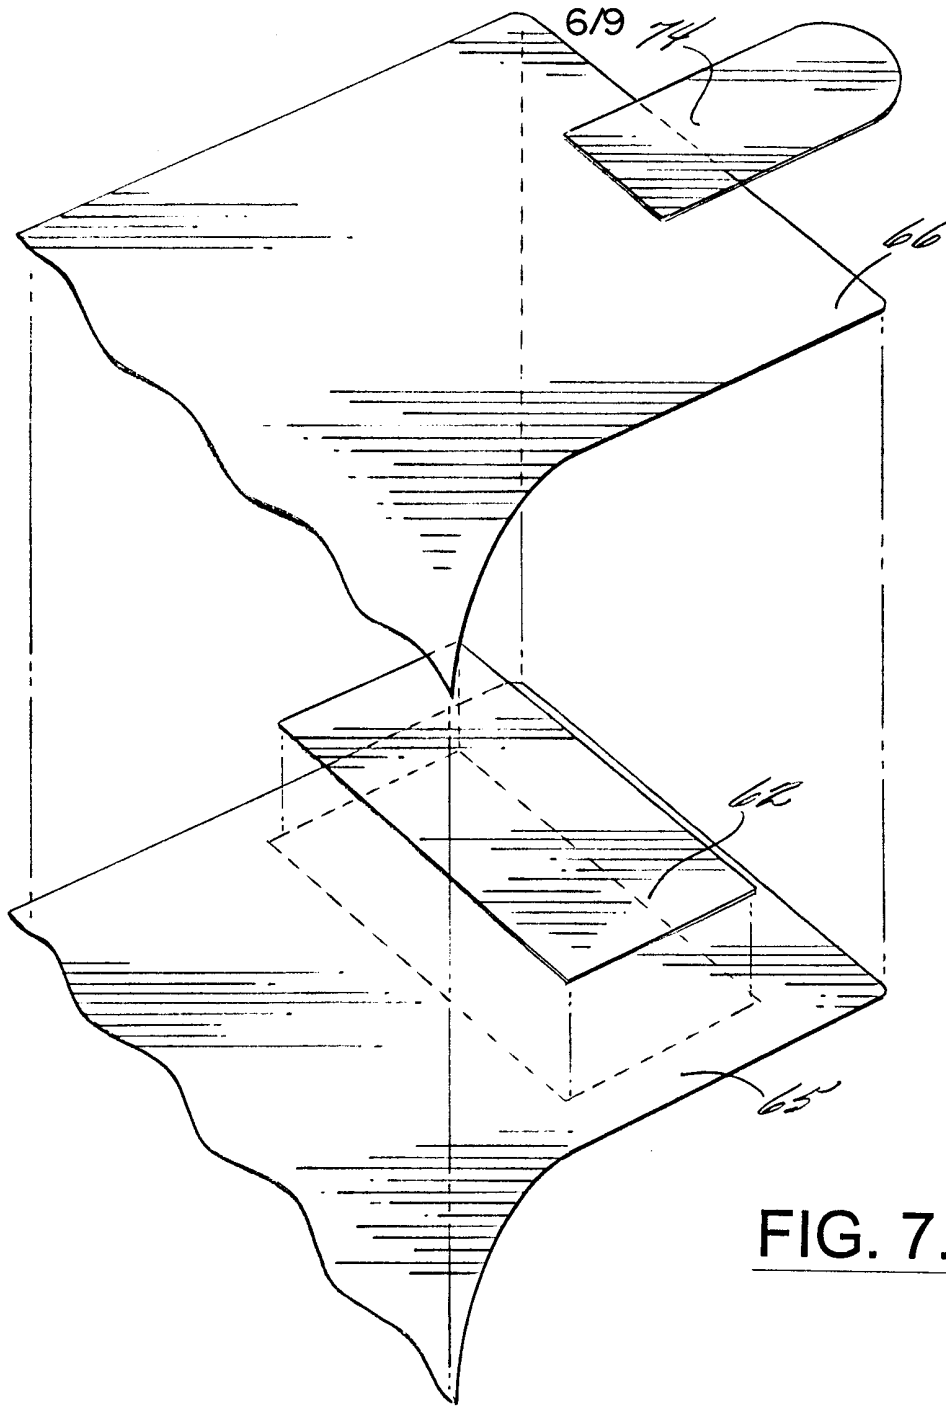


FIG. 7.

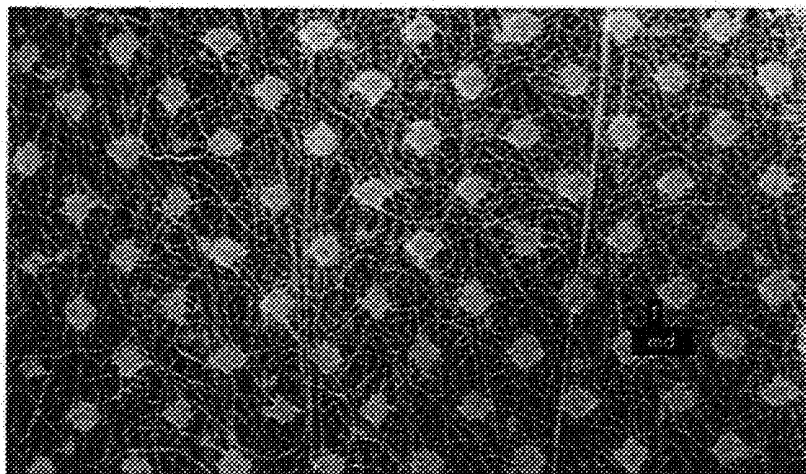


FIG. 8.

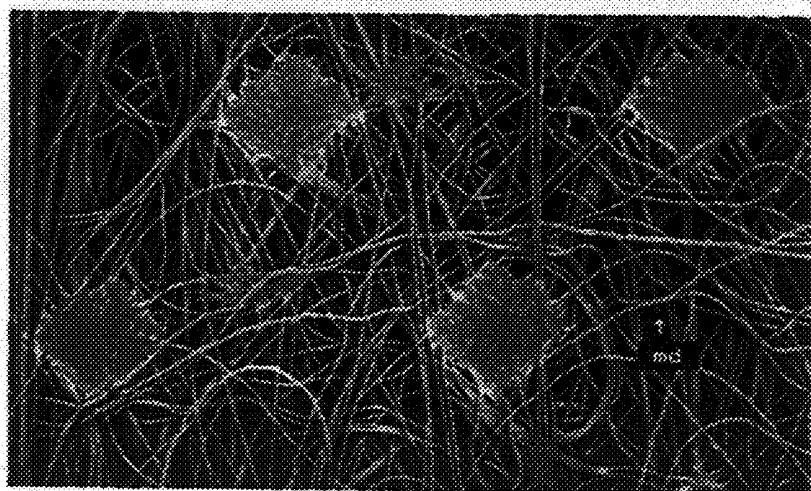


FIG. 9.



FIG. 10.

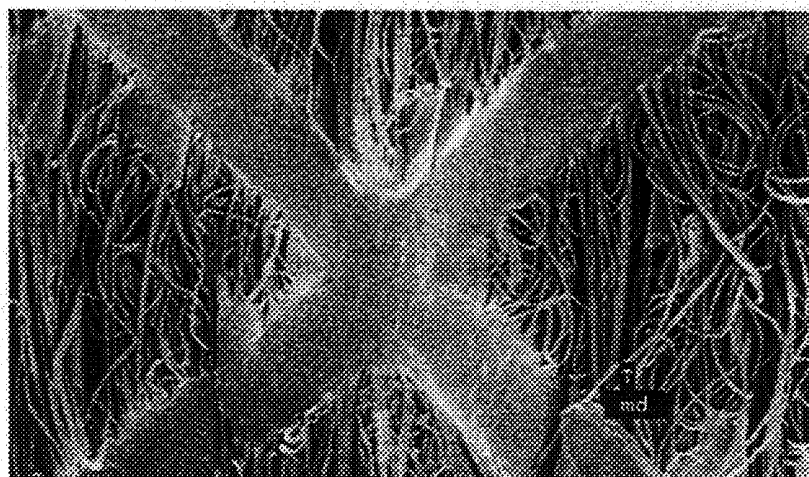


FIG. 11.

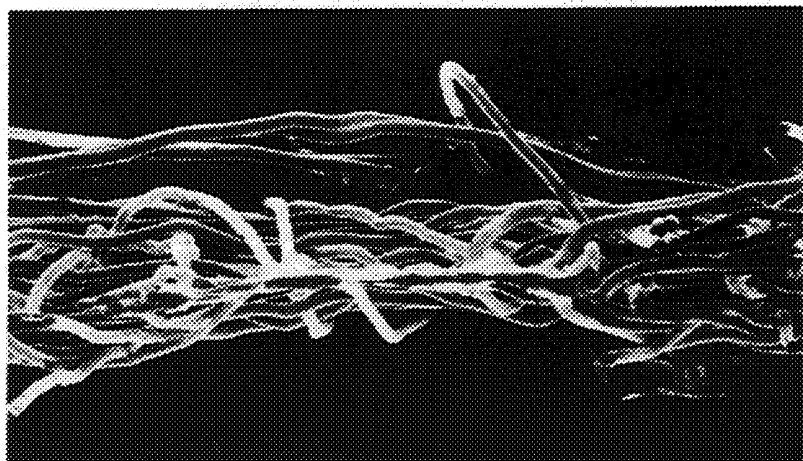


FIG. 12.

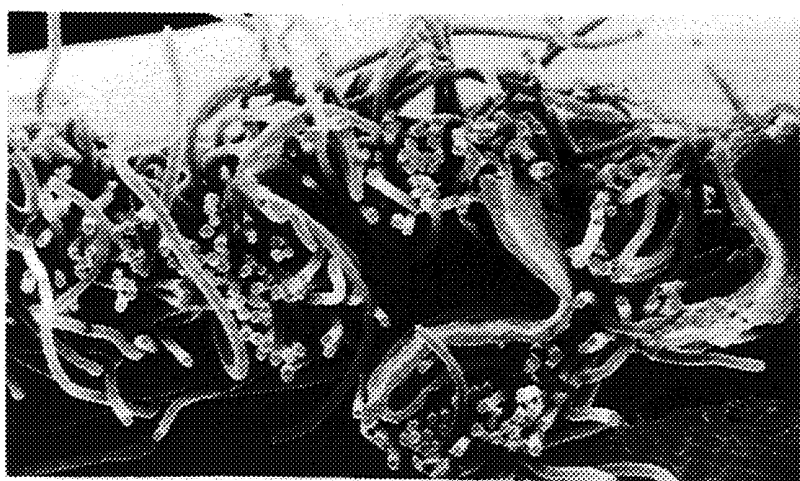


FIG. 13.

INTERNATIONAL SEARCH REPORT

Inter. Appl. No.

PCT/US 99/25740

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D04H1/42 D04H1/54 D04H3/14 D04H13/00 A61F13/15

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D04H A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 108 827 A (GESSNER SCOTT L) 28 April 1992 (1992-04-28) column 2, line 37 -column 4, line 2 column 6, line 63 -column 7, line 2 ---	1,9,10, 12
A	EP 0 127 483 A (JOHNSON & JOHNSON) 5 December 1984 (1984-12-05) page 4, line 33 -page 6, line 23 ---	1,5
P,A	US 5 851 935 A (SRINIVASAN RAMESH ET AL) 22 December 1998 (1998-12-22) column 2, line 28 -column 3, line 37 column 4, line 51 - line 63 ---	1,17
A	US 5 683 787 A (BOICH HEINZ-HORST ET AL) 4 November 1997 (1997-11-04) column 4, line 13 - line 46 ---	1,17,20, 21
	-/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

29 March 2000

Date of mailing of the international search report

05/04/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

V Beurden-Hopkins, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/25740

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 685 586 A (INT PAPER CO) 6 December 1995 (1995-12-06) page 3, line 45 -page 4, line 7; table 1 -----	1, 17, 20, 21

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/25740

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5108827	A	28-04-1992	DE 69026298 D	09-05-1996
			EP 0394954 A	31-10-1990
			US 5593768 A	14-01-1997
			US 5294482 A	15-03-1994
EP 0127483	A	05-12-1984	BR 8302903 A	15-01-1985
			AT 47165 T	15-10-1989
			AU 565623 B	24-09-1987
			AU 2885584 A	06-12-1984
			IE 55983 B	13-03-1991
			MX 159245 A	08-05-1989
			NZ 208104 A	30-03-1988
			ZA 8404133 A	29-01-1986
US 5851935	A	22-12-1998	AU 4238497 A	19-03-1998
			EP 0921941 A	16-06-1999
			WO 9808678 A	05-03-1998
			US 6025050 A	15-02-2000
US 5683787	A	04-11-1997	DE 4243012 A	23-06-1994
			AT 138850 T	15-06-1996
			AU 5692294 A	19-07-1994
			BR 9307673 A	08-09-1999
			CA 2150366 A,C	07-07-1994
			CZ 9501395 A	13-12-1995
			WO 9414607 A	07-07-1994
			DE 59302850 D	11-07-1996
			DK 674581 T	07-10-1996
			EP 0674581 A	04-10-1995
			ES 2089908 T	01-10-1996
			FI 952983 A	16-06-1995
			GR 3020954 T	31-12-1996
			HU 72562 A	28-05-1996
			JP 8504693 T	21-05-1996
NO 952421 A	16-06-1995			
EP 0685586	A	06-12-1995	CA 2150333 A	27-11-1995
			JP 8058007 A	05-03-1996