



(11) **EP 1 539 630 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
09.03.2011 Bulletin 2011/10

(51) Int Cl.:
B66B 13/00 *(2006.01)* **B66B 13/24** *(2006.01)*
B66B 3/00 *(2006.01)*

(21) Application number: **02761210.0**

(86) International application number:
PCT/US2002/024357

(22) Date of filing: **01.08.2002**

(87) International publication number:
WO 2004/013030 (12.02.2004 Gazette 2004/07)

(54) **ELEVATOR EMPLOYING RADIO FREQUENCY IDENTIFICATION DEVICES (RFIDS)**

HOCHFREQUENZIDENTIFIKATIONSVORRICHTUNGEN (RFIDS) EINSETZENDER AUFZUG
ASCENSEUR UTILISANT DES DISPOSITIFS D'IDENTIFICATION PAR RADIOFREQUENCE

(84) Designated Contracting States:
DE ES FR GB IT

(43) Date of publication of application:
15.06.2005 Bulletin 2005/24

(73) Proprietor: **Otis Elevator Company**
Farmington, CT 06032-2568 (US)

(72) Inventors:
• **VECCHIOTTI, Alberto**
Middletown, CT 06457 (US)
• **BACELLAR, Adriana**
S. Glastonbury, CT 06073 (US)
• **BACELLAR, Luiz**
S. Glastonbury, CT 06073 (US)
• **HAAS, Deborah**
Coventry, CT 06238 (US)
• **NETTER, Christian**
Vernon, CT 06066 (US)

- **STUCKY, Paul**
Vernon, CT 06066 (US)
- **VERONESI, William, A.**
Hartford, CT 06114 (US)
- **ZACCHIO, Joseph**
Wethersfield, CT 06109 (US)
- **ZEPKE, Bruce**
Glastonbury, CT 06033 (US)

(74) Representative: **Klunker . Schmitt-Nilson . Hirsch**
Patentanwälte
Destouchesstrasse 68
80796 München (DE)

(56) References cited:
EP-A- 1 103 510 WO-A-02/12109
US-A- 4 742 893 US-A- 5 749 443
US-A- 5 832 365 US-B1- 6 446 761

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 539 630 B1

Description

Technical Field

[0001] This invention relates to an elevator safety chain in which the status or condition of a monitored safety-related parameter of the elevator is communicated by wireless transmission from an interrogated, passive RFID.

Background Art

[0002] As is known, the safety chain of literally every elevator comprises a series of switches, all of which must be made (closed) so that the entire safety chain is a closed, conductive circuit, otherwise, the elevator is prevented from operating. In the past, elevator safety chains comprised a plurality of discrete switches, each of which have a moveable contact which connects between a pair of circuits when a parameter is in a safe condition, and which disconnects from at least one circuit in the safety chain when the parameter is no longer in a safe condition. Examples of switches in the safety chain are hoistway door lock switches, elevator door switch, emergency stop switch, inspection switch on the top of a cab, upper and lower hoistway limit switches, and the overspeed switch. The various switches are interconnected by wiring, which in turn must conform to local government regulation codes with respect to size and location of wires and conduits. Furthermore, once a building is wired to provide a safety chain, it is difficult to alter the building configuration, or the architectural design of the landings, due to the imbedded wiring. The elevator and hoistway door lock switches must be mounted on the doors themselves, and therefore are connected by flexible wiring either to the cab or to the building, as the case may be.

[0003] To overcome the foregoing and other deficiencies in hard-wired, discrete switch safety chains, a wireless safety chain for elevator systems is disclosed in U.S. patent application Serial No. 09/899,400, filed July 5, 2001. Therein, each parameter related to elevator safety has a sensor related to a wireless communication means, such as transceivers, so that when the monitored parameter becomes unsafe, the condition of the sensor causes the transceiver to be switched off. A master transceiver related to the elevator controller sends a token to a first transceiver, which in turn will send it to the next transceiver, and so forth. It will not be sent through all of the wireless communication means of the safety chain and back to the master transceiver whenever any parameter is in an unsafe condition; thus, the controller will be informed that an unsafe condition exists. Power for the transceivers may be supplied by hardwire to the building power, by passive battery, or by a battery system which is recharged by inductive coupling, such as with a recharging circuit disposed on the elevator car. Use of hard-wired power obviates the advantage of a wireless system, in that wires supplied for power are as inconvenient

as wires interconnecting the safety chain switches. Battery operation requires far too much maintenance, cost and environmental impact. Inductively coupled recharging systems are complex and unreliable.

[0004] The foregoing analysis is applicable as well to call buttons, in the car and at the landings.

Disclosure of Invention

[0005] Objects of the invention include a safety chain: having components which rely on neither hardwired power nor batteries; which are passive; in which sensing of the unsafe condition may be integral with the related transceiver; providing improved flexibility, low cost, low maintenance, and ease of upgrading at low cost. Other objects include provision of: improved communication of elevator service calls; integrated wireless transmission of elevator service calls; and simplified, passive communication of elevator service calls.

[0006] According to the present invention, transceivers related to various conditions monitored by an elevator safety chain and related to call buttons are passive, comprising, for instance, radio frequency identification devices (RFIDs). According further to the invention, a switch which becomes open upon the existence of an unsafe elevator condition may be connected directly with, or incorporated into the related passive transceiver. In further accord with the invention, the sensing of an unsafe condition may be an integral part of the passive transceiver; an example is the use of adjacent structural parts of the elevator (such as a door component) to either tune or detune the frequency determining circuit of the passive transceiver so as to communicate the safe or unsafe condition of the corresponding elevator parameter.

[0007] As is well known, the RFID is powered by the received electromagnetic energy, and may respond only to a signal of its own unique frequency, or to a signal on a common frequency which however has an address code unique to the individual RFID. The RFID will then respond by transmitting a signal which may contain its address and which, in this case, will contain the condition of the related parameter, in the safety chain or a call button. If an address is not appropriate, the frequency of the RFID will identify the source of the response.

[0008] Other objects, features and advantages of the present invention will become more apparent in the light of the following detailed description of exemplary embodiments thereof, as illustrated in the accompanying drawing.

Brief Description of the Drawings

[0009]

Fig. 1 is a simplified, front elevation schematic of an elevator hoistway and machine room incorporating the invention.

Fig. 2 is a simplified, front elevation schematic of an

elevator car incorporating the present invention.

Figs. 3-7 are simplified schematic illustrations of passive transceiver tuning circuits with which the invention may be practiced.

Fig. 8 is a partial side elevation view of a hoistway door lock, illustrating how a passive transmitter of the present invention may become tuned when adjacent to a safety-related structural element.

Fig. 9 is a simplified, partial side elevation view of the elevator limits, illustrating how passive transceivers of the invention may become detuned when adjacent to a safety-related structural element.

Mode(s) for Carrying Out the Invention

[0010] Referring to Fig. 1, a hoistway 11 of an elevator system includes a plurality of hoistway doors 12, 13, there being one set 12, 13 for each landing. Each set has a passive transmitter 15, such as an RFID, associated with the corresponding hoistway door lock. The condition of the door lock is part of the safety chain; if any of the hoistway doors are not locked, the elevator safety chain will fail. Each landing also has an up hall call button with a related transceiver 14 or a down hall call button with a related transceiver 19, or both. The hoistway also has disposed therein a plurality of transceivers 16 related to upper limit switches and a plurality of transceivers 17, 18 related to lower limit switches. In this example, within the machine room 20 of the elevator system, elevator overspeed detection will have a corresponding passive transmitter 22. A transceiver 23 is in wired communication with the elevator car controller 24, and communicates with other transceivers and passive transmitters in the elevator system. For instance, a transceiver 26 may interrogate the condition of the hoistway doors for the three lowest floors by sending out signals either on a unique frequency or with a unique address code so as to successively interrogate the status of each related door lock as reflected by the corresponding one of the passive transmitters 15. Similarly, the transceiver 26 may interrogate the passive transmitters 17, 18 related to the lower limit switches. A transceiver 27 may interrogate the passive transmitters 15 related to the hoistway door locks of the upper three floors, and may interrogate the passive transmitters 16 to provide indications of the condition of the upper limits. The transceiver 23 will then receive communications from the transceivers 26, 27 indicative of the various passive transmitter responses in the hoistway. The transceiver 23 may also interrogate the passive transmitter 22 to determine the condition of the related overspeed sensor. Depending upon the number of floors in the building, additional transceivers such as transceivers 26, 27 may be provided so as to be within range of all of the transceivers 15 in the hoistway.

[0011] In Fig. 2, an elevator car 30 has a pair of doors 30, 32 and an RFID 33 related to the car door lock switch. The elevator car 30 also has a plurality of car call buttons with related RFIDs 34, and an emergency stop switch

with a related RFID 35. As is known, there is also an inspection switch on the top of the cab, and in this case, an RFID 36 related thereto. The RFIDs 33-36 will be interrogated by any of the transceivers 23, 26, 27. There are other conditions in the elevator which are monitored within the safety chain, which are not shown herein for clarity.

[0012] The RFIDs may be arranged so as to reflect the condition of a safety-related parameter of the elevator, in a variety of ways. The simplest are shown in Figs. 3 and 4 where the frequency-determining RF loop containing a capacitor 40 and an inductor 41 is either opened by a switch 43 (Fig. 3) or shorted by a switch 44 (Fig. 4). Either of these arrangements will cause the RFID to provide no response at all. On the other hand, the RFIDs can be caused to produce two different responses, one indicative of a safe condition and the other indicative of an unsafe condition, as is illustrated in Fig. 5. Therein, an additional capacitor 47 is in series with the switch 48, the two being in parallel with the capacitor 40 and the inductor 41. When the condition is safe, the capacitor 47 is in the circuit, causing the RFID to be responsive at a first frequency. But if the condition becomes unsafe, the switch 48 will become open and the capacitor 47 will no longer be in the circuit; then, the RFID will respond at a different frequency indicative of the unsafe condition. Utilizing a dual response of this type will allow the controller to identify the particular RFID which has sensed an unsafe condition, in contrast with the prior art, serial-switch safety chain which provided no indication of which of the switches has become open and thus no indication of the nature of the failure. In the embodiments of Figs. 3-5, the switch must be disposed to react to the condition being monitored, and the RFID should be located immediately adjacent thereto, the switch and wiring being accommodated in the frequency-determining loop.

[0013] An alternative form of response is illustrated in Fig. 7. Therein, the capacitor 40 and inductor 41 may indicate one condition when the RFID is adjacent to a structure 51 having magnetic reluctance as indicated in Fig. 6, but will have a different frequency when there is no adjacent magnetic reluctance, as illustrated in Fig. 7. This may be utilized either to sense the presence of magnetic reluctance 51 as being the safe condition, or to sense the presence of the magnetic reluctance 51 as being the unsafe condition. The first of these is illustrated with respect to a hoistway door switch, a portion of which is shown in Fig. 8. Therein, the lock selvage 53 (the locking lip) is fastened to the header 54 of the doorway. The locking member 55 is disposed on a hoistway door 56. When a lip 59 engages selvage 53 as seen in Fig. 8, a contact portion 62 (which normally makes a connection between two terminals on the hoistway door lock switch to indicate that the door lock is engaged) will be adjacent to an associated RFID 63 so as to provide tuning of the frequency-determining loop, as illustrated in Fig. 6, so as to provide a response indicative of safety. However, if the portion 62 is not immediately adjacent the RFID 63,

the situation will be as in Fig. 7 and the response will either be non-existent, or indicative of an unsafe condition.

[0014] The opposite situation may be obtained as illustrated in Fig. 9. Therein, the lower limit switches 17, 18 are shown as disposed on a frame 66 which is mounted to the rail 67 by brackets 68. The well-known cam 71 is disposed by brackets 72 to the stile 74, which comprises the main vertical frame of the elevator platform, as is known. As can be seen, when the elevator gets close to the bottom of the hoistway, the cam 71 will be adjacent to the switch 17, causing it to detune the frequency-determining circuitry, as is illustrated in Fig. 6, and either causing there to be no response from the RFID 17 or, depending upon the protocol being used, a response indicative of the unsafe condition. Obviously, as the elevator goes lower in the hoistway, the cam 71 will become adjacent to additional ones of the RFIDs 18, thus providing the indication of the successive unsafe conditions due to the position of the elevator car in the hoistway. Thus, alteration of the frequency-determining circuit by means of magnetic reluctance can either be utilized so the presence of the reluctance indicates a safe condition (Fig. 8) or an unsafe condition (Fig. 9).

[0015] The call buttons may each have a passenger-actuated button switch incorporated into the RFIDs frequency determining circuitry (Figs. 3-5), or they may each have a passenger-displaced member with reluctance (Figs. 6 and 7). In systems having button lights to indicate when a call is registered, the lights will normally be wired to building power; the RFID may connect the power through a solid state switch in response to a call confirmation signal transmitted to the RFID. The interrogations should be at a repetition frequency, such as 5HZ or 10HZ, sufficient to coincide with button actuation, which may be as short as 200 msec to 500 msec.

Claims

1. An elevator safety chain for monitoring the condition of a plurality of safety-related parameters of an elevator, said parameters including at least one of: hoistway door lock, car door lock, upper limits, lower limits, emergency stop switch, inspection switch, and overspeed sensor; **characterized by:**

at least one transceiver (23, 26, 27) for transmitting interrogation signals and for receiving responses to said interrogation signals; and
 at least one passive radio frequency identification device (22, 33, 35, 36) (RFID) associated with a corresponding one of said parameters, the frequency determining circuitry (40, 41, 43, 44, 47, 48) of any said RFID being related to said corresponding parameter to have the capability to: (a) provide a transmitted response to an interrogation signal from one said transceiver

indicative of a safe condition, when the condition of the corresponding parameter is safe, and (b) not provide a transmitted response when the condition of the corresponding parameter is not safe.

2. A safety chain according to claim 1 wherein:

said RFID includes a switch (44, 48) that is opened and closed in response to the condition of the corresponding parameter, said switch associated with frequency-determining circuitry (40, 41) of said RFID so as to cause the frequency determination to result in a transmitted response indicative of a safe condition when said switch is in a position indicative of the fact that the condition of the corresponding parameter is safe.

3. A safety chain according to claim 2 wherein said switch (43, 48) is connected in series with frequency-determining elements (40, 41, 47) of said frequency determining circuitry.

4. A safety chain according to claim 2 wherein said switch (44) is connected in parallel with frequency-determining elements (40, 41) of said frequency determining circuitry.

5. A safety chain according to claim 2 further comprising:

an additional frequency-determining element (47); and wherein
 said switch (48) connects said additional frequency-determining element to said frequency-determining circuitry.

6. An elevator safety chain according to claim 1 wherein:

said frequency-determining circuitry (40, 41) is responsive to structure having magnetic reluctance adjacent to said RFID; and further comprising:

a structure (51, 71) having magnetic reluctance, the position of which is indicative of the condition of said corresponding parameter, the safe or unsafe condition of said parameter being determined by the presence or absence of said structure immediately adjacent to said RFID in a manner which will alter the frequency of said frequency-determining circuit.

7. A safety chain according to claim 6 wherein the presence of said structure (71) adjacent to said RFID (17)

indicates a safe condition.

8. A safety chain according to claim 6 wherein the presence of said structure (71) having magnetic reluctance adjacent to said RFID (18) indicates an unsafe condition. 5
9. An elevator call system for monitoring at least one of a car call button and a hall call button, **characterized by:** 10

at least one transceiver (23, 26, 27) for transmitting interrogation signals and for receiving responses to said interrogation signals; and at least one passive radio frequency identification device (RFID) (14, 19, 34) associated with a corresponding one of said call buttons, the frequency determining circuitry (40, 41, 43, 44, 47, 48) of any said RFID being related to said corresponding call button to have the capability to: (a) provide a transmitted response to an interrogation signal from one said transceiver indicative of the button being actuated, when the corresponding button is actuated and (b) not provide a transmitted response when the corresponding button is not actuated. 15 20 25

10. An elevator call system according to claim 9 wherein:

said RFID includes a switch (44,48) that is operated by the corresponding button, said switch associated with frequency-determining circuitry (40, 41, 47) of said RFID so as to cause the frequency determination to result in a transmitted response indicative of a call request when said switch is in a position indicative of the fact that the corresponding button is actuated. 30 35

11. An elevator call system according to claim 10 wherein said switch (43, 48) is connected in series with frequency-determining elements (40, 41, 47) of said frequency determining circuitry. 40
12. An elevator call system according to claim 10 wherein said switch (44) is connected in parallel with frequency-determining elements (40, 41) of said frequency determining circuitry. 45
13. An elevator call system according to claim 10 further comprising: an additional frequency-determining element (47); and wherein said switch (48) connects said additional frequency-determining element to said frequency-determining circuitry (40,41). 50

14. An elevator call system according to claim 9 wherein: 55
- said frequency-determining circuitry is responsive to structure having magnetic reluctance ad-

jacent to said RFID; and further comprising:

a structure having magnetic reluctance, the position of which is determined by said corresponding button, the actuated or unactuated condition of said button being indicated by the presence or absence of said structure immediately adjacent to said RFID in a manner which will alter the frequency of said frequency-determining circuit.

15. A safety chain according to claim 6 wherein the presence of said structure adjacent to said RFID indicates a call request.

16. An elevator system including a safety chain for monitoring the condition of a plurality of safety-related parameters of an elevator, said parameters including at least one of: hoistway door lock, car door lock, upper limits, lower limits, emergency stop switch, inspection switch, and overspeed sensor; said elevator system also for monitoring at least one of a car call button and a hall call button, **characterized by:**

at least one transceiver (23, 26, 27) for transmitting interrogation signals and for receiving responses to said interrogation signals; at least one passive radio frequency identification device (safety FRID) (22, 33, 35, 36) associated with a corresponding one of said parameters, the frequency determining circuitry (40, 41, 43, 44, 47, 48) of any said safety RFID being related to said corresponding parameter to have the capability to provide a transmitted response to an interrogation signal from one said transceiver indicative of a safe condition, when the condition of the corresponding parameter is safe, and not providing said indication of a safe condition when the condition of the corresponding parameter is not safe; and at least one passive radio frequency identification device (call RFID) (14, 19, 34) associated with a corresponding one of said call buttons, the frequency determining circuitry of any said call RFID being related to said corresponding call button to have the capability to: (a) provide a transmitted response to an interrogation signal from one said transceiver indicative of the button being actuated, when the corresponding button is actuated, and (b) not provide a transmitted response when the corresponding button is not actuated.

Patentansprüche

1. Aufzugsicherheitskette zum Überwachen des Zustands einer Mehrzahl von sicherheitstechnischen

Parametern eines Aufzugs, wobei die Parameter mindestens einen aufweisen aus: Schachttürverriegelung, Kabinentürverriegelung, oberen Begrenzungen, unteren Begrenzungen, Notfall-Stopp-schalter, Inspektionsschalter und Sensor für überhöhte Geschwindigkeit; **gekennzeichnet durch:**

mindestens einen Sender/Empfänger (23, 26, 27) zum Senden von Abfragesignalen und zum Empfangen von Antworten auf die Abfragesignale; und
mindestens eine passive Hochfrequenz-Identifikationsvorrichtung (22, 33, 35, 36) (RFID), die einem entsprechenden der Parameter zugeordnet ist, wobei die Frequenzbestimmungs-Schaltungseinrichtung (40, 41, 43, 44, 47, 48) einer beliebigen RFID zu dem entsprechenden Parameter in derartiger Beziehung steht, dass sie in der Lage ist: (a) eine einen sicheren Zustand anzeigende, gesendete Antwort auf ein Abfragesignal von einem der Sender/Empfänger bereitzustellen, wenn der Zustand des entsprechenden Parameters sicher ist, und (b) keine gesendete Antwort bereitzustellen, wenn der Zustand des entsprechenden Parameters nicht sicher ist.

2. Sicherheitskette nach Anspruch 1, wobei die RFID einen Schalter (44, 48) aufweist, der nach Maßgabe des Zustands des entsprechenden Parameters geöffnet und geschlossen wird, wobei der Schalter einer Frequenzbestimmungs-Schaltungseinrichtung (40, 41) der RFID zugeordnet ist, so dass die Frequenzbestimmung zu einer einen sicheren Zustand anzeigenden, gesendeten Antwort führt, wenn sich der Schalter in einer Stellung befindet, die die Tatsache anzeigt, dass der Zustand des entsprechenden Parameters sicher ist.
3. Sicherheitskette nach Anspruch 2, wobei der Schalter (43, 48) mit Frequenzbestimmungselementen (40, 41, 47) der Frequenzbestimmungs-Schaltungseinrichtung in Reihe geschaltet ist.
4. Sicherheitskette nach Anspruch 2, wobei der Schalter (44) Frequenzbestimmungselementen (40, 41) der Frequenzbestimmungs-Schaltungseinrichtung parallel geschaltet ist.
5. Sicherheitskette nach Anspruch 2, die weiterhin Folgendes aufweist:

ein zusätzliches Frequenzbestimmungselement (47); und
wobei der Schalter (48) das zusätzliche Frequenzbestimmungselement mit der Frequenzbestimmungs-Schaltungseinrichtung verbindet.

6. Aufzugsicherheitskette nach Anspruch 1, wobei die Frequenzbestimmungs-Schaltungseinrichtung (40, 41) auf eine Struktur mit magnetischer Reluktanz benachbart der RFID anspricht; und wobei die Aufzugsicherheitskette ferner eine Struktur (51, 71) mit magnetischer Reluktanz aufweist, deren Position den Zustand des entsprechenden Parameters anzeigt, wobei der sichere oder unsichere Zustand des Parameters durch das Vorhandensein oder das Nichtvorhandensein der Struktur in unmittelbarer Nachbarschaft zu der RFID in einer die Frequenz der Frequenzbestimmungsschaltung ändernden Weise bestimmt wird.

7. Sicherheitskette nach Anspruch 6, wobei das Vorhandensein der Struktur (71) benachbart der RFID (17) einen sicheren Zustand anzeigt.

8. Sicherheitskette nach Anspruch 6, wobei das Vorhandensein der Struktur (71) mit magnetischer Reluktanz benachbart der RFID (18) einen unsicheren Zustand anzeigt.

9. Aufzugrufsystem zum Überwachen von mindestens einer von einer Kabinen-Ruftaste und einer Zugangsbereich-Ruftaste, **gekennzeichnet durch:**

mindestens einen Sender/Empfänger (23, 26, 27) zum Senden von Abfragesignalen und zum Empfangen von Antworten auf die Abfragesignale; und
mindestens eine passive Hochfrequenz-Identifikationsvorrichtung (RFID) (14, 19, 34), die einer entsprechenden der Ruftasten zugeordnet ist, wobei die Frequenzbestimmungs-Schaltungseinrichtung (40, 41, 43, 44, 47, 48) einer beliebigen RFID zu der entsprechenden Ruftaste in derartiger Beziehung steht, dass sie in der Lage ist: (a) eine einen betätigten Zustand der Taste anzeigende, gesendete Antwort auf ein Abfragesignal von einem der Sender/Empfänger bereitzustellen, wenn die entsprechende Taste betätigt ist, und (b) keine gesendete Antwort bereitzustellen, wenn die entsprechende Taste nicht betätigt ist.

10. Aufzugrufsystem nach Anspruch 9, wobei die RFID einen Schalter (44, 48) aufweist, der durch die entsprechende Taste betätigt wird, wobei der Schalter einer Frequenzbestimmungs-Schaltungseinrichtung (40, 41, 47) der RFID zugeordnet ist, damit die Frequenzbestimmung in einer eine Rufanforderung anzeigenden, gesendeten Antwort resultiert, wenn sich der Schalter in einer Position befindet, die die Tatsache anzeigt, dass die entsprechende Taste betätigt ist.

11. Aufzugrufsystem nach Anspruch 10,
wobei der Schalter (43, 48) mit Frequenzbestimmungselementen (40, 41, 47) der Frequenzbestimmungs-Schaltungseinrichtung in Reihe geschaltet ist. 5
12. Aufzugrufsystem nach Anspruch 10,
wobei der Schalter (44) Frequenzbestimmungselementen (40, 41) der Frequenzbestimmungs-Schaltungseinrichtung parallel geschaltet ist. 10
13. Aufzugrufsystem nach Anspruch 10,
das weiterhin Folgendes aufweist:
- ein zusätzliches Frequenzbestimmungselement (47); und 15
- wobei der Schalter (48) das zusätzliche Frequenzbestimmungselement mit der Frequenzbestimmungs-Schaltungseinrichtung (40, 41) verbindet. 20
14. Aufzugrufsystem nach Anspruch 9,
wobei die Frequenzbestimmungs-Schaltungseinrichtung auf eine Struktur mit magnetischer Reluktanz benachbart der RFID anspricht; und 25
- wobei das Aufzugrufsystem ferner eine Struktur mit magnetischer Reluktanz aufweist, deren Position durch die entsprechende Taste bestimmt wird, wobei der betätigte oder unbetätigte Zustand der Taste durch das Vorhandensein oder das Nichtvorhandensein der Struktur in unmittelbarer Nachbarschaft zu der RFID in einer die Frequenz der Frequenzbestimmungsschaltung ändernden Weise angezeigt wird. 30
15. Sicherheitskette nach Anspruch 6, 35
- wobei das Vorhandensein der Struktur benachbart der RFID eine Rufanforderung anzeigt.
16. Aufzugsystem mit einer Sicherheitskette zum Überwachen des Zustands einer Mehrzahl von sicherheitstechnischen Parametern eines Aufzugs, wobei die Parameter mindestens einen aufweisen aus: Schachttürverriegelung, Kabinentürverriegelung, oberen Begrenzungen, unteren Begrenzungen, Notfall-Stoppschalter, Inspektionsschalter und Sensor für überhöhte Geschwindigkeit; 40
- gekennzeichnet durch:** 45
- mindestens einen Sender/Empfänger (23, 26, 27) zum Senden von Abfragesignalen und zum Empfangen von Antworten auf die Abfragesignale; und 50
- mindestens eine passive Hochfrequenz-Identifikationsvorrichtung (Sicherheits-RFID) (22, 33, 35, 36), die einem entsprechenden der Parameter zugeordnet ist, wobei die Frequenzbestimmungs-Schaltungseinrichtung (40, 41, 43, 44, 47, 48) einer beliebigen Sicherheits-RFID zu 55

dem entsprechenden Parameter in derartiger Beziehung steht, dass sie in der Lage ist, einen sicheren Zustand anzeigende, gesendete Antwort auf ein Abfragesignal von einem der Sender/Empfänger bereitzustellen, wenn der Zustand des entsprechenden Parameters sicher ist, und die Anzeige eines sicheren Zustands nicht bereitzustellen, wenn der Zustand des entsprechenden Parameters nicht sicher ist; und

mindestens eine passive Hochfrequenz-Identifikationsvorrichtung (Ruf-RFID) (14, 19, 34), die einer entsprechenden der Ruftasten zugeordnet ist, wobei die Frequenzbestimmungs-Schaltungseinrichtung einer beliebigen Ruf-RFID zu der entsprechenden Ruftaste in derartiger Beziehung steht, dass sie in der Lage ist: (a) einen betätigten Zustand der Taste anzeigende, gesendete Antwort auf ein Abfragesignal von einem der Sender/Empfänger bereitzustellen, wenn die entsprechende Taste betätigt ist, und (b) keine gesendete Antwort bereitzustellen, wenn die entsprechende Taste nicht betätigt ist.

Revendications

1. Chaîne de sécurité d'ascenseur pour surveiller l'état d'une pluralité de paramètres liés à la sécurité d'un ascenseur, lesdits paramètres incluant au moins l'un des éléments suivants : un verrouillage de porte palière, un verrouillage de porte de cabine, des limites supérieures, des limites inférieures, un bouton d'arrêt d'urgence, un interrupteur d'inspection, et un détecteur de survitesse ; **caractérisée par** :

au moins un émetteur-récepteur (23, 26, 27) pour transmettre des signaux d'interrogation et pour recevoir des réponses auxdits signaux d'interrogation ; et

au moins un dispositif passif d'identification à radiofréquences (22, 33, 35, 36) (RFID) associé à l'un correspondant desdits paramètres, les circuits de détermination de fréquence (40, 41, 43, 44, 47, 48) de l'un quelconque desdits RFID étant liés audit paramètre correspondant afin de pouvoir : (a) fournir une réponse transmise à un signal d'interrogation depuis ledit un émetteur-récepteur représentative d'un état sûr, lorsque l'état du paramètre correspondant est sûr, et (b) ne pas fournir une réponse transmise lorsque l'état du paramètre correspondant n'est pas sûr.

2. Chaîne de sécurité selon la revendication 1, dans laquelle :

ledit RFID inclut un interrupteur (44, 48) qui est ouvert et fermé en réponse à l'état du paramètre

- correspondant, ledit interrupteur étant associé aux circuits de détermination de fréquence (40, 41) dudit RFID afin de provoquer la détermination de la fréquence pour obtenir une réponse transmise représentative d'un état sûr lorsque ledit interrupteur est dans une position représentative du fait que l'état du paramètre correspondant est sûr.
3. Chaîne de sécurité selon la revendication 2, dans laquelle ledit interrupteur (43, 48) est raccordé en série à des éléments de détermination de fréquence (40, 41, 47) desdits circuits de détermination de fréquence.
 4. Chaîne de sécurité selon la revendication 2, dans laquelle ledit interrupteur (44) est raccordé en parallèle avec les éléments de détermination de fréquence (40, 41) desdits circuits de détermination de fréquence.
 5. Chaîne de sécurité selon la revendication 2, comprenant en outre :
 - un élément de détermination de fréquence supplémentaire (47) ; et dans laquelle ledit interrupteur (48) raccorde ledit élément de détermination de fréquence supplémentaire auxdits circuits de détermination de fréquence.
 6. Chaîne de sécurité d'ascenseur selon la revendication 1, dans laquelle :
 - lesdits circuits de détermination de fréquence (40, 41) sont sensibles à une structure ayant une reluctance magnétique adjacente audit RFID ; et comprenant en outre :
 - une structure (51, 71) ayant une reluctance magnétique, dont la position est représentative de l'état dudit paramètre correspondant, l'état sûr ou dangereux dudit paramètre étant déterminé par la présence ou l'absence de ladite structure immédiatement adjacente audit RFID d'une manière qui modifiera la fréquence desdits circuits de détermination de fréquence.
 7. Chaîne de sécurité selon la revendication 6, dans laquelle la présence de ladite structure (71) adjacente audit RFID indique un état sûr.
 8. Chaîne de sécurité selon la revendication 6, dans laquelle la présence de ladite structure (71) ayant une reluctance magnétique adjacente audit RFID (18) indique un état dangereux.
 9. Système d'appel d'ascenseur pour surveiller au moins un bouton d'appel de cabine ou un bouton d'appel palier, **caractérisé par** au moins un émetteur-récepteur (23, 26, 27) pour transmettre des signaux d'interrogation et pour recevoir des réponses auxdits signaux d'interrogation ; et au moins un dispositif passif d'identification à radiofréquences (RFID) (14, 19, 34) associé à l'un correspondant desdits boutons d'appel, les circuits de détermination de fréquence (40, 41, 43, 44, 47, 48) de l'un quelconque desdits RFID étant liés audit bouton d'appel correspondant afin de pouvoir : (a) fournir une réponse transmise à un signal d'interrogation depuis ledit un émetteur-récepteur représentative du bouton actionné, lorsque le bouton correspondant est actionné et (b) ne pas fournir une réponse transmise lorsque le bouton correspondant n'est pas actionné.
 10. Système d'appel d'ascenseur selon la revendication 9, dans lequel ledit RFID inclut un interrupteur (44, 48) qui est actionné par le bouton correspondant, ledit interrupteur étant associé aux circuits de détermination de fréquence (40, 41, 47) dudit RFID afin de provoquer la détermination de la fréquence pour obtenir une réponse transmise représentative d'une demande d'appel lorsque ledit interrupteur est dans une position représentative du fait que le bouton correspondant est actionné.
 11. Système d'appel d'ascenseur selon la revendication 10, dans lequel ledit interrupteur (43, 48) est raccordé en série à des éléments de détermination de fréquence (40, 41, 47) desdits circuits de détermination de fréquence.
 12. Système d'appel d'ascenseur selon la revendication 10, dans lequel ledit interrupteur (44) est raccordé en parallèle à des éléments de détermination de fréquence (40, 41) desdits circuits de détermination de fréquence.
 13. Système d'appel d'ascenseur selon la revendication 10, comprenant en outre :
 - un élément de détermination de fréquence supplémentaire (47) ; et dans lequel ledit interrupteur (48) raccorde ledit élément de détermination de fréquence supplémentaire auxdits circuits de détermination de fréquence (40, 41).
 14. Système d'appel d'ascenseur selon la revendication 9, dans lequel lesdits circuits de détermination de fréquence sont sensibles à une structure ayant une reluctance magnétique adjacente audit RFID ; et comprenant en outre :

une structure ayant une reluctance magnétique, dont la position est déterminée par ledit bouton correspondant, l'état actionné ou non actionné dudit bouton étant indiqué par la présence ou l'absence de ladite structure immédiatement adjacente audit RFID d'une manière qui modifiera la fréquence desdits circuits de détermination de fréquence.

15. Chaîne de sécurité selon la revendication 6, dans laquelle la présence de ladite structure adjacente audit RFID indique une demande d'appel.
16. Système d'ascenseur incluant une chaîne de sécurité pour surveiller l'état d'une pluralité de paramètres liés à la sécurité d'un ascenseur, lesdits paramètres incluant au moins l'un des éléments suivants : un verrouillage de porte palière, un verrouillage de porte de cabine, des limites supérieures, des limites inférieures, un bouton d'arrêt d'urgence, un interrupteur d'inspection, et un détecteur de survitesse ; ledit système d'ascenseur étant également destiné à surveiller au moins un bouton d'appel de cabine ou un bouton d'appel palier, **caractérisé par**
- au moins un émetteur-récepteur (23, 26, 27) pour transmettre des signaux d'interrogation et pour recevoir des réponses auxdits signaux d'interrogation ; et
- au moins un dispositif passif d'identification à radiofréquences (RFID de sécurité) (22, 33, 35, 36) associé à l'un correspondant desdits paramètres, les circuits de détermination de fréquence (40, 41, 43, 44, 47, 48) de l'un quelconque desdits RFID de sécurité étant liés audit paramètre correspondant afin de pouvoir fournir une réponse transmise à un signal d'interrogation depuis ledit un émetteur-récepteur représentative d'un état sûr, lorsque l'état du paramètre correspondant est sûr, et ne pas fournir ladite indication d'un état sûr lorsque l'état du paramètre correspondant n'est pas sûr ; et
- au moins un dispositif passif d'identification à radiofréquences (RFID d'appel) (14, 19, 34) associé à l'un correspondant desdits boutons d'appel, les circuits de détermination de fréquence de l'un quelconque desdits RFID d'appel étant liés audit bouton d'appel correspondant afin de pouvoir : (a) fournir une réponse transmise à un signal d'interrogation depuis ledit un émetteur-récepteur représentative du bouton actionné, lorsque le bouton correspondant est actionné, et (b) ne pas fournir une réponse transmise lorsque le bouton correspondant n'est pas actionné.

FIG. 1

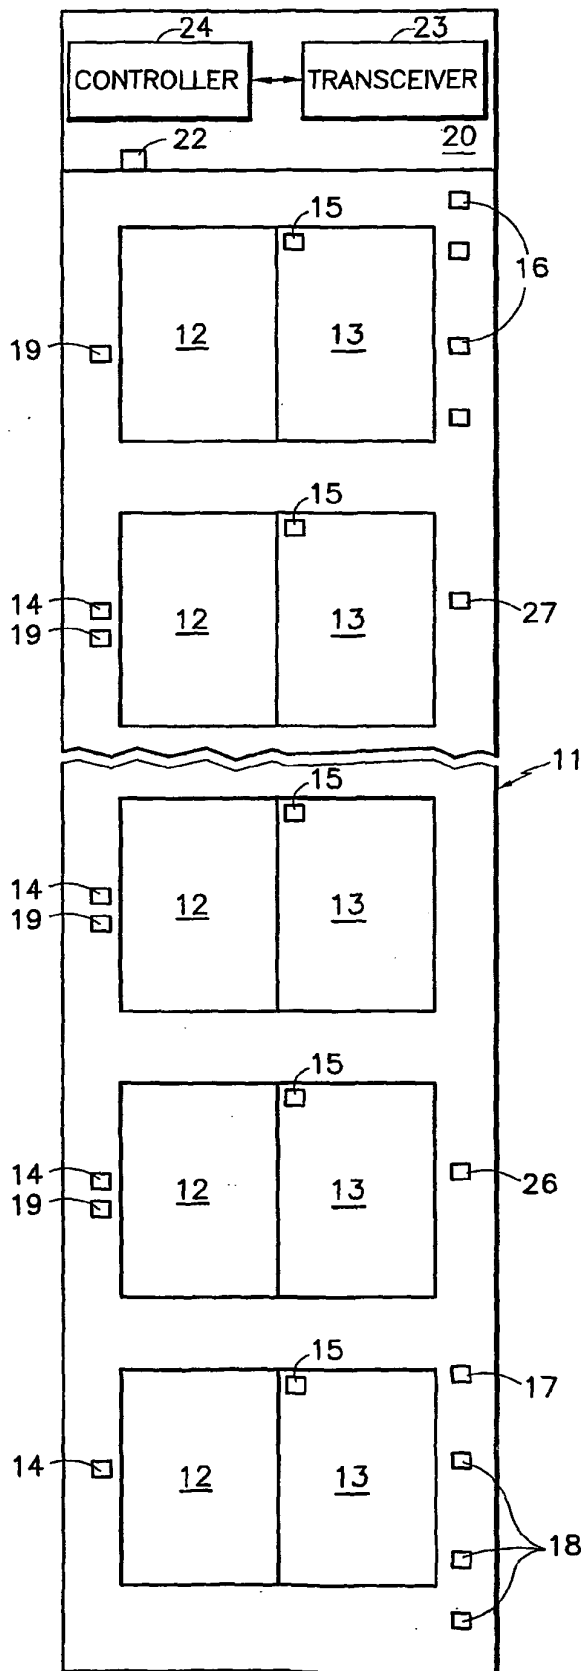


FIG. 2

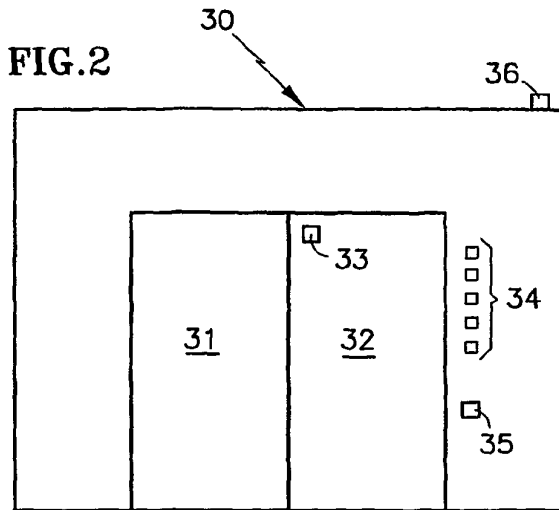


FIG. 3




FIG. 4




FIG. 5




FIG. 6




FIG. 7




FIG.8


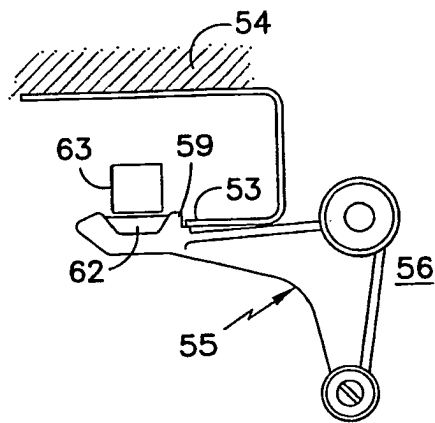


FIG.9

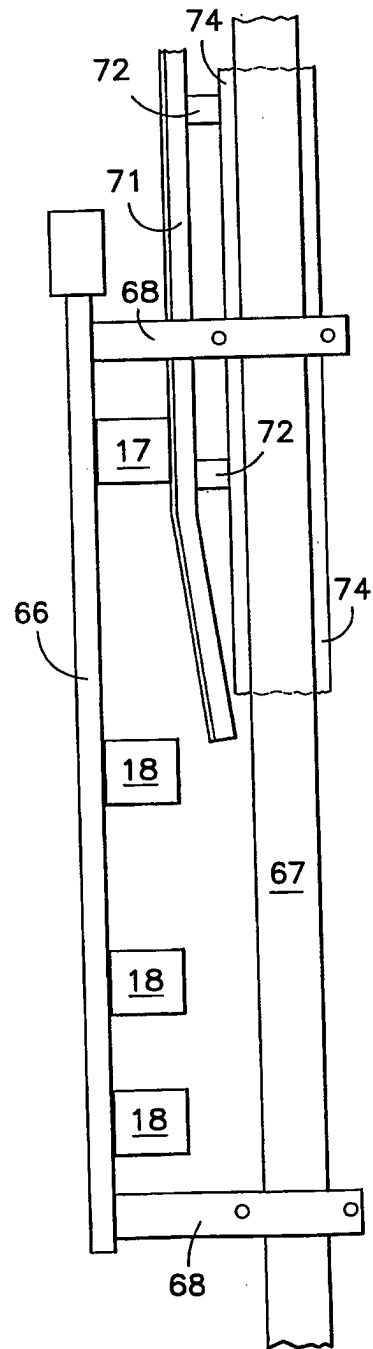

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 89940001 A [0003]