




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E01F 9/04		A1	(11) International Publication Number: WO 99/04096
			(43) International Publication Date: 28 January 1999 (28.01.99)
(21) International Application Number: PCT/US97/23235	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).		
(22) International Filing Date: 12 December 1997 (12.12.97)			
(30) Priority Data: 08/895,297 16 July 1997 (16.07.97) US			
(71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).			
(72) Inventors: HEDBLOM, Thomas, P.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). JACOBS, Gregory, F.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).			
(74) Agents: FAGAN, Lisa, M. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).			

(54) Title: RETROREFLECTIVE BLACK PAVEMENT MARKING ARTICLES

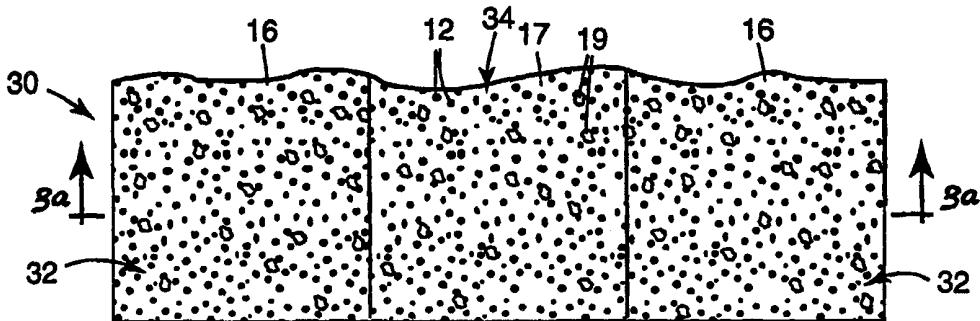

(57) Abstract

The articles of the present invention comprise optical elements (12) embedded in either a core having a binder layer (16) which is embedded in a road-binder (26) or optical elements (16) which are directly embedded into a binder layer (16). The binder layer may be part of a preformed pavement marking tape or may be applied directly to a traffic-bearing surface. The binder layer is comprised of a black pigment. The pavement marking articles of the present invention comprise one or more first region(s) (32) wherein the first region(s) has a daytime appearance of black and is retroreflective. In another embodiment of the present invention, the pavement marking articles further comprise one or more second region(s) (34) having a color which contrasts with black during the daytime and which is typically also retroreflective. The second region(s) is adjacent to the first region(s).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

RETROREFLECTIVE BLACK PAVEMENT MARKING ARTICLES

Field of the Invention

The present invention relates to pavement markings comprising optical elements and/or skid-resistant particles. More particularly, the present invention relates to pavement markings having a portion which retroreflects either white, yellow or another color yet under daylight illumination appears substantially black.

Background of the Invention

10 The use of pavement markings (e.g., paints, retroreflective elements, tapes, and individually mounted articles) to guide and direct motorists traveling along a roadway is well known. During the daytime the markings may be sufficiently visible under ambient light to effectively signal and guide a motorist. However, the degree of conspicuity or visibility depends in large part on the pavement 15 surface. For example, a white pavement marking on a concrete road may be difficult for the motorist to see because of the lack of contrast.

In addition, at night, especially when the primary source of illumination is the motorist's vehicle headlights, the markings may be insufficient to adequately 20 guide a motorist because the light from the headlight hits the pavement and marking at a very low angle of incidence and the light is not sufficiently reflected back toward the motorist. Thus, improving daytime conspicuity and night time retroreflection is desirable.

Retroreflection describes the mechanism where light incident on a surface is reflected so that much of the incident beam is directed back toward its source. 25 The most common retroreflective pavement markings, such as lane lines on roadways, are made by dropping transparent glass or ceramic microspheres or optical elements onto a freshly painted line such that the optical elements become partially embedded therein. The transparent optical elements each act as a spherical lens and thus, the incident light passes through the optical elements to 30 the base paint or sheet striking pigment particles therein. The pigment particles

scatter the light redirecting a portion of the light back into the optical element such that a portion is then redirected back towards the light source.

In addition to providing the desired optical effects, pavement markings must withstand road traffic, adverse weather conditions, and cost constraints.

5 Pavement marking articles and other substantially horizontal markings typically exhibit high retroreflective brightness when the light is incident at high entrance angles (typically greater than about 85°). Retroreflective sheeting and other retroreflective articles attached to vertical surfaces, on the other hand, tend to exhibit high retroreflective brightness at lower entrance angles (e.g., within 30°
10 to 40° of normal). Thus, the optics of pavement marking articles differ from the optics of retroreflective sheeting.

The retroreflective efficiency of flat pavement marking articles is limited because the exposed surfaces of the optical elements are directed upward, whereas the optimal orientation is toward vehicle headlights which typically illuminate the
15 retroreflective beads from angles slightly above the road surface and because the optical element alignment results in the exposed surface of the optical elements being exposed to maximum abrasive wear by vehicle tires. Pavement marking articles having protrusions have several advantages including, runoff of rain water and availability of locally non-horizontal surfaces to support optical elements.

20 The need exists for substantially horizontal retroreflective pavement marking articles having enhanced visibility and contrast.

Summary of the Invention

The present invention provides pavement marking articles which are
25 substantially black under ordinary daytime illumination and which are retroreflective. These substantially horizontal pavement marking articles can be preformed pavement marking tapes, retroreflective elements embedded in a road-binder, or optical elements embedded in a binder layer.

The articles of the present invention comprise optical elements embedded
30 in either a core having a binder layer which is embedded in a road-binder (i.e., material for adhering retroreflective elements to a traffic-bearing surface) or

optical elements which are directly embedded into a binder layer. The binder layer may be part of a preformed pavement marking tape or may be applied directly to a traffic-bearing surface. The binder layer is comprised of a black pigment (preferably carbon black). The pavement marking articles of the present invention 5 comprise one or more first region(s) wherein the first region(s) has a daytime appearance of black and is retroreflective.

In another embodiment of the present invention, the pavement marking articles further comprise one or more second region(s) having a color which contrasts with black during the daytime and which is typically also retroreflective.

10 The second region(s) is adjacent to the first region(s). Advantageously, these articles provide enhanced conspicuity during the daytime and enhanced retroreflection at night. The contrast between the first and second regions enhances daytime visibility. Additionally, the area of retroreflectivity of the marking article is enlarged enhancing retroreflectivity and visibility at night.

15 Typically, the pavement marking articles of the present invention retroreflect white or yellow.

Figures

FIG. 1 is a cross-sectional view of the pavement marking article 10 where 20 optical elements 12 are embedded in the binder layer 16.

FIG. 2 is a cross-sectional view of the pavement marking article 10a where optical elements 12 are embedded in binder layer 16. The base layer 14 is located between the binder layer 16 and the optional adhesive layer 20 which secures the 25 article to the traffic-bearing surface 18.

FIG. 3 is a plan view of pavement marking article 30 where optical elements 12 and skid-resistant particles 19 are embedded in the binder layers 16 and 17 of first regions 32 and second region 34.

FIG. 3a is a cross-sectional view of pavement marking article 30 on a traffic-bearing surface 18 where optical elements 12 are embedded in binder layers 16 and 17 of first regions 32 and second region 34.

5 FIG. 4 is a top plan view of pavement marking article 40 on a traffic bearing surface 18 where first region 32 is longitudinally adjacent to second region 34.

10 FIG. 5 is a cross-sectional view of pavement marking article 50 on a traffic-bearing surface 18, where optical elements 12 are embedded in binder layer 16.

15 FIG. 6 is a cross-sectional view of pavement marking article 60 on a traffic-bearing surface 18, where optical elements 12 are embedded in a binder layer 16 to form a retroreflective element 62 which is embedded in road-binder 26.

The figures, which are idealized and not to scale, are intended to be merely illustrative and non-limiting.

20 **Detailed Description of Illustrative Embodiments**

The present invention provides a pavement marking article comprising one or more first regions having a daytime appearance of black while being retroreflective. A pavement marking article is attached to the surface of a road or other traffic-bearing surface. Types of roads include asphalt, concrete, etc.

25 The pavement marking articles of the present invention generally have an optical system comprising transparent microspheres (i.e., optical elements) partially embedded in a binder layer containing black pigment (e.g., carbon black). The pavement marking articles of the present invention may be in the form of preformed tapes, typically further comprising a conformance layer and/or adhesive 30 layer on one surface of the binder layer. The pavement marking articles of the present invention may also be formed directly on the roadway. For example, the

binder layer may be applied to the surface of the roadway and then optical elements may be applied or partially embedded therein or retroreflective elements comprising a binder layer and optical elements may be partially embedded in a road-binder.

5 The second region(s) may be made by using tinted optical elements in combination with a binder layer containing a light scattering or reflecting pigment such as titanium dioxide.

A preferred embodiment of the present invention is a pavement marking article which further comprises one or more second regions. The first region(s) is 10 adjacent to the second region(s). However, the second region(s) has a color which contrasts with black. "Black" is defined herein as having a low luminance factor and being substantially achromatic or as preferably having a Y value of about 20 or less, preferably about 15 or less, and more preferably about 10 or less. Contrasting colors include, but are not limited to, white, yellow, orange, etc.

15 Contrasting colors may be fluorescent if desired.

Generally, the second region(s) comprise optical elements partially embedded in a binder layer.

The second region(s) is adjacent to the first region(s). However, the regions do not need to share a border (i.e., there may be a small space between the 20 regions) and the regions may overlap. The second region(s) may be adjacently oriented relative to the first region such that the second region is laterally adjacent to the first region (i.e., across the road surface width or transversely adjacent to the direction of the driver). (See Figure 3.) Alternatively, the second region may be oriented such that it longitudinally alternates with the first region as a traveler 25 progresses along the road length. (See Figure 4.) The first type of orientation may provide enhanced conspicuity on concrete road surfaces as well as on "bleached" asphalt road surfaces (i.e., asphalt surfaces lightened by the sun, commonly found on roads in the southern part of the United States). With this first orientation, the pavement marking article has a larger area of retroreflection 30 across the width of the marking. For example, the width of available

retroreflective surface may increase from 4 inches (100 mm) to 7 inches (180 mm).

The second type of orientation also may enhance visibility or conspicuity of the pavement marking, particularly on concrete or "bleached" asphalt road surfaces. The retroreflectivity of the pavement marking article may also be enhanced because a longer line or a continuous line of the roadway may be retroreflective. The retroreflected color may vary depending on the type of optical element embedded in each region as well as the light-reflecting system of the binder layer of each region.

10

Binder Material

The binder layer in the first region(s) is comprised of a binder material, black pigment (e.g., carbon black), light-reflecting system, optical elements, and optional skid-resistant particles. Typically, the binder material is a polymeric material. The polymeric material, at least in the areas surrounding the embedded portions of the optical elements, preferably is sufficiently light transmissive such that incident light refracted by the optical elements can pass through the binder material to interact with the dispersed pigment particles. Many useful polymeric materials for use in the binder layers of the pavement marking articles are well known and a suitable one for use in a particular embodiment of the present invention can be readily selected by one skilled in the art. Illustrative examples of suitable polymeric materials include thermoset materials and thermoplastic materials. Suitable polymeric material includes, but is not limited to, urethanes, epoxies, alkyds, acrylics, acid olefin copolymers such as ethylene/methacrylic acid, polyvinyl chloride/polyvinyl acetate copolymers, etc.

The binder material in the first region(s) is comprised of black pigment, preferably carbon black. Generally, the black pigment is added at about 1 weight percent or greater. The particle size of the black pigment generally ranges from about 0.01 micron to about 0.08 micron. The ratio of the light-reflecting system to the black pigment ranges from about 7:1 to about 80:1; preferably the ratio ranges from about 7:1 to about 27:1 by weight.

The binder material also comprises a light-reflecting system. The light-reflecting system may comprise either a specular pigment or a diffuse pigment. Preferably, the light-reflecting system is a specular pigment such as a pearlescent pigment. Illustrative examples of pearlescent pigments include, but are not limited to 5 AFFLAIR 9103 and 9119 (obtained from EM Industries Inc., New York), Mearlin Fine Pearl #139V and Bright Silver #139Z (obtained from The Mearl Corporation, Briarcliff Manor, New York). Typically, if the light-reflecting system comprises pearlescent pigment, the pearlescent pigment is present at about 10% to about 30% by volume or about 20% to about 45% by weight, more 10 preferably between about 30% and about 40% by weight, and most preferably at about 35% by weight.

Illustrative examples of diffuse pigments include, but are not limited to, 15 titanium dioxide, zinc oxide, zinc sulfide, lithophane, zirconium silicate, zirconium oxide, natural and synthetic barium sulfates, and combinations thereof. Typically, if the light-reflecting system comprises diffuse pigment, the diffuse pigment is present at about 5% to about 15% by volume.

Vapor coated (e.g., with aluminum) optical elements may also be used with black pigment. When vapor coated optical elements are used, the light-reflecting system is optional in the binder. See U.S. Patent No. 2,963,378 20 (Palmquist et al.) for a description of vapor coated optical elements. The coefficient of retroreflection measured at an entrance angle of -4.0 degrees and an observation angle of 0.2 degrees typically ranges from 80 to 100 cd/lx/m² for aluminum vapor coated optical elements.

The binder material may comprise colorants in the second region(s). 25 Illustrative samples of common colorants include white, yellow, and red, although other colorants may be used as desired. Examples of suitable colorants include, but are not limited to Titanium Dioxide CI 77891 Pigment White 6 (DuPont, Wilmington, DE), Chrome Yellow CI 77603 Pigment Yellow 34 (Cookson, Pigments, Newark, NJ), Arylide Yellow CI 11741 Pigment Yellow 74 (Hoechst 30 Celanese, Charlotte, NC), Arylide Yellow CI 11740 Pigment Yellow 65 (Hoechst Celanese, Charlotte, NC), Diarylide Yellow HR CI 21108 Pigment Yellow 83

(Hoechst Celanese, Charlotte, NC), and Naphthol Red CI 12475 Pigment Red 170 (Hoechst Celanese, Charlotte, NC).

The binder layer thickness varies with product usage and wear requirements. The binder layer thickness is sufficient to provide adequate 5 mechanical anchorage to the optical elements and sufficient embedment to enable retroreflection.

The binder layer material preferably has good resistance to contaminants on the road and weathering, good abrasion-resistance, and the ability to firmly hold embedded optical elements and optional skid-resistant particles.

10

Preformed Pavement Marking Tapes

If desired, preformed pavement marking tapes may further comprise additional layers beneath the binder layer to improve the performance of the resultant pavement marking tape. For example, a base layer (e.g., a conformance 15 layer) and/or adhesive layer may be provided. Many useful examples of such layers of pavement marking tapes are well known and selection of suitable choices for particular embodiments of the invention may be readily made by one with ordinary skill in the art. Examples of suitable base layers include, but are not limited to, those disclosed in U.S. Patent Nos. 4,117,192; 4,490,432; 5,114,193; 20 5,316,406; and 5,643,655. Suitable adhesives include, but are not limited to, pressure-sensitive adhesives, rubber resin adhesives, neoprene contact adhesives, etc.

Pavement marking tapes of the present invention may be substantially flat or have protrusions. The binder layer is modified as described herein. Illustrative 25 examples of substantially flat pavement marking tapes include, but are not limited to, U.S. Patent Nos. 4,117,192; 4,248,932; and 5,643,655.

The top surface of the tape can have protrusions which are selectively coated with a binder layer comprising a black pigment (e.g. carbon black) in a first region, and/or another desired colorant in a second region, and a light-reflecting 30 system. Optical elements and optionally skid-resistant particles are partially embedded in this binder layer. Illustrative examples of tapes having protrusions

include, but are not limited to U.S. Patent No. 4,388,359, 4,988,555, 5,557,461, 4,969,713, 5,139,590, 5,087,148, 5,108,218, and 4,681,401. A preferred pavement marking tape having protrusions is disclosed in European Patent Application No. 95 107696.7, filed May 19, 1995.

5 The pavement marking articles of the present invention can also be preformed magnetic pavement marking tapes. These magnetic tapes can be substantially invisible to the eye during the day (e.g., along the edge lines of a roadway and centerline). Alternatively, these magnetic tapes may comprise second regions having a color which contrasts with black and these tapes can be 10 used as the edge line or center line on a roadway. A preferred embodiment of the magnetic pavement marking tape is a tape comprising a conformance layer having at least 30 volume percent of magnetic particles distributed therein.

The tapes may also be removable for short-term usage.

15 **Retroreflective Elements in a Binder**

In another embodiment, the pavement marking article of the present invention is a retroreflective element comprising a core having a plurality of optical elements embedded in a binder layer on the core. The core is then partially embedded in a road-binder. The core comprises a binder layer having black 20 pigment (e.g., carbon black) and a light-reflecting system. Skid-resistant particles may also be embedded in the binder layer. Illustrative examples of retroreflective elements include, but are not limited to, U.S.S.N. 08/503,532, filed July 18, 1995; U.S.S.N. 08/591,570, filed February 5, 1996; U.S.S.N. 08/591,569, filed February 5, 1996. The road-binder can also comprise a black pigment.

25

Optical Elements in Binder Layer Directly on Road Surface

Another embodiment of the present invention is optical elements partially embedded in a binder layer which is applied directly to a road surface.

Composite Articles

The pavement marking articles of the present invention include composites. Examples of composites include, but are not limited to, flat tape adjacent to tape having protrusions; flat or protrusion tape adjacent to paint or a 5 binder layer having embedded optical elements; tapes in combination with retroreflective elements, etc. One illustrative embodiment is to add a pavement marking tape to an existing line to form a composite.

Optical Elements

10 A wide variety of optical elements may be employed in the present invention. Typically, for optimal retroreflective effect, the optical elements have a refractive index of about 1.5 to about 2.6.

15 For pavement marking tape embodiments, the optical elements preferably have a diameter compatible with the size and shape of the protuberances or with the thickness or the top layer (i.e., the binder layer). For the embodiments where the optical elements are embedded in a binder such as paint, the optical elements preferably have a diameter compatible with the binder thickness. Generally, optical elements of about 50 to about 1000 micrometers in diameter may be suitably employed.

20 The optical elements comprise an amorphous phase, a crystalline phase, or a combination, as desired. The optical elements preferably are comprised of inorganic materials that are not readily susceptible to abrasion. Suitable optical elements include microspheres formed of glass, preferably having indices of refraction of from about 1.5 to about 2.3. Commonly used optical elements are 25 made of soda-lime-silicate glasses.

30 Microcrystalline ceramic optical elements as disclosed in U.S. Patent Nos. 3,709,706; 4,166,147; 4,564,556; 4,758,469; and 4,772,511 have higher refractive indexes and enhanced durability. Preferred ceramic optical elements are disclosed in U.S. Patent Nos. 4,564,556 and 4,758,469. These optical elements are resistant to scratching and chipping, are relatively hard (above 700 Knoop hardness), and

are made of to have a relatively high index of refraction. The optical elements may comprise zirconia, alumina, silica, titania, and mixtures thereof.

The optical elements can be colored to retroreflect a variety of colors. Techniques to prepare colored ceramic optical elements that can be used herein 5 are described in U.S. Patent No. 4,564,556. Colorants such as ferric nitrate (for red or orange) may be added in an amount of about 1 to about 5 weight percent of the total metal oxide present. Color may also be imparted by the interaction of two colorless compounds under certain processing conditions (e.g., TiO_2 and ZrO_2 may interact to produce a yellow color). The optical elements may be 10 colored so that, for example, colorless, yellow, orange, or some other color of light is retroreflected at night.

Skid-Resistant Particles

Typically a retroreflective preformed pavement marking tape also 15 comprises skid-resistant particles. Illustrative examples of particularly useful skid-resistant particles include those disclosed in U.S. Patent Nos. 5,124,178; 5,094,902; 4,937,127; and 5,053,253. Skid-resistant particles may also be embedded in a retroreflective element, or embedded in a road-binder.

Generally, skid-resistant particles are randomly sprinkled and become 20 embedded in the binder material while it is in a softened state.

Methods of Manufacture

The articles of the present invention can be made using conventional methods known in the art, modified by selection of materials as described herein.

25

Methods of Application

Binders layers for pavement marking articles are well-known in the art, particularly for preformed pavement marking tapes and optical elements embedded in a binder layer on a road. Typically, optical elements and skid-resistant particles 30 are sprinkled or otherwise applied to a binder layer material while it is in a liquid state. The elements or particles become partially embedded in the binder layer

material while it is liquid. The binder layer material subsequently becomes solid resulting in elements and/or particles partially embedded therein.

The preformed pavement marking tape articles of the present invention may be installed on a roadway or other location using any one of a variety of 5 apparatus such as human pushable dispensers, "behind a truck" types of dispensers, and "built into a truck" type dispensers. U.S. Pat. No. 4,030,958 (Stenemann) discloses a suitable behind a truck type dispenser for applying the articles of the invention in the form of adhesive-backed tapes to a surface.

Other means may be used to install the pavement marking tape articles of 10 the invention, such as simple manual application, or use of the previously mentioned mechanical fasteners.

Examples

The invention will be further explained by the following illustrative 15 examples, wherein all parts and percentages are by weight, unless otherwise specified.

Retroreflective Brightness Measurements

The coefficient of retroreflection (R_A), in $cd/Lux/m^2$, following Procedure 20 B of ASTM Standard E 809-94a, was measured at an entrance angle of -4.0 degrees and an observation angle of 0.2 degrees. The photometer used for those measurements is described in U.S. Defensive Publication No. T987,003.

The coefficient of retroreflective luminance (R_L), in $mcd/m^2/Lx$, following 25 ASTM D4061-94, was measured keeping the presentation angle constant at 0 degrees and the orientation angle constant at -180 degrees. The intrinsic geometry as described in ASTM E 808-94 was used. The R_L was measured at a range of entrance angles and observation angles corresponding to different observation distances for a driver.

When evaluating different optical systems for pavement marking tapes 30 having protrusions, it is much easier to simply make a flat pavement marking tape sample of the light-reflecting system of choice with a flood coating of optical

elements embedded to about 50 percent of their diameter. Trying to make small samples of pavement marking tapes having protrusions with the same light-reflecting and optical element system secured selectively onto the protrusions is much more time consuming. In addition, the variability between each light-reflecting/optical element system is much greater. When flat pavement marking tape samples are made and the R_A is measured at -4.0/0.2 and is compared to pavement marking tapes having protrusions using the same light-reflecting/optical element system and the R_L measured at a geometry that approximates 80 meters (89.5/0.39), an excellent correlation is obtained. Correlation coefficients of 10 greater than 0.99 have been obtained over a range of R_A from 4 to 400 cd/lx/m².

Color Measurements

Y is a colorimetric measurement of the sheeting's whiteness. Y values were measured using a Hunter Spectrophotometer (Hunter Miniscan XE, available 15 from Hunter Associates Laboratory, Inc., Reston, VA), according to ASTM E 97-77 using illuminant D65 and a 2° 1931 CIE Standard Observer.

Example 1. Comparative Aluminum Flake Samples

20 The following polyurethane formulas were made by mixing DESMODUR N-100 aliphatic polyisocyanate, (obtained from the Bayer Corp., Pittsburgh, PA), with TONE 0301 polyol, (obtained from Union Carbide Corp., Houston, TX), with ATA 5100 aluminum flake, (obtained from Alcan-Toyo American, Naperville, Illinois), and a 31.5% pigment vinyl chip consisting of: 30% PBL7 (pigment black 25 #7) dispersed in a 70% vinyl copolymer resin (obtained from Penn Color Inc., Doylestown, PA, product code 81B221), dissolved in 24.5% propylene glycol methyl ether acetate, 24.5% cyclohexanone, and 19.5% dipropylene glycol monomethyl ether acetate. The formulas were coated onto a paper liner at a thickness of about 0.4 mm. Then, ceramic optical elements (1.9 index of 30 refraction), with an average size of approximately 0.2 mm, were flood coated onto the polyurethane. The samples were then cured in a forced air oven for about 10 minutes at about 120°C.

Various methods of manufacturing these optical elements are available such as described in Example 1 of U.S. Patent No. 4,772,551. In that Example, 90.0 g of aqueous colloidal silica sol, while being rapidly stirred, was acidified by the addition of 0.75 ml concentrated nitric acid. The acidified colloidal silica was 5 added to 200.0 g of rapidly stirring zirconyl acetate solution. 52.05 g of Niacet aluminum formoacetate (34.44% fired solids) were mixed in 300 ml deionized water and dissolved by heating to 80°C. This solution, when cooled, was mixed with the zirconyl acetate/silica mixture described previously. The resulting mixture was concentrated by rotovaporation to 35% fired solids. The 10 concentrated bead precursor solution was added dropwise to stirred, hot (88°- 90°C) peanut oil. The precursor droplets were reduced in size by the agitation of the oil and gelled.

Agitation was continued in order to suspend most of the resulting gelled droplets in the oil. After about one hour, agitation was stopped and the gelled 15 optical elements separated by filtration. The recovered gelled optical elements were dried in an oven for 5 hours at 78°C prior to firing. The dried optical elements were placed in a quartz dish and fired in air by raising the furnace temperature slowly to 900°C over 10 hours, maintaining 900°C for 1 hour, and cooling the optical elements with the furnace. The initial firing of all the samples 20 was done a box furnace with the door slightly open.

The Coefficient of Retroreflection (R_A) was measured at an entrance angle of -4.0 degrees and an observation angle of 0.2 degrees. This geometry correlates with geometries representing observation distances ranging from 30 to 120 meters.

Y was measured at 0 degrees entrance angle and 45 degree observation 25 angle. The following table summarizes the results:

Table 1

Sample #	DES N-100	TONE 301	Aluminum Flake (Al)	Carbon Black (CB)	Vinyl Resin	Ratio Al To CB	R_A Cd/Lx/m ²	Y
1	46.4%	24.3%	16.0%	4.01%	9.35%	3.99	13	12
2	53.6%	28.1%	8.68%	2.90%	6.76%	3.00	16	11
3	41.7%	21.8%	20.0%	4.96%	11.6%	4.03	15	15

Sample #	DES N-100	TONE 301	Aluminum Flake (Al)	Carbon Black (CB)	Vinyl Resin	Ratio Al To CB	R _A Cd/Lx/m ²	Y
4	48.2%	25.2%	10.0%	5.00%	11.6%	2.01	9.0	9.9
5	56.0%	29.3%	8.00%	2.02%	4.70%	3.97	20	11
6	58.6%	30.7%	4.02%	2.00%	4.68%	2.01	12	9.2
7	44.8%	23.5%	15.0%	5.00%	11.7%	3.00	11	13

Example 2. Comparative Pearlescent Samples

5 Polyurethane samples similar to Example 1 were prepared substituting AFFLAIR 9119 pearlescent pigment, (obtained from EM Industries Inc., New York), for the aluminum flake. Table 2 sets forth the formulations as well as R_A and Y values. These samples have slightly lower Y values and nominally the same retroreflectivity values as Example 1.

10

Table 2

Sample #	DES N-100	TONE 301	AFFLAIR 9119	Carbon Black (CB)	Vinyl Resin	Ratio AFFLAIR TO CB	R _A Cd/Lx/m ²	Y
1	46.4%	24.3%	16.0%	4.01%	9.35%	3.99	14	7.2
2	53.6%	28.1%	8.68%	2.90%	6.76%	3.00	13	7.0
3	41.7%	21.8%	20.0%	4.96%	11.6%	4.03	12	7.4
4	48.2%	25.2%	10.0%	5.00%	11.6%	2.01	8.0	6.7
5	56.0%	29.3%	8.00%	2.02%	4.70%	3.97	17	6.9
6	58.6%	30.7%	4.02%	2.00%	4.68%	2.01	16	6.8
7	44.8%	23.5%	15.0%	5.00%	11.7%	3.00	10	6.9

15 **Example 3. Aluminum Flake Samples**

Polyurethane samples similar to Example 1 were prepared using a higher percentage of Aluminum flake pigment and a range of black pigment loadings. Table 3 summarizes the Y values and R_A values. These samples have significantly higher retroreflectivity values and increased Y values than the samples (Example 1) having a lower aluminum flake loading.

20

Table 3

Sample #	DES N-100	TONE 301	Aluminum Flake (Al)	Carbon Black (CB)	Vinyl Resin	Ratio Al To CB	R _A Cd/Lx/m ²	Y
1	42.6%	22.3%	35.0%	0.00%	0.00%	NA	98	34
2	41.6%	21.8%	35.0%	0.46%	1.08%	76.0	70	29
3	39.7%	20.8%	35.0%	1.32%	3.1%	26.5	55	25
4	38.0%	19.9%	35.0%	2.11%	4.9%	16.6	43	24
5	35.7%	18.7%	35.0%	3.17%	7.39%	11.1	35	24
6	31.8%	16.7%	35.0%	4.94%	11.5%	7.09	24	22
7	23.4%	12.2%	35.0%	8.81%	20.6%	3.97	11	19
8	17.0%	8.92%	35.0%	11.7%	27.3%	2.99	7.0	19

Example 4. Pearlescent Samples

5 Polyurethane samples similar to Example 3 substituting AFFLAIR for Aluminum flake pigment and a range of black pigment loadings. Table 4 summarizes the results. In this Example, the retroreflectivity values are substantially increased and the Y values are equal to or lower than Example 1. With higher pearlescent 10 pigment loading, ratios of pearl to carbon black in the range of 10 to 76 give substantially better results than Example 1.

Table 4

Sample #	DES N-100	TONE 301	AFFLAIR 9119	Carbon Black (CB)	Vinyl Resin	Ratio AFFLAIR To CB	R _A Cd/Lx/m ²	Y
1	42.6%	22.3%	35.0%	0.00%	0.00%	NA	72	52
2	41.6%	21.8%	35.0%	0.46%	1.08%	76.0	52	13
3	39.7%	20.8%	35.0%	1.32%	3.1%	26.5	39	10
4	38.0%	19.9%	35.0%	2.11%	4.9%	16.6	37	9.0
5	35.7%	18.7%	35.0%	3.17%	7.39%	11.1	27	8.5
6	31.8%	16.7%	35.0%	4.94%	11.5%	7.09	15	7.9
7	23.4%	12.2%	35.0%	8.81%	20.6%	3.97	7.0	2.0
8	17.0%	8.92%	35.0%	11.7%	27.3%	2.99	5.0	7.2

15

Example 5. Titanium Dioxide Samples

Polyurethane samples similar to Example 3 were prepared substituting 20 STANTONE 10EXP03, a 60%/40% titanium dioxide dispersed in an epoxy resin (obtained from Harwick Chemical Corp., Akron, Ohio), for the aluminum flake. Table 5 sets forth the formulations as well as R_A values and Y values. The results

are rather surprising. Retroreflectivity similar to Example 1 with lower Y is achieved with titanium dioxide to carbon black ratios in the range of 10 to 30.

Table 5

5

Sample #	DES N-100	TONE 301	TiO ₂	Epoxy Resin	Carbon Black (CB)	Vinyl Resin	Ratio TiO ₂ To CB	R _A Cd/Lx/m ²	Y
1	27.3%	14.3%	35.0%	23.4%	0.00%	0.00%	NA	17	79
2	26.3%	13.8%	35.0%	23.4%	0.46%	1.06%	76.8	17	19
3	24.5%	12.8%	35.0%	23.4%	1.28%	2.98%	27.4	14	14
4	22.9%	12.0%	35.0%	23.4%	1.99%	4.64%	17.6	11	10
5	20.9%	11.0%	35.0%	23.4%	2.91%	6.78%	12.1	9.0	8.7
6	17.8%	9.33%	35.0%	23.4%	4.33%	10.1%	8.10	7.0	7.9
7	11.9%	6.24%	35.0%	23.4%	7.03%	16.4%	4.99	5.0	7.0
8	8.1%	4.26%	35.0%	23.4%	8.75%	20.4%	4.00	4.0	6.7

Example 6. Flat Pavement Marking Samples

10 Flat pavement marking tapes were made with a binder layer comprising the polyurethane compositions in Table 6. The urethane compositions were coated onto a paper liner at a thickness of 0.25 mm. Immediately, 77 grams per square meter of 1.9 index ceramic optical elements of approximately 0.2 mm size (described in Example 1) were randomly dropped into the coating. The tapes

15 were then cured in an oven for about 10 minutes at about 120°C. The optical elements sank into the polyurethane to embed nominally about 50%. The R_L was then measured at a geometry which represents an automobile at 30 meters (88.8 degree entrance angle and 1.05 degree observation angle). Table 6 summarizes the results of R_L and Y. Surprisingly, very low Y levels and good retroreflectivity

20 can be achieved in flat pavement marking tapes. In general titanium dioxide and pearlescent pigment give better results.

Table 6

Sample #	DES N-100	TONE 301	Aluminum Flake	AFFLAIR 9109	TiO ₂	Epoxy Resin	Carbon Black (CB)	Vinyl Resin	Ratio Pigment To CB	R _L 88.8/1.05 mcd/m ² /lx	Y
1	56.0%	29.3%	6.98%				2.02%	4.70%	3.97	117	5.5
2	56.0%	29.3%	6.98%				2.02%	4.70%	3.97	71	3.6
3	35.7%	18.7%	35.0%				3.17%	7.39%	11.1	224	25
4	39.7%	20.8%		35.0%			1.32%	3.08%	26.5	339	14
5	38.0%	19.9%		35.1%			2.11%	4.92%	16.6	180	9.8
6	35.7%	18.7%		35.0%			3.17%	7.39%	11.1	115	7.3
7	24.5%	12.8%			35.0%	23.4%	1.28%	2.98%	27.5	488	16
8	22.9%	12.0%			35.1%	23.4%	1.99%	4.64%	17.6	294	10
9	0.209	11.1%			35.0%	23.4%	2.91%	6.78%	12.1	232	8.2

Example 7.

Pavement marking tapes having protrusions were made as follows. A flat black pliant polymer premix used in the production of 3M SCOTCH-LANETM Removable Black Line Mask Series 145 available from 3M. The material was 5 heated to 120°C and embossed at a pressure of about 600 psi (4.1 MPa) for about 3 minutes. The pattern consisted of raised cylinders with a height of about 2.5 mm and a diameter of about 8.6 mm. The cylinders were arranged about 26 mm apart in rows. Each row was separated about 19.5 mm such that the cylinders in every fourth row align in registry. Thus, cylinders were separated in the 10 longitudinal direction by a spacing of about 59 mm. Three different polyurethane binder layers were prepared. The first contained 42.6 grams of DesN100 isocyanate, 22.4 grams of TONE 301 polyol, and 35 grams of AFFLAIR 103 pearlescent pigment (hereafter called "white" binder layer). The second binder layer was made by adding 40 grams of a 25.3% pigment vinyl chip consisting of: 15 50% PY110 ((pigment yellow 110) dispersed in a 50% vinyl copolymer resin (obtained from pigment dispersion Penn Color Inc., Doylestown, PA, product code 81Y312) dissolved in 34.2% propylene glycol methyl ether acetate, 34.2% cyclohexanone, and 5.30% dipropylene glycol monomethyl ether acetate, to 100 grams of the previous urethane formula. This formula is hereafter called "yellow" 20 binder layer. A "black" binder layer was made by adding 15 grams of 3M SCOTCHLITETM Transparent Screen Printing Ink Series 905, available from 3M, to 100 grams of the "white" binder layer (hereafter called "black" binder layer). Each urethane composition was coated onto a release liner at a thickness of about 0.5mm using a notch bar. A 4 inch by 6 inch (10 cm by 15 cm) piece of black 25 embossed premix was inverted and pressed into the urethane, and then peeled out. Colorless 1.93 index of refraction ceramic optical elements (as described in Example 1) were embedded into the "white" binder layer. Yellow tinted ceramic optical elements were embedded into the "yellow" binder layer. Colorless and yellow ceramic optical elements were embedded into the "black" binder layer. 30 The R_L was measured in both directions on the samples at entrance/observation angles of 86.0/0.2, 86.0/0.5, and 86.5/1.0.

Using the pattern orientation of this example, measurements of R_L at these geometries correlates very well with R_L measurements at geometries which approximate distances of 30 to 120 meters (88.8/1.05 to 89.7/0.26).

As noted previously, with measurements of R_A at specific geometries, 5 measurements of R_L at these entrance and observations angles can also be correlated with retroreflection performance measures at approximate driver geometries within a given family of pavement marking constructions or articles.

Table 7 summarizes the results.

10

Table 7

Entrance/Observation Angle	Coefficient of retroreflected luminance (R_L) in $\text{mcd}/\text{m}^2/\text{lx}$			
	"white" binder layer with colorless optical elements	"yellow" binder layer with yellow optical elements	"black" binder layer with colorless optical elements	"black" binder layer with yellow optical elements
86.0/0.2	16,500	22,000	20,200	19,000
86.0/0.5	8,200	8,400	7,700	7,600
86.5/1.0	1,680	1,280	1,700	900

Example 8.

A black polyurethane was prepared according to Example 4, Sample #3. The polyurethane was coated onto a release liner at a thickness of 0.5 mm using a 15 notch bar.

A conformable magnetic article of the invention was made by compounding the following in a Banbury-type internal mixer to thoroughly mix the ingredients.

Material	Spec. Grav.	Parts	Description	Available From
Paracril™ B	0.98	100.0	medium acrylonitrile content nitrile rubber	Uniroyal Chemical Co., Akron, Ohio
Chlorez™ 700S	1.66	70.0	solid chlorinated paraffin	Dover Chemical Corp., Dover, Ohio
Paroil 140 LV	1.16	5.0	a liquid chlorinated paraffin	Dover Chemical Corp., Dover, Ohio
Stearic Acid	0.84	0.5	process aid	Humko Chemical Division of Witco Chemical Corp., Memphis, Tennessee
Vanstay™ SC	0.89	0.5	"chelating agent" type stabilizer	R.T. Vanderbilt Company, Inc., Norwalk, Connecticut
Santowhite™ Crystals	1.07	1.0	antioxidant	Monsanto Chemical Co., St. Louis, Missouri
PE Minifiber 13038F	0.94	20.0	high density polyethylene fiber	Mini Fibers, Inc., Johnson City, Tennessee
PET 6-3025 fibers	1.38	10.0	¼" x 3d. polyester fiber	Mini-Fibers, Inc., Johnson City, Tennessee
Barium hexaferrite P-235	5.3	950.0	magnetic pigment	Arnold Engineering Co., Norfolk, Nebraska
Total Weight		1157		

When the temperature of the mix reached 146°C the mix was dropped from the mixer onto a two roll rubber mill. The material was sheeted off the rubber mill and fed through a two-roll calender to yield a sheet of material having a thickness of approximately 1.4 mm.

The sheet of material was embossed according to the process described in U.S. Patent No. 5,227,221 (col. 2, lines 47-65) to provide a conformable magnetic sheet having a plurality of protrusions projecting from one of its major surfaces. The embossed sheet had a thickness of about 0.5 mm in the valleys between the protrusions, and a thickness of about 1.6 mm at the protrusions.

The sheet was then laminated protrusion side into the urethane film. A hand roller was used to press the protrusion into the urethane. The pavement marking was then peeled out of the urethane. Immediately, the sample was flood

coated with colorless optical elements (a 1.9 index glass optical element with a hemispherical vapor coat as described in U.S. Patent No. 2,963,378).

These optical elements can be made using one of the following methods.

One way is to use a high-vacuum metal vapor deposition procedure. A carrier

5 web having a non-volatile plastic tacky surface (such as a plasticized resin layer) is coated with a layer of 1.9 index of refraction glass spheres of the desired size which are partially pressed in, the excess being brushed off to leave a mono-layer adhering to and partially embedded in the carrier surface. One way to do this is to pass the web, sphere side down, through a region of a high-vacuum chamber

10 where it is subjected to a vapor that condenses on the lower halves of the spheres, the vapor being produced from a material that is located beneath the web and is suitably heated. Cryolite (sodium aluminum fluoride) is a preferred example. The thickness of the coating is determined by the length of exposure time. The carrier web, sphere side down, is then passed through a region of high-vacuum chamber

15 where it is subjected to aluminum vapor arising from a source located therebeneath, the exposure time being sufficient to deposit a thin opaque reflective coating of metallic aluminum on the lower half of each sphere, this deposition being upon the spacing coating if such has been provided. The reflectorized particles are subsequently removed from the carrier sheet by means of a rotary

20 wire brush.

A second sheet was laminated with the urethane and flood coated with yellow optical elements with a hemispherical vapor coat. The urethane coated sample was cured in an oven at approximately 120°C for about 15 minutes. Any excess optical elements were brushed off the sample after cooling.

25 The sample was substantially black when viewed in daylight and retroreflected a brilliant white or yellow color when illuminated with a flashlight (depending on the optical element color). The Coefficient of Retroreflected Luminance (R_L) was measured as follows:

Optical Element Color	R_L at 86.0/0.2 (mcd/m ² /lx)	R_L at 86.5/1.0 (mcd/m ² /lx)
white vapor coated optical elements	8500	1900
yellow vapor coated optical elements	11400	2500

Claims:

What is claimed is:

1. A pavement marking article comprising a top surface having one or more
5 first region(s) wherein:
said first region(s) has a daytime appearance of black; and
said first region(s) is retroreflective.
2. The pavement marking article according to claim 1, further comprising one
10 or more second region(s) (34) wherein:
said first region(s) (32) is adjacent to said second region(s) and said
second region(s) has a color which contrasts with black.
3. The pavement marking article according to claim 1, wherein said first
15 region(s) comprises a binder layer (16).
4. The pavement marking article according to claim 3, wherein said binder
layer (16) comprises black pigment.
- 20 5. The pavement marking article according to claim 4, wherein said black
pigment is carbon black.
6. The pavement marking article according to claim 4, wherein optical
elements (12) are partially embedded in said binder layer (16).
- 25 7. The pavement marking article according to claim 6, wherein said optical
elements (12) are selected from the group consisting of yellow optical elements,
colorless optical elements, and mixtures thereof.
- 30 8. The pavement marking article according to claim 6, wherein said binder
layer (16) further comprises a light-reflecting system selected from the group

consisting of pearlescent pigment, titanium dioxide, zinc oxide, zinc sulfide, lithophane, zirconium silicate, zirconium oxide, natural and synthetic barium sulfates, and mixtures thereof.

5 9. The pavement marking article according to claim 8, wherein said light-reflecting system to black pigment ratio ranges from about 7:1 to about 80:1.

10. The pavement marking article according to claim 6, wherein said optical elements are vapor coated.

10 11. The pavement marking article according to claim 6, wherein said binder layer (16) is directly applied to a traffic-bearing surface (18).

12. The pavement marking article according to claim 6, wherein said article is
15 a retroreflective element (62).

13. The pavement marking article according to claim 12, wherein said retroreflective element (62) is partially embedded in a road-binder (26).

20 14. The pavement marking article according to claim 6, wherein said binder layer (16) forms the top layer of a pavement marking tape.

15. The pavement marking article according to claim 14, wherein said pavement marking tape has protrusions.

25 16. The pavement marking article according to claim 14, wherein said pavement marking tape is substantially flat.

17. The pavement marking article according to claim 14, wherein said
30 pavement marking tape is removable.

18. The pavement marking article according to claim 14, wherein said pavement marking tape is magnetic.
19. The pavement marking article according to claim 2, wherein said second region(s) (34) is oriented longitudinally or laterally adjacent to said first region (32).
5
20. The pavement marking article according to claim 2, wherein said second region (34) is oriented such that said second region alternates with said first region (32).
10
21. The pavement marking article according to claim 2, wherein said second region(s) (34) comprises a binder layer (17).
- 15 22. The pavement marking article according to claim 21, wherein said binder layer (17) comprises a color selected from the group consisting of yellow, white, orange, fluorescents and mixtures thereof.
23. The pavement marking article according to claim 22, further comprising optical elements (12) partially embedded in said binder layer (17) in said second region(s) (34).
20
24. The pavement marking article according to claim 23, wherein said optical elements (12) are selected from the group consisting of yellow optical elements, colorless optical elements, and mixtures thereof.
25
25. The pavement marking article according to claim 4, wherein said black pigment has a Y value of about 20 or less.

26. The pavement marking article according to claim 4, wherein said black pigment has a coefficient of reflectance greater or equal to about 150 mcd/m²/lux at 88.76° entrance angle and 1.05° observation angle.

5 27. The pavement marking article according to claim 4, wherein said black pigment ranges in size from about 0.01 micron to about 0.08 micron.

10 28. The pavement marking article according to claim 4, wherein said black pigment is present at a concentration of at least about 1 weight percent based on the total weight of the binder layer material.

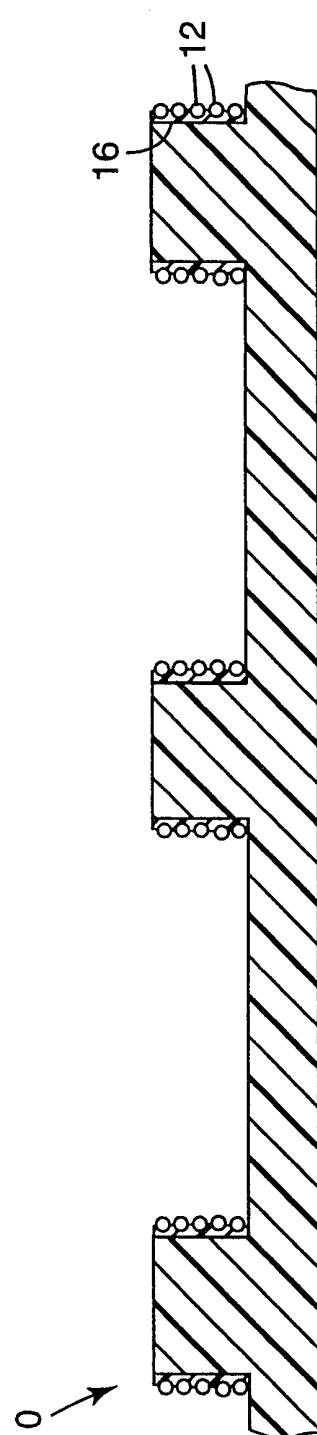


Fig. 1

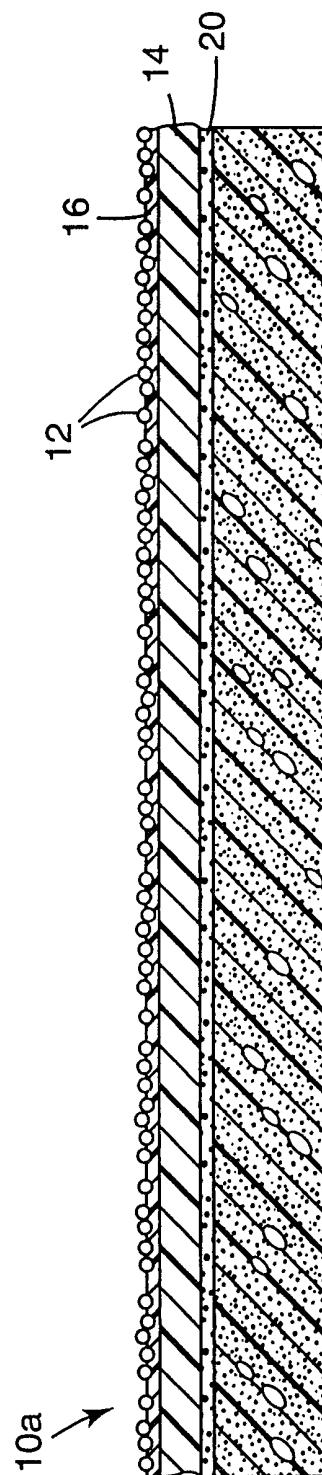


Fig. 2

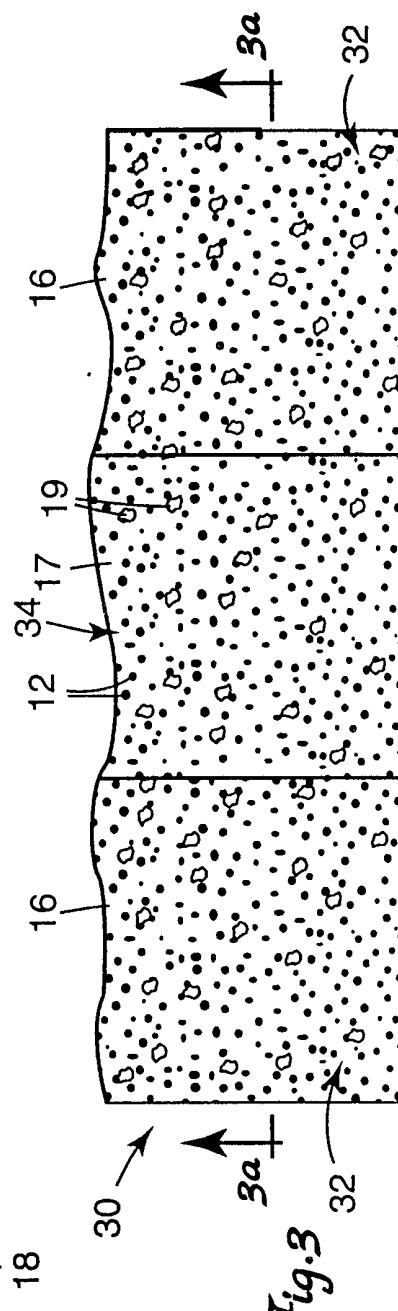


Fig. 3

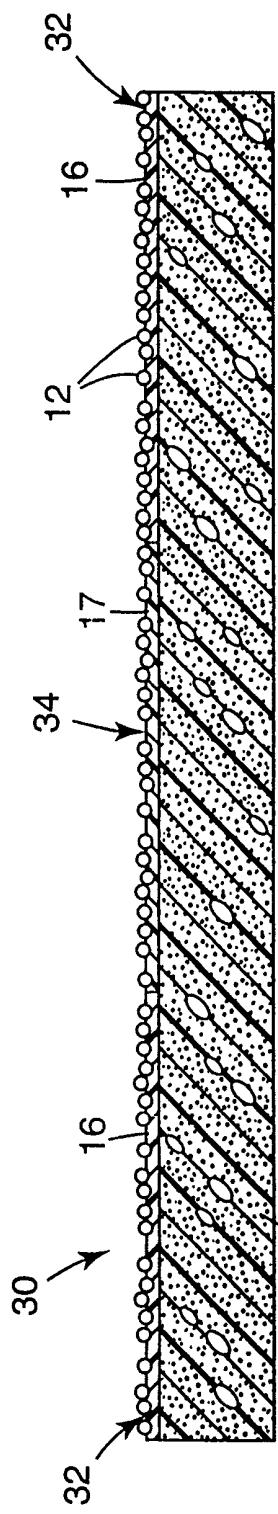


Fig. 3a

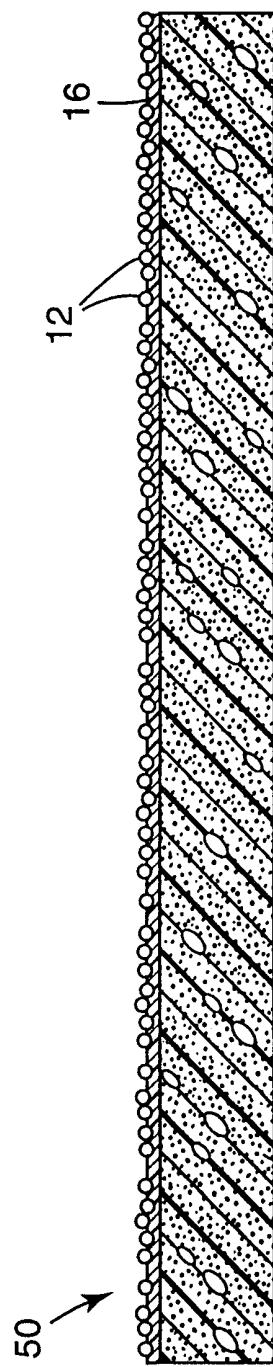


Fig. 5


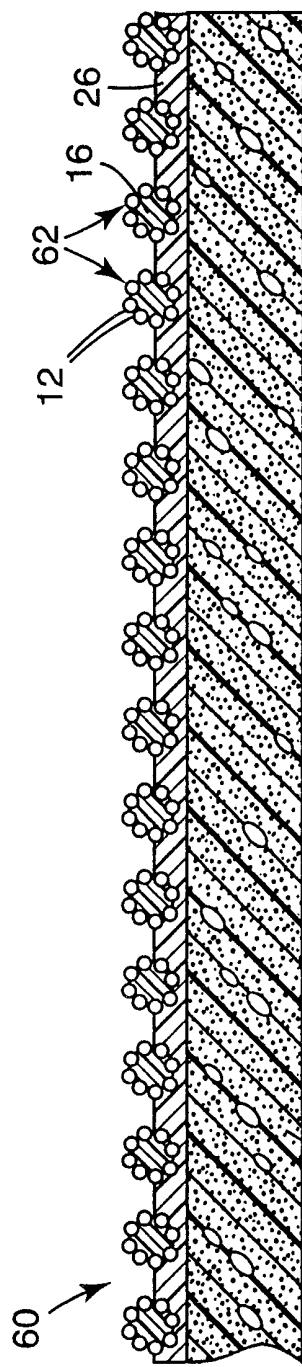


Fig. 6

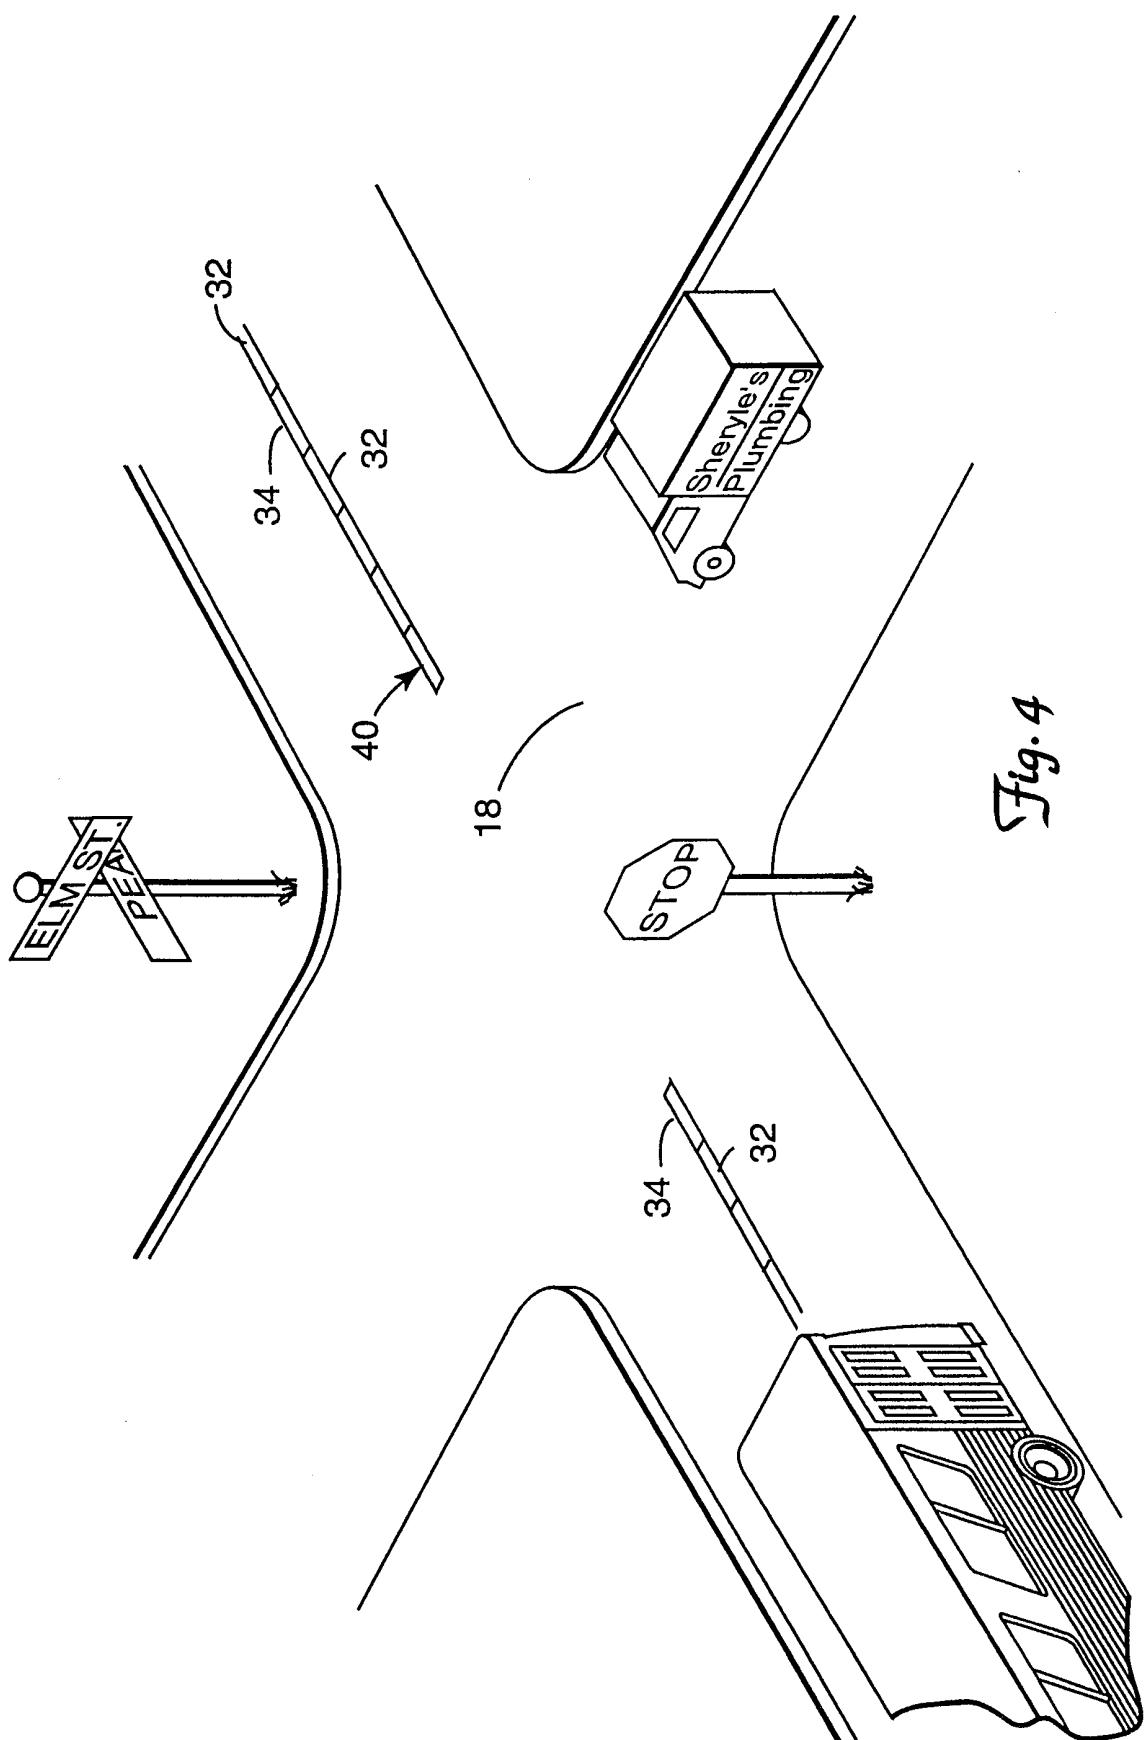

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/23235

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 E01F9/04

According to International Patent Classification(IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 E01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category ^o	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 304 405 A (SNOLINE) 22 February 1989	1,3-6, 14,16-18
Y	see column 2, line 46 - column 4, line 12; figures	2,7,8, 10-13, 15, 19-24, 27,28
Y	---	2,12,13, 15,19-24
A	see page 9, line 4 - line 9 see page 18, line 1 - line 27 see page 41, line 8 - line 11 see page 45, line 7 - page 46, line 21; figures	6,14
	---	-/-

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

^o Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

7 May 1998

13/05/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Verveer, D

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/23235

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	WO 93 17188 A (3M) 2 September 1993 see page 5, line 24 - page 6, line 10 see page 7, line 3 - page 8, line 3; figure ----	7,8,10 6
Y A	US 3 891 451 A (H. OKAZAKI) 24 June 1975 see column 2, line 39 - line 51 see column 3, line 20 - line 29 see column 4, line 9 - line 17 see column 6, line 2 - line 10 ----	11,27,28 1,4,5,8, 12,13
A	CH 469 779 A (DYNAMIT NOBEL) 30 April 1969 see column 5, line 40 - line 57 ----	2,19,20
A	EP 0 358 384 A (3M) 14 March 1990 & US5094912 cited in the application see page 9, line 35 - line 53 ----	4
A	EP 0 488 526 A (3M) 3 June 1992 -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

In: International Application No

PCT/US 97/23235

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
EP 304405	A 22-02-1989	NONE		
WO 9616231	A 30-05-1996	AU 4156396 A	17-06-1996	
		EP 0792399 A	03-09-1997	
WO 9317188	A 02-09-1993	AU 3433993 A	13-09-1993	
US 3891451	A 24-06-1975	JP 874277 C	29-07-1977	
		JP 50074634 A	19-06-1975	
		JP 51003727 B	05-02-1976	
		AU 6658674 A	18-09-1975	
		CA 1021488 A	22-11-1977	
		DE 2410730 A	03-10-1974	
		FR 2221502 A	11-10-1974	
		GB 1436911 A	26-05-1976	
CH 469779	A	BE 686737 A	15-02-1967	
		DE 1544800 A	26-06-1969	
		FR 1492600 A	04-12-1967	
		GB 1171131 A	19-11-1969	
		NL 6612897 A	15-03-1967	
EP 358384	A 14-03-1990	US 4937127 A	26-06-1990	
		AU 623672 B	21-05-1992	
		AU 4000889 A	15-03-1990	
		CA 1315586 A	06-04-1993	
		CN 1041021 A	04-04-1990	
		DE 68911798 D	10-02-1994	
		DE 68911798 T	04-08-1994	
		DK 440789 A	08-03-1990	
		ES 2048844 T	01-04-1994	
		IE 63190 B	22-03-1995	
		JP 2162033 A	21-06-1990	
		MX 167295 B	15-03-1993	
		US 5053253 A	01-10-1991	
		US 5094902 A	10-03-1992	
		US 5124178 A	23-06-1992	
EP 488526	A 03-06-1992	AT 114342 T	15-12-1994	
		AU 645614 B	20-01-1994	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/23235

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
EP 488526	A	AU	8587091 A	07-05-1992
		CA	2053607 A	01-05-1992
		DE	69105260 D	05-01-1995
		DE	69105260 T	18-05-1995
		ES	2064051 T	16-01-1995
		IE	65160 B	04-10-1995
		JP	4265305 A	21-09-1992
		US	5453320 A	26-09-1995