

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 September 2006 (28.09.2006)

PCT

(10) International Publication Number
WO 2006/102147 A2

(51) International Patent Classification:
A47L 9/16 (2006.01) A47L 9/12 (2006.01)

(21) International Application Number:
PCT/US2006/009848

(22) International Filing Date: 16 March 2006 (16.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/082,501 17 March 2005 (17.03.2005) US
60/693,826 24 June 2005 (24.06.2005) US

(71) Applicant (for all designated States except US): **ROYAL APPLIANCE MFG. CO.** [US/US]; 7005 Cochran Road, Glenwillow, Ohio 44139 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **IVARSSON, Bengt, Ivar, Anders** [SE/GB]; 27, Park Road, Bearwood, Smethwick B67 5HP (GB). **MATUSZ, Glenn** [US/US]; 182 Ravenshollow Drive, Cuyahoga Falls, Ohio 44223 (US).

PROUD, Reuben [GB/GB]; 52, Gilliam Street, Worcester WR3 8JT (GB). **MAKAROV, Sergey V.** [US/US]; 33273 Cottessmore Place, Solon, Ohio 44139 (US).


(74) Agent: **MOLDOVANYI, Jay, F.**; FAY, SHARPE, FAGAN, MINNICH & MCKEE, LLP, 1100 Superior Avenue, 7th Floor, Cleveland, Ohio 44114-2579 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: TWIN CYCLONE VACUUM CLEANER

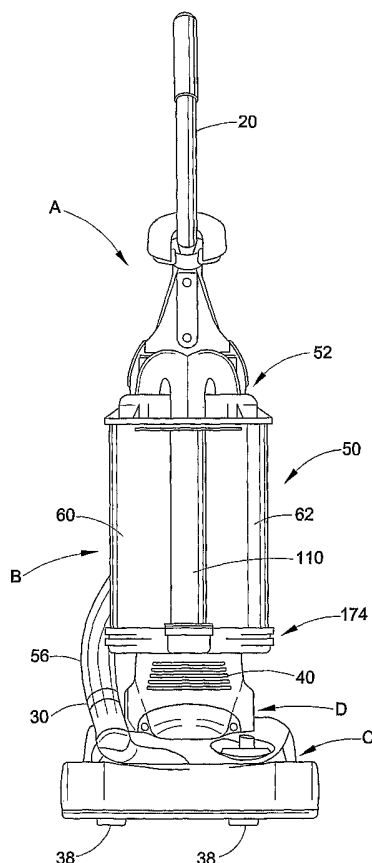

(57) Abstract: An upright vacuum cleaner (A) includes a housing (B) having a suction airstream inlet and a suction airstream outlet. A dirt container (50, 500) is selectively mounted to the housing for receiving and retaining dirt and dust separated from the suction airstream. The suction airstream inlet and the suction airstream outlet are in fluid communication with, respectively, an inlet and an outlet of the dirt container. The dirt container includes a first cyclonic airflow chamber (66, 508) and a second cyclonic airflow chamber (68, 510), each cyclonic airflow chamber including a longitudinal axis. The second cyclonic airflow chamber is spaced from the first chamber, wherein the first and second chambers are each approximately vertically oriented and are arranged in a parallel relationship. An air manifold (52, 540, 540') is disposed at a top portion of the dirt container. The air manifold includes an inlet section (54, 536, 565) through which dirty air passes and an outlet section (138, 560, 560'). The inlet section directs a flow of dirty air into two separate inlet conduits leading to a respective one of the first and second airflow chambers. The outlet section collects a flow of cleaned air from both of the chambers and merges the flow of cleaned air into a single outlet conduit (110, 570). An airstream suction source (E) is mounted to the housing and is in communication with the outlet conduit of the manifold.



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TWIN CYCLONE VACUUM CLEANER

Background of the Invention

[0001] The present invention relates to vacuum cleaners. More particularly, the present invention relates to upright vacuum cleaners used for suctioning dirt and debris from carpets and floors.

[0002] Upright vacuum cleaners are well known in the art. The two major types of traditional vacuum cleaners are a soft bag vacuum cleaner and a hard shell vacuum cleaner. In the hard shell vacuum cleaner, a vacuum source generates the suction required to pull dirt from the carpet or floor being vacuumed through a suction opening and into a filter bag or a dust cup housed within the hard shell upper portion of the vacuum cleaner. After multiple uses of the vacuum cleaner, the filter bag must be replaced or the dust cup emptied.

[0003] To avoid the need for vacuum filter bags, and the associated expense and inconvenience of replacing the filter bag, another type of upright vacuum cleaner utilizes cyclonic air flow and one or more filters, rather than a replaceable filter bag, to separate the dirt and other particulates from the suction air stream. Such filters need infrequent replacement.

[0004] While some prior art cyclonic air flow vacuum cleaner designs and constructions are satisfactory, it is desirable to develop continued improvements and alternative designs for such vacuum cleaners. For example, it would be desirable to simplify assembly and improve filtering and dirt removal.

[0005] Accordingly, the present invention provides a new and improved upright vacuum cleaner having a twin cyclonic air flow design which overcomes difficulties with the prior art while providing better and more advantageous overall results.

Brief Description of the Invention

[0006] In one embodiment of the present invention, a twin cyclone vacuum cleaner is provided.

[0007] More particularly, in accordance with this aspect of the present invention, a vacuum cleaner comprises a housing including a suction airstream inlet and a suction airstream outlet. A dirt container is selectively mounted to the housing for receiving and retaining dirt and dust separated from the suction airstream. The suction airstream inlet

and the suction airstream outlet are in fluid communication with, respectively, an inlet and an outlet of the dirt container. The dirt container includes a first cyclonic airflow chamber and a second cyclonic airflow chamber, each cyclonic airflow chamber including a longitudinal axis. The second cyclonic airflow chamber is spaced from the first chamber, wherein the first and second chambers are each approximately vertically oriented and are arranged in a parallel relationship. An air manifold is disposed at a top portion of the dirt container. The air manifold includes an inlet section through which dirty air passes and an outlet section. The inlet section directs a flow of dirty air into two separate inlet conduits leading to a respective one of the first and second airflow chambers. The outlet section collects a flow of cleaned air from both of the chambers and merges the flow of cleaned air into a single outlet conduit. An airstream suction source is mounted to the housing and is in communication with the outlet conduit of the manifold.

[0008] In accordance with another aspect of the present invention, a vacuum cleaner includes a housing, a nozzle base having a main suction opening, an airstream suction source, an air manifold and a dirt cup. The housing is pivotally mounted on the nozzle base. The airstream suction source is mounted to one of the housing and the nozzle base for selectively establishing and maintaining a suction airstream from the nozzle main suction opening to an exhaust outlet of the suction source. The dirt cup is selectively mounted to the housing. The dirt cup comprises a first centrifugal chamber having a first longitudinal axis. The first centrifugal chamber includes a first cyclone assembly for removing at least some contaminants from the airstream. A first perforated tube extends in the first cyclonic chamber and includes a closed lower end and an open upper end in fluid communication with the air manifold. A skirt extends away from the closed lower end of the perforated tube. A laminar flow member extends away from the closed lower end of the perforated tube. At least a portion of the laminar flow member is encircled by said skirt.

[0009] In accordance with yet another aspect of the present invention, a vacuum cleaner includes a housing and a dirt container selectively mounted to the housing. The dirt container includes a side wall and a separator cone mounted to the side wall. A perforated tube extends longitudinally in the separator cone. A cyclonic flow chamber is defined between the separator cone and the perforated tube. A dirt storage area is

located beneath the separator cone. An air manifold comprises a top wall of the dirt container. The separator cone and the perforated tube communicates with the air manifold.

[0010] In accordance with still yet another aspect of the present invention, each perforated tube further includes an axially extending laminar flow member, wherein the air discharged through a pair of dirty air outlets communicating with a respective one of first and second centrifugal chambers loses its rotative force by the laminar flow member.

[0011] In accordance with still yet another aspect of the present invention, the air manifold includes an inlet section which directs a flow of the dirty airstream into two separate dirty air outlets leading to a respective one of the first and second airflow chambers. The inlet section is inclined at an acute angle which allows the airstream within the inlet section to be drawn into the airflow chambers by way of the venturi effect thereby increasing the velocity of the airstream entering the airflow chambers.

[0012] Still other aspects of the invention will become apparent from a reading and understanding of the detailed description of the several embodiments hereinbelow.

Brief Description of the Drawings

[0013] The present invention may take physical form in certain parts and arrangements of parts, several embodiments of which will be described in detail in this specification and illustrated in the accompanying drawings which form a part of the invention.

[0014] FIGURE 1 is a front elevational view illustrating a cyclonic air flow vacuum cleaner including a dirt cup in accordance with a first embodiment of the present invention.

[0015] FIGURE 2 is a left side elevational view of the cyclonic air flow vacuum cleaner of FIGURE 1.

[0016] FIGURE 3 is an enlarged left side elevational view in cross section, and partially broken away, of the cyclonic air flow vacuum cleaner of FIGURE 1.

[0017] FIGURE 4 is a rear elevational view in cross section, and partially broken away, of the cyclonic air flow vacuum cleaner including of FIGURE 1.

[0018] FIGURE 5 is an enlarged front perspective view of an assembled dirt cup for the cyclonic air flow vacuum cleaner of FIGURE 1 in accordance with a second embodiment of the present invention.

[0019] FIGURE 6 is a side cross-sectional view of the dirt cup of FIGURE 5 and a portion of a base on which it rests.

[0020] FIGURE 7 is a front cross-sectional view of the dirt cup of FIGURE 5.

[0021] FIGURE 8 is an assembled front perspective view of a dirt cup for the cyclonic air flow vacuum cleaner of FIGURE 1 in accordance with a third embodiment of the present invention.

[0022] FIGURE 9 is an exploded front perspective view of the dirt cup of FIGURE 8.

[0023] FIGURE 10 is a front perspective view of a dirt cup for the cyclonic air flow vacuum cleaner of FIGURE 1 in accordance with a fourth embodiment of the present invention.

[0024] FIGURE 11 is an exploded front perspective view of the dirt cup of FIGURE 10.

[0025] FIGURE 12 is an enlarged front perspective view of an upper portion of the dirt cup of FIGURE 10.

[0026] FIGURE 13 is a rear perspective view of the dirt cup of FIGURE 10.

[0027] FIGURE 14 is a front perspective view of the dirt cup of FIGURE 10 with a bottom plate shown in an open position.

[0028] FIGURE 15 is an enlarged front perspective view of a partially assembled dirt cup for the cyclonic air flow vacuum cleaner of FIGURE 1 in accordance with a fifth embodiment of the present invention.

[0029] FIGURE 16 is a front cross-sectional view of the dirt cup of FIGURE 15.

[0030] FIGURE 17 is an enlarged perspective view of a perforated tube of the dirt cup of FIGURE 15.

[0031] FIGURE 18 is a left side elevational view in cross-section of the dirt cup of FIGURE 15.

[0032] FIGURE 19 is a top cross-sectional view of the dirt cup of FIGURE 15 illustrating an air manifold thereof.

[0033] FIGURE 20 is a right side elevational view in cross-section of the dirt cup of FIGURE 15 showing an alternative embodiment of an inlet section of an air manifold.

[0034] FIGURE 21 is a top cross-sectional view of the dirt cup of FIGURE 20 illustrating the air manifold thereof.

Detailed Description of the Preferred Embodiments

[0035] Referring now to the drawings, wherein the drawings illustrate the preferred embodiments of the present invention only and are not intended to limit same, FIGURE 1 shows an upright vacuum cleaner **A** including an upright housing section **B** and a nozzle base section **C**. The sections **B** and **C** are pivotally or hingedly connected through the use of trunnions or another suitable hinge assembly **D** so that the upright housing section **B** pivots between a generally vertical storage position (as shown) and an inclined use position. Both the upright and nozzle sections **B** and **C** can be made from conventional materials, such as molded plastics and the like. The upright section **B** includes a handle **20** extending upward therefrom, by which an operator of the vacuum cleaner **A** is able to grasp and maneuver the vacuum cleaner.

[0036] During vacuuming operations, the nozzle base **C** travels across a floor, carpet, or other subjacent surface being cleaned. With reference now to FIGURES 2 and 3, an underside **24** of the nozzle base includes a main suction opening **26** formed therein, which can extend substantially across the width of the nozzle at the front end thereof. As is known, the main suction opening **26** is in fluid communication with the vacuum upright body section **B** through a passage and a connector hose assembly, such as at **30**. A rotating brush assembly **32** is positioned in the region of the nozzle main suction opening **26** for contacting and scrubbing the surface being vacuumed to loosen embedded dirt and dust. A plurality of wheels **38** supports the nozzle on the surface being cleaned and facilitates its movement thereacross.

[0037] The upright vacuum cleaner **A** includes a vacuum or suction source for generating the required suction airflow for cleaning operations. A suitable suction source, such as an electric motor and fan assembly **E**, generates a suction force in a suction inlet and an exhaust force in an exhaust outlet. The motor assembly airflow exhaust outlet is in fluid communication with an exhaust grill **40**. If desired, a final filter assembly can be provided for filtering the exhaust airstream of any contaminants which may have been picked up in the motor assembly immediately prior to its discharge into the atmosphere. The motor assembly suction inlet, on the other hand, is in fluid

communication with a dust and dirt separating region **F** (FIGURE 3) of the vacuum cleaner **A** to generate a suction force therein.

[0038] The dust and dirt separating region **F** housed in the upright section **B** includes a dirt cup or container **50** which is releasably connected to the upper housing **B** of the vacuum cleaner. Cyclonic action in the dust and dirt separating region **F** removes a substantial portion of the entrained dust and dirt from the suction airstream and causes the dust and dirt to be deposited in the dirt container **50**. The suction airstream enters an air manifold **52** of the dirt container through a suction airstream inlet section **54** which is formed in the air manifold. The suction airstream inlet **54** is in fluid communication with a suction airstream hose **56** through a fitting **58** as illustrated in FIGURES 2 and 3. The dirt container **50** can be mounted to the vacuum cleaner upright section **B** via conventional means.

[0039] As shown in FIGURE 4, the dirt container **50** includes first and second generally cylindrical sections **60** and **62**. Each cylindrical sections includes a longitudinal axis, the longitudinal axis of the first cylindrical section is spaced from the longitudinal axis of the second cylindrical section. The first and second cylindrical sections define a first cyclonic airflow chamber **66** and a second cyclonic airflow chamber **68**, respectively. The first and second airflow chambers are each approximately vertically oriented and are arranged in a parallel relationship. The cylindrical sections **60**, **62** have a common outer wall and are separated from each other by a dividing wall **70**.

[0040] The first and second cyclonic airflow chambers include respective first and second cyclone assemblies **72** and **74**. The first and second cyclone assemblies act simultaneously to remove coarse dust from the airstream. Each cyclone assembly includes a separator cone **80** and a perforated tube **82** disposed within the separator cone. The separator cones have a larger diameter end **84** located adjacent a top portion of the dirt container **50** and a smaller diameter end **86** spaced from the top portion. A flange **88** extends radially from the smaller diameter end **84**. As best illustrated in FIGURE 4, the flange is dimensioned to effectively seal off a space **90**, which is defined by an inner surface **92** of each cylindrical section **60**, **62**, the dividing wall **70** and an outer periphery **94** of the separator cone **80**, from the dirt entrained airstream entering into the first and second cyclonic airflow chambers **66**, **68**.

[0041] Each perforated tube **82** extends longitudinally in its respective cyclonic airflow chamber **66** and **68**. In the present embodiment, the tubes have longitudinal axes coincident with the longitudinal axes of the first and second cylindrical sections **60**, **62**; although, it should be appreciated that the respective axes can be spaced from each other. Each perforated tube **82** includes a plurality of small holes **100** disposed in a side wall of the tube for removing threads and fibers from the airstream. The diameter of the holes **100** and the number of those holes within the perforated tube **82** directly affect the filtration process occurring within each cyclonic airflow chambers **66**, **68**. Also, additional holes result in a larger total opening area and thus the airflow rate through each hole is reduced. Thus, there is a smaller pressure drop and lighter dust and dirt particles will not be as likely to block the holes.

[0042] Each perforated tube further includes an upper end **102** in fluid communication with the inlet section **54** of the air manifold **52** and a closed lower end **104**. The closed lower end of each tube **82** includes an outwardly flared portion **106** for retarding an upward flow of dust that has fallen below the lower end **104**.

[0043] With continued reference to FIGURES 3 and 4, the air manifold **52** is disposed at a top portion of the dirt container **50**. The air manifold directs dirty air to each of the first and second cyclonic flow chambers **66**, **68** and directs a flow of cleaned air from each of the first and second cyclonic flow chambers to the electric motor and fan assembly **E** of the vacuum cleaner **A**. The features of the air manifold and the securing of the air manifold to the dirt container **50** will be discussed in greater detail below with reference to a second embodiment of the vacuum cleaner **A**.

[0044] The air manifold **52** collects a flow of cleaned air from both of the airflow chambers and merges the flow of cleaned air into a single cleaned air outlet passage or conduit **110** which is in fluid communication with an inlet (not shown) of the electric motor and fan assembly **E**. With continued reference to FIGURE 3, the outlet passage **110** has a longitudinal axis which is oriented approximately parallel to the longitudinal axes of the first and second cyclonic chambers **66**, **68**. The features of the outlet passage and the securing of the outlet passage to the air manifold **52** will also be discussed in greater detail below with reference to a second embodiment of the vacuum cleaner **A**.

[0045] Similar to the aforementioned embodiment, a second embodiment is shown in FIGURES 5-7. Since most of the structure and function is substantially identical, reference numerals with a single primed suffix (') refer to like components (e.g., dirt container is referred to by reference numeral **50'**), and new numerals identify new components in the additional embodiment.

[0046] With reference to FIGURES 6 and 7, the dirt container **50'** includes first and second generally cylindrical sections **60'** and **62'**. The first and second cylindrical sections include a first cyclonic airflow chamber **66'** and a second cyclonic airflow chamber **68'**, respectively, each cyclonic airflow chamber including a longitudinal axis. The cylindrical sections **60'**, **62'** have a common outer wall and are separated from each other by a dividing wall **70'**.

[0047] The first and second cyclonic airflow chambers include respective first and second cyclone assemblies **72'** and **74'**. Each cyclone assembly includes a separator cone **80'** and a perforated tube **82'** disposed within the separator cone. The separator cones have a larger diameter end **84'** located adjacent a top portion of the dirt container **50'** and a smaller diameter end **86'** spaced from the top portion. A flange **88'** extends radially from the smaller diameter end **84'**.

[0048] Each perforated tube **82'** extends longitudinally in each cyclonic airflow chambers **66'**, **68'** and includes a plurality of small holes **100'** disposed in a side wall of the tube. Each perforated tube further includes an upper end **102'** in fluid communication with the inlet section **54'** of the air manifold **52'** and a closed lower end **104'**. As shown in FIGURES 6 and 7, the closed lower end of each tube **82** includes an outwardly flared section **112** which also retards an upward flow of dust that has fallen below the lower end **104'**. The flared section includes a first portion **114** and a second portion **116**, the first portion being larger than the second portion. A flange **118** extends longitudinally from the flared section which also blocks rising dust from reentering the separator cone, thereby further improving the filtering of the dust entrained airstream.

[0049] With continued reference to FIGURES 6 and 7, to secure the air manifold to the dirt container **50**, a lower portion **130** of the air manifold includes downwardly extending flanges **132** which define a recess **134**. The recess is dimensioned to receive at least an upper peripheral end **136** of each cylindrical section **60'** and **62'**, thereby creating a seal between the air manifold and the dirt container.

[0050] The air manifold includes the inlet section **54'** through which dirty air passes and an outlet section **138**. The inlet section, which is in fluid communication with the nozzle main suction opening **26**, directs a flow of the dirty airstream into two separate dirty air outlets **140** leading to a respective one of the first and second airflow chambers **66'**, **68'**. As is evident from FIGURES 6 and 7, an in-line flow path is thus provided from the air manifold inlet section **54'** through the motor and fan assembly. More specifically, dirty air flows into the inlet section **54'**, into the two separate dirty air outlets **140** and thus into the first and second airflow chambers **66'**, **68'** defined within the dirt container **50'**. As illustrated by the arrows in FIGURES 6 and 7, the airflow into the airflow chambers **66'**, **68'** is tangential. This causes a vortex-type, cyclonic or swirling flow as is illustrated by the arrows. Such vortex flow is directed downwardly in the airflow chamber since the top end thereof is blocked by the flange **88'** of the separator cone **80'**.

[0051] The outlet section **138** collects a flow of cleaned air from both of the airflow chambers and merges the flow of cleaned air into the single cleaned air outlet passage **110'** which is in fluid communication with the inlet of the electric motor and fan assembly **E**. After being filtered, the air flows into and through the suction motor and fan assembly as is illustrated by the arrows. After being exhausted from the motor and fan assembly **E**, the air flows through the grill **40**.

[0052] The outlet section includes a pair of cleaned air inlets **142** communicating with a respective one of the first and second centrifugal chambers **66'**, **68'**. Each inlet is in fluid communication with a pair of cleaned air conduits **144**. As shown in FIGURE 6, a first end **146** of each cleaned air conduit **144** is secured to the upper end **102'** of each perforated tube **82'**. In this embodiment, the upper end **102'** has an inner diameter greater than an outer diameter of the cleaned air conduit first end **146** such that the first end **146** is frictionally received in the upper end **102'**. However, it should be appreciated that the cleaned air conduit first end **146** can have an outer diameter larger than an inner diameter of the upper end **102'** such that the upper end **102'** is frictionally received in the first end **146**.

[0053] With reference to FIGURES 5 and 7, each cleaned air conduit **144** has a second end **148** which merges into a single outlet end **150** that is in fluid communication with an inlet **144** of the outlet passage **110'**.

[0054] The outlet passage **110'** has a longitudinal axis which is oriented approximately parallel to the longitudinal axes of the first and second cyclonic chambers **66'**, **68'**. With reference again to FIGURE 6, the inlet end **160** of the outlet passage **110'** is secured to the lower portion **130** of the air manifold **52'** and the single outlet end **150** of the cleaned air outlet conduits **144** by one of the flanges **132** and a flange **162** extending from the outlet end **150**. An outlet end **166** of the outlet passage **110'** extends through an opening **168** located in a bottom wall **170** of the dirt container **50'** and a corresponding opening **172** located in a filter plenum **174**. Similar to the flanges **132** of the air manifold, the bottom includes flanges **180** which also define a recess **182** dimensioned to receive at least a lower peripheral end **184** of each cylindrical sections **60'** and **62'**, thereby creating a seal between the bottom and the dirt container.

[0055] As shown in FIGURES 6 and 7, the filter plenum **174**, which can be located beneath the dirt container **50'**, houses a filter **190** which is in fluid communication with the outlet end **166** of the outlet passage **110'**. The filter is disposed downstream from the first and second cyclonic chambers **66'**, **68'** for filtering fine dirt from the airstream. The plenum can be suitably secured to one of the upright housing section **B** and a nozzle base section **C** by conventional means. An outlet **192** of the filter plenum **174** is in fluid communication with the inlet of the electric motor and fan assembly **E**.

[0056] Similar to the aforementioned embodiment, a third embodiment is shown in FIGURES 8 and 9. Since most of the structure and function is substantially identical, reference numerals with a double primed suffix ("") refer to like components (e.g., dirt container is referred to by reference numeral **50''**), and new numerals identify new components in the additional embodiment.

[0057] With reference to FIGURES 8 and 9, the dirt container **50''** includes an upper portion **200** mounted to lower portion **202**. The upper portion includes first and second generally cylindrical sections **204** and **206**. The first and second cylindrical sections include a first cyclonic airflow chamber **208** and a second cyclonic airflow chamber **210**, respectively. Each cyclonic airflow chamber includes a longitudinal axis. The longitudinal axis of the first cyclonic airflow chamber is spaced from the longitudinal axis of the second cyclonic airflow chamber and is oriented parallel thereto. The cylindrical sections **204**, **206** are connected to each other by a common wall section **212**. The first and second airflow chambers are each approximately vertically oriented and are

arranged in a parallel relationship. The first and second cyclonic airflow chambers include the respective first and second cyclone assemblies **72"** and **74"**.

[0058] Similar to the second embodiment, the air manifold **52"** is secured to a top portion of the upper portion **200** of the dirt container **50"**. The air manifold directs dirty air to each of the first and second cyclonic flow chambers **208**, **210**. To secure the upper portion **200** to the lower portion **202**, a top end **218** of the lower portion includes a lip **220** having a first section extending outwardly from the top end and a second section extending generally normal to the first section. The lip defines a shelf **222** which is dimensioned to receive a lower end **224** of the upper portion **200**. A bottom end **226** of the lower portion **202** is secured to a bottom wall **230** of the dirt container **50"** in a manner similar to the above described second embodiment, particularly the securing of the cylindrical sections **60'**, **62'** to the bottom **170** of the dirt container **50'**.

[0059] Similar to the aforementioned embodiments, a fourth embodiment is shown in FIGURES 10-14. Since most of the structure and function is substantially identical, reference numerals with a triple primed suffix ("") refer to like components (e.g., dirt container is referred to by reference numeral **50'''**), and new numerals identify new components in the additional embodiment.

[0060] With reference to FIGURES 10-14, the dirt container **50'''** includes an air manifold **300** and first and second generally cylindrical sections **302** and **304**. The first and second cylindrical sections include a first cyclonic airflow chamber **310** and a second cyclonic airflow chamber **312**, respectively. The first and second airflow chambers are each approximately vertically oriented and are arranged in a parallel relationship. The cylindrical sections are connected to each other by a common wall section **314**. First and second rim sections **316**, **318** extend between a top portion **320** of the cylindrical sections.

[0061] As shown in FIGURE 11, the first and second cyclonic airflow chambers include respective first and second cyclone assemblies **330** and **332**. These cyclone assemblies act simultaneously to remove coarse dust from the airstream. Each cyclone assembly includes a separator cone **334** and a perforated tube **82'''** disposed within the separator cone. A flange **336** extends continuously around a top portion of the separator cones **334**. As best illustrated in FIGURE 12, the flange is dimensioned to effectively seal the top portion **320** of the cylindrical sections **302** and **304**.

[0062] With continued reference to FIGURE 12, extending from the flange **336** are a plurality of first projections **340**, a first portion of the first projection extending upwardly from the flange and a second portion extending downwardly from the flange. The second portion of each first projection is received in an opening (not shown) located in the rim sections **316**, **318**. The flange **336** and rim section **316** further include mating openings **348**, **350** dimensioned to receive the single cleaned air outlet passage **110'''**.

[0063] With reference to Figure 11, the air manifold **300** includes a top portion **356** and a bottom portion **358**. The bottom portion includes a pair of cover plates **360** having a downwardly extending lip **362** which engages the top portion of the separator cones **334**. As best shown in FIGURE 13, an airstream inlet **364**, which is in fluid communication with a nozzle main suction opening, extends outwardly from the bottom portion **358**. Each cover plate includes an outlet **366** in fluid communication with an outlet **368** of the bottom portion **358** and a corresponding inlet **370** of the single cleaned air outlet passage **110'''**. A vane **372** can direct the airstream from the outlets **366** to the inlet **370**.

[0064] The bottom portion **358** further includes at least one tab **374**. With reference now to FIGURE 12, the tab includes an aperture (not shown) adapted to receive the upwardly extending first portion of at least one first projection **340**. Similar to the flange **336**, extending upwardly from the bottom portion is a plurality of second projections **376**.

[0065] With continued reference to FIGURES 11 and 12, the top portion **356** includes a plurality of caps **378**. The caps are adapted to receive the first and second projections **340**, **374** thereby securing the top portion **356** of the air manifold to the bottom portion **358** of the air manifold and to the first and second generally cylindrical sections **302** and **304**.

[0066] With reference to FIGURE 10, the dirt container **50'''** includes a top wall **380** which is mounted to the air manifold **300**. If desired, the top wall **380**, including the air manifold **300** and the cyclone assemblies **330** and **332**, could also be removable as a single unit from the top portion **320** of the cylindrical sections **302** and **304**. Defined on the top wall is a handle **382** to facilitate operator movement of the dirt container. As shown in FIGURE 13, a latch assembly **384**, which is located on the top wall,

cooperates with the upright housing section **B** to removably secure the dirt container **50'''** to the upright housing section.

[0067] With reference to FIGURES 11 and 14, the dirt container **50'''** further comprises a bottom plate or lid **386** including a pair of raised sections **388** and a continuous shelf **390**. A pair of seal rings **392** can be fitted over the raised sections, a bottom portion of each seal ring sitting on the shelf **390**. As shown in FIGURES 13 and 14, a hinge assembly **400** is used to mount the bottom plate to a bottom portion **394** of the first and second generally cylindrical sections **302** and **304**. The hinge assembly allows the bottom plate **386** to be selectively opened so that dirt and dust particles that were separated from the airstream can be emptied from the dirt container.

[0068] Similar to the aforementioned embodiments, a fifth embodiment is shown in FIGURES 15-19.

[0069] With reference to FIGURES 15 and 16, a dirt container **500**, which can be mounted to the vacuum cleaner upright section (not shown) via conventional means, includes first and second separate generally cylindrical sections **504** and **506**. The first and second cylindrical sections include, respectively, a first cyclonic airflow chamber **508** and a second cyclonic airflow chamber **510**. Each cyclonic airflow chamber includes a longitudinal axis. The longitudinal axis of the first cyclonic airflow chamber is spaced from the longitudinal axis of the second cyclonic airflow chamber and is oriented approximately parallel thereto. The first and second airflow chambers **508**, **510** are each approximately vertically oriented and are arranged in a parallel relationship. Of course, other designs are also contemplated. For example, the first and second airflow chambers could be angled in relation to each other, if desired.

[0070] The first and second cyclonic airflow chambers include respective first and second cyclone assemblies **514** and **516**. Each cyclone assembly includes a separator cone **520** and a perforated tube **522** disposed within the separator cone. The separator cones have a larger diameter end located adjacent a top portion of the dirt container **500** and a smaller diameter end spaced from the top portion. A flange **526** extends radially from the smaller diameter end. As best illustrated in FIGURE 16, the flange is dimensioned to effectively seal off a space **528**, which is defined by an inner surface of each cylindrical section **504**, **506** and an outer periphery of the separator cone **520**,

from the dirt entrained airstream entering into the first and second cyclonic airflow chambers **508, 510**.

[0071] Each perforated tube **522** extends longitudinally in each cyclonic airflow chambers **508, 510** and includes a plurality of small holes **532** disposed in a side wall of the tube. Each perforated tube has an upper end **534** in fluid communication with an inlet section **536** of an air manifold **540** and a closed lower end **542**. As shown in FIGURE 17, the closed lower end of each tube **522** includes an outwardly flared section **544** which retards an upward flow of dust that has fallen below the lower end **542**. A flange or skirt **546** extends longitudinally from the flared section, which also blocks rising dust from reentering the separator cone **520**, thereby further improving the filtering of the dust entrained airstream.

[0072] Extending from the closed lower end **542** of each tube **522** is a laminar flow member **550**. Each laminar flow member can include a cross blade assembly **552**, which can be formed of two flat blade pieces **554** that are oriented approximately perpendicular to each other. It should be appreciated that the cross blade **552** is not limited to the configuration shown in FIGURE 17 but may be formed of various shapes such as a rectangular shape, a triangular shape or an elliptical shape, when viewed from its side. Also, in addition to a cross blade design, other designs are also contemplated. Such designs can include blades that are oriented at angles other than normal to each other or that use more than two sets of blades.

[0073] With reference again to FIGURES 15 and 16, the air manifold **540** includes the inlet section **536** through which dirty air passes and an outlet section **560**. The inlet section, which is in fluid communication with the nozzle main suction opening, directs a flow of the dirty airstream into two separate dirty air outlets **562** leading to a respective one of the first and second airflow chambers **508, 510**. Dirt entrained air flows into the inlet section **536**, into the two separate dirty air outlets **562** and thus into the first and second airflow chambers defined within the dirt container **500**. The airflow into the airflow chambers **508, 510** is tangential which causes a vortex-type, cyclonic or swirling flow. Such vortex flow is directed downwardly in the airflow chamber since the top end thereof is blocked by the flange **526** of the separator cone **520**.

[0074] With reference now to FIGURES 18 and 19, the inlet section **536** includes an inlet **563** having a first diameter and an outlet **564** having a second, smaller, diameter.

This arrangement allows the airstream within the inlet section to be drawn into the airflow chambers by way of the venturi effect, which increases the velocity of the airstream. It should be appreciated that because the inlet **563** has a greater diameter than the outlet **564**, the venturi effect created within the inlet section **536** creates an increased vacuum in the inlet section. Also, the outlet section is inclined at an acute angle to the direction of the inlet section at the point at which the outlet **564** opens into the dirty air outlets **562** and the interior of the airflow chambers **508**, **510**. It will also be appreciated that the venturi could be formed by narrowing the passageway in the inlet section **536** in some other way, for example by forming the sides of the passageway with inwardly curved opposing sides to form a narrowing in the inlet section.

[0075] Similar to the aforementioned embodiment of the inlet section **536**, an alternative embodiment is shown in FIGURES 20-21. Since most of the structure and function is substantially identical, reference numerals with a primed suffix (') refer to like components (e.g., air manifold **540** is referred to by reference numeral **540'**), and new numerals identify new components in the additional embodiment.

[0076] As illustrated in FIGURES 20 and 21, an inlet section **565** of the air manifold **540'** has a generally arcuate/shoulder configuration and includes an inlet **566** having a first diameter and an outlet **567** having a second, smaller, diameter. This arrangement also allows the airstream within the inlet section to be drawn into the airflow chambers by way of the venturi effect, which increases the velocity of the airstream. The inlet section **565** can be secured to a suction airstream conduit **568** by a flange **569** extending from the inlet end **566**. The suction airstream conduit **568** is in fluid communication with the main suction opening of the nozzle base and has a longitudinal axis which is oriented generally parallel to the longitudinal axes of the airflow chambers defined within the dirt container **500'**.

[0077] With reference again to FIGURES 15 and 16, as the dirt entrained air enters the airflow chambers **508**, **510**, the air and the dirt cyclonically rotate along an inner wall of the separator cone **520**. The dirt and debris is removed from the air flow, via gravity, and collects at a bottom portion of the chambers. However, relatively light fine dust is less subject to a centrifugal force. Accordingly, the fine dust may be contained in the airflow circulating near the bottom portion of the airflow chambers **508**, **510**. Since the cross blade **552** extends into the bottom portion of the airflow chambers, the circulating

airflow hits the blade pieces **554** of the cross blade **552**. When the circulating airflow contacts the laminar flow member, further rotation is stopped thereby forming a laminar flow. As a result, the dirt entrained in the air is allowed to drop out, via gravity. Also, dust is prevented from being re-entrained in the airflow by the laminar flow member **550**. The fine dust in the airflow drops out of the airstream and falls by gravity in each of the airflow chambers **508**, **510**. Such fine dust is collected at the bottom portion of the chambers.

[0078] The cleaned and now laminar axial flow of air then makes a 90° turn and becomes a radial flow, as mandated by the presence of the skirt **546**. This change in air flow direction will cause even more dirt to fall out of the airflow. Then, the air flows again axially up the flange **546** until it is again allowed to flow radially inwardly once it clears the outwardly flared section **544** at the lower end of each tube. The cleaned air is then discharged out through the holes **532** of the perforated tube **522** and the outlet section **560**. The outlet section **560** collects a flow of cleaned air from both of the airflow chambers and merges the flow of cleaned air into the single cleaned air outlet passage **570**.

[0079] As shown in FIGURE 16, the outlet section includes a pair of cleaned air inlets **572** communicating with a respective one of the first and second centrifugal chambers **508**, **510**. Each inlet is in fluid communication with a pair of cleaned air conduits **574**. A first end of each cleaned air conduit **574** is secured to the upper end **534** of each perforated tube **522**. As shown in FIGURE 15, a second end of each cleaned air conduit **574** merges into a single outlet end **576** that is in fluid communication with an inlet of the outlet passage **570**.

[0080] With continuing reference to FIGURES 15 and 16, to secure the air manifold **540** to the dirt container **500**, a lower portion **580** of the air manifold includes a first channel **582** which is dimensioned to receive at least an upper peripheral end **584** of each cylindrical section **504** and **506**, thereby creating a seal between the air manifold and the dirt container. The lower portion also includes a second channel **586** which is dimensioned to receive a radial rim **588** extending from the larger diameter end of the separator cone **520**.

[0081] Similar to the first channel **582** of the air manifold, a bottom plate **594** includes a channel **596** dimensioned to receive at least a lower peripheral end **598** of

each cylindrical sections **504** and **506**, thereby creating a seal between the bottom plate and the dirt container **500**.

[0082] The present disclosure has been described with reference to several preferred embodiments. Obviously, modifications and alterations will occur to others upon reading and understanding the preceding detailed description. It is intended that the embodiments be construed as including all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

What is claimed is:

1. A vacuum cleaner comprising:
 - a housing including a suction airstream inlet and a suction airstream outlet;
 - a dirt container selectively mounted to said housing for receiving and retaining dirt and dust separated from said suction airstream, and said suction airstream inlet and said suction airstream outlet being in fluid communication with, respectively, an inlet and an outlet of said dirt container, said dirt container including:
 - a first cyclonic airflow chamber including a longitudinal axis,
 - a second cyclonic airflow chamber including a longitudinal axis, said second chamber being spaced from said first chamber, wherein said first and second chambers are each approximately vertically oriented and are arranged in a parallel relationship, and
 - an air manifold disposed at a top portion of said dirt container, said air manifold including an inlet section through which dirty air passes, said inlet section directing a flow of dirty air into two separate inlet conduits leading to a respective one of said first and second airflow chambers, and an outlet section, said outlet section collecting a flow of cleaned air from both of said chambers and merging the flow of cleaned air into a single outlet conduit; and,
 - an airstream suction source mounted to said housing, said suction source being in communication with said outlet conduit of said manifold.
2. The vacuum cleaner of claim 1, further comprising a cleaned air outlet passage including a longitudinal axis which is oriented approximately parallel to said longitudinal axes of said first and second cyclonic chambers, wherein said cleaned air outlet passage communicates with said manifold outlet conduit.
3. The vacuum cleaner of claim 2, wherein said cleaned air outlet passage is mounted to said dirt container.
4. The vacuum cleaner of claim 1, wherein said dirt container is generally cylindrical in shape.

5. The vacuum cleaner of claim 1 further comprising:
a first perforated tube extending in said first cyclonic chamber; and,
a second perforated tube extending in said second cyclonic chamber, wherein each of said first and second tubes includes a closed lower end and an open upper end in fluid communication with said inlet of said air manifold.
6. The vacuum cleaner of claim 5, wherein said closed lower end of each of said first and second tubes includes an outwardly flared portion.
7. The vacuum cleaner of claim 1, wherein each cyclonic chamber includes a separator cone having a larger diameter end located adjacent said top portion of said dirt container and a smaller diameter end spaced from said top portion.
8. The vacuum cleaner of claim 7, wherein each of said separator cones is connected to a generally cylindrical wall of said dirt container.
9. The vacuum cleaner of claim 1 further comprising a filter in fluid communication with said air manifold outlet conduit, wherein said filter is positioned in a plenum located in said housing.
10. The vacuum cleaner of claim 1, wherein said inlet section of said air manifold is inclined at an acute angle allowing the airstream within said inlet section to be drawn into each of said first and second cyclonic chambers by way of the venturi effect thereby increasing the velocity of the airstream entering said cyclonic chambers.
11. The vacuum cleaner of claim 1, wherein said inlet section of said air manifold includes an inlet having a first diameter and an outlet having a second, smaller, diameter allowing the airstream within said inlet section to be drawn into each of said first and second cyclonic chambers by way of the venturi effect, which increases the velocity of the airstream entering said cyclonic chambers.

12. A vacuum cleaner including a housing, a nozzle base having a main suction opening, said housing being pivotally mounted on said nozzle base, an airstream suction source mounted to one of said housing and said nozzle base for selectively establishing and maintaining a suction airstream from said nozzle main suction opening to an exhaust outlet of said suction source, an air manifold, and a dirt cup selectively mounted to said housing, said dirt cup comprising:

a first centrifugal chamber having a first longitudinal axis, said first centrifugal chamber including a first cyclone assembly for removing at least some contaminants from the airstream;

a first perforated tube extending in said first cyclonic chamber, said first perforated tube including a closed lower end and an open upper end in fluid communication with said air manifold;

a skirt extending away from said closed lower end of said perforated tube; and

a laminar flow member extending away from said closed lower end of said perforated tube, wherein at least a portion of said laminar flow member is encircled by said skirt.

13. The vacuum cleaner of claim 12, wherein said laminar flow member extends along a longitudinal axis of said perforated tube.

14. The vacuum cleaner of claim 12, wherein said first cyclone assembly is defined by a conical wall surface including an upper end of a first diameter and a lower end of a second, smaller diameter.

15. The vacuum cleaner of claim 14, wherein said conical wall surface is mounted to a cylindrical portion of said dirt cup.

16. The vacuum cleaner of claim 14, wherein said skirt includes an outwardly flared section, an end of said flared section having a diameter larger than said diameter of said lower end of said conical wall surface.

17. The vacuum cleaner of claim 14 further including a generally cylindrical dirt storage area located beneath said first cyclone assembly, said dirt storage area having a diameter larger than said diameter of said upper end of said conical wall surface.

18. The vacuum cleaner of claim 12 further including a filter disposed downstream from said first centrifugal chamber for filtering dirt from the airstream.

19. The vacuum cleaner of claim 18 further comprising a plenum mounted to one of said housing and said nozzle base for accommodating said filter.

20. The vacuum cleaner of claim 19, wherein said plenum is located beneath said dirt cup.

21. A vacuum cleaner comprising:

a housing; and

a dirt container selectively mounted to said housing, said dirt container including:

a side wall,

a separator cone mounted to said side wall,

a perforated tube extending longitudinally in said separator cone,

a cyclonic flow chamber defined between said separator cone and said perforated tube,

a dirt storage area located beneath said separator cone, and

an air manifold comprising a top wall of said dirt container, said separator cone and said perforated tube communicating with said air manifold.


22. The vacuum cleaner of claim 21, wherein said dirt container further comprises a bottom wall.

23. The vacuum cleaner of claim 22, wherein said bottom wall comprises a selectively openable lid to allow an emptying of said dirt container.

24. The vacuum cleaner of claim 21 further comprising a cleaned air outlet tube communicating with said air manifold, said cleaned air outlet tube extending parallel to a longitudinal axis of said dirt container.

25. The vacuum cleaner of claim 21, wherein said air manifold includes an air inlet passage leading to said separator cone, said air inlet passage having a first end of a first diameter and a second end of a second, smaller, diameter allowing an airstream to be drawn into said separator cone by way of the venturi effect, to increase a velocity of the airstream entering said separator cone.

FIG. 1

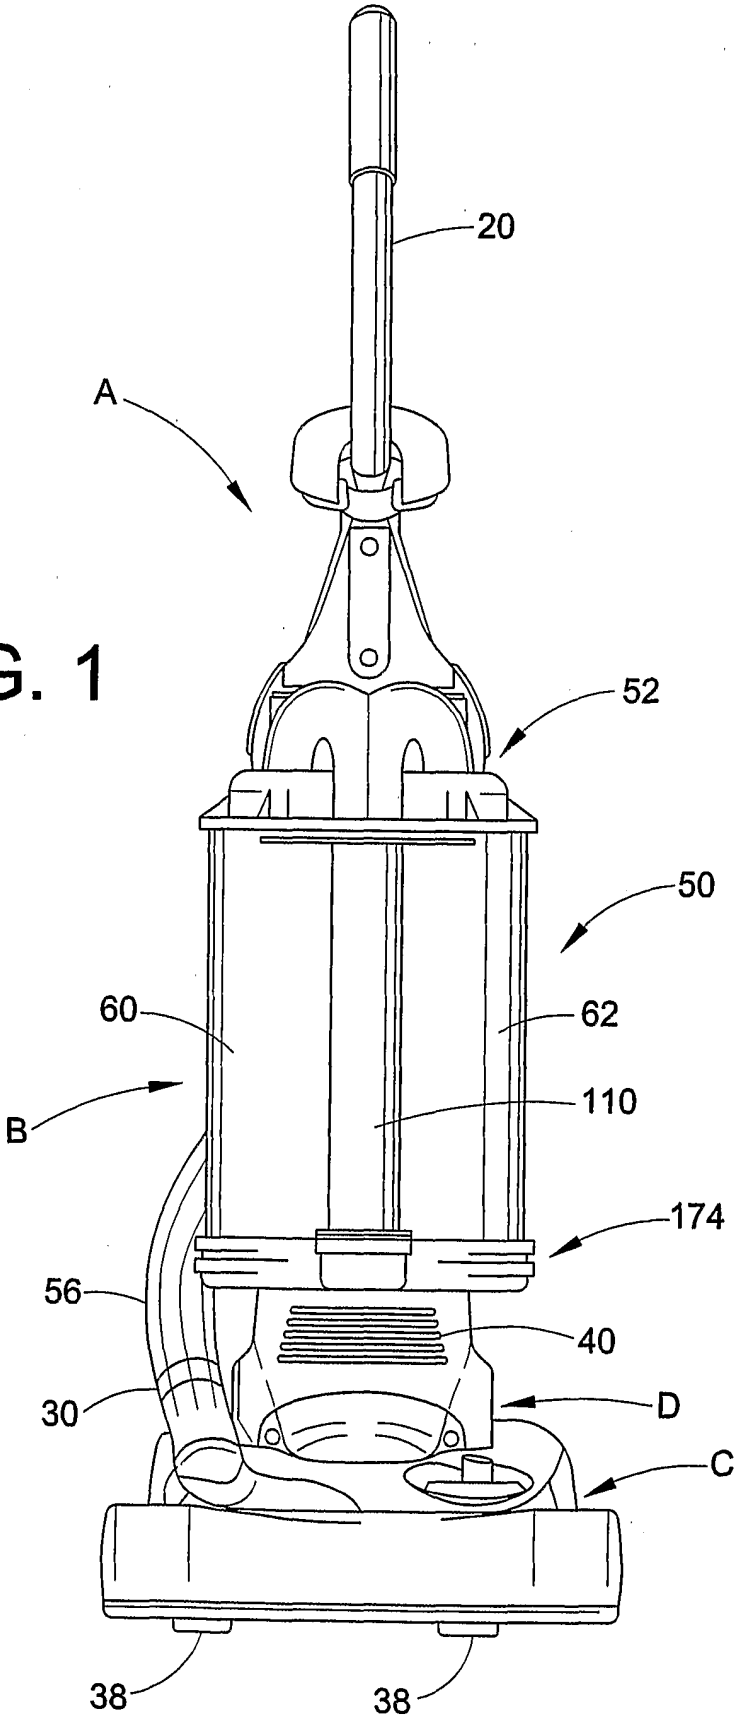

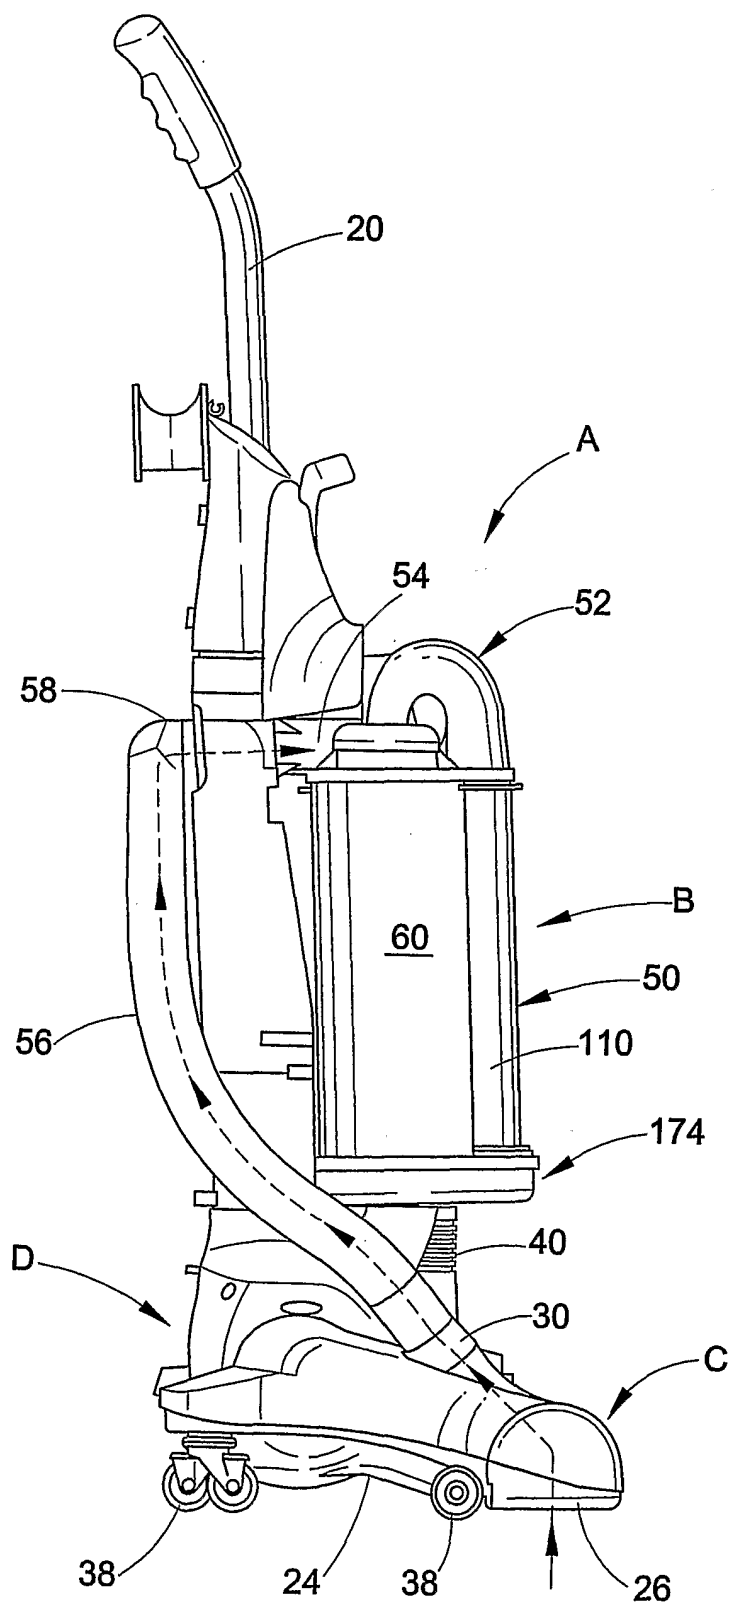


FIG. 2

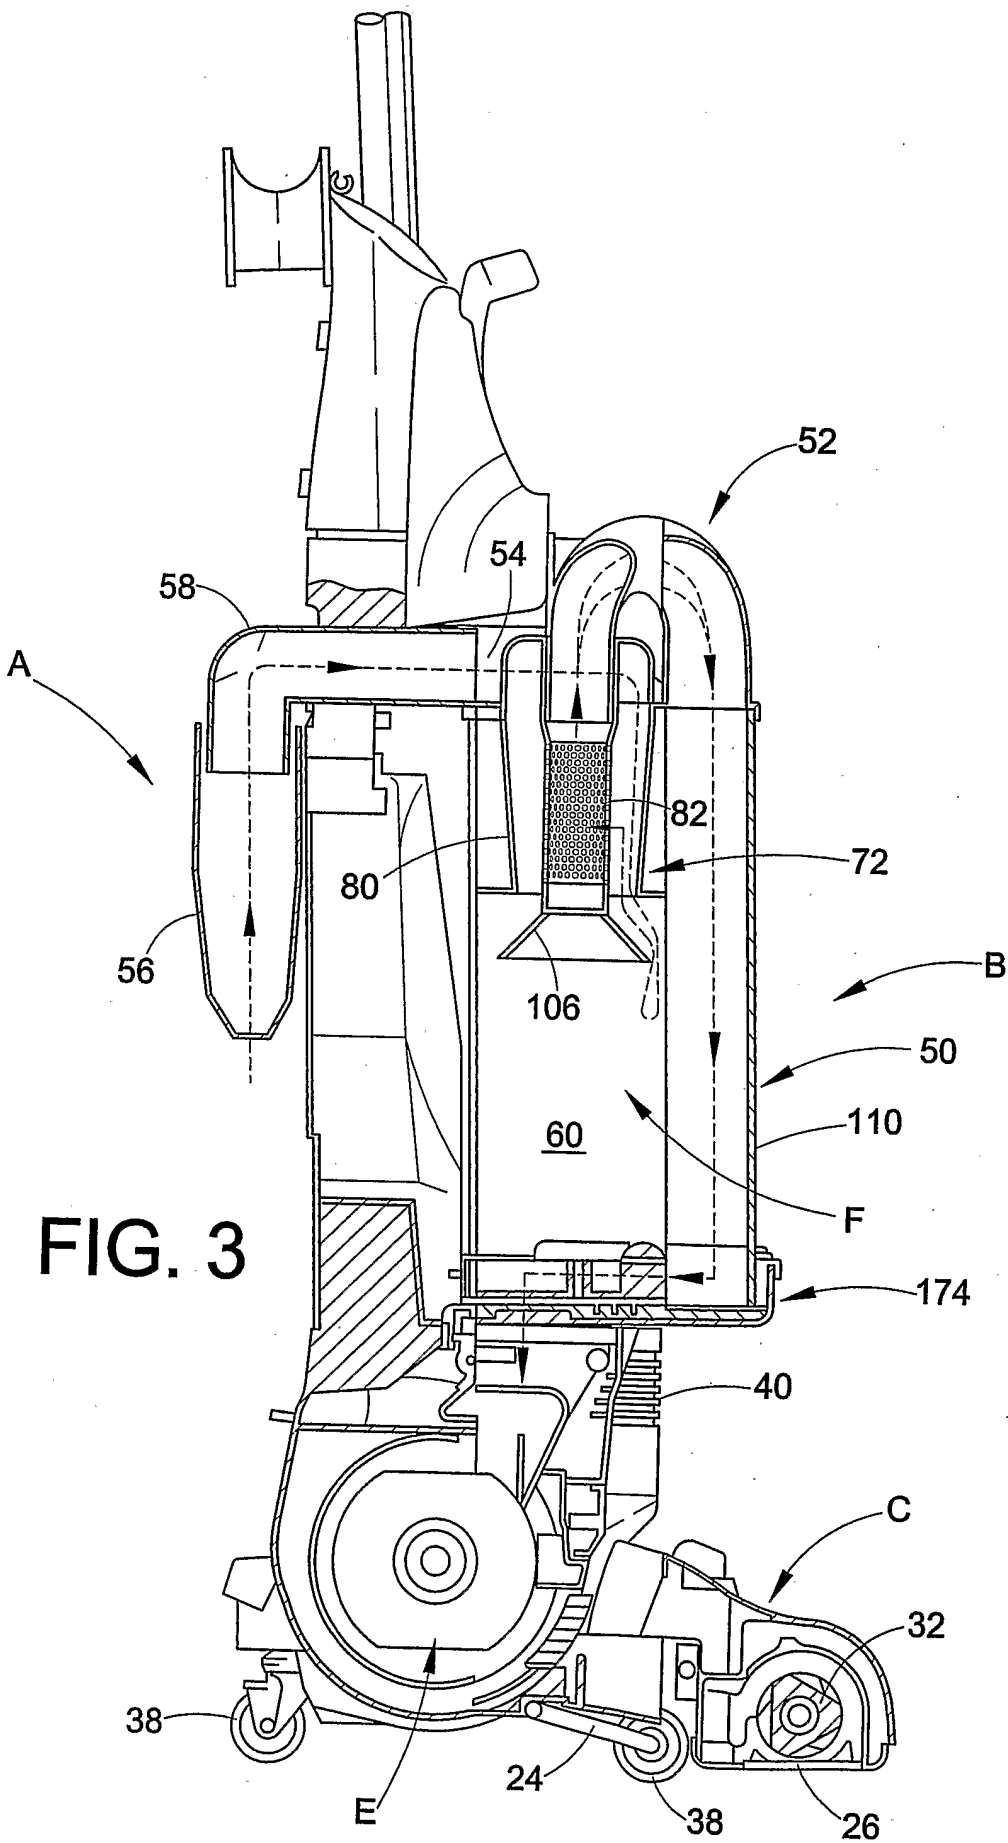
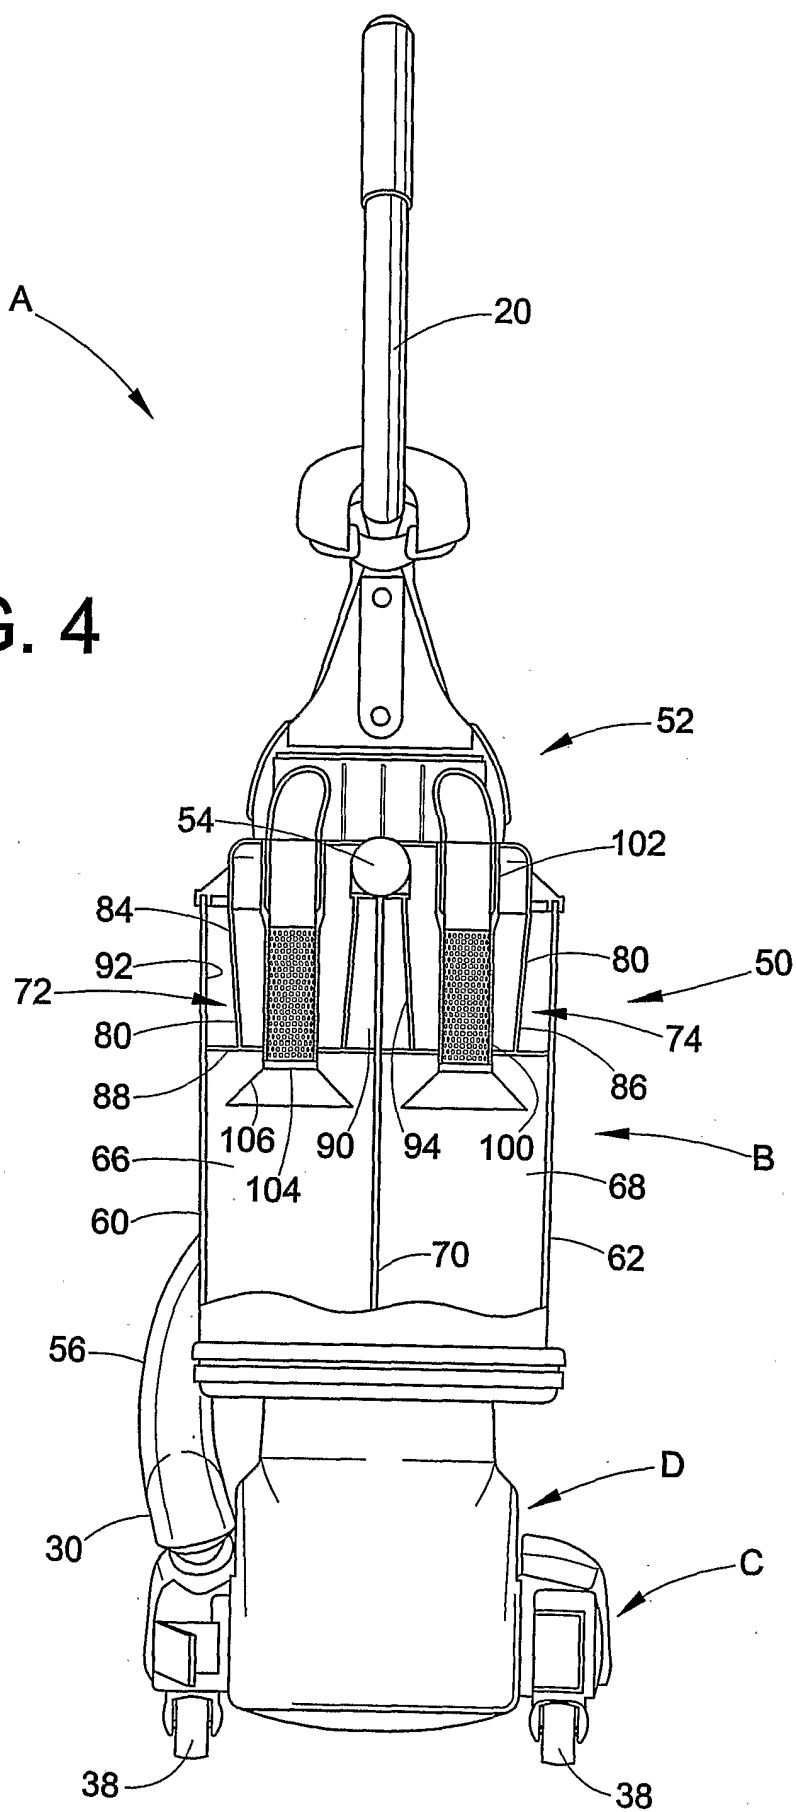


FIG. 4



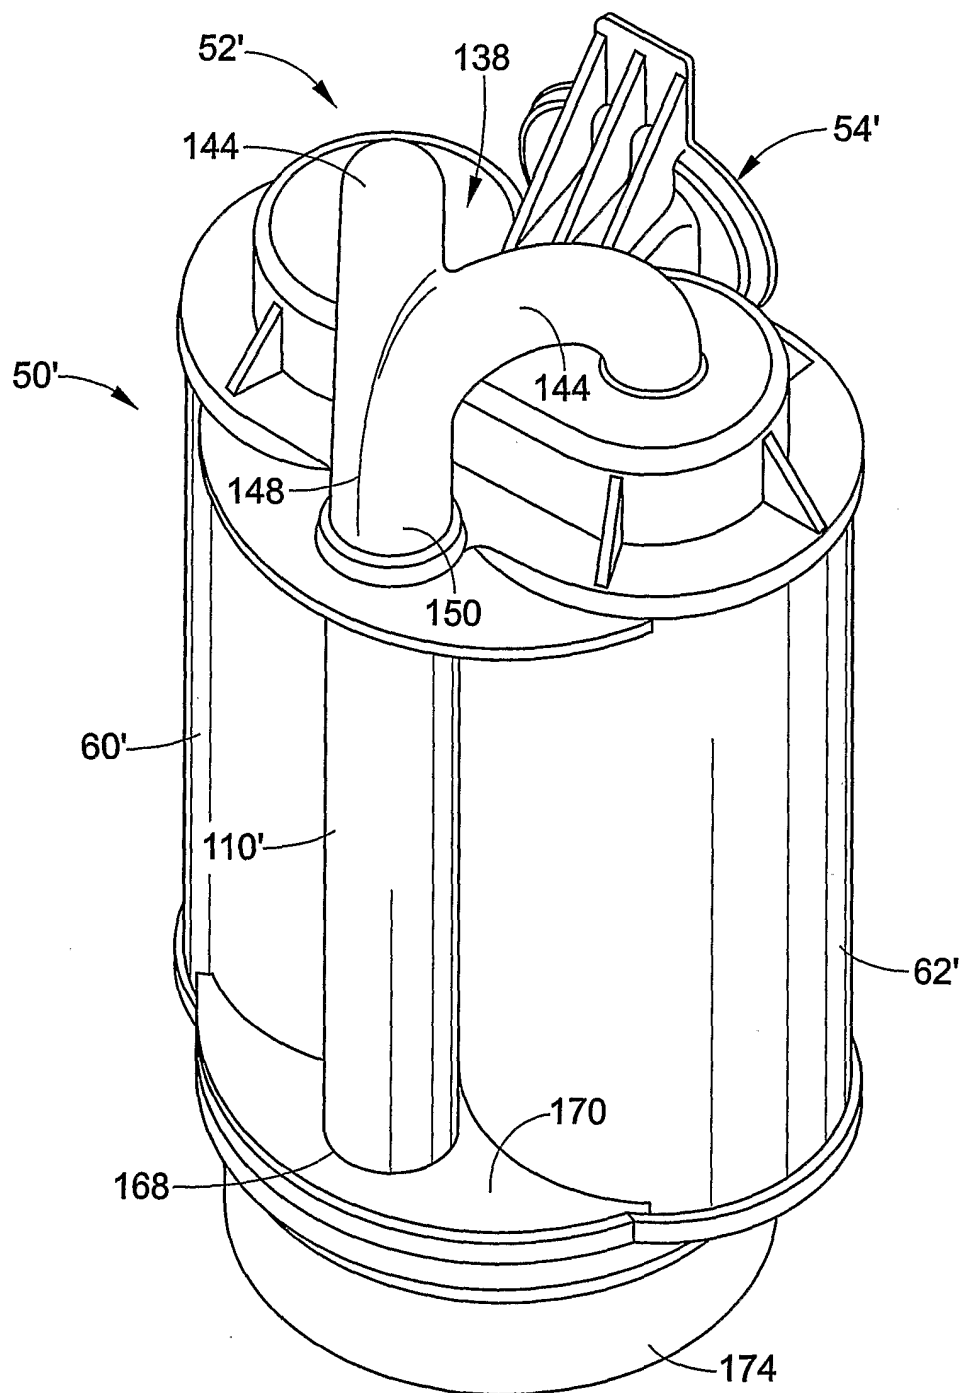


FIG. 5

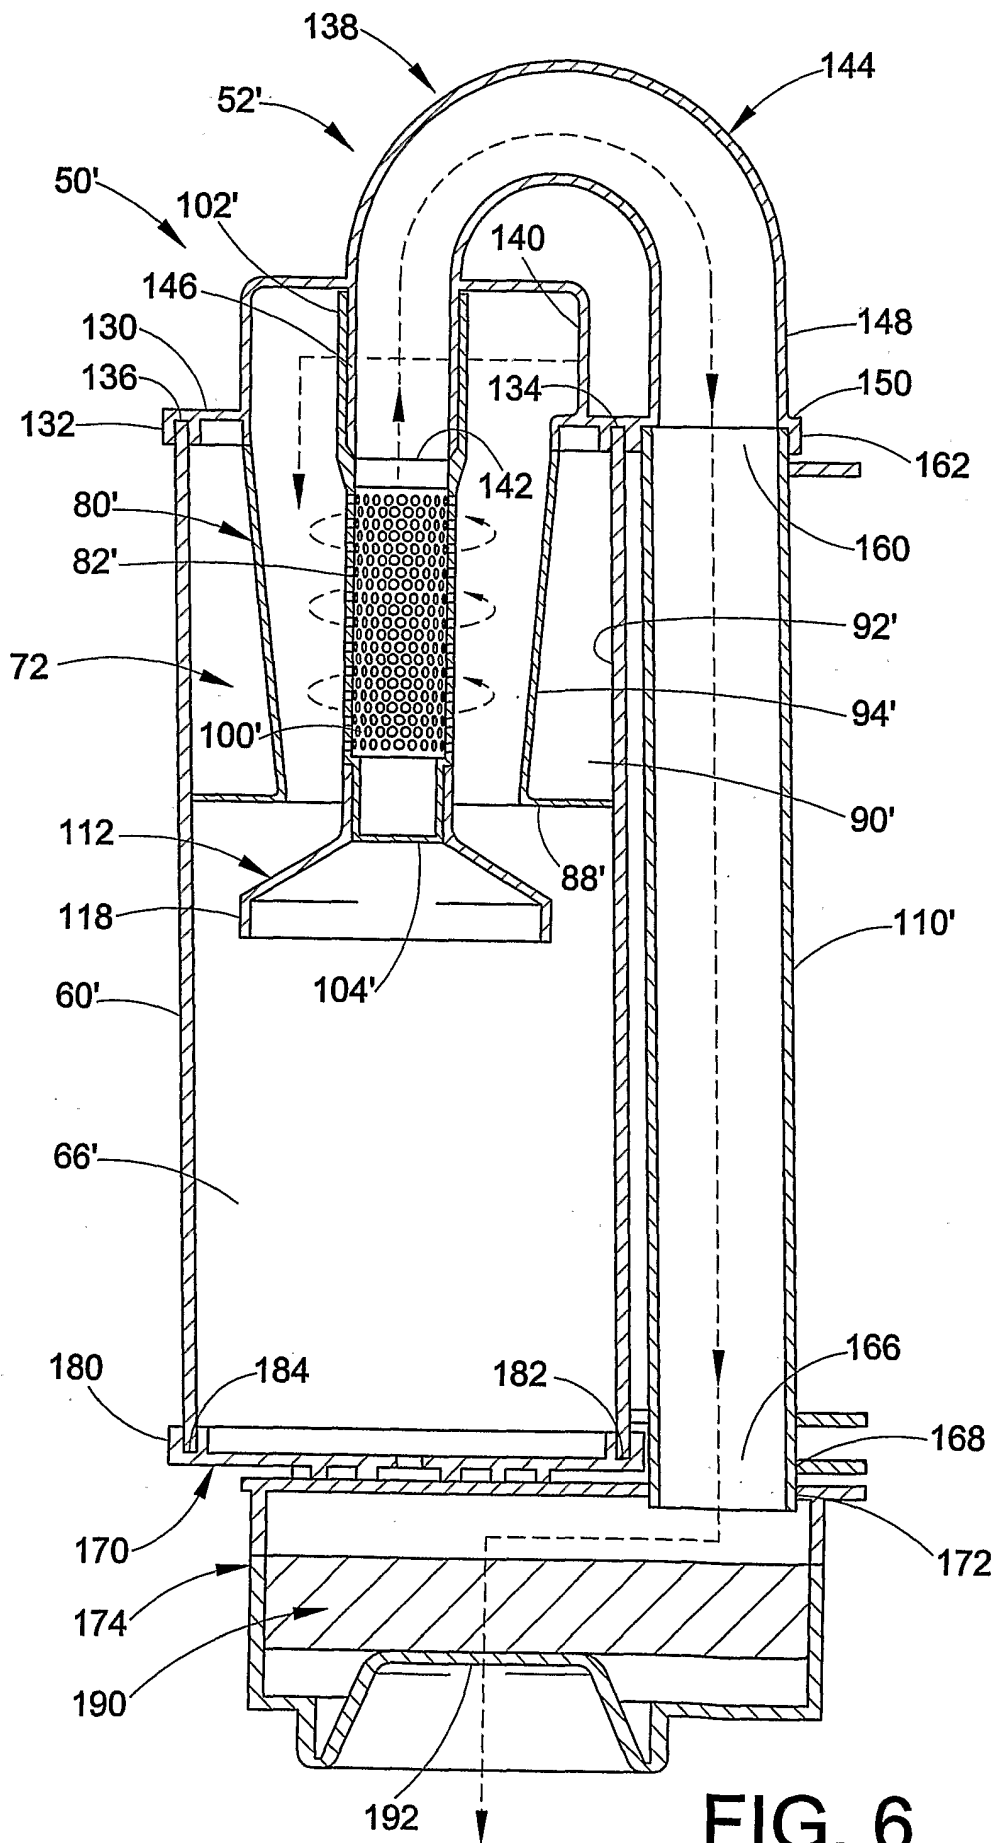


FIG. 6

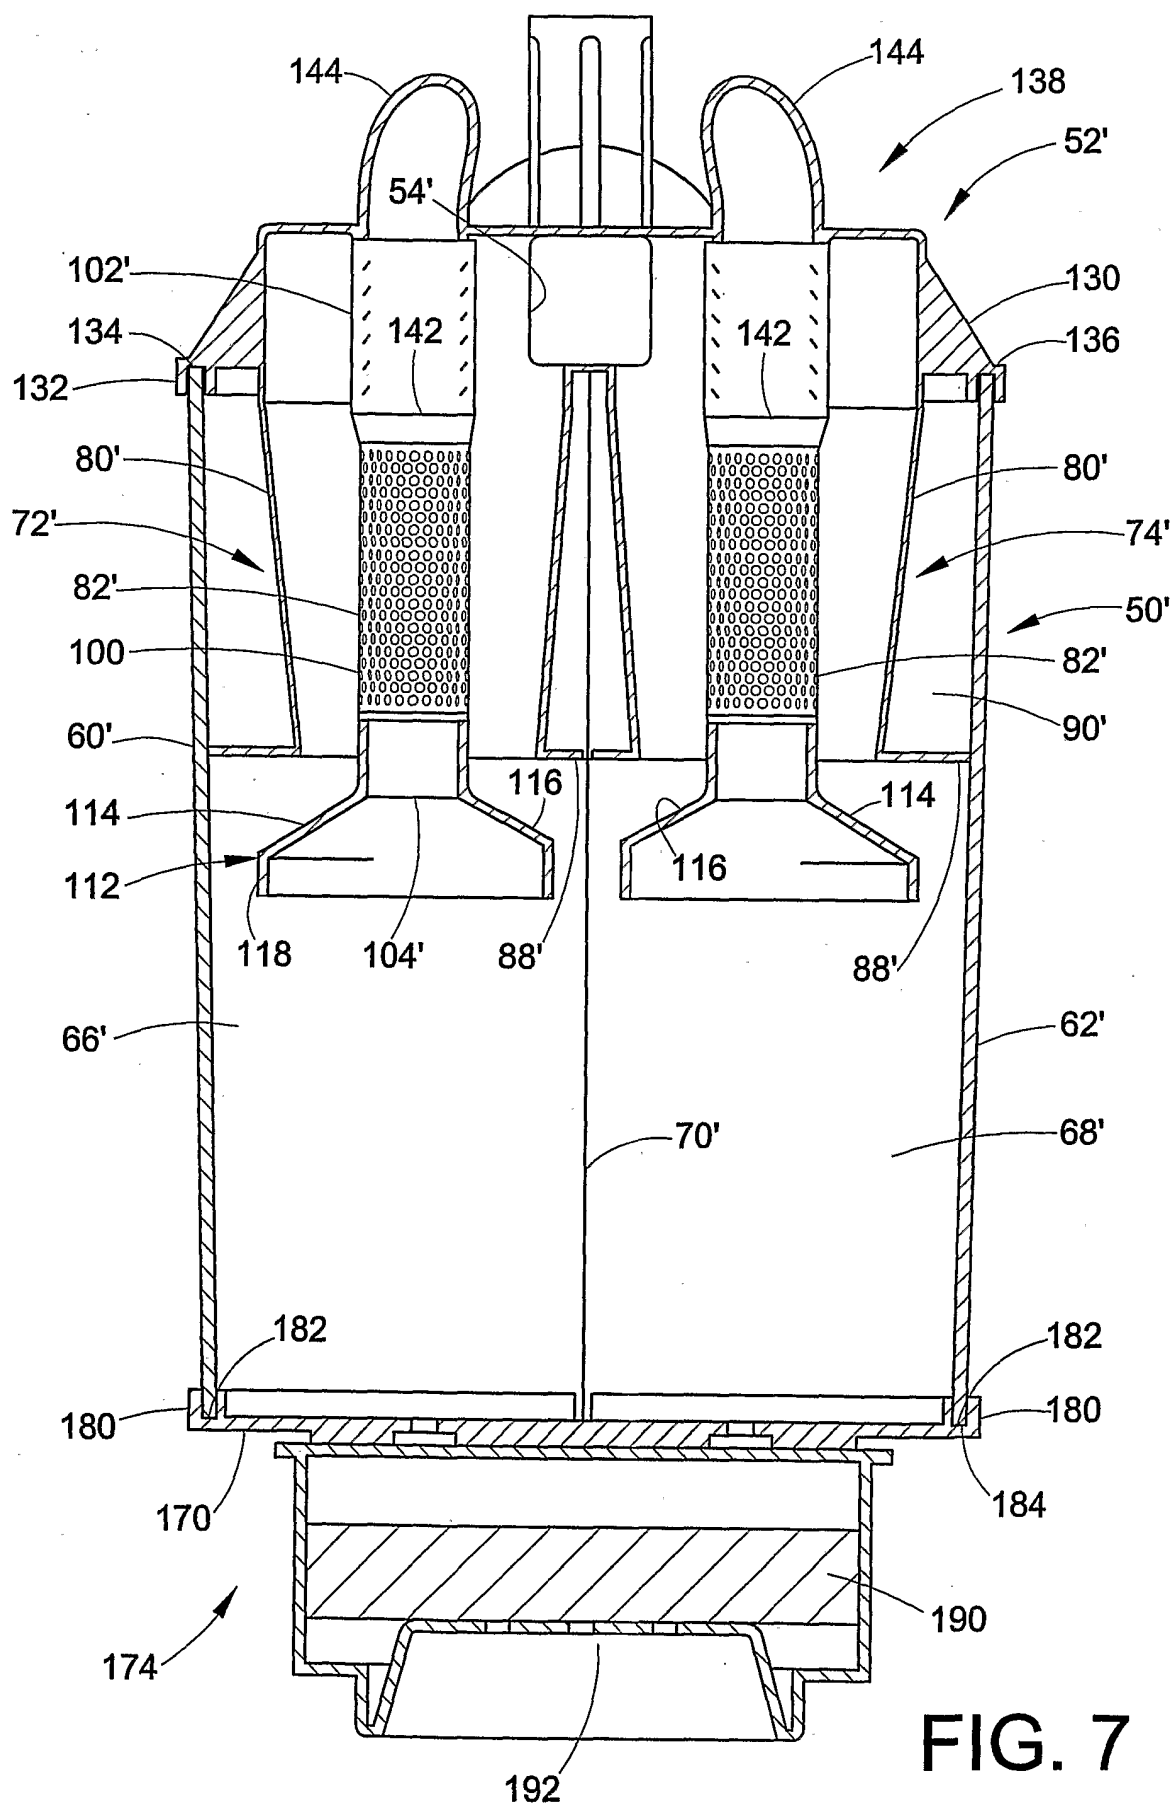


FIG. 7

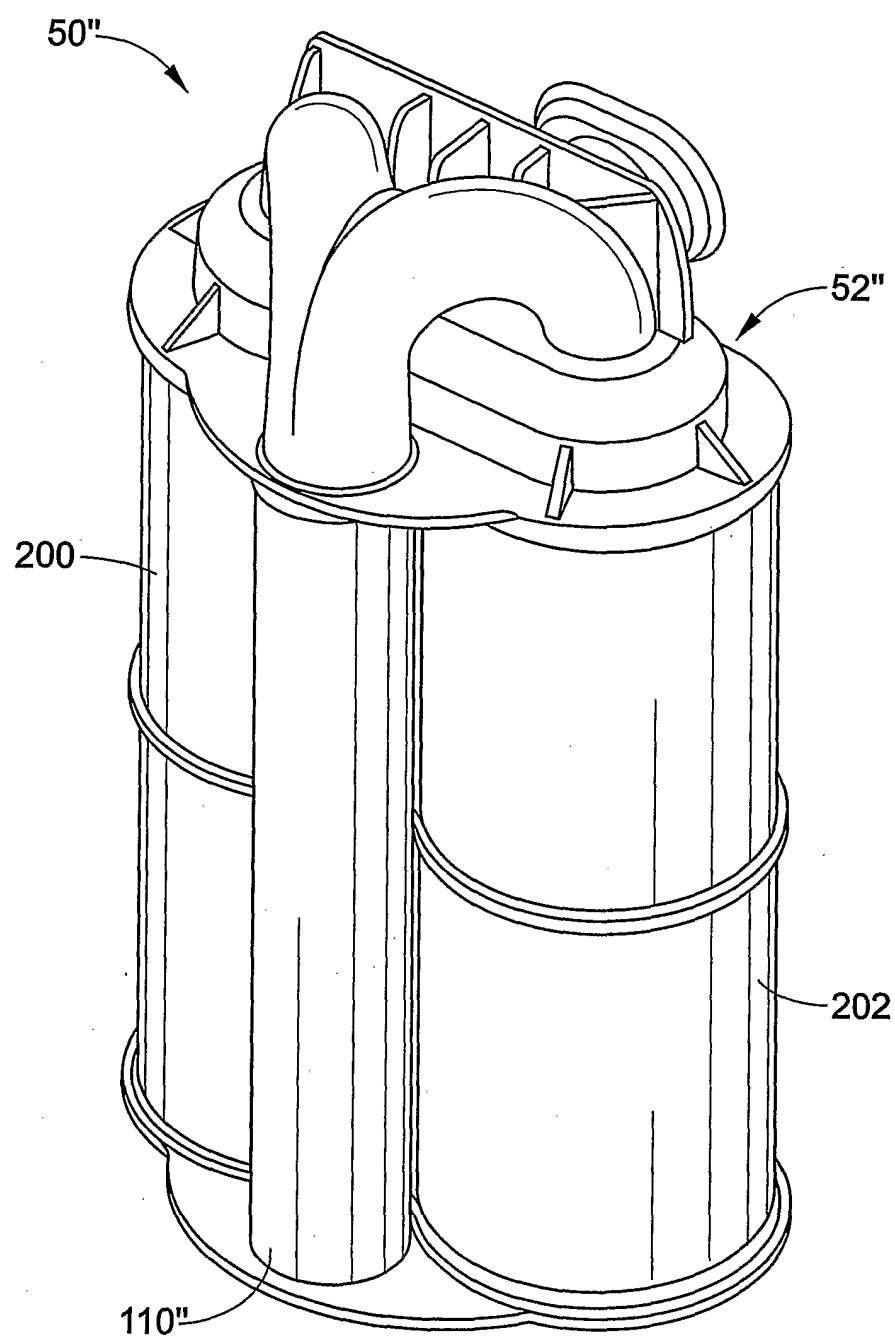
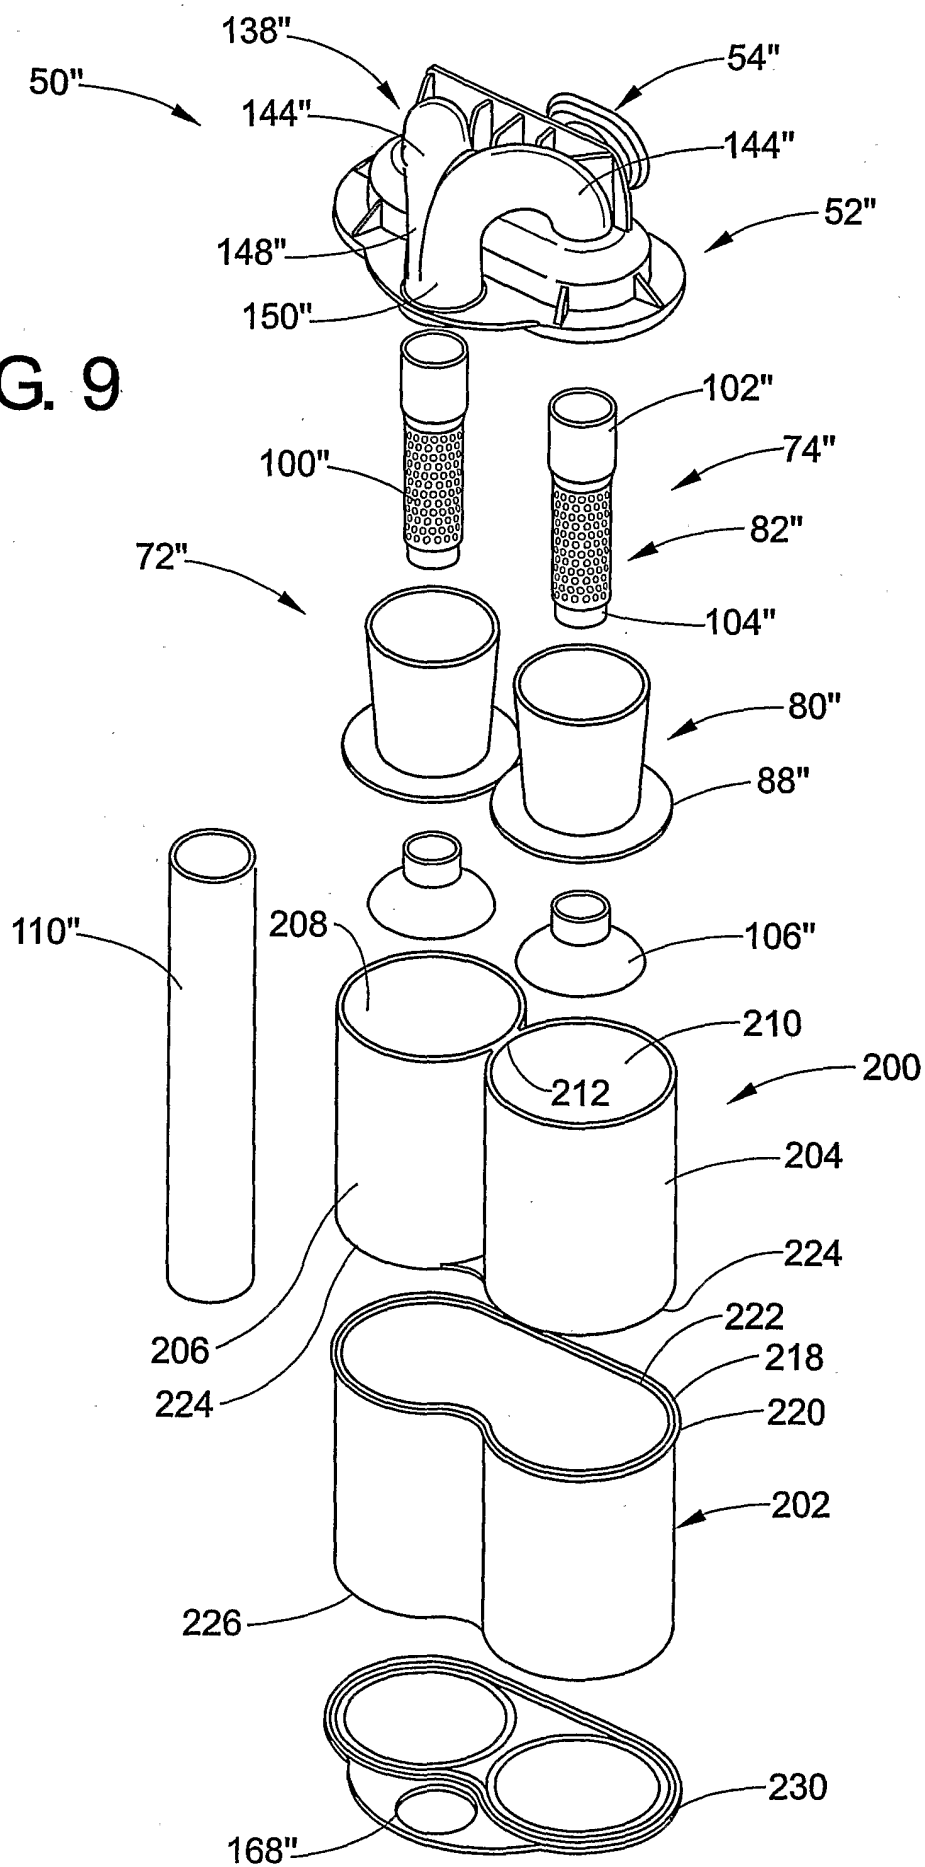
**FIG. 8**

FIG. 9



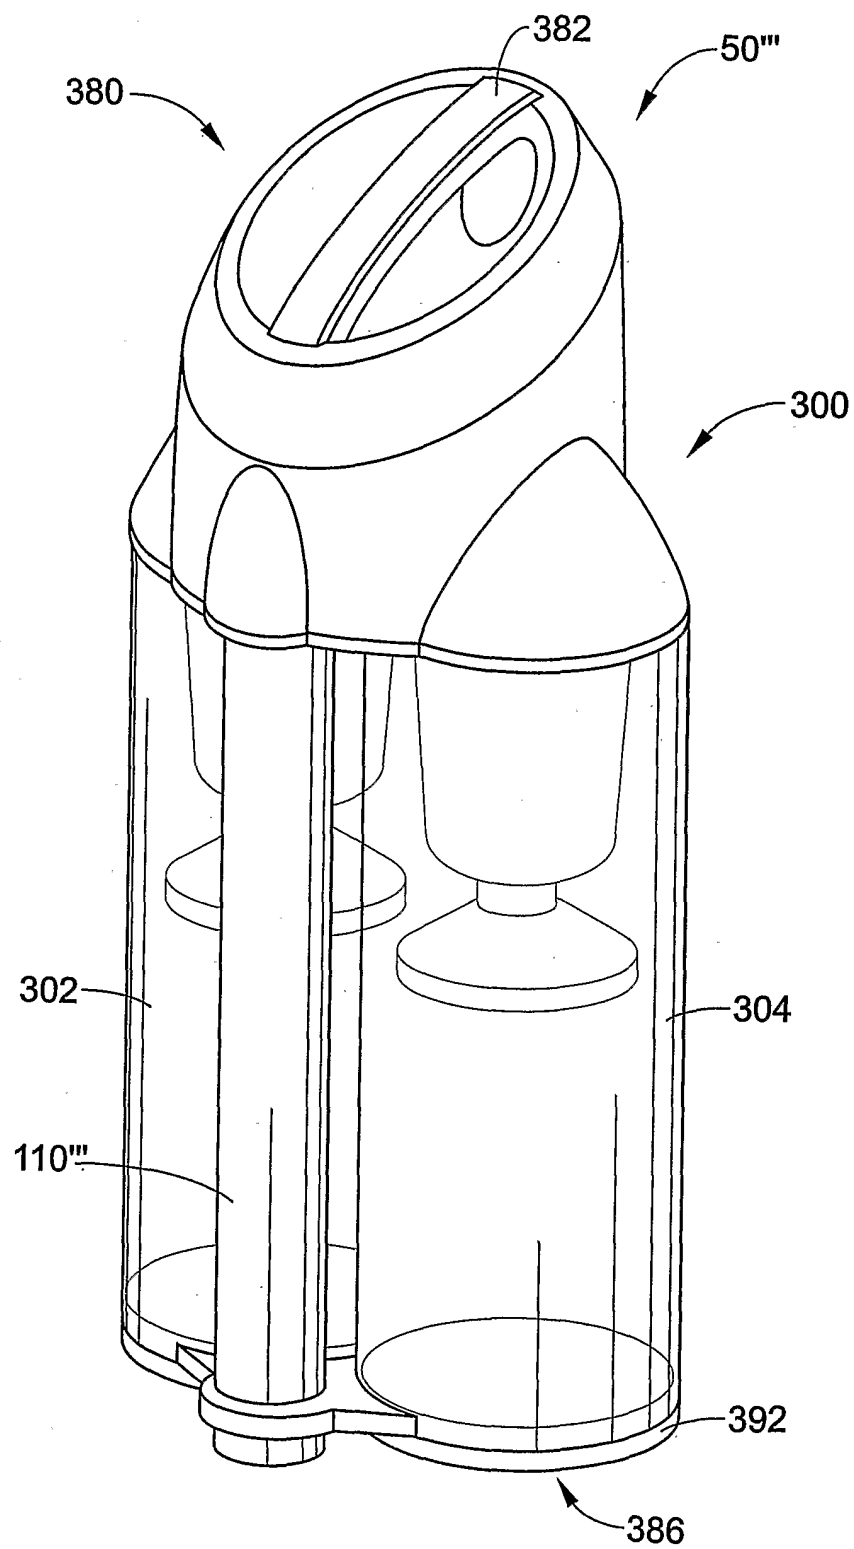
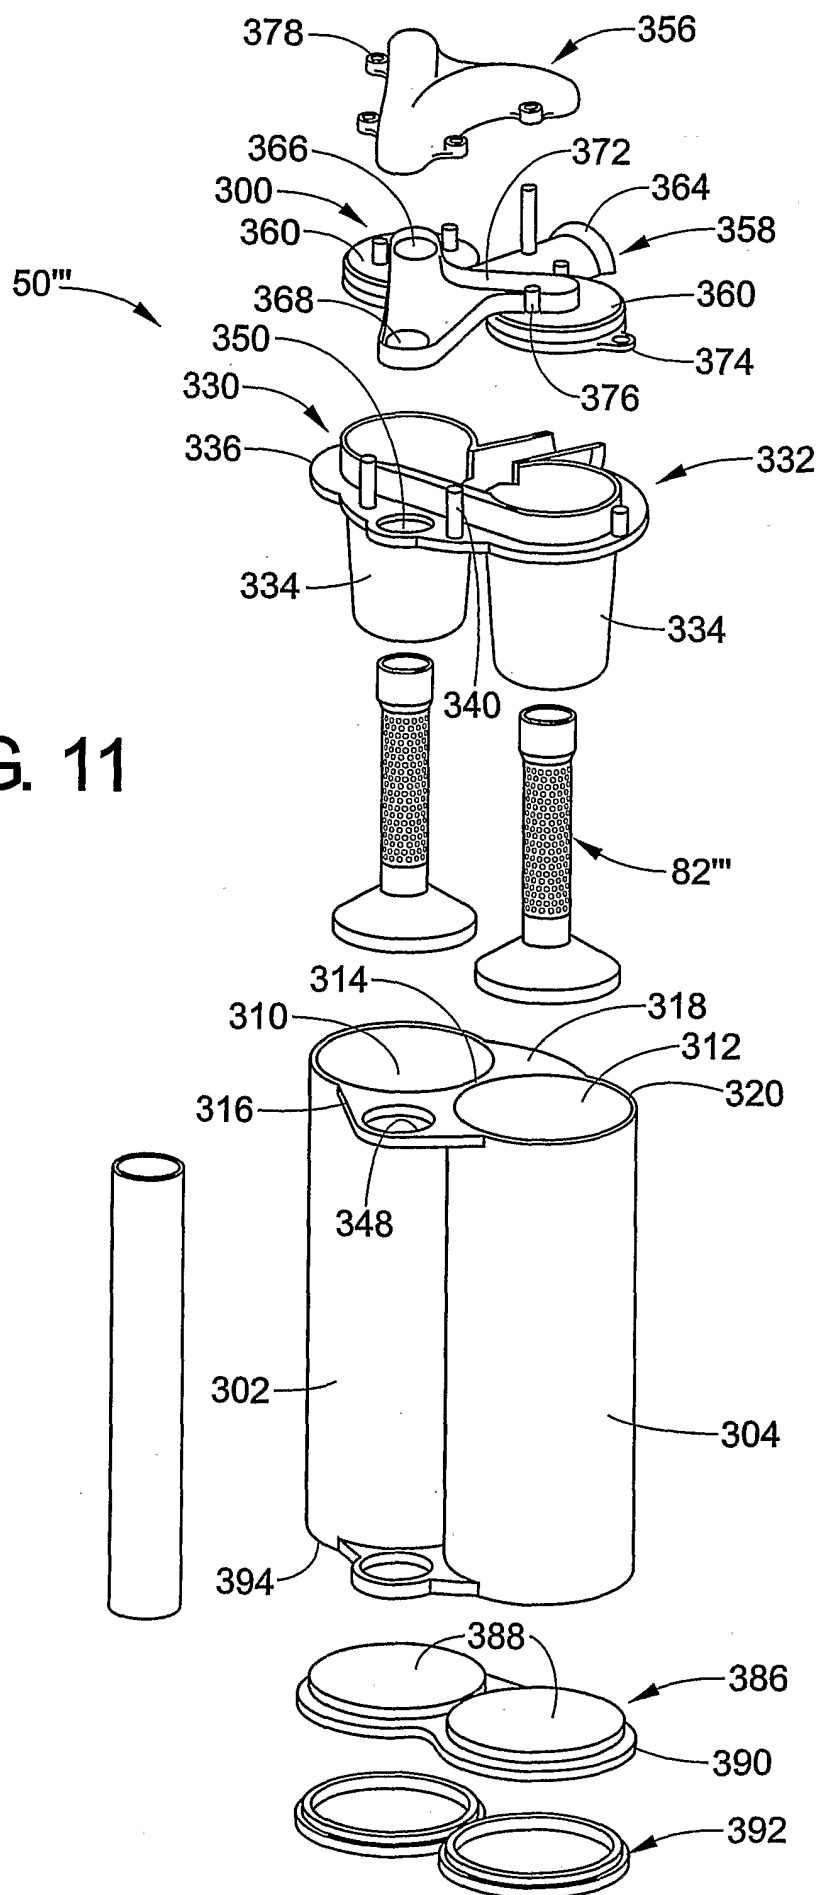


FIG. 10

FIG. 11



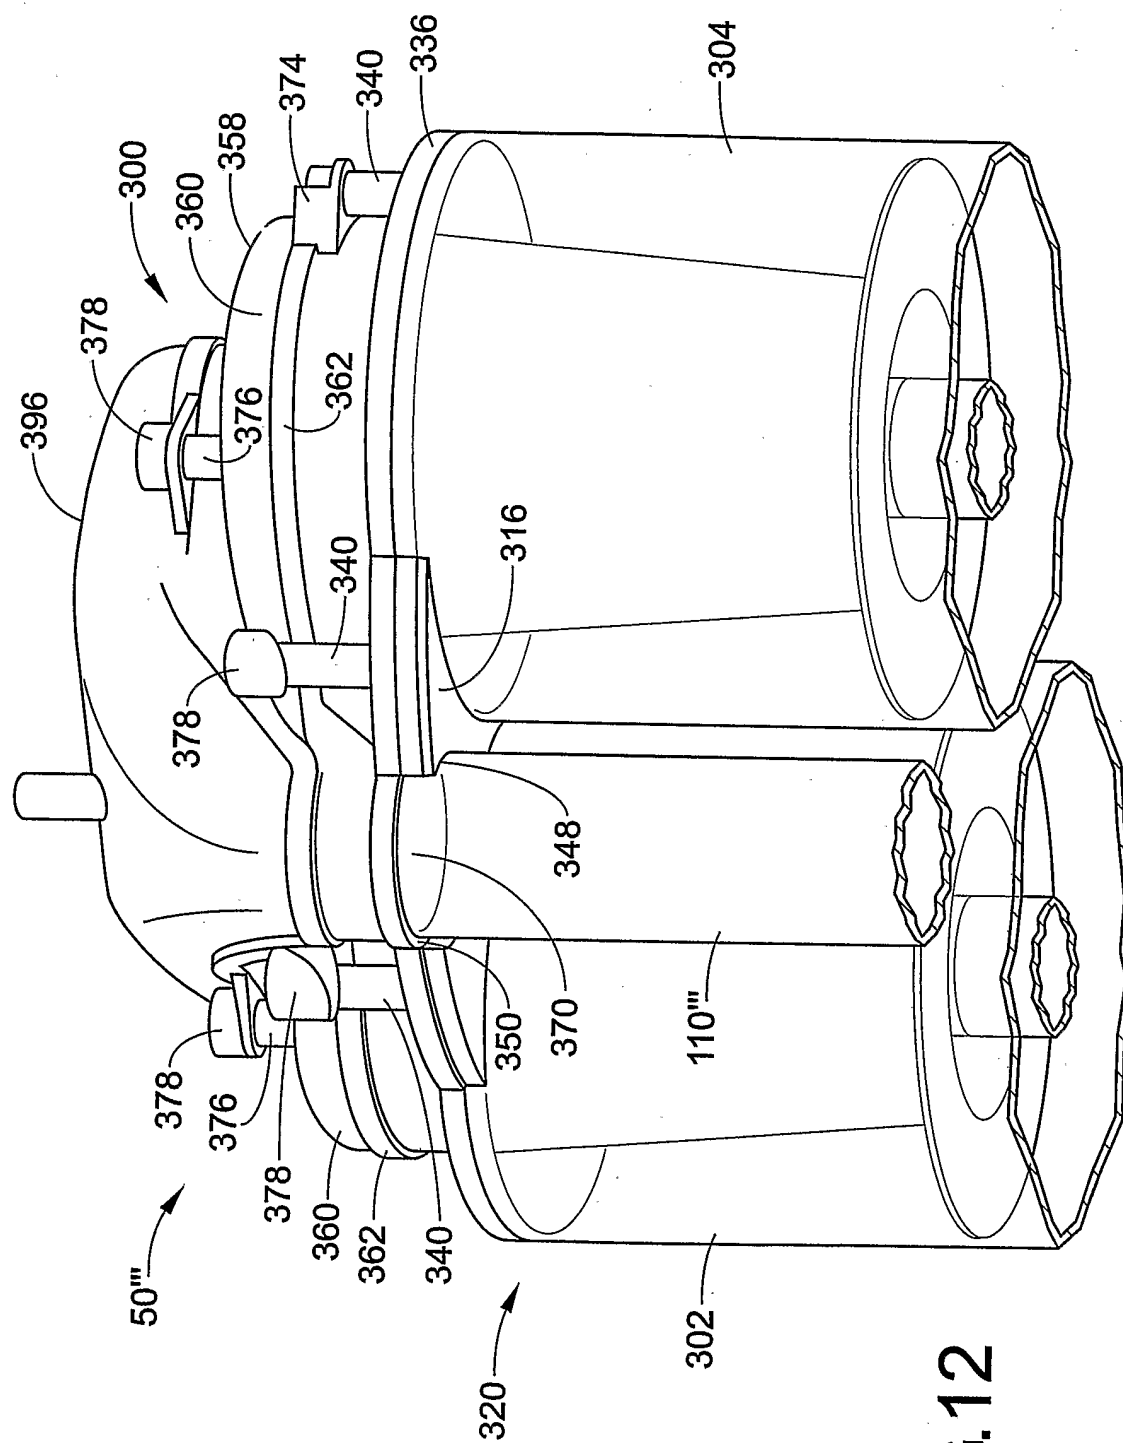


FIG. 12

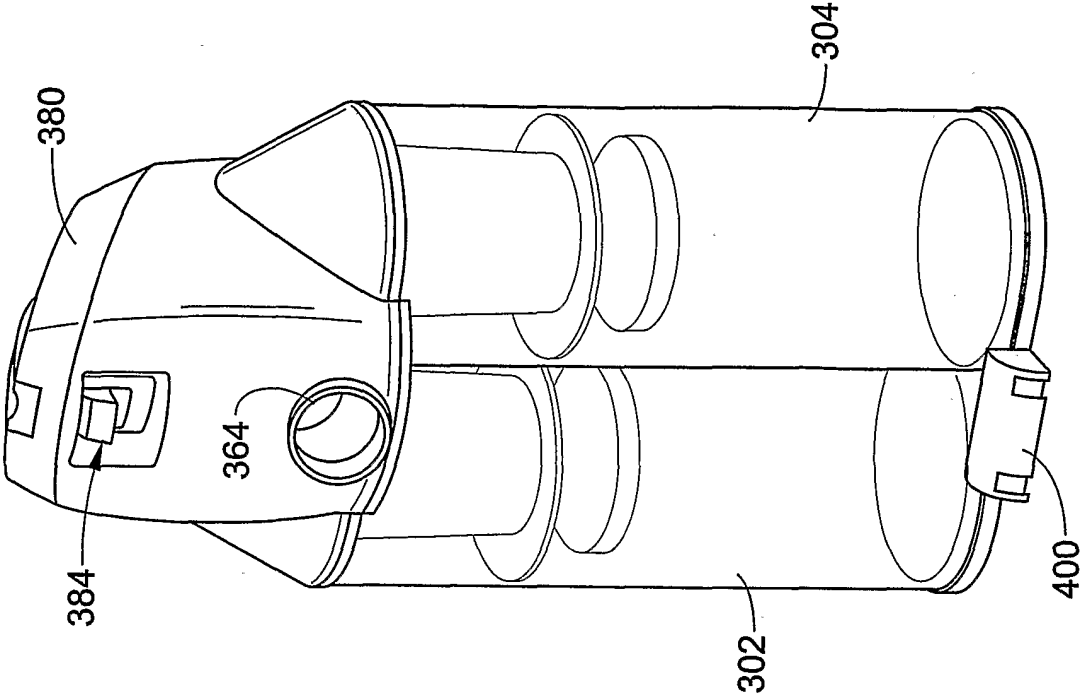


FIG. 13

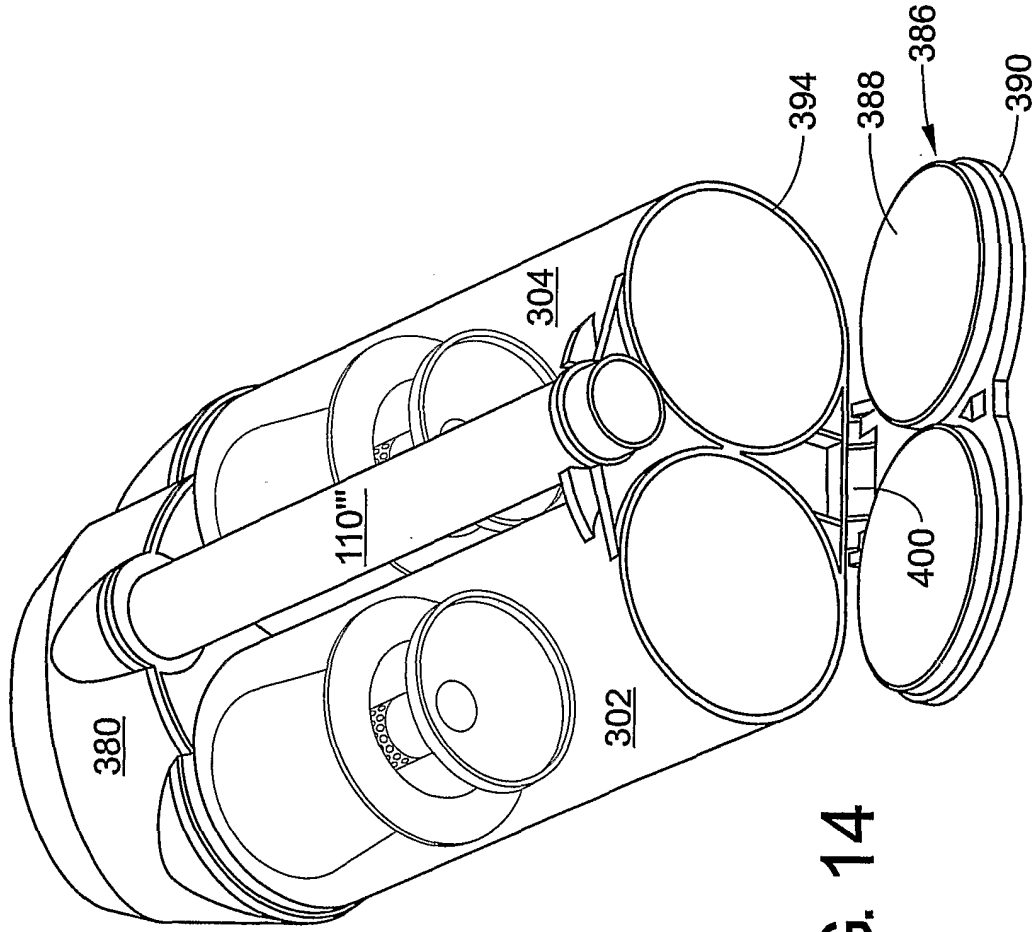


FIG. 14

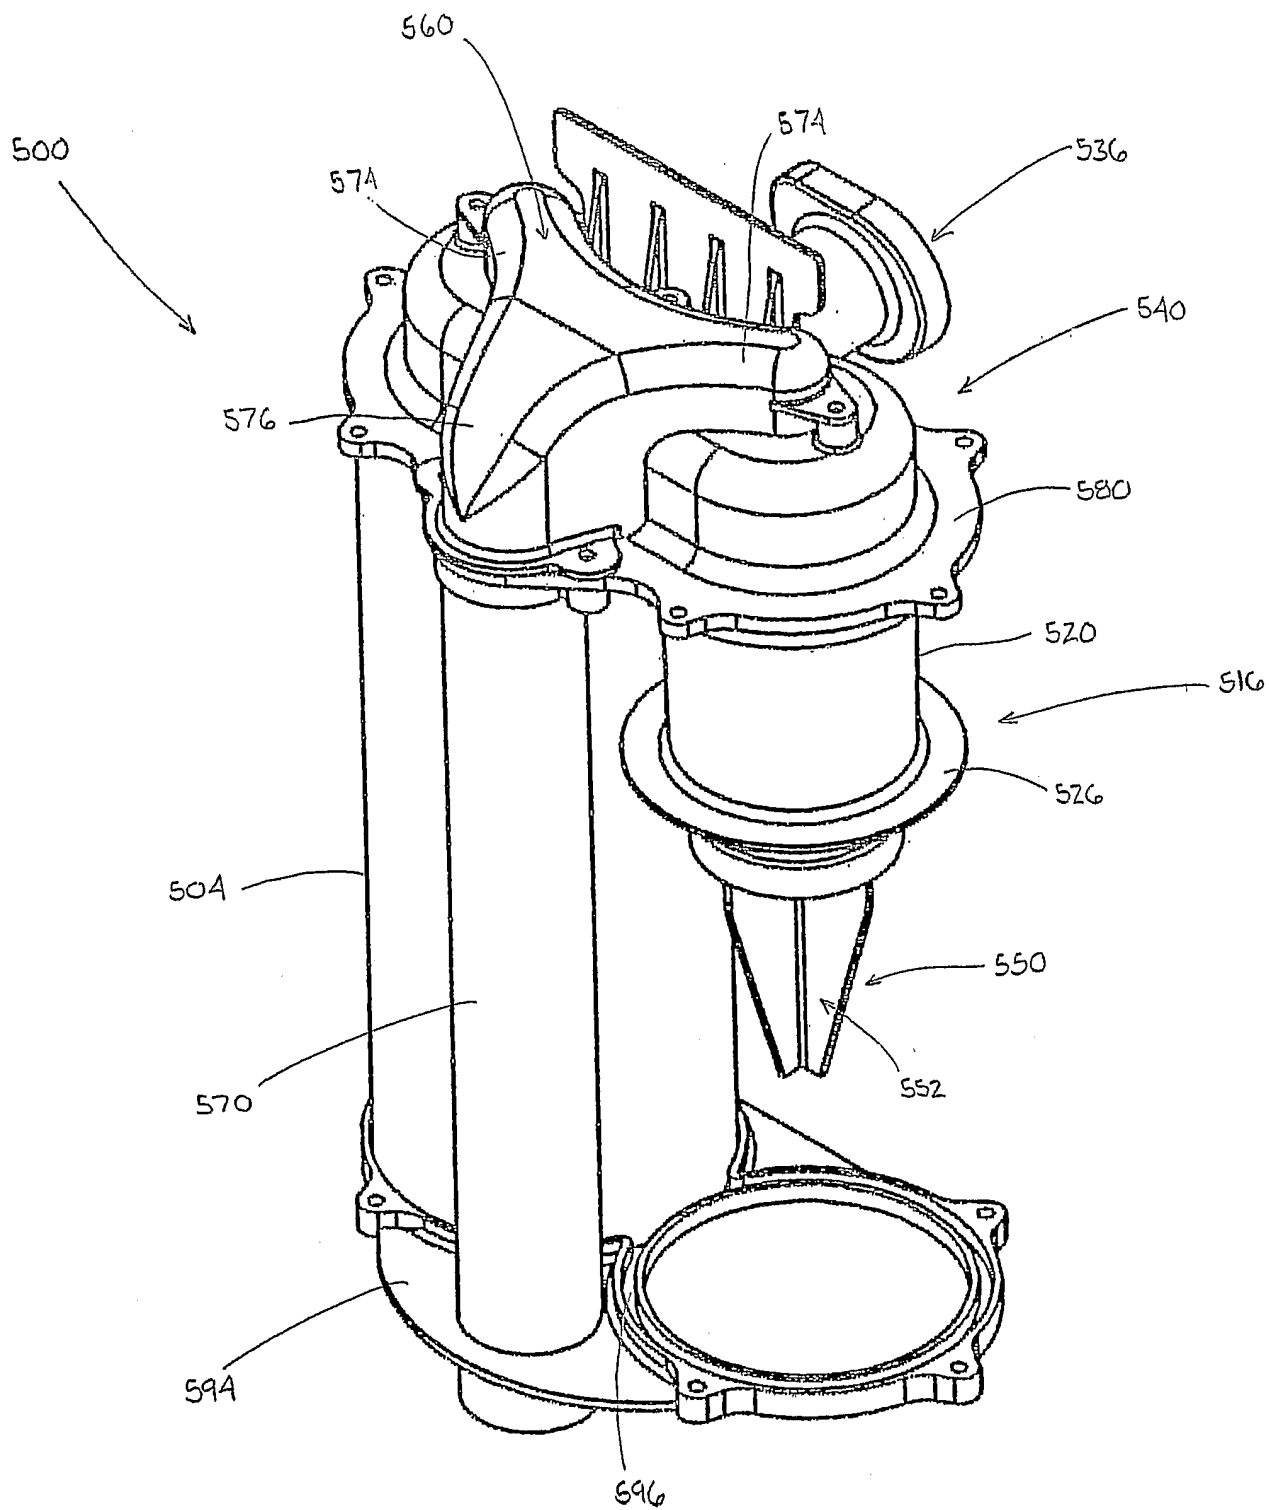


FIG. 15

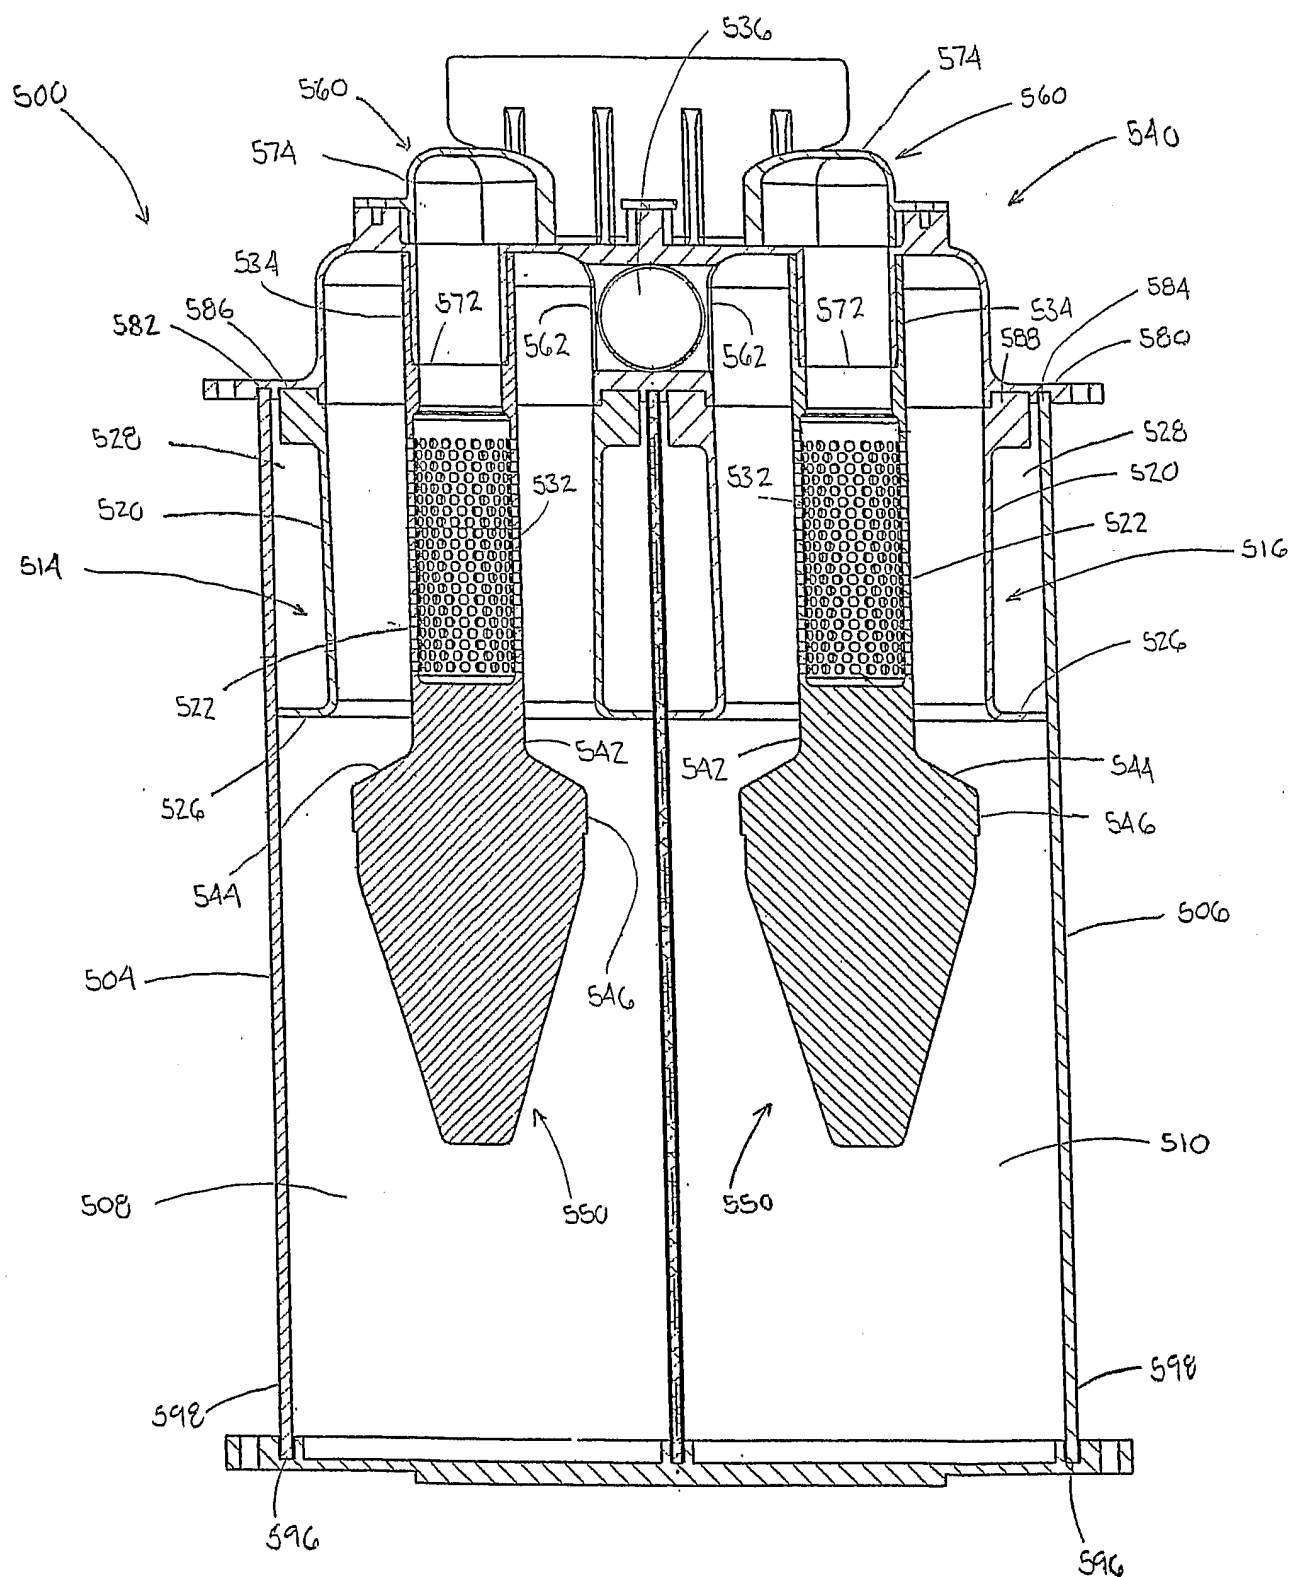


FIG. 16

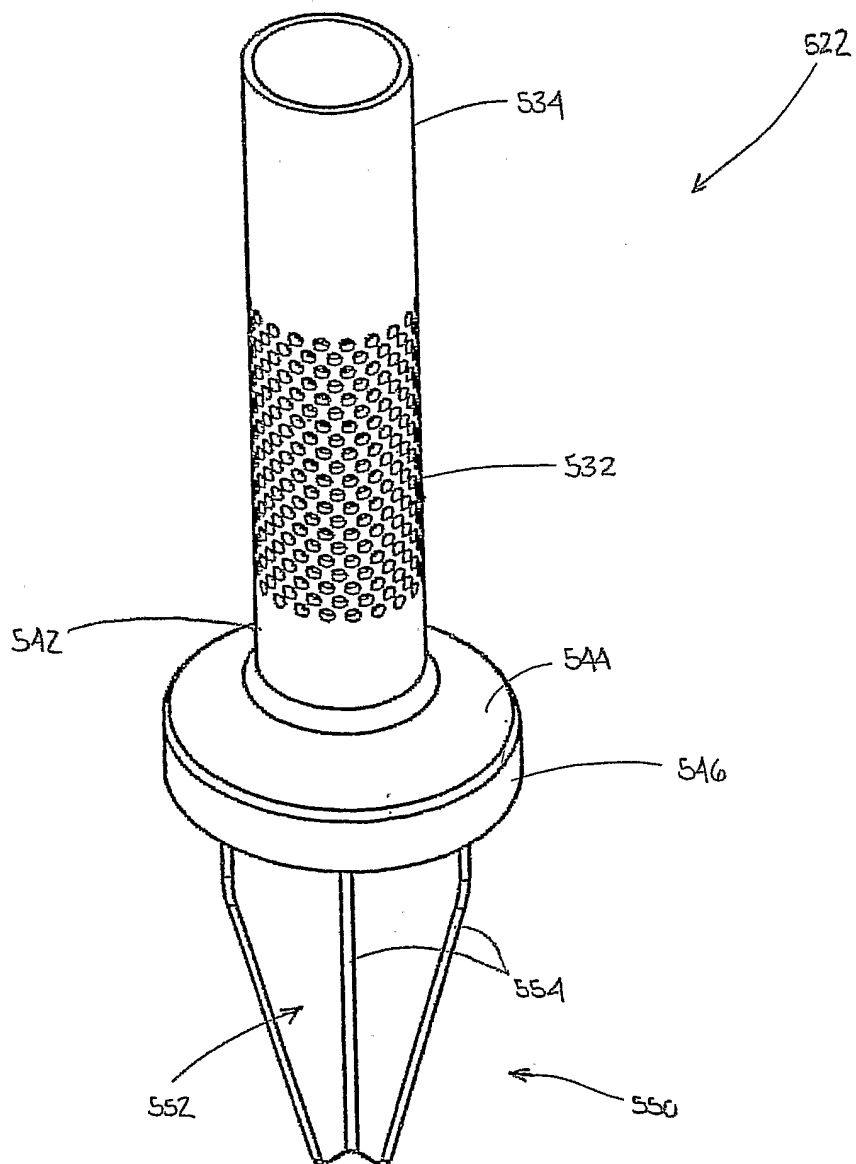


FIG. 17

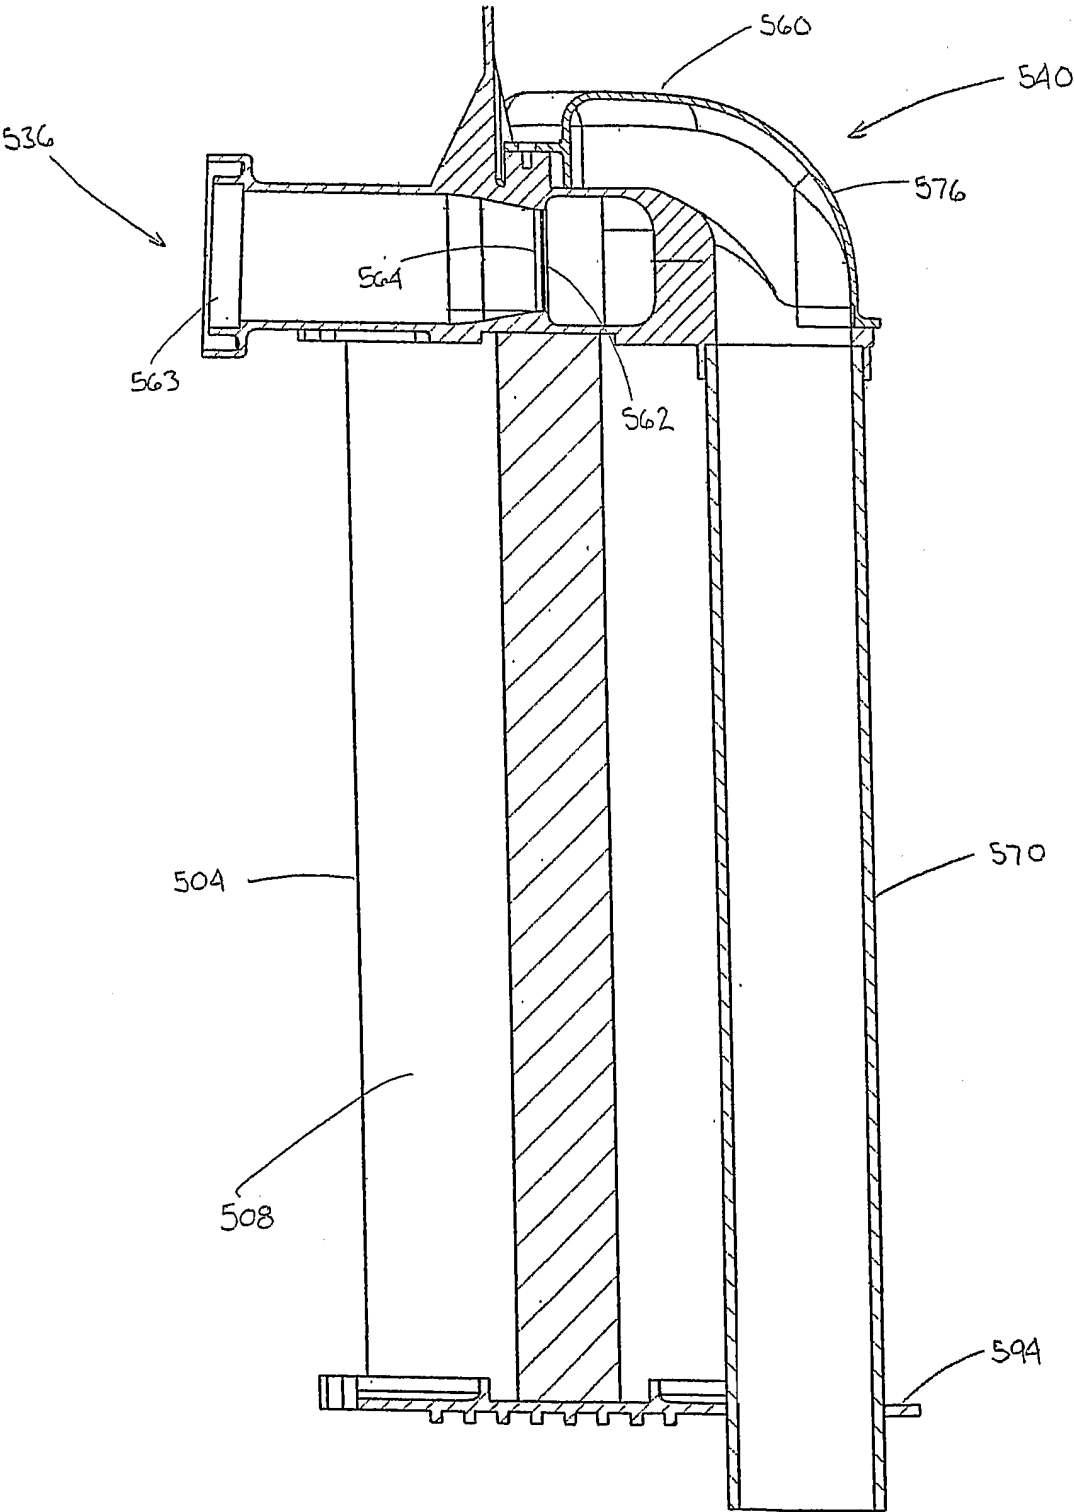


FIG. 18

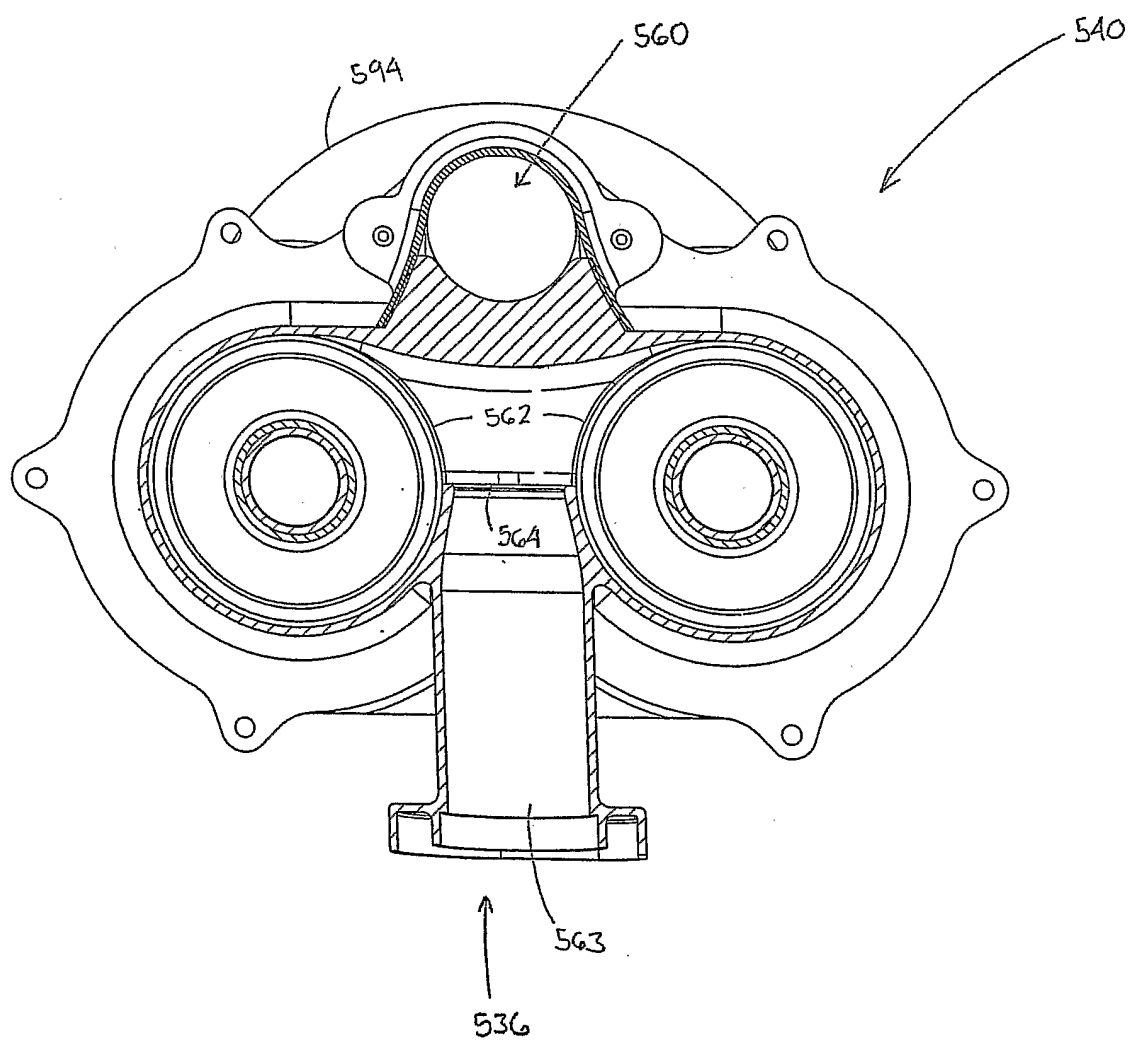


FIG. 19

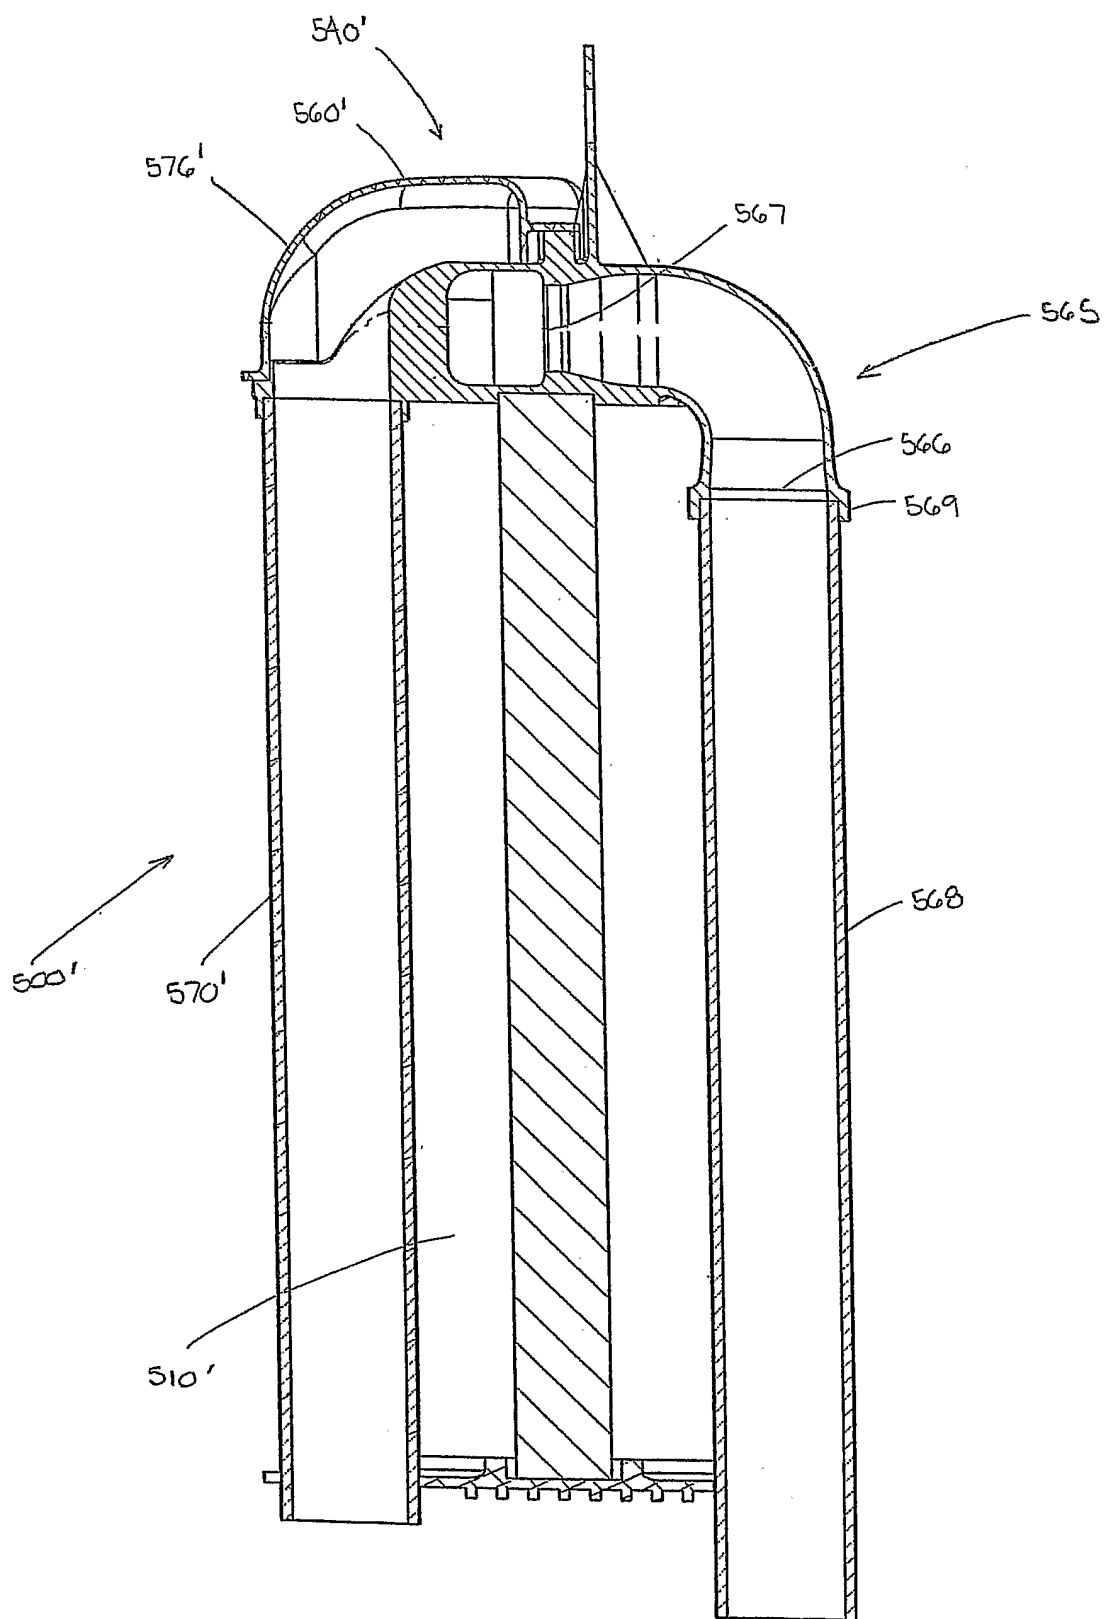


FIG. 20

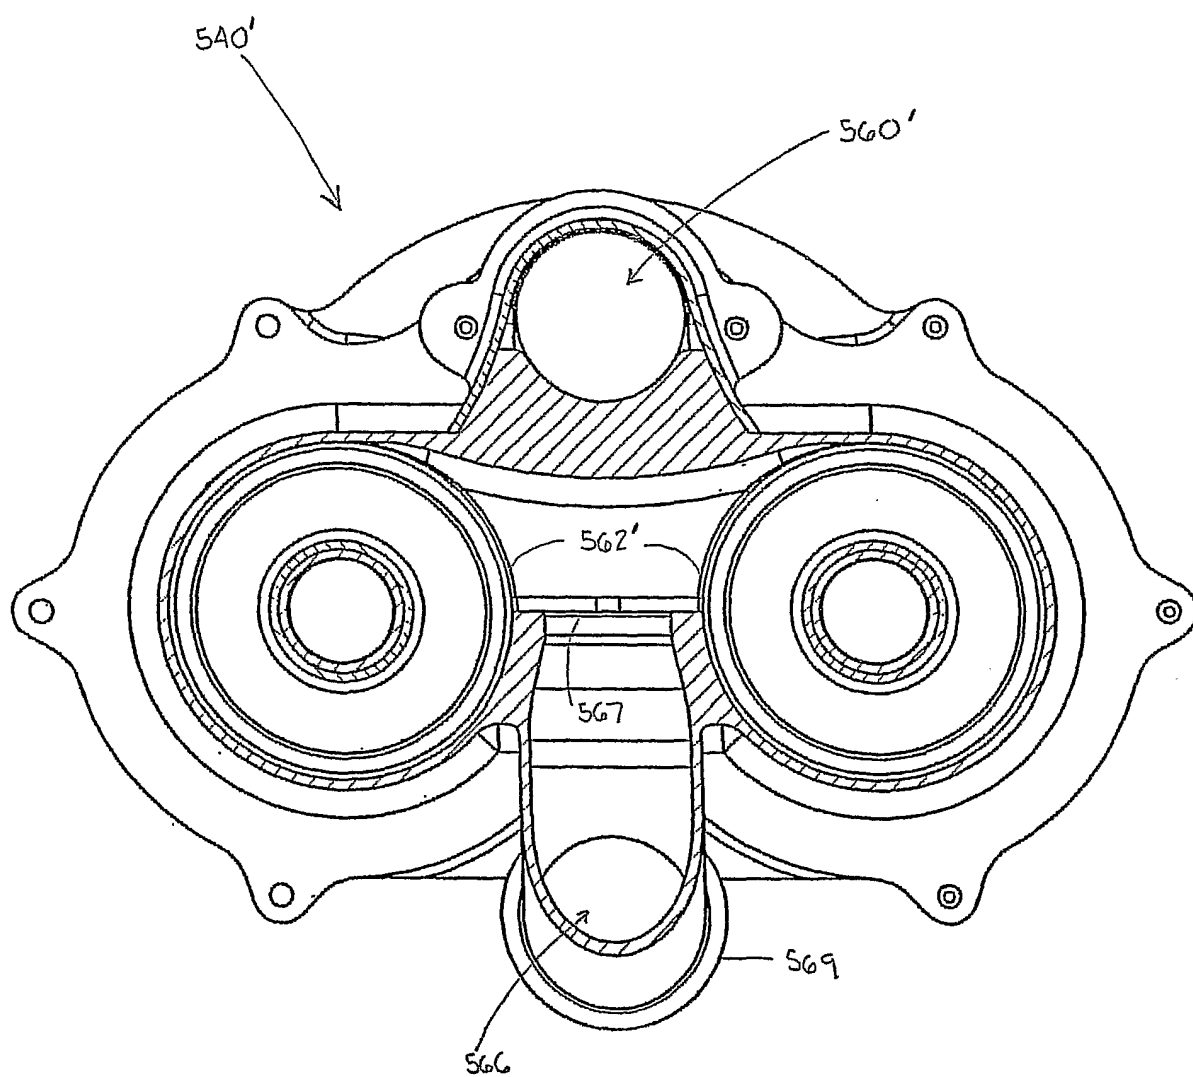


FIG. 21