



Office de la Propriété

Intellectuelle
du CanadaUn organisme
d'Industrie CanadaCanadian
Intellectual Property
OfficeAn agency of
Industry Canada

CA 2684696 C 2010/10/12

(11)(21) 2 684 696

(12) BREVET CANADIEN
CANADIAN PATENT

(13) C

(86) Date de dépôt PCT/PCT Filing Date: 2008/05/07
 (87) Date publication PCT/PCT Publication Date: 2008/11/27
 (45) Date de délivrance/Issue Date: 2010/10/12
 (85) Entrée phase nationale/National Entry: 2009/11/20
 (86) N° demande PCT/PCT Application No.: CA 2008/000877
 (87) N° publication PCT/PCT Publication No.: 2008/141423
 (30) Priorité/Priority: 2007/05/21 (US60/939,254)


(51) Cl.Int./Int.Cl. C22B 21/00 (2006.01),
 C22B 3/10 (2006.01), C22B 3/22 (2006.01),
 C22B 3/38 (2006.01)

(72) Inventeurs/Inventors:
 BOUDREAU, RICHARD, CA;
 ALEX, SERGE, CA;
 BIASOTTO, FABIENNE, CA

(73) Propriétaire/Owner:
 EXPLORATION ORBITE VSPA INC., CA

(74) Agent: BERESKIN & PARR LLP/S.E.N.C.R.L., S.R.L.

(54) Titre : PROCEDES D'EXTRACTION DE L'ALUMINIUM ET DU FER A PARTIR DE MINERAIS ALUMINEUX
 (54) Title: PROCESSES FOR EXTRACTING ALUMINUM AND IRON FROM ALUMINOUS ORES

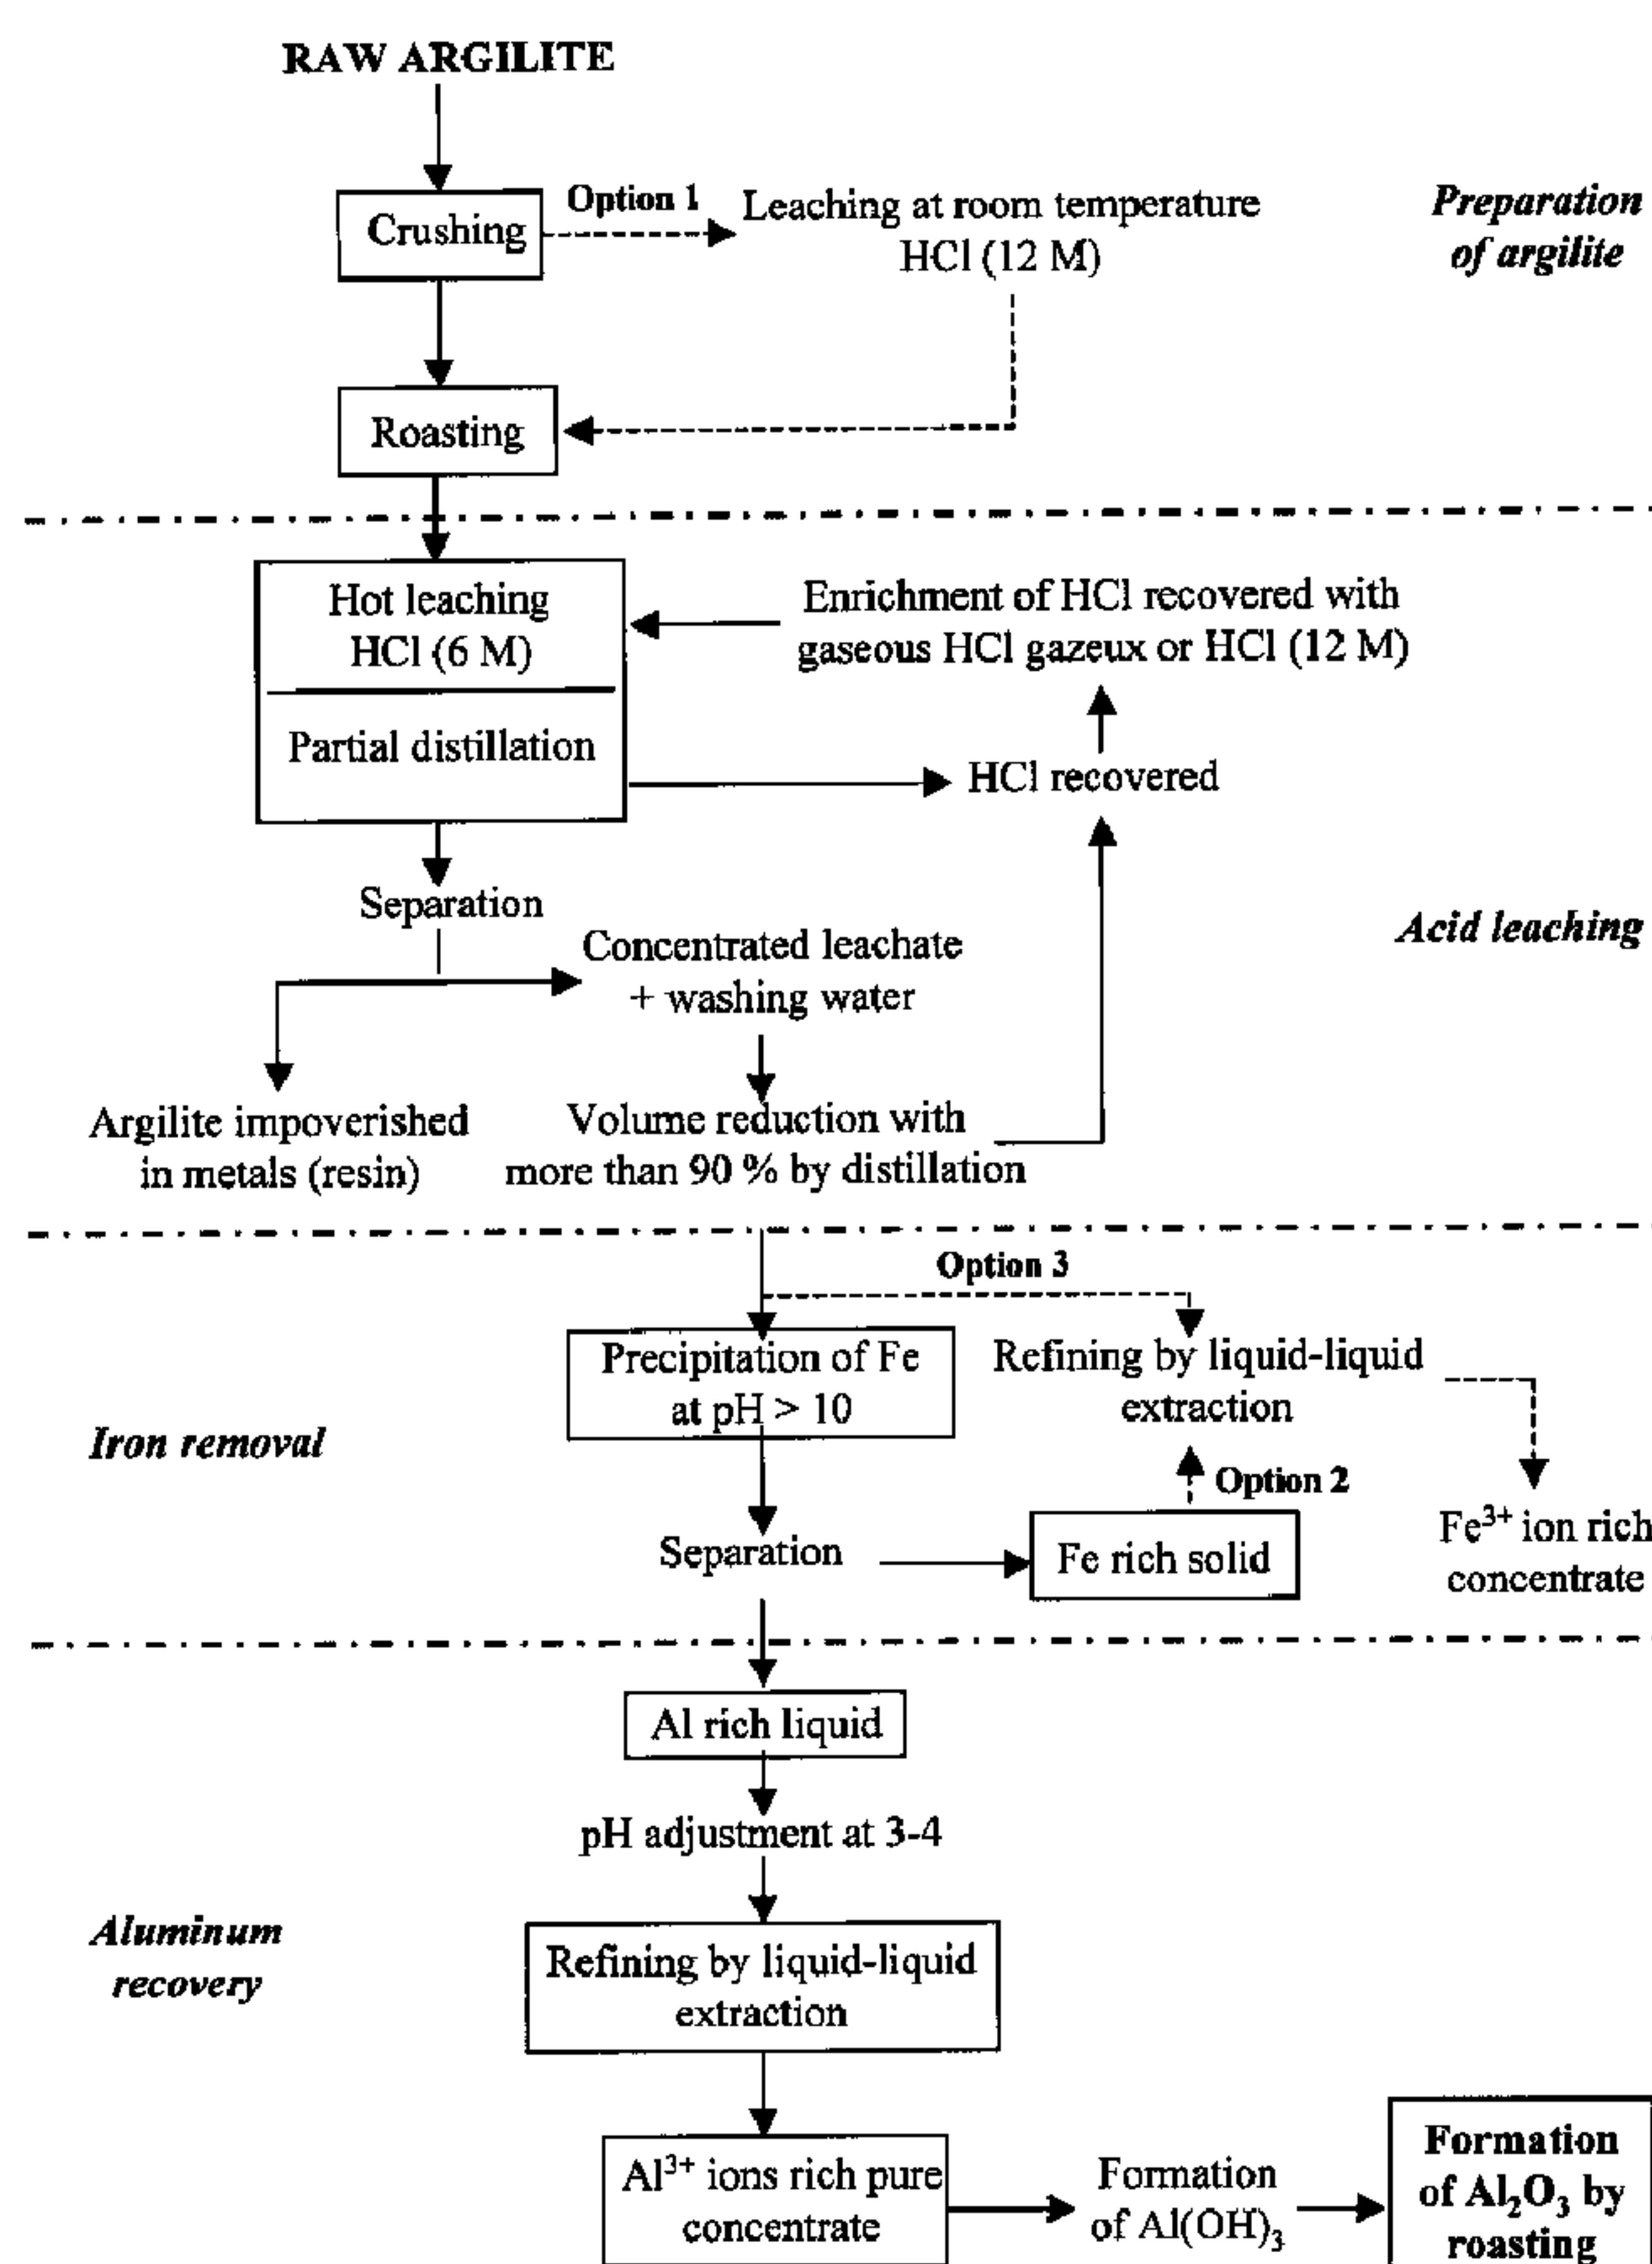

(57) Abrégé/Abstract:

There are provided processes and compositions for extracting aluminum and/or iron ions from aluminous ores or a mixture. One process comprises recovering said aluminum ions from a composition comprising said aluminum ions, said iron ions, an organic

(57) Abrégé(suite)/Abstract(continued):

solvent and an extracting agent adapted to form an organometallic complex substantially selectively with said iron ions or with said aluminum ions which is soluble in said organic solvent. Another process for extracting aluminum from an ore comprising leaching said ore with an acid so as to obtain a leachate and a solid residue and removing at least a portion of iron ions contained in said leachate by either substantially selectively precipitating said at least a portion of said iron ions in basic conditions in which the pH is of at least 10, or substantially selectively complexing said at least a portion of said iron ions with an extracting agent adapted to form an organometallic complex. Another process for at least partially separating aluminum ions from iron ions comprised in a composition comprises substantially selectively precipitating at least a portion of said iron ions in basic conditions in which the pH is at least 10.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
27 November 2008 (27.11.2008)

PCT

(10) International Publication Number
WO 2008/141423 A1

(51) International Patent Classification:

C22B 21/00 (2006.01) **C22B 3/22** (2006.01)
C22B 3/10 (2006.01) **C22B 3/38** (2006.01)

(21) International Application Number:

PCT/CA2008/000877

(22) International Filing Date: 7 May 2008 (07.05.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/939,254 21 May 2007 (21.05.2007) US

(71) Applicant (for all designated States except US): EXPLORATION ORBITE VSPA INC. [CA/CA]; 400 rue St-Jacques, Bureau 200, Montréal, Québec H2Y 1S1 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BOUDREAU,

Richard [CA/CA]; 2723 Luce-Guilbeault, Ville St-Laurent, Québec H4R 2T3 (CA). **ALEX, Serge** [CA/CA]; 1336 Blanchette, Québec, Québec G1Y 1P1 (CA). **BIASOTTO, Fabienne** [CA/CA]; 6178 Durocher, Outremont, Québec H2V 3Y6 (CA).


(74) Agent: BERESKIN & PARR; 40 King Street West, 40th Floor, Toronto, Ontario M5H 3Y2 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: PROCESSES FOR EXTRACTING ALUMINUM AND IRON FROM ALUMINOUS ORES

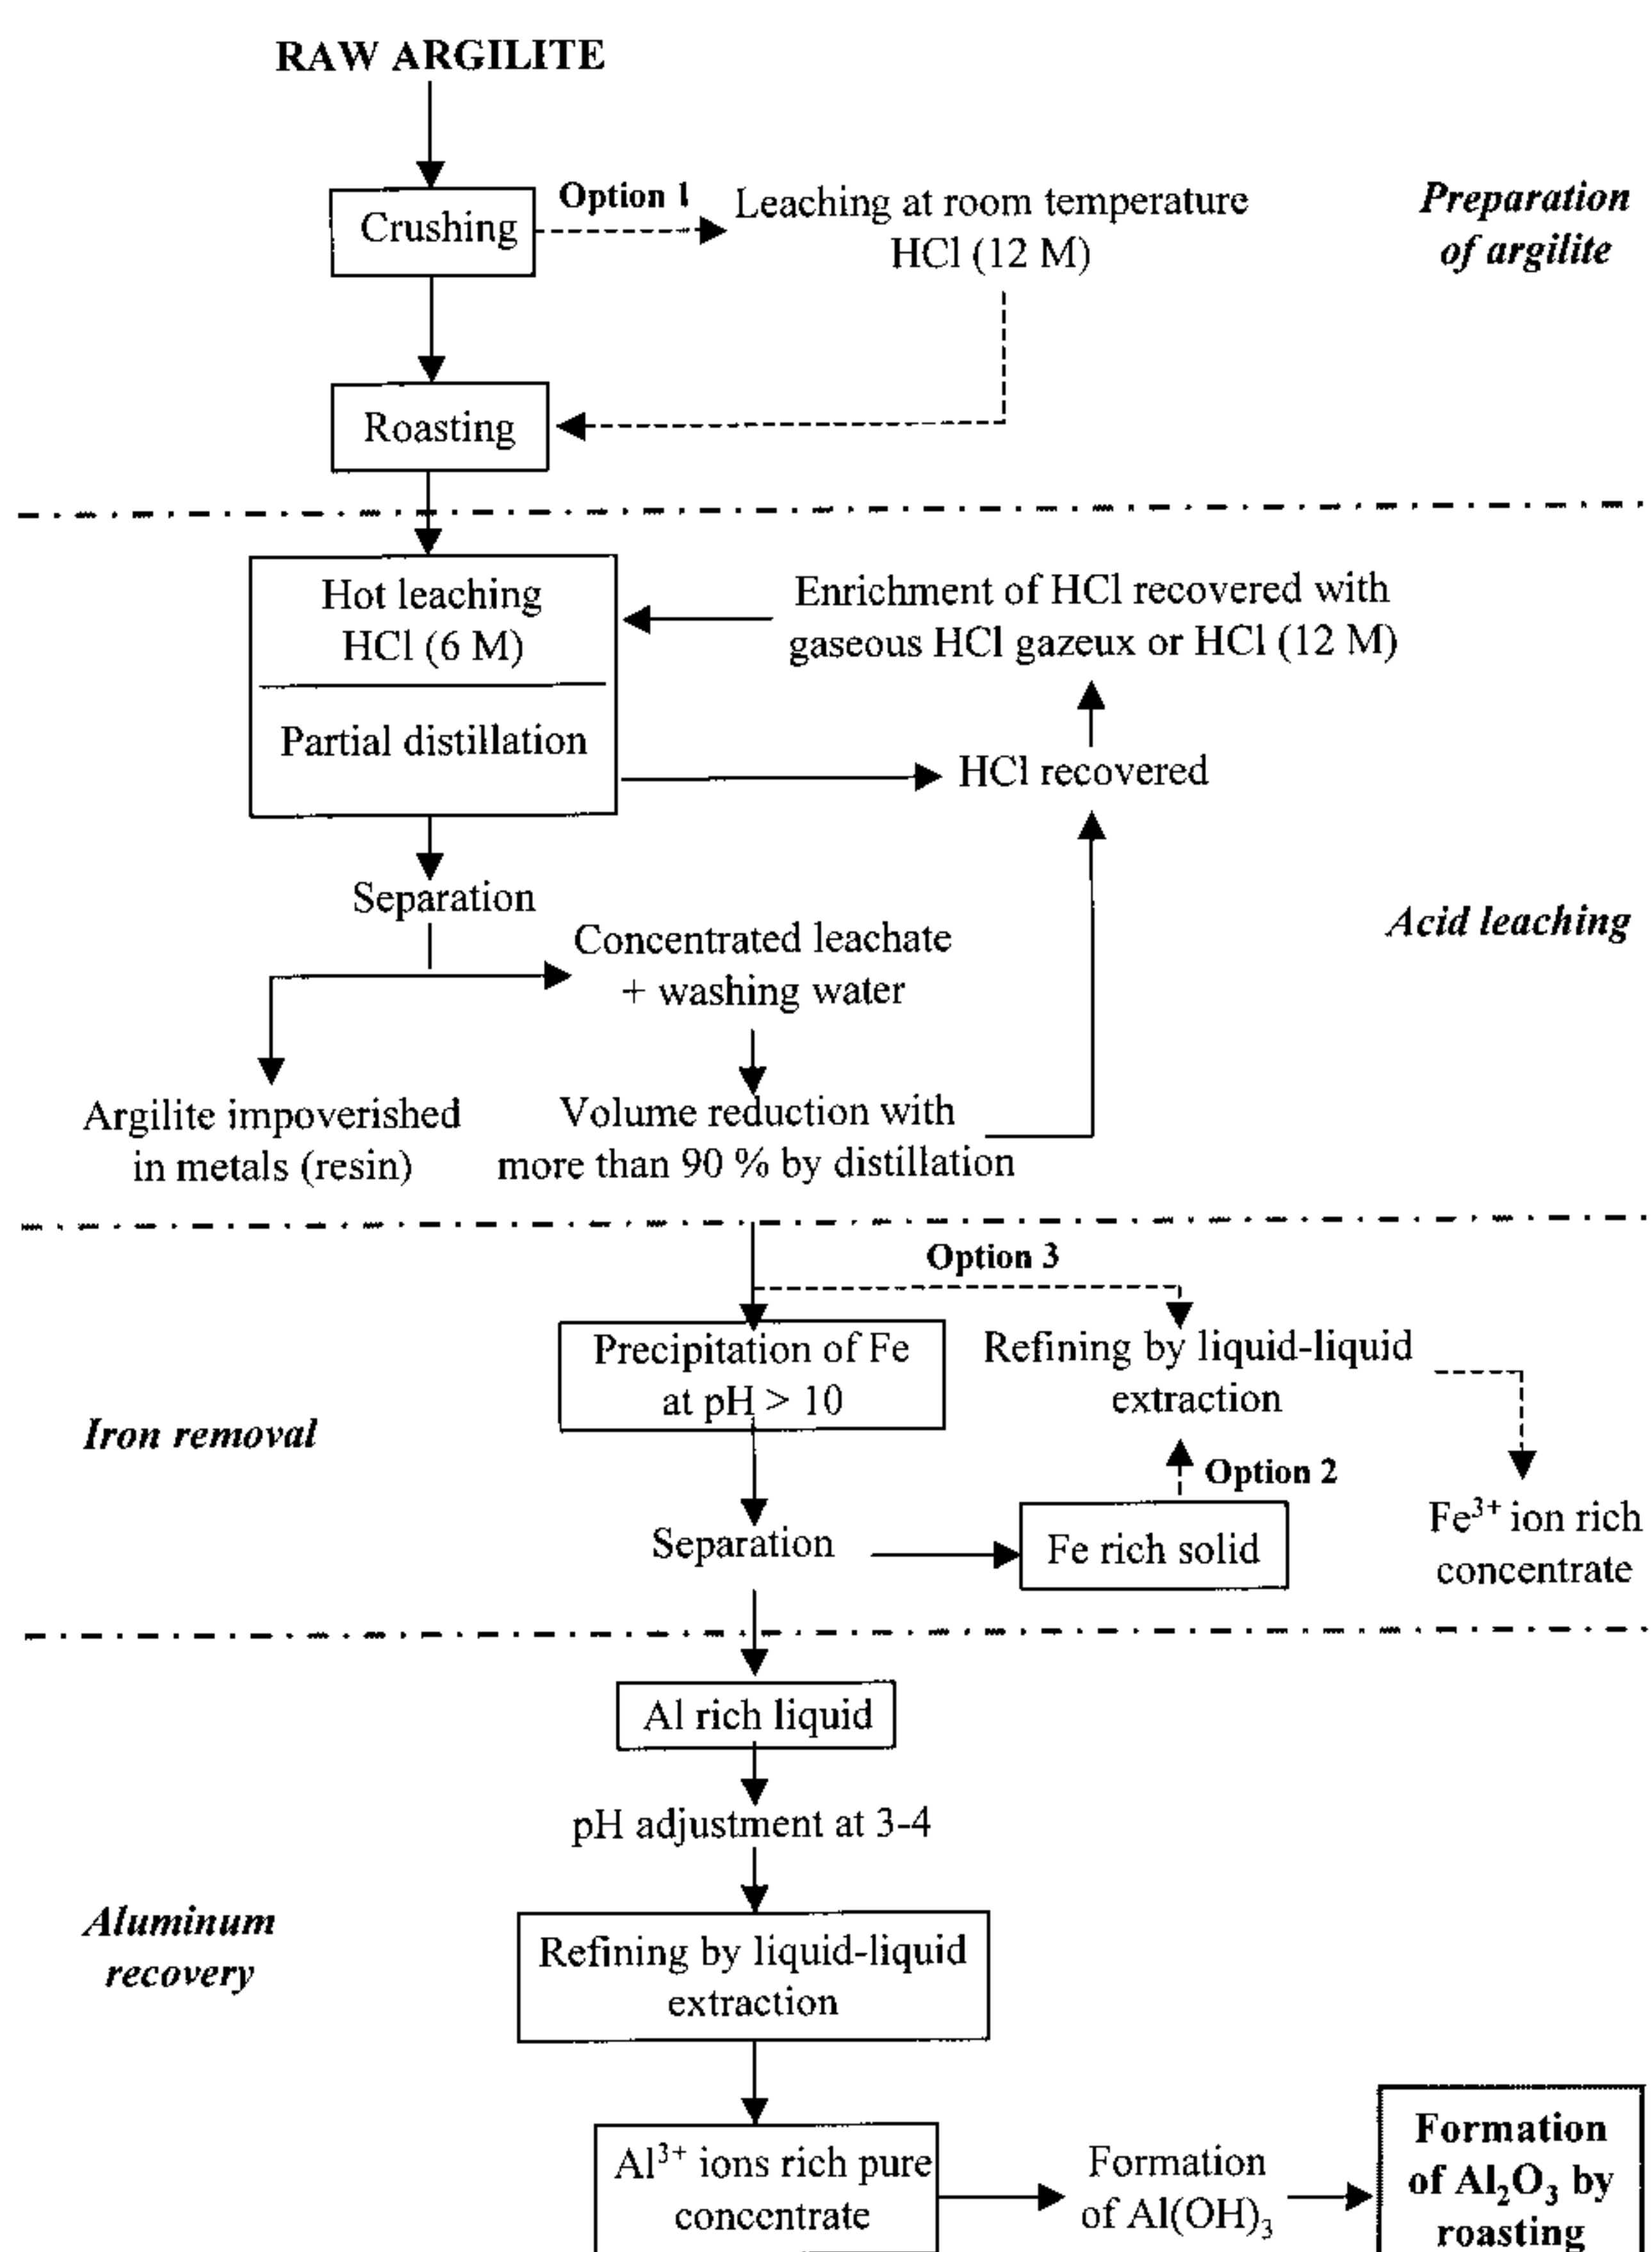

(57) Abstract: There are provided processes and compositions for extracting aluminum and/or iron ions from aluminous ores or a mixture. One process comprises recovering said aluminum ions from a composition comprising said aluminum ions, said iron ions, an organic solvent and an extracting agent adapted to form an organometallic complex substantially selectively with said iron ions or with said aluminum ions which is soluble in said organic solvent. Another process for extracting aluminum from an ore comprising leaching said ore with an acid so as to obtain a leachate and a solid residue and removing at least a portion of iron ions contained in said leachate by either substantially selectively precipitating said at least a portion of said iron ions in basic conditions in which the pH is of at least 10, or substantially selectively complexing said at least a portion of said iron ions with an extracting agent adapted to form an organometallic complex. Another process for at least partially separating aluminum ions from iron ions comprised in a composition comprises substantially selectively precipitating at least a portion of said iron ions in basic conditions in which the pH is at least 10.

Fig. 1

WO 2008/141423 A1

WO 2008/141423 A1

GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:— *with international search report*

PROCESSES FOR EXTRACTING ALUMINUM AND IRON FROM ALUMINOUS ORES

TECHNICAL FIELD

[0001] The present invention relates to improvements in the field of chemistry applied to extraction of aluminum from aluminous ores. For example, such processes are useful for extracting aluminum from aluminous ores comprising various types of metals such as Fe, K, Mg, Na, Ca, Mn, Ba, Zn, Li, Sr, V, Ni, Cr, Pb, Cu, Co, Sb, As, B, Sn, Be, Mo, or mixtures thereof.

BACKGROUND OF THE INVENTION

[0002] More than 96 % of the alumina which is produced worldwide is obtained from bauxite, which is a mineral that is particularly rich in alumina (40 – 60 %) and whose main suppliers are from Jamaica, Australia, Brazil, Africa and Russia. In certain areas of the world there are large quantities of aluminous ores, which are aluminosilicates (for example argillite, nepheline, etc.) that are relatively rich in alumina (20 – 28 %). However such areas have received little attention up to now because the production costs for extracting aluminum from such ores remained too high. In these aluminous materials, and contrary to bauxite, aluminum oxide is associated with silicated or sulfated phases. Thus, the Bayer process cannot be used, which means that alternative treatments for the production of alumina must be used or developed. Various processes have been proposed so far in order to extract aluminum from such aluminous ores comprising aluminosilicates but there is still room for improvement or for alternative routes.

SUMMARY OF THE INVENTION

[0003] According to one aspect, there is provided a process for extracting aluminum ions from a mixture comprising iron ions and the aluminum ions. The process comprises recovering the aluminum ions from a composition comprising the aluminum ions, the iron ions, an organic solvent and an extracting agent adapted to form an organometallic complex substantially

selectively with the iron ions or with the aluminum ions which is soluble in the organic solvent.

[0004] According to one embodiment, the composition can comprise an acidic aqueous phase comprising aluminum ions and an organic phase comprising iron ions complexed with the extracting agent and wherein the aluminum ions are recovered by separating the aqueous phase from the organic phase. The aqueous phase can have a pH of about 1 to about 2.5 or of about 2. The extracting agent can be chosen from phosphoric acids and derivatives thereof, and phosphinic acids and derivatives thereof. For example, the extracting agent can be chosen from di-2-ethylhexyl phosphoric acid (HDEHP), bis(2,4,4-trimethylpentyl) phosphinic acid and 2-ethylhexyl phosphonic acid mono-2-ethylhexyl ester. The extracting agent can have a concentration of about 0.5 M to about 1.5 M in the organic phase or of about 1 M in the organic phase. The composition can have a volumic ratio organic phase : aqueous phase of about 1:1. After extraction (passing the composition through the membrane), the aqueous phase can be separated from the organic phase, and the aluminum ions can recovered in the aqueous phase and the aqueous phase can be treated with a base (for example NaOH, KOH, or a mixture thereof). The aqueous phase can be treated with the base so as to obtain a pH of at least about 4. The process can further comprise treating the organic phase with HCl and isolating the iron ions in the form of Fe^{3+} .

[0005] According to another embodiment, the composition can comprise an acidic aqueous phase comprising iron ions and an organic phase comprising aluminum ions complexed with the extracting agent, and wherein the aluminum ions are recovered by separating the aqueous phase from the organic phase. The aqueous phase can have a pH of about 2.5 to about 3.5. The extracting agent can be a phosphinic acid or a derivative thereof. For example, the extracting agent can be bis(2,4,4-trimethylpentyl) phosphinic acid. The extracting agent can have a concentration of about 10 % to about 25 % v/v with respect to the organic solvent or of about 20 % v/v with respect to the organic solvent. The composition can have a volumic ratio aqueous phase : organic phase of about 1:1 to about 1:3. During the process, the

composition can be at a temperature of about 30 °C to about 50 °C or at a temperature of about 35 °C to about 45 °C. After extraction through the membrane, the aqueous phase can be separated from the organic phase. The complexed aluminum ions can be recovered in the organic phase. The organic phase can then be treated with HCl so as to obtain an aqueous composition comprising the aluminum ions.

[0006] For example, the organic solvent can be chosen from hydrocarbons. For example, the organic solvent can be chosen from C₅-C₁₂ alkanes and mixtures thereof. The organic solvent can also be hexane or heptane. The organic phase and the aqueous phase can be separated by means of a filtration membrane, for example a hollow fiber membrane. Such membrane can comprise polypropylene, polyvinylidene difluoride, or a mixture thereof. The aqueous phase can be treated with the base so as to obtain a pH of at least about 4. The process can also further comprise a separation by filtration so as to obtain Al(OH)₃. The process can also comprise washing the Al(OH)₃. The process can also comprise converting Al(OH)₃ into Al₂O₃. Conversion of Al(OH)₃ into Al₂O₃ can be carried out at a temperature of about 800 °C to about 1200 °C.

[0007] According to another aspect there is provided a composition comprising aluminum ions, iron ions, an organic solvent and an extracting agent adapted to form an organometallic complex substantially selectively with the iron ions or with the aluminum ions which is soluble in the organic solvent.

[0008] According to another aspect, there is provided a composition comprising an acidic aqueous phase comprising aluminum ions and an organic phase comprising iron ions complexed with an extracting agent.

[0009] According to another aspect, there is provided a composition comprising an acidic aqueous phase comprising iron ions and an organic phase comprising aluminum ions complexed with an extracting agent.

[0010] The various parameters, embodiments and examples previously described concerning the processes can also be applied, when possible, to these compositions.

[0011] According to another aspect, there is provided a process for at least partially separating aluminum ions from iron ions comprised in a composition, the process comprising substantially selectively precipitating at least a portion of the iron ions in basic conditions in which the pH is of at least 10. The iron ions can be precipitated from a basic aqueous composition comprising NaOH or KOH. For example, the base can be reacted with the composition so as to obtain a mixture in which the pH is of at least 10, and then, the at least portion of precipitated iron ions can be separated from the rest of the mixture. For example, the precipitated iron ions can be separated from the rest of the mixture by carrying out a filtration, a decantation, a centrifugation, or combinations thereof. The process can further comprise rinsing the obtained precipitated iron ions with a basic solution. The basic solution can have a concentration of about 0.01 M to about 0.02 M. The pH can be at least 11, at least 12, about 10.8 to about 11.2, or about 11.5 to about 12.5. The process can further comprise purifying the precipitated iron ions by means of a hollow fiber membrane.

[0012] According to another aspect, there is provided a process for extracting aluminum from an aluminum ore, the process comprising:

- leaching the aluminum ore with an acid so as to obtain a leachate and a solid residue;

- removing at least a portion of iron ions contained in the leachate by:

(i) substantially selectively precipitating the at least portion of the iron ions in basic conditions in which the pH is of at least 10, so as to obtain an aluminum enriched composition; or

(ii) substantially selectively complexing the at least portion of the iron ions with an extracting agent adapted to form an organometallic complex substantially selectively with the iron ions so as to obtain an aluminum enriched composition.

[0013] For example, the acid can be HCl. The aluminum ore can be leached with HCl at a temperature of at least 80 °C, at least 90 °C, or about 100 °C to about 110 °C. HCl can have a concentration of about 6 M. The aluminum ore / acid ratio can be about 1 / 10 in weight by volume.

[0014] For example, the removal of the at least portion of iron ions can be carried out by precipitating the iron ions from a basic aqueous composition. The composition can comprise comprising NaOH or KOH.

[0015] For example, the removal of the at least portion of iron ions can be carried out by reacting the leachate with a base in order to obtain a pH of at least 10 and precipitating the iron ions.

[0016] For example, the precipitated iron ions can be separated from the rest of the leachate by carrying out a filtration, a decantation, a centrifugation, or mixtures thereof.

[0017] The process can further comprise rinsing the obtained precipitated iron ions with a basic solution. The basic solution can have a concentration of about 0.01 M to about 0.02 M. The pH can be at least 11, at least 12, about 10.8 to about 11.2, or about 11.5 to about 12.5. The process can further comprise purifying the precipitated iron ions by means of a hollow fiber membrane.

[0018] The removal of the at least portion of iron ions can be carried out by reacting the leachate, under acidic conditions, with the extracting agent and an organic solvent in order to obtain a composition comprising an acidic aqueous phase comprising aluminum ions and an organic phase comprising iron ions complexed with the extracting agent. The aluminum enriched composition can be obtained by separating the aqueous phase from the

organic phase. The aqueous phase can have a pH of about 1 to about 2.5, or about 2. The extracting agent can be chosen from di-2-ethylhexyl phosphoric acid (HDEHP), bis(2,4,4-trimethylpentyl) phosphinic acid and 2-ethylhexyl phosphonic acid mono-2-ethylhexyl ester). The extracting agent can have a concentration of about 0.5 M to about 1.5 M in the organic phase or about 1 M in the organic phase.

[0019] For example, the organic solvent can be chosen from C₅-C₁₂ alkanes and mixtures thereof. The organic solvent can be heptane. The composition can have a volumic ratio organic phase : aqueous phase of about 1:1. The organic phase and the aqueous phase can be separated by means of a filtration membrane. The membrane can be a hollow fiber membrane. The membrane can comprise polypropylene, polyvinylidene difluoride, or a mixture thereof.

[0020] After passing the composition through the membrane, the aqueous phase can be separated from the organic phase. The aluminum ions can be recovered in the aqueous phase and the aqueous phase is treated with a base (such as NaOH or KOH). The aqueous phase can be treated with the base so as to obtain a pH of at least about 4. The process can further comprise a separation by filtration to obtain Al(OH)₃, which can be eventually washed.

[0021] For example, the aluminum ore can be crushed and roasted before being leached.

[0022] For example, before removal of the iron ions, the leachate is treated with a base.

[0023] For example, before removal of the iron ions, the leachate can be distilled so as to reduce its volume.

[0024] For example, the process can further comprise at least partially recovering the aluminum ions present in the aluminum enriched composition.

[0025] For example, the aluminum enriched composition can be treated with an extracting agent adapted to form an organometallic complex substantially selectively with the aluminum ions in the presence of an organic solvent and an acid solution in order to form a composition comprising an acidic aqueous phase comprising impurities and an organic phase comprising aluminum ions complexed with the extracting agent. The aluminum ions can be recovered by separating the aqueous phase from the organic phase. For example, the aqueous phase can have a pH of about 2.5 to about 3.5. The extracting agent can be a phosphinic acid or a derivative thereof. The extracting agent can be bis(2,4,4-trimethylpentyl) phosphinic acid. The extracting agent can have a concentration of about 10 % to about 25 % v/v or about 20 % v/v with respect to the organic solvent. The organic solvent can be chosen from C₅-C₁₂ alkanes and mixtures thereof. The organic solvent can be heptane. The composition can have a volumic ratio aqueous phase : organic phase of about 1:1 to about 1:3. The organic phase and the aqueous phase can be separated by means of a membrane (for example a hollow fiber membrane). The membrane can comprise polypropylene, polyvinylidene difluoride, or a mixture thereof. The composition can be at a temperature of about 30 °C to about 50 °C, or about 35 °C to about 45 °C. After passing the composition through the membrane, the aqueous phase can be separated from the organic phase. The complexed aluminum ions can be recovered in the organic phase. The organic phase can then be treated with HCl so as to obtain an aqueous composition comprising the aluminum ions. The aluminum ions can be converted into Al(OH)₃ by contacting it with a base. Al(OH)₃ can then be converted into Al₂O₃. Such a conversion of Al(OH)₃ into Al₂O₃ can be carried out at a temperature of about 800 °C to about 1200 °C.

BRIEF DESCRIPTION OF DRAWINGS

[0026] In the following drawings, which represent by way of example only, various embodiments of the invention :

[0027] Fig. 1 shows a bloc diagram of a process according to one embodiment of a process for extracting aluminum from an aluminous ore.

DETAILED DESCRIPTION OF VARIOUS EMBODIMENTS

[0028] Further features and advantages will become more readily apparent from the following description of various embodiments as illustrated by way of examples only in the appended drawings wherein:

[0029] As it can be seen from Fig. 1, such a process can comprise various steps, and each of these steps can eventually be individually considered as being a process.

Preparation of argillite sample

[0030] Argillite can be finely crushed in order to help along during the following steps. For example, micronization can shorten the reaction time by few hours (about 2 to 3 hours). In order to remove most of the iron, a leaching step at room temperature is optionally carried out between the crushing step and the roasting step (see option 1). This operation is, for example, carried out with hydrochloric acid HCl (12 M) and an argillite / acid ratio (weight / volume) of 1:5 is used. Depending on experimental conditions (sizes of the particles, time of treatment, agitation system), about 65 % to about 93 % of the iron can then be removed. However, this leaching step can also bring in a certain percentage of the aluminum (0 - 5 %). The last step of the preparation of argillite comprises roasting the pretreated argillite. This can be accomplished at a temperature greater than 550 °C for a period of about 1 to 2 hours. For example, a heat treatment makes it possible to increase the quantity of extracted aluminum by about 30 % to about 40 % for the same period of time. In other words, the quantity of extracted aluminum is doubled. When leaching at room temperature is carried out, a phase separation before roasting can be made in order to recover the acid and reduce heating costs.

Acid leaching

[0031] Acid leaching comprises reacting the crushed and roasted argillite with a hydrochloric acid solution at elevated temperature during a given period of time. For example, the argillite / acid ratio can be of about of

1:10 (weight / volume), the HCl concentration can be of about 6 M, the temperature can be of about 100 °C to about 110 °C, and the reaction time can be of about 5 to about 7 hours. Under such conditions, more than about 90 % of the aluminum and about 100 % of the iron can be extracted in addition to impurities.

[0032] During the second half of such a treatment (for example the last 2 or 3 hours), a portion of the acid can be recovered by condensation. Once the extraction is terminated, the solid (argillite impoverished in metals) can be separated from the liquid by decantation or by filtration, after which it is washed. The residual leachate and the washing water may be completely evaporated. The corresponding residue can thereafter be washed many times with water so as to decrease acidity and to lower the quantities of sodium hydroxide (NaOH) that are required to adjust the pH during iron removal. Final volume accounts for 10 % to 20 % of initial volume. The acid recovered will can be re-utilized after having adjusted its titer either by adding gaseous HCl, or by adding concentrated HCl (12 M). After the reaction, the titer of the acid can vary from about 4 M to about 6 M depending on experimental conditions. With respect to the solid, it represents about 65 % to about 75 % of the initial mass of argillite, it can be valorized and be used again either as an ion exchange resin, or as an adsorbent.

Removal of iron

[0033] Removal of iron can be carried out by precipitation of the latter in basic medium for example at a pH of at least 10 or at a pH of about 11.5 to about 12.5. Such a step can be made by adding NaOH, for example at a concentration of 10 M. Other bases such as KOH can also be used. Then, all that is required is to separate the solid portion from the liquid portion by filtration, decantation or centrifugation and to rinse the solid by means of a diluted base, such as a solution of NaOH (for example NaOH at a concentration of 0.01 M to 0.02 M). Then, the solid is washed with distilled water. The liquid portion comprises aluminum and alkaline-earths A substantially complete removal of the iron and of nearly all the impurities

(other metals) can thus be achieved. Optionally, it is possible to recover iron by using a refining step by liquid-liquid extraction through a hollow fiber membrane (see option 2).

[0034] Alternatively (see option 3), removal of iron can be carried out by using an extracting agent and a hollow fiber membrane. Various extracting agents that could substantially selectively complex iron ions over aluminum ions (or aluminum ions over iron ions) could be used in such a step depending on Al / Fe ratio. For example, extraction can be carried out by using HDEHP (diethylhexylphosphoric acid) as an extracting agent adapted to complex iron ions. A concentration of about 1 M of HDEHP can be used in an organic solvent, such as heptane or any hydrocarbon solvent. Such an extraction can require relatively short contact times (few minutes). For example, the pH of the order of 2 can be used and aqueous phase / organic phase ratio can be of about 1:1. It was observed that it is possible to extract from 86 % to 98 % iron under such conditions. It will be understood that in the present case, iron is trapped in the organic phase. To recover iron in an aqueous phase, a reverse extraction with hydrochloric acid (2 M or 6 M) and organic phase / acidic phase ratio of about 1:0.5 can then be carried out. In such a case, the resulting aqueous phase is rich in Fe^{3+} ions.

Aluminum recovery

[0035] The solution obtained from the previous step using either the precipitation or the extraction technique is relatively clean and mainly contains aluminum for example about 90 % to 95 % (without the alkaline-earths in the case of precipitation). Recovery of the latter can be carried out by liquid-liquid extraction for example by using a same hollow fiber membrane and an extracting agent that is adapted to complex at least substantially selectively aluminum over other metals or residues. For example, bis(2,4,4-trimethylpentyl) phosphinic acid (such as the one sold under the name CyanexTM 272) can be used as an extracting agent specific to aluminum. For example, this extracting agent can be used at a concentration of about 20 % v/v in an organic solvent such as heptane. The ratios between the aqueous

phase and the organic phase can be of about 1:1 to about 1:3. For example, the extraction temperatures can be of about 40 °C and the pH can be maintained at about 2.5 to about 3.5. It was observed that such a technique makes it possible to extract more than 70 - 90 % of the aluminum. After the aluminum has been trapped in the organic phase, it can be recovered in the form of a concentrate of Al^{3+} ions by using a back extraction. For example, the reverse extraction can be carried out at a temperature of about 40 °C with hydrochloric acid (for example at a concentration of 6 M). Under this condition, more than 90 % of aluminum can be recovered. Then, Al^{3+} can be converted into aluminum hydroxide $\text{Al}(\text{OH})_3$ by addition of NaOH. Finally, $\text{Al}(\text{OH})_3$ can be converted into alumina (alumina Al_2O_3) by roasting $\text{Al}(\text{OH})_3$ for example at a temperature of about 800 °C to 1200 °C.

[0036] The following non-limiting examples further illustrate the invention.

Examples

Example 1

Preparation of argillite sample

[0037] Crushing of mudstone : The resulting micronization average employed for the tests ranges between 10 and 50 microns.

[0038] Roasting : Crushed mudstone was roasted at least during 1 hour at a temperature of 600 °C. Its average composition was :

Al_2O_3	21,0 %
Fe_2O_3	8,0 %
K_2O	1,5 %
Na_2O	0,9 %
TiO_2	0,9 %
CaO	0,08 %
ZnO	0,06 %
SiO_2	51,0 %

Acid leaching

[0039] 500 g of argillite crushed and roasted were added to 5 liters of hydrochloric acid 6 M. The mixture was then heated at 100 °C - 110 °C during 7 hours.

[0040] After reaction, the liquid part was separated from the solid part by filtration. The solid was washed with distilled water which was added to the liquid portion. This washing makes it possible to recover part of the aluminum trapped in the solid. This solid had a dry mass of 345 ± 5 g, which corresponds to a loss of about 30 % - 32 %.

[0041] The remaining liquid part, containing aluminum, iron and a great part of the impurities initially present in mudstone, was reduced by evaporation at a temperature of 100 °C to 90 % of its initial volume. Residual volume was then 50 mL. The liquid compositions before and after evaporation were :

	Leaching solution	Evaporated leaching solution
	Composition (%) [concentration (mg/L)]	Composition (%) [concentration (mg/L)]
Aluminum	47.63 [9 250]	47.86 [59 500]
Iron	31.54 [6 125]	31.07 [38 625]
Alkaline-earths (Na, Mg, K, Ca)	19.30 [3 749]	19.53 [24 277]
Other metals	1.53 [297.3]	1.54 [1 920]

All the ions species seem to remain soluble.

Removal of iron

[0042] The residual volume was slightly diluted (+ 25 %) and concentrated hydroxide sodium (10 M) was added until a pH higher than 11.5 was reached. The formed precipitate was separated from the solution by standard filtration and was washed several times with NaOH diluted and hot ultra-pure water. The precipitate contained all the iron and the majority of the metal impurities. The filtrate contained in addition to ions Al³⁺ mainly alkaline-earths and some following impurities:

	Major filtrate impurities (%)
Iron	0.14
Sodium	94.13
Alkaline-earths (Mg, K, Ca)	5.71
Other metals	0.02

Na⁺ came from soda and was also the Al(OH)₄⁻ counter-ion.

Aluminum recovery

[0043] The filtrate is adjusted at a pH of 2.5 to 3.5 by addition of HCl 6 M. The resulting solution is extracted by means of the complexing agent, Cyanex 272, at a concentration of 20 % volume / volume in an organic solvent with a volumetric ratio of 1:1. The extraction is carried out at a temperature of 40 °C in a membrane contactor with hollow fibers. In less than about 30 to 60 min, more than 85 % of aluminum is extracted. The pH adjustment is performed by a regulation loop controlling the NaOH (10 M) addition. Complexed Al³⁺ in Cyanex are then recovered by carrying out a back extraction with HCl (6 M) at 40 °C and an organic phase / acid phase volumetric ratio of 1:0.5. After the back extraction, the composition of the recovered acid phase is :

	Composition (%)
Aluminum	92.81
Iron	0
Alkaline-earths (Na, Mg, K, Ca)	7.14
Other metals	0.05

[0044] To increase the percentage of purity, the Al^{3+} ions are precipitated in the form of $\text{Al}(\text{OH})_3$ hydroxide, then washed several times with ultra-pure water. The composition of the hydroxide becomes :

	Composition (%)
Aluminum	99.09
Iron	0
Alkaline-earths (Na, Mg, K, Ca)	0.88
Other metals	0.03

[0045] Further purification can be performed by recrystallization

[0046] While a description was made with particular reference to the specific embodiments, it will be understood that numerous modifications thereto will appear to those skilled in the art. Accordingly, the above description and accompanying drawings should be taken as specific examples and not in a limiting sense.

WHAT IS CLAIMED IS:

1. A process for extracting aluminum ions from a mixture comprising iron ions and the aluminum ions, said process comprising recovering said aluminum ions from a composition comprising said aluminum ions, said iron ions, an acid, an organic solvent and an extracting agent adapted to form an organometallic complex substantially selectively with said iron ions or with said aluminum ions, said extracting agent being soluble in said organic solvent,

wherein when said extracting agent is adapted to form an organometallic complex substantially selectively with said iron ions, said composition comprises an acidic aqueous phase comprising said aluminum ions and said acid, and an organic phase comprising said organic solvent and said iron ions complexed with said extracting agent, said aluminum ions are recovered by separating said aqueous phase from said organic phase by means of a hollow fiber membrane, and reacting said separated aqueous phase with a base,

and wherein when said extracting agent is adapted to form an organometallic complex substantially selectively with said aluminum ions, said composition comprises an acidic aqueous phase comprising said iron ions and said acid, and an organic phase comprising said organic solvent and said aluminum ions complexed with said extracting agent, said aluminum ions are recovered by separating said aqueous phase from said organic phase by means of a hollow fiber membrane, reacting said separated organic phase with HCl so as to obtain another aqueous phase comprising said aluminum ions and another organic phase, separating said another aqueous phase from said another organic phase and recovering said aluminum ions in the form of Al(OH)_3 by reacting said another aqueous phase with a base.

2. The process of claim 1, wherein said extracting agent is adapted to form an organometallic complex substantially selectively with said iron ions.
3. The process of claim 2, wherein said acidic aqueous phase has a pH of about 1 to about 2.5.
4. The process of claim 2, wherein said acidic aqueous phase has a pH of about 2.
5. The process of any one of claims 2 to 4, wherein said extracting agent is chosen from di-2-ethylhexyl phosphoric acid (HDEHP), bis(2,4,4-trimethylpentyl) phosphinic acid and 2-ethylhexyl phosphonic acid mono-2-ethylhexyl ester.
6. The process of any one of claims 2 to 5, wherein said extracting agent has a concentration of about 0.5 M to about 1.5 M in said organic phase.
7. The process of any one of claims 2 to 5, wherein said extracting agent has a concentration of about 1 M in said organic phase.
8. The process of any one of claims 2 to 7, wherein said organic solvent is chosen from C₅-C₁₂ alkanes and mixtures thereof.
9. The process of any one of claims 2 to 7, wherein said organic solvent is heptane.
10. The process of any one of claims 2 to 9, wherein said composition has a volumic ratio organic phase : aqueous phase of about 1:1.
11. The process of any one of claims 2 to 10, wherein said membrane comprises polypropylene, polyvinylidene difluoride, or a mixture thereof.
12. The process of any one of claims 2 to 10, wherein said membrane comprises polypropylene.

13. The process of any one of claims 2 to 12, wherein said separated aqueous phase is reacted with said base, said base being chosen from NaOH, KOH, and a mixture thereof.
14. The process of any one of claims 2 to 12, wherein said separated aqueous phase is reacted with said base, said base being NaOH.
15. The process of any one of claims 2 to 14, wherein said aqueous phase is reacted with said base so as to obtain a pH of at least about 4.
16. The process of any one of claims 2 to 15, further comprising a separation by filtration to recover said aluminum ions in the form of Al(OH)₃.
17. The process of claim 16, further comprising washing said Al(OH)₃.
18. The process of claim 16 or 17, further comprising converting Al(OH)₃ into Al₂O₃.
19. The process of claim 18, wherein conversion of Al(OH)₃ into Al₂O₃ is carried out at a temperature of about 800 °C to about 1200 °C.
20. The process of any one of claims 2 to 19, further comprising treating said separated organic phase with HCl and isolating said iron ions in the form of Fe³⁺.
21. The process of claim 1, wherein said extracting agent is adapted to form an organometallic complex substantially selectively with said aluminum ions.
22. The process of claim 21, wherein said aqueous phase has a pH of about 2.5 to about 3.5.
23. The process of claim 21 or 22, wherein said extracting agent is a phosphinic acid or a derivative thereof.

24. The process of claim 21 or 22, wherein said extracting agent is bis(2,4,4-trimethylpentyl) phosphinic acid.
25. The process of any one of claims 21 to 24, wherein said extracting agent has a concentration of about 10 % to about 25 % v/v with respect to said organic solvent.
26. The process of any one of claims 21 to 24, wherein said extracting agent has a concentration of about 20 % v/v with respect to said organic solvent.
27. The process of any one of claims 21 to 26, wherein said organic solvent is chosen from C₅-C₁₂ alkanes and mixtures thereof.
28. The process of any one of claims 21 to 26, wherein said organic solvent is heptane.
29. The process of any one of claims 21 to 28, wherein said composition has a volumic ratio aqueous phase : organic phase of about 1:1 to about 1:3.
30. The process of any one of claims 21 to 30, wherein said membrane comprises polypropylene, polyvinylidene difluoride, or a mixture thereof.
31. The process of any one of claims 21 to 30, wherein said membrane comprises polypropylene.
32. The process of any one of claims 21 to 31, wherein said composition is at a temperature of about 30 °C to about 50 °C.
33. The process of any one of claims 21 to 31, wherein said composition is at a temperature of about 35 °C to about 45 °C.
34. The process of any one of claims 21 to 31, wherein said base comprises NaOH, KOH, or a mixture thereof.

35. The process of any one of claims 21 to 31, wherein said base comprises NaOH.
36. The process of any one of claims 21 to 35, wherein said another aqueous phase is treated with said base so as to obtain a pH of at least about 4.
37. The process of any one of claims 21 to 36, further comprising a separation by filtration to obtain Al(OH)₃.
38. The process of claim 37, further comprising washing said Al(OH)₃.
39. The process of any one of claims 21 to 38, further comprising converting Al(OH)₃ into Al₂O₃.
40. The process of claim 39 wherein conversion of Al(OH)₃ into Al₂O₃ is carried out at a temperature of about 800 °C to about 1200 °C.
41. A process for extracting aluminum from an aluminous ore, said process comprising:
 - leaching said aluminous ore with an acid so as to obtain a leachate and a solid residue, and separating said leachate from said solid residue;
 - removing at least a portion of iron ions contained in said leachate by reacting said leachate with a base in order to obtain a pH of at least 10 and substantially selectively precipitating said at least a portion of said iron ions and separating said precipitated at least a portion of said iron ions from said leachate so as to obtain an aluminum enriched composition;
 - at least partially recovering said aluminum ions present in said aluminum enriched composition by treating said aluminium enriched composition with an extracting agent adapted to form

an organometallic complex substantially selectively with said aluminum ions in the presence of an organic solvent and an acid solution in order to form a composition comprising an acidic aqueous phase comprising impurities and an organic phase comprising aluminum ions complexed with said extracting agent, said aluminum ions being recovered by separating said aqueous phase from said organic phase.

42. The process of claim 41, wherein said aqueous phase has a pH of about 2.5 to about 3.5.
43. The process of claim 41 or 42, wherein said extracting agent is a phosphinic acid or a derivative thereof.
44. The process of claim 41 or 42, wherein said extracting agent is bis(2,4,4-trimethylpentyl) phosphinic acid.
45. The process of any one of claims 41 to 44, wherein said extracting agent has a concentration of about 10 % to about 25 % v/v with respect to said organic solvent.
46. The process of any one of claims 41 to 44, wherein said extracting agent has a concentration of about 20 % v/v with respect to said organic solvent.
47. The process of any one of claims 41 to 46, wherein said organic solvent is chosen from C₅-C₁₂ alkanes and mixtures thereof.
48. The process of any one of claims 41 to 46, wherein said organic solvent is heptane.
49. The process of any one of claims 41 to 48, wherein said composition has a volumic ratio aqueous phase : organic phase of about 1:1 to about 1:3.
50. The process of any one of claims 41 to 49, wherein said organic phase and said aqueous phase are separated by means of a membrane.

51. The process of claim 50, wherein said membrane is a hollow fiber membrane.
52. The process of claim 51, wherein said membrane comprises polypropylene, polyvinylidene difluoride, or a mixture thereof.
53. The process of claim 51, wherein said membrane comprises polypropylene.
54. The process of any one of claims 41 to 53, wherein said composition is at a temperature of about 30 °C to about 50 °C.
55. The process of any one of claims 41 to 53, wherein said composition is at a temperature of about 35 °C to about 45 °C.
56. The process of any one of claims 50 to 53, wherein after passing said composition through said membrane, said aqueous phase is separated from said organic phase, said complexed aluminum ions are recovered in said organic phase, said organic phase being then treated with HCl so as to obtain an aqueous composition comprising said aluminum ions.
57. The process of claim 56, wherein aluminum ions are converted into Al(OH)_3 by contacting it with a base.
58. The process of claim 57, further comprising converting Al(OH)_3 into Al_2O_3 .
59. The process of claim 58, wherein conversion of Al(OH)_3 into Al_2O_3 is carried out at a temperature of about 800 °C to about 1200 °C.
60. The process of any one of claims 41 to 59, wherein said acid is HCl.
61. The process of claim 60, wherein said aluminum ore is leached with HCl at a temperature of at least 80 °C.

62. The process of claim 60, wherein said aluminum ore is leached with HCl at a temperature of at least 90 °C.
63. The process of claim 60, wherein said aluminum ore is leached with HCl at a temperature of about 100 °C to about 110 °C.
64. The process of any one of claims 60 to 63, wherein said HCl has a concentration of about 6 M.
65. The process of any one of claims 41 to 64, wherein the alunimum ore / acid ratio is about 1 / 10 in weight by volume.

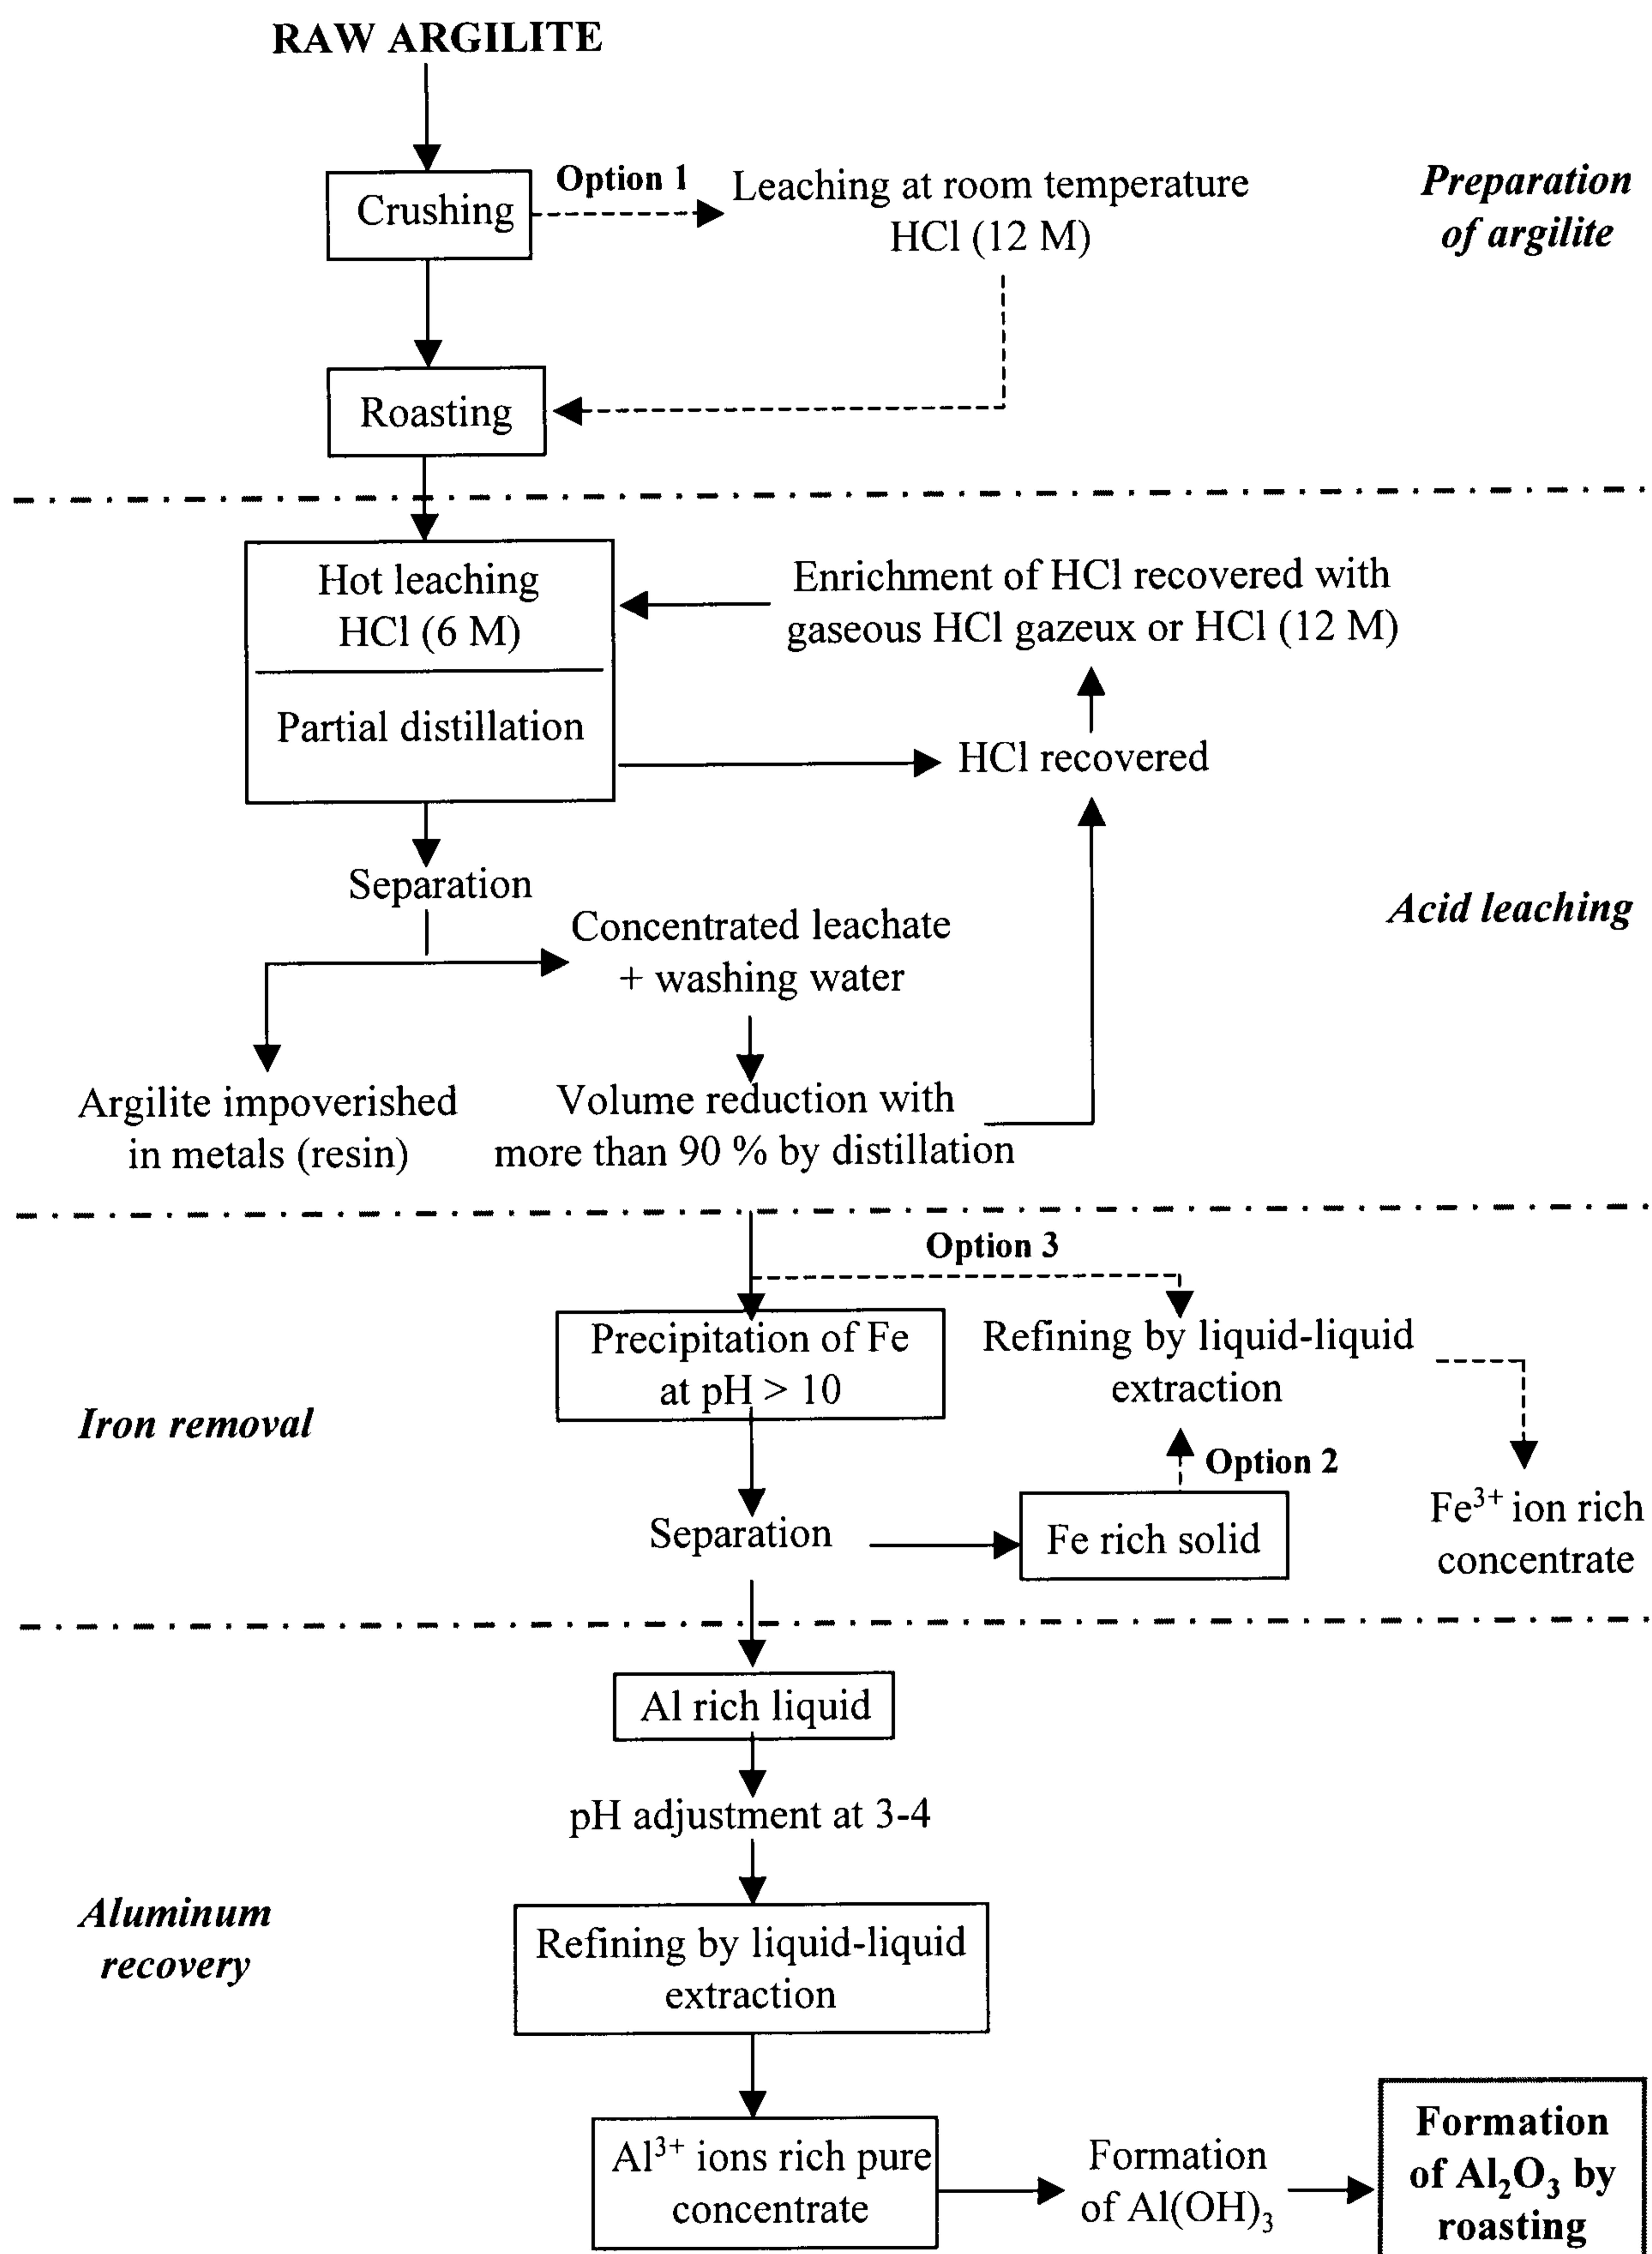


Fig. 1

