



(51) International Patent Classification:

H01L 25/075 (2006.01) *H05K 1/18* (2006.01)
H01K 1/02 (2006.01) *H01L 33/64* (2010.01)

(21) International Application Number:

PCT/US2014/068167

(22) International Filing Date:

2 December 2014 (02.12.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/911,537 4 December 2013 (04.12.2013) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(72) Inventors: **PALANISWAMY, Ravi**; Concorde Block, UB City, 24 Vittal Mallya Road, Bangalore 560001 (IN). **GAO, Jian Xia**; 1 Yishun Avenue 7, Singapore 768923 (SG). **NARAG, Alejandro Aldrin A. II**; 1 Yishun Avenue 7, Singapore 768923 (SG). **KREUTTER, Nathan P.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **OUDEKIRK, Andrew J.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(74) Agents: **RICHARDSON, Clifton F.** et al.; 3M Center Office of Intellectual, Property Counsel Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: FLEXIBLE LIGHT EMITTING SEMICONDUCTOR DEVICE WITH LARGE AREA CONDUIT

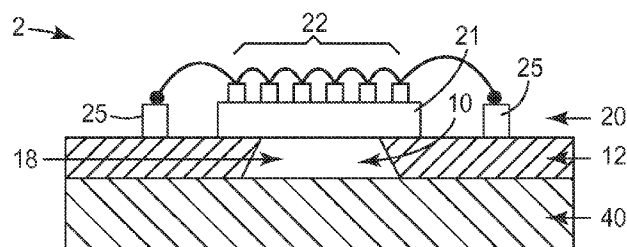


FIG. 1A

(57) Abstract: A flexible polymeric dielectric layer (12) having first and second major surfaces, the first major surface having a conductive layer (20) thereon, the dielectric layer having at least one conduit (10) extending from the second major surface to the first major surface, the conduit having at least one lateral dimension of at least about one centimeter and being at least partially filled with conductive material (18), the conductive layer including at least one conductive feature (21) substantially aligned with the conduit (10), the conductive feature (21) supporting a plurality of light emitting semiconductor devices (22).



FLEXIBLE LIGHT EMITTING SEMICONDUCTOR DEVICE WITH LARGE AREA CONDUIT

TECHNICAL FIELD

This invention relates to flexible high power light emitting semiconductor devices.

BACKGROUND

Conventional light emitting semi-conductor (LES) devices (LESs), including light emitting diodes (LEDs) and laser diodes, and packages containing LESs have several drawbacks. High power LESs generate a substantial amount of heat that must be managed. Thermal management deals with problems arising from heat dissipation and thermal stresses, which is currently a key factor in limiting the performances of light-emitting diodes.

In general, LES devices are commonly prone to damage caused by, e.g., a buildup of trapped heat generated from within the devices. Excessive heat buildup can cause deterioration of the materials used in the LES devices, such as encapsulants for the LESs, which can shorten the life of the LESD. When LESs are attached to flexible-circuit laminates, which may also include other electrical components, the heat dissipation problems are greatly increased.

Additionally, conventional LES devices and packages tend to be thick, which limits their uses in low form factor applications. Consequently, there is a continuing need to improve the design of flexible LES devices and packages to improve their thermal dissipation properties, as well as to allow for their use in low form factors.

SUMMARY

At least one aspect of the present invention provides a cost-effective thermal management solution for current and future high power LESD constructions through a robust flexible LESD construction. The ability to dissipate large amounts of heat is typically needed for the operation of high power LESD arrays. According to at least one embodiment of the present invention, heat dissipation can be managed by integrating the LESs into a system having a flexible polymeric dielectric substrate, i.e., a dielectric layer. To accomplish better heat management, LESs are positioned so they are in close or direct thermal contact with thermally conductive layers. In at least one embodiment of the present invention, controlled removal, e.g., by etching, of the dielectric substrate to create an opening completely through the dielectric substrate to form a conduit, is performed.

At least one embodiment of the present invention provides an article comprising a flexible polymeric dielectric layer having first and second major surfaces, the first major surface having a conductive layer thereon, the dielectric layer having at least one conduit extending from the second major surface to the first major surface, the conduit having at least one lateral dimension of at least about one

centimeter and being at least partially filled with conductive material, the conductive layer including at least one conductive feature substantially aligned with the conduit, the conductive feature configured to support a plurality of light emitting semiconductor device.

As used in this application:

“array” means an arrangement of a plurality of elements;

“conductive” means thermally, and optionally electrically, conductive unless otherwise indicated;

“LES” means light emitting semiconductor(s), including light emitting diode(s) and laser diode(s); and

“LESD” means light emitting semiconductor device(s), including light emitting diode device(s) and laser diode device(s). An LESD may be a bare LES die construction, a complete packaged LES construction, or an intermediate LES construction comprising more than the bare die, but less than all the components for a complete LES package, such that the terms LES and LESD may be used interchangeably and refer to one or all of the different LES constructions. The term “flexible LES device” or “flexible LESD” typically refers to the flexible article containing the bare die light emitting semiconductor, packaged LES construction, or intermediate LES construction. Examples of the type of complete packaged LES constructions that may be suitable for use in embodiments of the present invention Golden DRAGON LEDs, available from OSRAM Opto Semiconductors GmbH, Germany; LUXION LEDs, available from Philips Lumileds Lighting Company, USA; and XLAMP LEDs, available from Cree, Inc., USA.

An advantage of at least one embodiment of the present invention is:

The LESDs on the flexible dielectric substrate may be electrically connected in series, in parallel, or individually depending on the desired application.

The dielectric layer removal may be achieved using wet chemistries, excimer laser ablation, plasma etching, or punching.

The flexible substrate provides great flexibility and bendability for the LESD articles.

The flexible LES devices provide excellent heat dissipation, which is typically needed for high power LESDs.

The flexible LES devices can be wired as an array on a single flexible and insulating layer.

The resulting flexible LES devices can be bent in simple or compound curves.

The resulting flexible LES devices can provide a robust, cost-effective thermal management solution for current and future high power LESD constructions.

Using the article of the present invention with a discrete LESD can reduce the overall thermal resistance of a light emitting device.

The conduits of the present invention containing conductive material provide excellent Z-axis thermal conductivity.

The size of the conduits and the surface area of the conductive layers can be tailored to provide optimized thermal resistance values.

The above summary of the present invention is not intended to describe each disclosed embodiment or every implementation of the present invention. The Figures and detailed description that follow below more particularly exemplify illustrative embodiments.

BRIEF DESCRIPTION OF DRAWINGS

Figs. 1A is a schematic cross-sectional view and Fig. 1B is a top view of an exemplary embodiment of a flexible LESD according to an aspect of the present invention.

Fig. 2 is a top view of an exemplary embodiment of a flexible LESD according to an aspect of the present invention.

Figs. 3A-3E and 3E' are schematic cross-sectional views of an exemplary process for preparing a flexible LESD of the present invention.

Fig. 4 is a schematic cross-sectional view of an exemplary embodiment of a flexible LESD according to an aspect of the present invention.

Fig. 5 is a schematic cross-sectional view of an exemplary embodiment of a flexible LESD according to an aspect of the present invention.

Fig. 6 is a top view of an exemplary embodiment of a flexible LESD according to an aspect of the present invention.

Fig. 7 is a top view of an exemplary embodiment of a flexible LESD according to an aspect of the present invention.

DETAILED DESCRIPTION

In the following description, reference is made to the accompanying set of drawings that form a part of the description hereof and in which are shown by way of illustration several specific embodiments. In general similar reference numbers are used for similar features in the various embodiments. Unless indicated otherwise, these similar features may comprise the same materials, have the same attributes, and serve the same or similar functions. Additional or optional features described for one embodiment may also be additional or optional features for other embodiments, even if not explicitly stated, where appropriate. It is to be understood that other embodiments are contemplated and may be made without departing from the scope or spirit of the present invention. The following detailed description, therefore, is not to be taken in a limiting sense.

Unless otherwise indicated, all numbers expressing feature sizes, amounts, and physical properties used in the specification and claims are to be understood as being modified in all instances by the term "about." Accordingly, unless indicated to the contrary, the numerical parameters set forth in the foregoing specification and attached claims are approximations that can vary depending upon the desired properties sought to be obtained by those skilled in the art utilizing the teachings disclosed herein. The

use of numerical ranges by endpoints includes all numbers within that range (e.g. 1 to 5 includes 1, 1.5, 2, 2.75, 3, 3.80, 4, and 5) and any range within that range.

Unless otherwise indicated, the terms "coat," "coating," "coated," and the like are not limited to a particular type of application method such as spray coating, dip coating, flood coating, etc., and may refer to a material deposited by any method suitable for the material described, including deposition methods such as vapor deposition methods, plating methods, coating methods, etc. In addition, directional terminology, such as "top," "bottom," "front," "back," "above," "below," etc., is used with reference to the orientation of the Figure(s) being described. Because components of embodiments can be positioned in a number of different orientations, the directional terminology is used for purposes of illustration and is in no way limiting.

At least one embodiment of a flexible LESD 2 of the present invention is illustrated in Figs. 1A (cross-section) and 1B (top view), which shows a flexible dielectric layer 12 having at least one conduit 10 filled with conductive material 18. Conduit 10 extends all the way through dielectric layer 12 and may be any suitable shape, e.g., circular, oval, rectangular, serpentine, a channel, a grid (e.g., forming islands of dielectric layer separated by a continuous pattern of overlapping channels), etc. The flexible dielectric layer 12 has first and second major surfaces. Conductive layer 20 is disposed on the first major surface of dielectric layer 12 and may be patterned to include a conductive feature 21, which may be electrically isolated from other electrically conductive elements if it is electrically conductive, on which LESDs 22 are disposed in an array. LESDs 22 can be attached, directly, or indirectly, to conductive feature 21 using a known die bonding method such as eutectic, solder, adhesive, and fusion bonding. LESDs 22 may be wire bonded in series (or in parallel) to electrically conductive pads 25, which may be part of an electrically conductive circuit or may comprise material different from that of the conductive circuit, such as Au, AuSn, AuGe, or other suitable materials, which material is electrically connected to a conductive circuit. In some embodiments, a passivation or bonding layer is located beneath LESDs 22 to facilitate bonding LESDs 22 to an underlying layer. In at least one embodiment, conductive substrate 40 is attached to the flexible LES device adjacent the second major surface of dielectric layer 12, which brings it into contact with the conductive material 18 in conduit 10. Conductive substrate 40 may be any material that is thermally conductive. For example, conductive substrate may be a metal strip, e.g., of copper or aluminum, a heat sink, or other heat transferring or heat absorbing material. Conductive substrate 40 may be attached to the flexible LES device using a thermally conductive adhesive. The juxtaposition of conductive feature 21, conductive material 18 in conduit 10, and conductive substrate 40 allows for efficient dissipation of heat generated by the LESDs to conductive substrate 40. In addition, the conductive material 18 in conduit 10 can provide mechanical support for conductive feature 21, which is essentially suspended over the opening of conduit 10.

While a single conduit is described in this embodiment, the flexible LES device may comprise an array of conduits, at least one of which supports a conductive feature. The conduits of the present invention are substantially larger than state of the art vias, which are in the nanometer to lower micrometer size range. In contrast to vias, the conduits of the present invention have at least one lateral

dimension in the range, i.e., one or more centimeters. A lateral dimension is a dimension measured parallel (in the x or y direction) to the plane of the substrate in which the conduit is located. For example, the diameter, width, or length of a conduit is a lateral dimension. In at least one embodiment of the present invention, at least one conduit has at least one lateral dimension of at least 1 cm. In at least one other embodiment, at least one conduit has at least one lateral dimension of at least 2 cm. In other embodiments, at least one conduit has at least one lateral dimension of at least 3 cm, at least 4 cm, and up to, and including, 5 cm. In some embodiments, at least one conduit may have at least one lateral dimension that is greater than 5 cm.

The conductive features and underlying conduits may support any number of LESDs, which may be connected in series or in parallel and may have two top contacts or top and bottom contacts. When the LESDs are wire bonded to each other, then to a circuit trace adjacent the conductive feature, such as is illustrated in Figs. 1A, 1B, and 2, the conductive feature and underlying conduit can form an essentially solid mass of thermally conductive material, which can effectively move heat away from the LESs located on the conductive feature.

At least some embodiments of the present invention have conduits with sloped side walls. In some instances these may be preferred because, e.g., for a given thickness of dielectric layer and a given conduit diameter nearest a conductive feature, a conduit having sloped side walls can contain more material than a conduit having 90° side walls. For example, the opening of a conduit adjacent a conductive feature typically will be limited by the size of that conductive feature; however, by employing sloped conduit side walls, the opening at the opposing end of the conduit may be enlarged to an optimum size such that the conduit can contain a larger amount of conductive material (to transfer more heat away from the LESD) and the conductive material at this opening will have a large surface area that can interface more effectively with a heat transferring or absorbing material which may be attached to the dielectric layer and conductive material in the conduits.

Another advantage of sloped side walls is that, when a conduit is filled with conductive material, it bonds to the portion of any conductive feature covering an opening of the conduit. If the conduit walls are sloped, a wedge-shaped portion of dielectric layer around the circumference of the conduit is trapped between the conductive material in the conduit and the conductive feature on the first major surface of the dielectric layer. This trapped wedge helps prevent the conductive material in the conduit from dislodging when the dielectric material is bent and flexed.

Fig. 2 illustrates an embodiment of a flexible LESD 2 of the present invention in which LESDs 22 each have one top contact and one bottom contact. The top contacts are wire bonded in parallel to conductive pads 25. The bottom contacts are connected to conductive feature 21, which is connected to electrically conductive trace 26. pad

Figs. 3A through 3E show a method of making at least one embodiment of the present invention in which conductive layer 20 is electrically conductive. Because the conduits are so large, when the conduits 10 are filled with conductive material 18, it can be difficult to obtain an even surface. The inventors have developed a process that provides an even surface. Conductive layer 20 is created and

patterned on a first side of flexible dielectric layer 12 (Fig. 3A), which has first and second major surfaces and first and second side edges. Then conduit 10 (or multiple conduits) is (are) formed in flexible dielectric layer 12, extending from a second side to the first side of flexible dielectric layer 12 (Fig. 3B), thereby exposing a portion of the surface of conductive layer adjacent the first major surface of the dielectric layer. A photoresist mask 15 is applied over conductive layer 20, except for the portion exposed by conduit 10 (Fig. 13C). One or more electrical contacts are attached to the conductive layer 20 proximate a first side edge of the dielectric layer, then electroplating of the portion of the surface of conductive layer 20 exposed by the conduit 10 is initiated. Because the conduits are large, the portions of the conduits closest to the electrical contacts plate up faster than the portions further away. To accommodate this uneven deposition, after the conduit has been filled about half way (Fig. 3D), the electrical contacts are removed from the conductive layer proximate the first side edge of the dielectric layer and are attached to the conductive layer proximate a second side edge of the dielectric layer, then the electroplating process is continued until the conduit is filled to the desired level. In this manner, the variation in final thickness of the conductive material 18 filling the conduit 10 can be maintained at or about 10-15% of the total thickness of the conductive material in the conduit 10. The photoresist layer is then removed (Fig. 3E). Other methods may also be used to fill the conduits with conductive material. The added conductive material may fill the conduit to any suitable level, e.g., 100%, 75%, 50%, 25%, etc. A level of 100% is typically preferred to maximize heat transfer.

In some embodiments, the conduit may be filled to a level greater than 100% (Fig. 3E') such that the conductive material protrudes from the second surface of the substrate. This may further enhance heat transfer. In some embodiments, an adhesive layer 35 such as an adhesive thermal interface material (TIM) is used to attach the LESD to a thermally conductive substrate 40, such as a heat sink. The conductive material 18 typically has higher thermal transfer properties than an adhesive material such as a TIM. Therefore, minimizing the amount of less thermally conductive material (such as a TIM or conductive adhesive), such as occurs between the protruding portion of conductive material 18 and an opposing conductive substrate 40, will allow for more heat to be transferred away from the LESDs. This can be accomplished by, e.g., using a conformable material for adhesive layer 35 to attach the LESD to the conductive substrate 40.

Fig. 4 illustrates another embodiment of the present invention. The article illustrated in Fig. 4 is similar to the article of Fig. 3E except that it has two additional conduits 125 and 127 extending through dielectric layer 12 beneath conductive pads 25 and 27, that are filled with conductive material 18, which may be, but is not limited to, copper or other conductive materials. In at least some embodiments, these additional conduits are thermally and electrically conductive and can act as both electrodes and heat transfer channels.

Fig. 5 is an alternate embodiment of a flexible LESD 2. In this embodiment, conductive pads 25, 27 are larger. Additionally, reflective layer 30 is located between conductive feature 21 and LESDs 22. Reflective layer 30 preferably comprises a reflective, thermally conductive material. A suitable material may be silver or other reflective metals or alloys. Encapsulant dam 32 forms a barrier around the LESDs

22 such that when an encapsulant is applied over the LESDs, it is contained in a confined space. The encapsulant dam 32 may encircle a single conductive feature or multiple conductive features. Optionally, the encapsulant dam material may be reflective to enhance the light output of the LESD. Suitable materials for forming the encapsulant dam include, but are not limited to, electrically insulating materials such as white paste (e.g., heat curable), preformed white plastic, and materials that are also thermally conductive, including but not limited to polymers, gels, glues, e.g., epoxy that is shaped when applied to the article. The height of the encapsulant dam is typically about 50 to about 700 μm , but may be any suitable height. A reflective layer 34 may also be applied over the first major surface of the dielectric layer (and over any intervening layers and features such as circuit traces and conductive features). The reflective layer 34 may be adhered with a suitable adhesive 36 or may be attached in any other suitable manner. Suitable materials for the reflective layer include, but are not limited to, enhanced spectral reflective materials such as those available under the trade designation VIKUITI from 3M Company, USA; and white reflective materials such as white epoxy reflective covercoats and white soldermasks.

In at least some embodiments of the present invention, the arrays can be grouped together. For example, Fig. 6 illustrates an embodiment in which three circular conductive features are grouped on a reflective surface and inside a circular reflective dam. In this embodiment, each conductive feature supports an array of LESDs and the color of the arrays are different from each other. For example, one array is blue, one is green, and one is red. Fig. 7 illustrates another embodiment in which three rectangular conductive features are aligned within a circular dam.

In at least one embodiment of the present invention, a conductive layer, similar to conductive layer 20, is located on the bottom surface of the dielectric substrate. This conductive layer may be a portion of an electrical circuit formed using conventional flexible circuit manufacturing processes. The circuit may be pre-patterned, or may be patterned during the process of making the flexible LES devices. Alternatively, the conductive layer may function primarily as a heat transfer or heat dissipation element. The conductive layer may comprise any suitable material, but is typically copper.

A conductive layer on the second major surface of the dielectric substrate may be any suitable thickness. Making this conductive layer thick, e.g., about 35 micrometers (μm), preferably about 50 μm , about 75 μm , about 100 μm or more may enhance heat removal from the LESDs.

Suitable conductive matter for use in the conductive layers of the present invention will depend on the application, but may include, for example, conductive metals such as copper, silver, gold, nickel, aluminum, tin, and alloys thereof; thermally and electrically conductive adhesives, including non-conducting adhesives filled with conductive material, e.g., conductive particles, such that the resulting adhesive is conductive.

Suitable conductive matter for use in the conductive materials of the present invention will also depend on the application, but may include metals such as copper, gold, silver, nickel aluminum, tin, and alloys thereof as well as solders, conductive polymers, and conductive adhesives, including non-conductive polymers and adhesives filled with conductive material, e.g., conductive particles, such that the resulting matter is conductive.

Suitable polymeric materials for use in the flexible polymeric dielectric layer of the present invention include polyesters, polycarbonates, liquid crystal polymers, and polyimides. Polyimides are preferred. Suitable polyimides include those available under the trade names KAPTON, available from DuPont; APICAL, available from Kaneka Texas corporation; SKC Kolon PI, available from SKC Kolon PI Inc, and UPILEX and UPISEL including UPILEX S, UPILEX SN, and UPISEL VT, all available from Ube Industries, Japan. These UPILEX and UPISEL polyimides are made from monomers such as biphenyl tetracarboxylic dianhydride (BPDA) and phenyl diamine (PDA). In at least one embodiment, the thickness of the dielectric layer is preferably 50 micrometers or less.

Conduits may be formed in the dielectric substrates using any suitable method such as chemical etching, plasma etching, focused ion-beam etching, laser ablation, embossing, microreplication, injection molding, and punching. Chemical etching may be preferred in some embodiments. Any suitable etchant may be used and may vary depending on the dielectric substrate material. Suitable etchants may include alkali metal salts, e.g. potassium hydroxide; alkali metal salts with one or both of solubilizers, e.g., amines, and alcohols, such as ethylene glycol. Suitable chemical etchants for some embodiments of the present invention include KOH/ ethanol amine/ ethylene glycol etchants such as those described in more detail in U.S. Patent Publication No. 2007-0120089-A1, incorporated herein by reference. Other suitable chemical etchants for some embodiments of the present invention include a KOH/glycine etchants such as those described in more detail in co-pending U.S. Provisional Patent Application No. 61/409791, incorporated herein by reference. Subsequent to etching, the dielectric substrates may be treated with an alkaline KOH/ potassium permanganate (PPM) solution, e.g., a solution of about 0.7 to about 1.0 wt% KOH and about 3 wt% KMnO_4 .

The side wall angle resulting from chemical etching varies, and is most dependent on etch rate, with slower etching rates resulting in shallower side wall angles, i.e., closer to 0° . Typical side wall angles resulting from chemical etching are about 5° to 60° from the major plane of the dielectric layer. In at least some embodiments, the wall angles are about 9° to 45° . And in at least some other embodiments, the wall angles are about 25° to 30° . As previously mentioned as an alternative to chemical etching, conduits in the dielectric substrate may be formed by punching, plasma etching, focused ion-beam etching, and laser ablation. With these methods of forming a conduit, the side walls typically have a steeper angle, e.g., up to 90° from the major plane of the dielectric layer. For purposes of this application, a sloped side wall means a side wall that is not perpendicular to the horizontal plane of the dielectric layer. Conduits with sloped sidewalls could also be made using methods such as embossing, microreplication, and injection molding.

At least some embodiments of the flexible LES devices of the present invention provide excellent heat management properties. In at least one aspect, due at least in part to the conductive materials in the conduits, heat generated by the LESDs can be readily transmitted to a thermally conductive layer on the bottom side of the dielectric substrate. In this manner, heat can be readily conducted away from the LESDs.

The LEDSs can be packaged directly on the flexible substrate, e.g., by applying an encapsulating material over individual or multiple LEDSs and the conductive features on which they are located, or by applying an encapsulant over an array of LEDSs and the portion of conductive layer around such LEDSs. The encapsulant is preferably a transparent (i.e., having a transmittance over 99%) molding compound. It may optionally be suitable to act as a lens when cured. Silicones and epoxies are suitable encapsulating compounds. It may further contain optical diffusing particles distributed therein. Suitable molding compounds may be purchased, e.g., from Shin-Etsu Chemical Co., Ltd., of Japan and NuSil Silicone Technology of Santa Barbara, Calif. If desired, a wavelength converting material, such as a phosphor coating, may be deposited on top of the LEDS prior to encapsulation. An underfill material may optionally be applied prior to encapsulating the LEDS. The flexible LES devices may also be enclosed in a waterproof/weatherproof, transparent casing, which may be made from any suitable polymeric transparent material.

The flexible LES devices can be made in a batch process or a continuous process such as a roll-to-roll process that is often used in making flexible circuits. Arrays of LEDSs atop conduits can be formed in any desired pattern on the flexible substrate. The arrays of LEDSs can then be divided as desired, e.g., singulated into individual arrays, strips of arrays, or groups of arrays, e.g., by stamping or by slitting the substrate. Accordingly, an entire reel of LEDSs on a flexible substrate can be shipped without the need for the traditional tape and reel process in which individual LEDSs are typically transported in individual pockets of a carrier tape.

Before or after forming individual, strips, or groups of arrays, the flexible LEDSs can be attached to an additional substrate, for example by attaching the second major surface of the dielectric layer, or a conductive layer on the second major surface of the dielectric layer, to the additional substrate with a thermally conductive adhesive. The thermally conductive adhesive can further facilitate the transfer of heat away from the LEDS. Alternatively, the second major surface of the dielectric layer, or conductive layer on the second major surface of the dielectric layer, may be treated with metals or other materials that will facilitate its adhesion to a substrate. The substrate is preferably thermally conductive, e.g., a rigid or flexible metal strip or foil, such as an aluminum foil, but may be a semiconductor or ceramic substrate, which may or may not be electrically conductive.

The flexible LES devices can be attached to any desired substrate, depending on their intended use. For example, they can be attached to flexible or rigid metal substrates, such as copper or aluminum, heat sinks, dielectric substrates, circuit boards, etc. If the LEDS arrays are for use on a circuit board, the flexible LES devices, whether in singulated, strip, or groups form, can be directly attached to an end user's circuit board, thereby eliminating the need for conventional lead frame materials. If the LEDS arrays are for use as a lighting strip, they could be enclosed in a waterproof/weatherproof, transparent casing, as described above. If the LEDS arrays are in strip or group form, they may be electrically connected to one or more of the other LEDS arrays in the strip or group. Additional elements such as Zener diodes and Schottky diodes can also be added to the flexible substrate prior to the division of the flexible LES devices. These elements may also be electrically connected to the LEDS arrays.

Although specific embodiments have been illustrated and described herein for purposes of description of the preferred embodiment, it will be appreciated by those of ordinary skill in the art that a wide variety of alternate and/or equivalent implementations may be substituted for the specific embodiments shown and described without departing from the scope of the present invention. This application is intended to cover any adaptations or variations of the preferred embodiments discussed herein. Therefore, it is manifestly intended that this invention be limited only by the claims and the equivalents thereof.

What is claimed is:

1. An article comprising:
a flexible polymeric dielectric layer having first and second major surfaces, the first major surface having a conductive layer thereon, the dielectric layer having at least one conduit extending from the second major surface to the first major surface, the conduit having at least one lateral dimension of at least about one centimeter and being at least partially filled with conductive material, the conductive layer including at least one conductive feature substantially aligned with the conduit, the conductive feature configured to support a plurality of light emitting semiconductor device.
2. The article of claim 1 wherein the conduit has at least one lateral dimension of at least about 2 centimeters.
3. The article of claim 1 wherein the conductive feature covers at least a portion of the conduit and a portion of the first major surface adjacent the conduit.
4. The article of claim 3 wherein the at least one conductive feature covers at least 50% of the conduit and a portion of the first major surface adjacent the conduit.
5. The article of claim 3 wherein the at least one conductive feature covers at least 75% of the conduit and the portion of the first major surface adjacent the conduit.
6. The article of claim 3 wherein the at least one conductive feature covers the entire conduit and a portion of the first major surface adjacent the entire conduit.
7. The article of claim 1 wherein the at least one conduit has walls that slope from the second major surface toward the first major surface of the dielectric layer at an angle of about 5° to about 60° from normal.
8. The article of claim 1, wherein the conductive layer comprises a circuit.
9. The article of claim 1 further comprising a second conductive layer on the second major surface of the dielectric layer.
10. The article of claim 1 further comprising a plurality of light emitting semiconductor device supported by the conductive feature and electrically connected to the conductive layer on the first major surface.

11. The article of claim 9 further comprising a plurality of light emitting semiconductor device supported by the conductive feature and electrically connected to the conductive layer on the first major surface.

12. The article of claim 1 wherein two or more conduits and their substantially aligned conductive features are grouped together.

13. The article of claim 12 wherein three conduits and their substantially aligned conductive features are grouped together, each conductive feature supporting an array of light emitting semiconductor device, wherein each array is a different color from the other arrays.

14. The article of claim 12 wherein the first major surface has a reflective layer thereon.

15. The article of claim 12 wherein the two or more conductive features are surrounded by a single thermally conductive encapsulant dam.

16. The article of claim 1 wherein one or more conductive features is surrounded by a thermally conductive encapsulant dam.

17. The article of claim 1 wherein the first major surface has a reflective layer thereon.

18. The article of claim 1 wherein the conductive material in the conduit extends beyond the plane of the second major surface of the flexible polymeric dielectric layer.

1/4

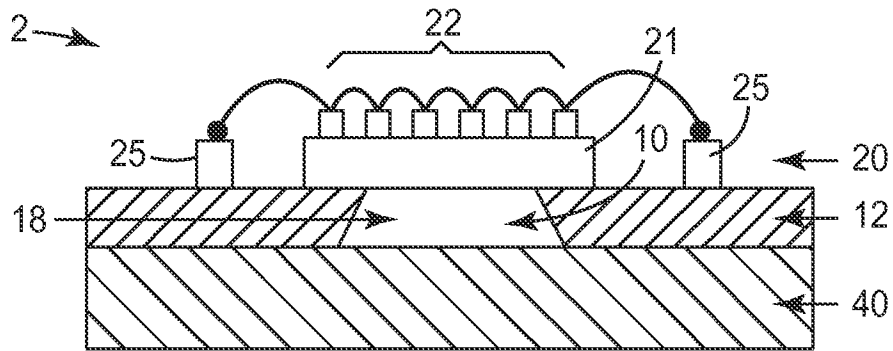


FIG. 1A

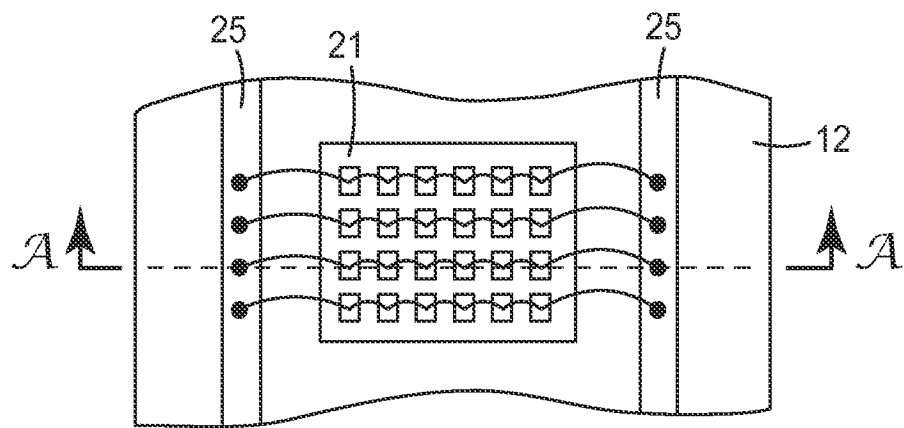


FIG. 1B

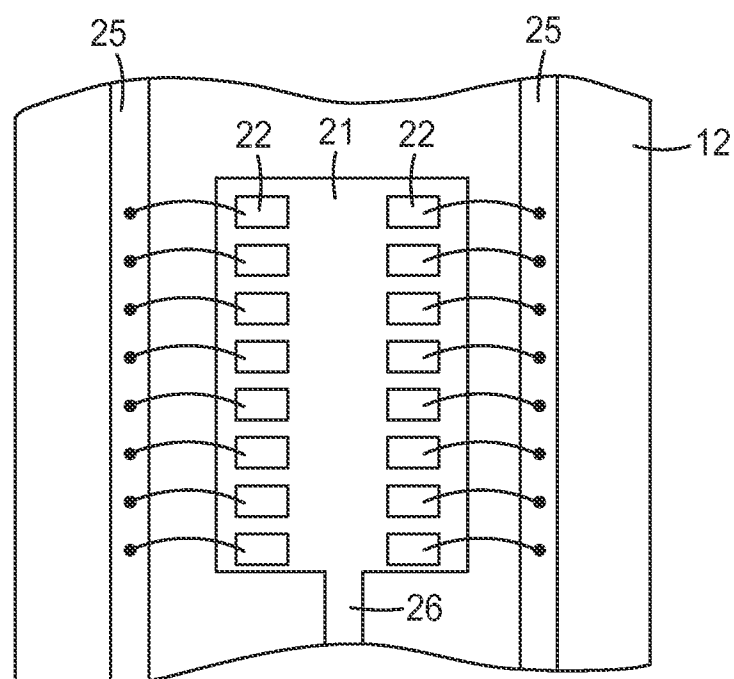


FIG. 2

2/4

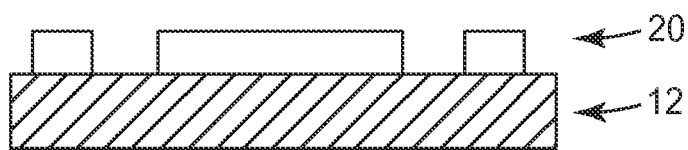


FIG. 3A

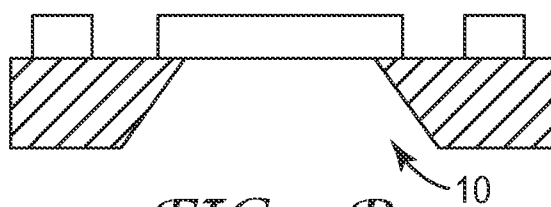


FIG. 3B

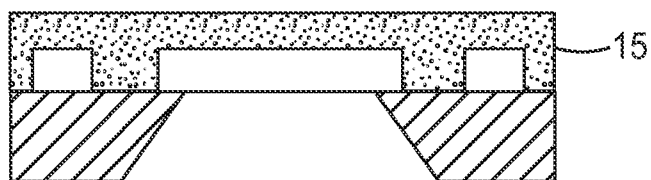


FIG. 3C

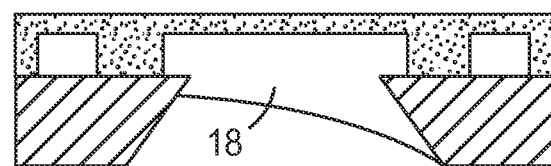


FIG. 3D

3/4



FIG. 3E

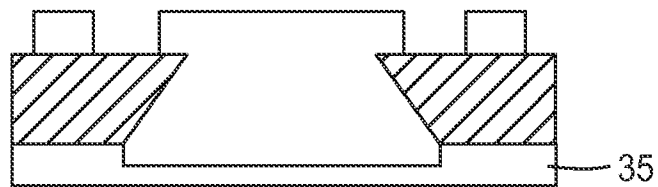


FIG. 3E'

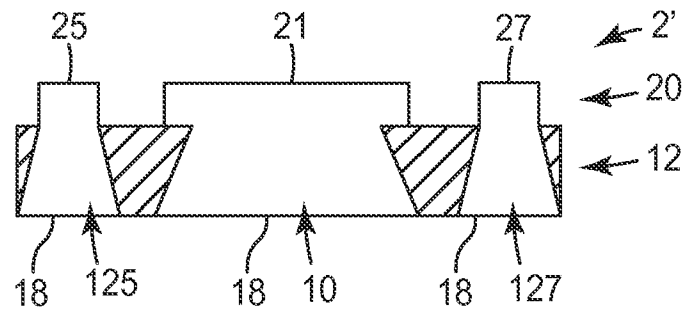


FIG. 4

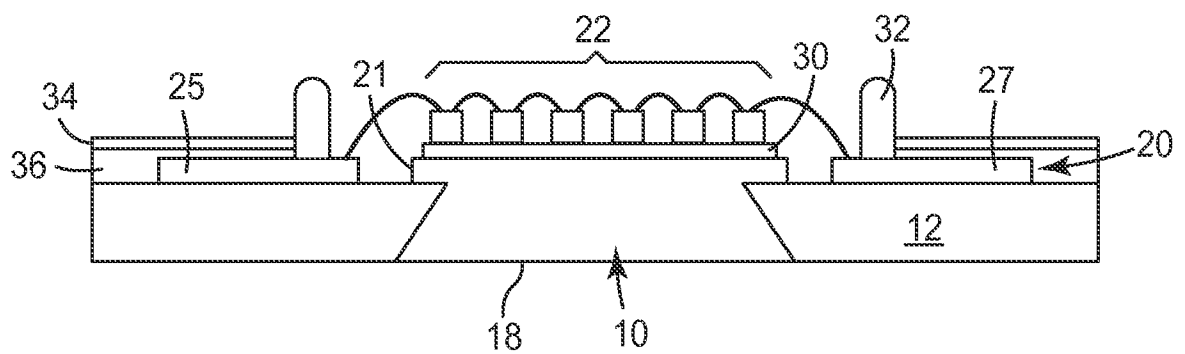
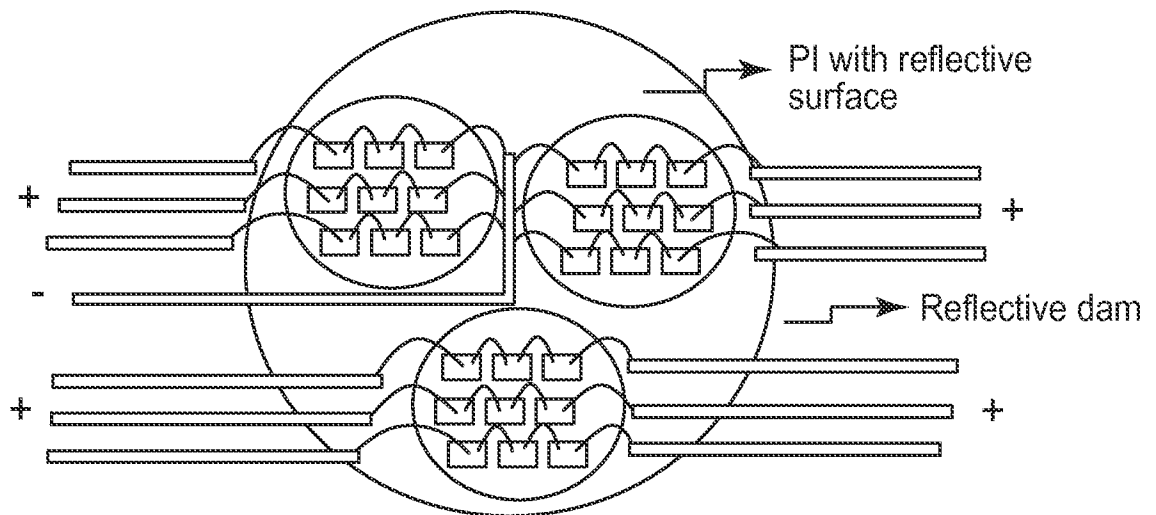
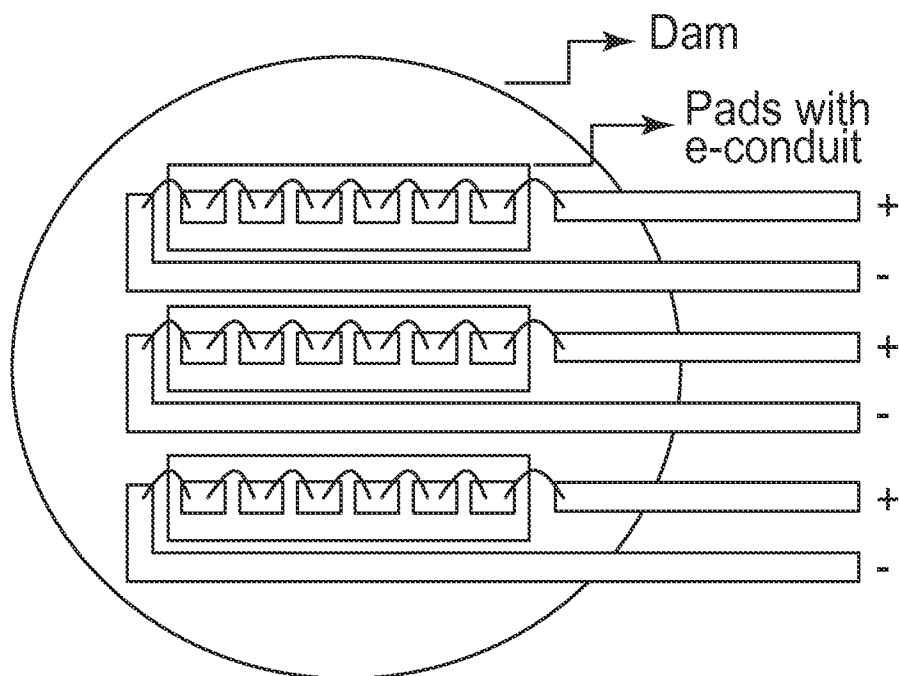


FIG. 5

4/4

*FIG. 6**FIG. 7*

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/068167

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01L25/075 H05K1/02 H05K1/18
ADD. H01L33/64

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01L H05K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2012/061183 A2 (3M INNOVATIVE PROPERTIES CO [US]; PALANISWAMY RAVI [SG]; JESUDOSS AROK) 10 May 2012 (2012-05-10) abstract; claim 6; figures 2,4,10,11 page 2, line 19 page 11, line 32 -----	1-17
A	US 2013/258658 A1 (HUSSELL CHRISTOPHER P [US] ET AL) 3 October 2013 (2013-10-03) paragraphs [0030], [0031] -----	15,16
X	WO 2012/112873 A2 (3M INNOVATIVE PROPERTIES CO [US]; PALANISWAMY RAVI [SG]; JESUDOSS AROK) 23 August 2012 (2012-08-23) abstract; claim 1; figures 6-9,11 page 10, line 21 - line 22 page 18, line 32 - line 35 ----- -/-	1-8,18



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

9 March 2015

Date of mailing of the international search report

18/03/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Heising, Stephan

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2014/068167

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2007/080438 A1 (YAMANAKA TOSHIHIRO [JP] ET AL) 12 April 2007 (2007-04-12) -----	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2014/068167

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2012061183 A2	10-05-2012	KR 20130141559 A TW 201228489 A US 2014036461 A1 WO 2012061183 A2	26-12-2013 01-07-2012 06-02-2014 10-05-2012
US 2013258658 A1	03-10-2013	CN 104247061 A US 2013258658 A1 WO 2013148573 A1	24-12-2014 03-10-2013 03-10-2013
WO 2012112873 A2	23-08-2012	CN 203932096 U KR 20140004755 A TW 201251153 A US 2013320390 A1 WO 2012112873 A2	05-11-2014 13-01-2014 16-12-2012 05-12-2013 23-08-2012
US 2007080438 A1	12-04-2007	CN 1945822 A KR 20070039398 A US 2007080438 A1	11-04-2007 11-04-2007 12-04-2007