




(86) Date de dépôt PCT/PCT Filing Date: 2003/03/25
(87) Date publication PCT/PCT Publication Date: 2003/10/09
(85) Entrée phase nationale/National Entry: 2004/09/24
(86) N° demande PCT/PCT Application No.: US 2003/009114
(87) N° publication PCT/PCT Publication No.: 2003/082125
(30) Priorité/Priority: 2002/03/25 (60/367,395) US

(51) Cl.Int.⁷/Int.Cl.⁷ A61B 17/04
(71) Demandeur/Applicant:
DVL ACQUISITION SUB, INC., US
(72) Inventeurs/Inventors:
FIELD, FREDERIC P., US;
FOGG, DOUGLAS A., US;
SANCOFF, GREGORY E., US
(74) Agent: SMART & BIGGAR

(54) Titre : INSTRUMENT CHIRURGICAL DE SUTURE ET SON PROCEDE D'UTILISATION
(54) Title: SURGICAL SUTURING INSTRUMENT AND METHOD OF USE

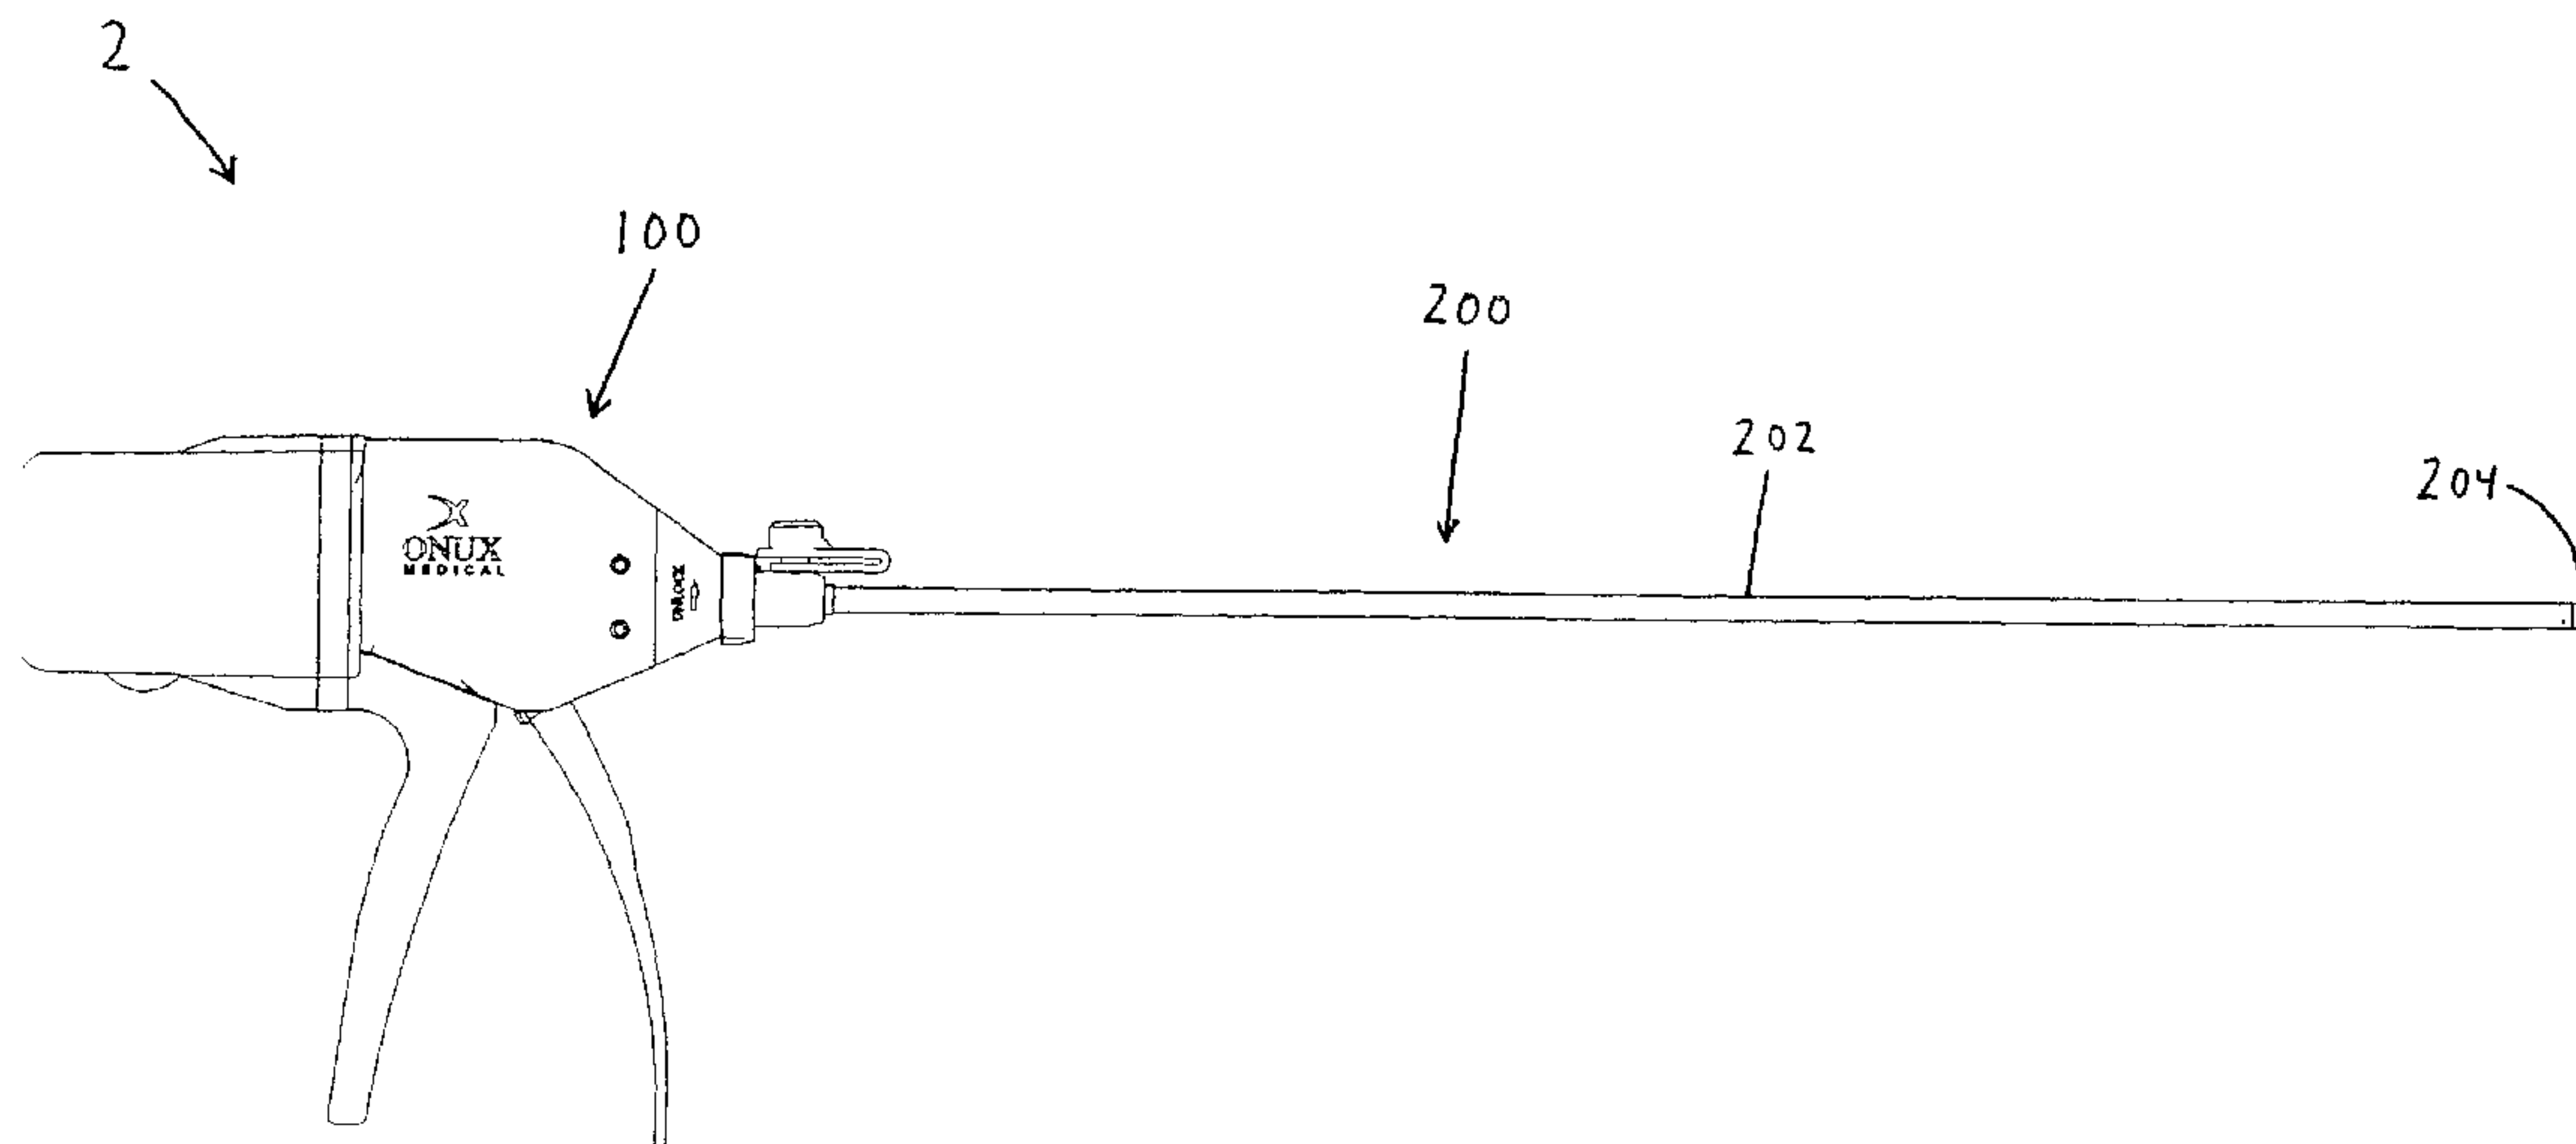

(57) **Abrégé/Abstract:**

A device (2) is disclosed for introducing a flexible elongated element through at least two portions of a subject. In a preferred embodiment, the device includes a proximal end and a distal end, and an advancement unit (300) for longitudinally advancing the flexible elongated element toward the distal end of the device (2) such that a proximal end of the elongated element may exit from the distal end of the device with sufficient force to pass through the subject. The device also includes a curved die (204) at the distal end of the device (2) for imparting a looping configuration to portions of the flexible elongated element exiting the distal end of the device (2), and a curved guide at the distal end for receiving the looped flexible elongated element as it returns to the distal end of the device. In a further feature of the invention, a cutting mechanism (206) is provided to permit the looped flexible elongated element to be separated from the remainder of the flexible elongated element. And in a further feature of the invention, the cutting mechanism (206) is adapted to deform the trailing end of the looped flexible elongated element so that the trailing end is forced distally, toward the subject being sutured.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number
WO 03/082125 A1

(51) International Patent Classification⁷: **A61B 17/04**

(21) International Application Number: PCT/US03/09114

(22) International Filing Date: 25 March 2003 (25.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/367,395 25 March 2002 (25.03.2002) US

(71) Applicant: **ONUX MEDICAL, INC.** [US/US]; 5 Merrill Drive, Hampton, NH 03842 (US).

(72) Inventors: **FIELD, Frederic, P.**; 5 Woodland Road, North Hampton, NH 03862 (US). **FOGG, Douglas, A.**; 15 South Pleasant Street, Merrimac, MA 01860 (US). **SANCOFF, Gregory, E.**; 120 Mill Road, North Hampton, NH 03862 (US).

(74) Agent: **PANDISCIO, Mark, J.**; Pandiscio & Pandiscio, 470 Totten Pond Road, Waltham, MA 02451-1914 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SURGICAL SUTURING INSTRUMENT AND METHOD OF USE

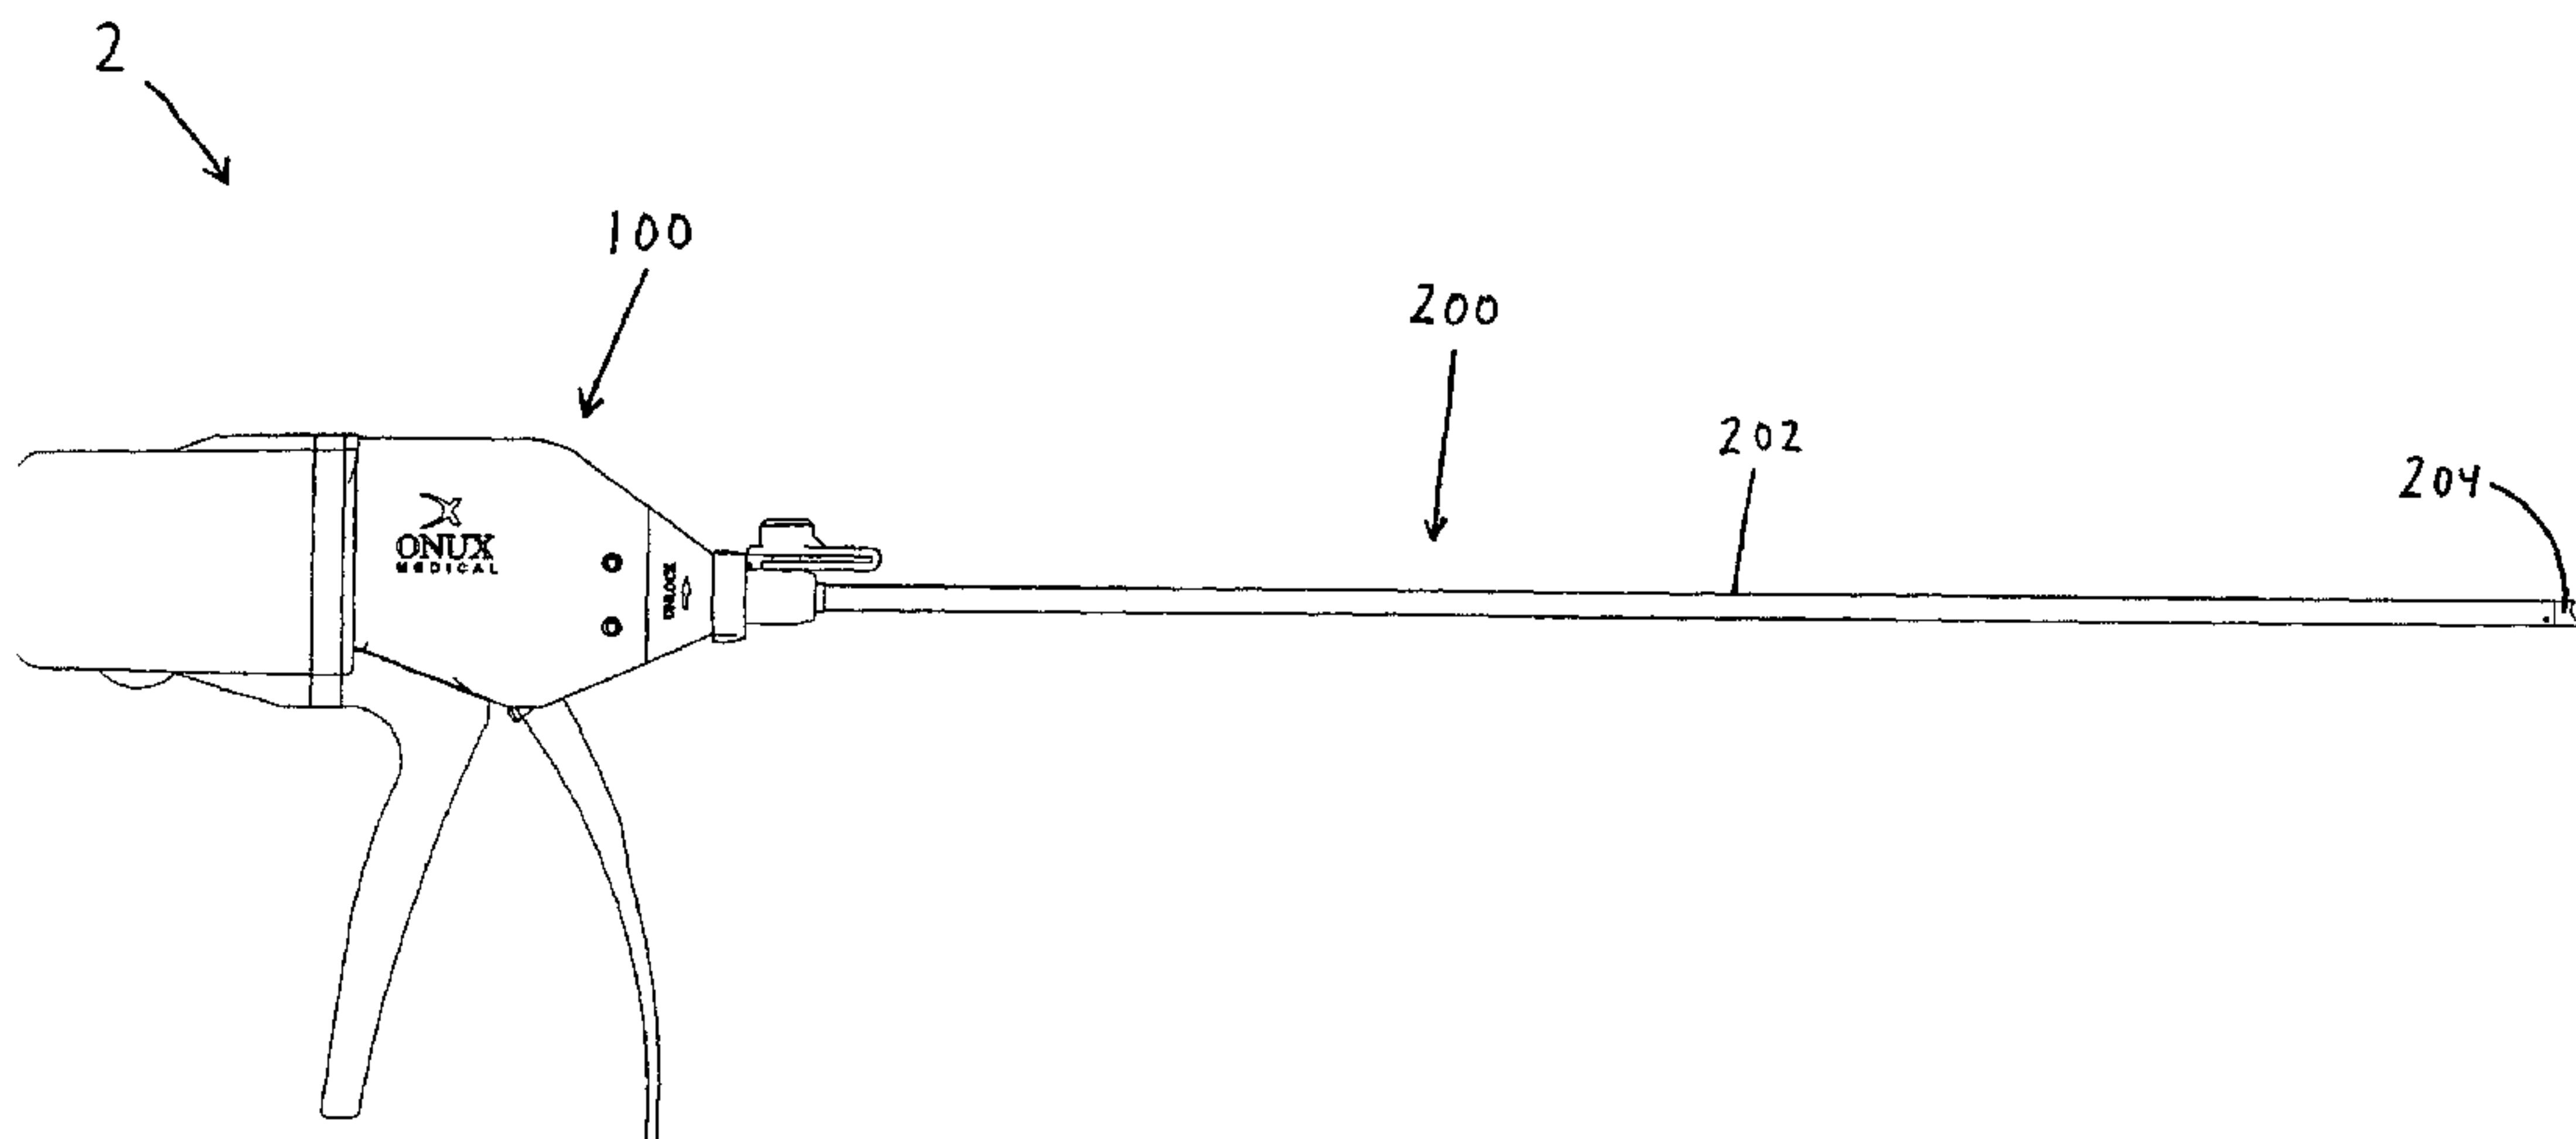

(57) Abstract: A device (2) is disclosed for introducing a flexible elongated element through at least two portions of a subject. In a preferred embodiment, the device includes a proximal end and a distal end, and an advancement unit (300) for longitudinally advancing the flexible elongated element toward the distal end of the device (2) such that a proximal end of the elongated element may exit from the distal end of the device with sufficient force to pass through the subject. The device also includes a curved die (204) at the distal end of the device (2) for imparting a looping configuration to portions of the flexible elongated element exiting the distal end of the device (2), and a curved guide at the distal end for receiving the looped flexible elongated element as it returns to the distal end of the device. In a further feature of the invention, a cutting mechanism (206) is provided to permit the looped flexible elongated element to be separated from the remainder of the flexible elongated element. And in a further feature of the invention, the cutting mechanism (206) is adapted to deform the trailing end of the looped flexible elongated element so that the trailing end is forced distally, toward the subject being sutured.

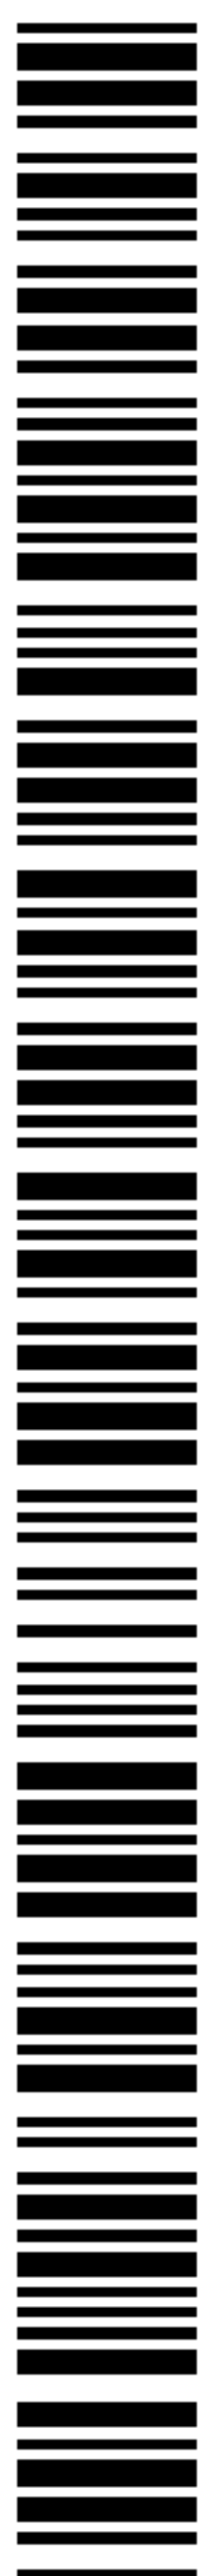

WO 03/082125 A1

SURGICAL SUTURING INSTRUMENT AND METHOD OF USEReference To Pending Prior Applications

5 This is a continuation-in-part of (1) pending
prior U.S. Patent Application Serial No. 10/352,600,
filed 01/28/03 by Frederic P. Field et al. for SURGICAL
SUTURING INSTRUMENT AND METHOD OF USE (Attorney's
Docket No. ONUX-22 CON), and (2) pending prior U.S.
Patent Application Serial No. 10/378,805, filed
10 03/04/03 by Gregory E. Sancioff et al. for SURGICAL
SUTURING INSTRUMENT AND METHOD OF USE (Attorney's
Docket No. ONUX-15 CON).

This patent application also claims benefit of
pending prior U.S. Provisional Patent application
15 Serial No. 60/367,395, filed 03/25/02 by Frederic P.
Field et al. for SURGICAL SUTURING INSTRUMENT AND
METHOD OF USE (Attorney's Docket No. ONUX-31 PROV).

This patent application also claims benefit of

The three above-identified patent applications
20 are hereby incorporated herein by reference.

- 2 -

Field Of The Invention

This invention relates to medical instruments and procedures in general, and more particularly to suturing instruments and methods for suturing.

5

Background Of The Invention

Suturing instruments are typically used to secure together two or more portions of a subject patient (e.g., tissue such as muscle or skin) or to attach an object to the patient (e.g., to attach a piece of surgical mesh to the abdominal wall of the patient during hernia repair surgery).

10

Certain suturing instruments employ a needle that precedes a length of suture material through a subject.

15

For example, U.S. Patents Nos. 3,470,875; 4,027,608; 4,747,358; 5,308,353; 5,674,230; 5,690,653; 5,759,188; and 5,766,186 generally disclose suturing instruments in which a needle, with trailing suture material, is passed through a subject.

20

- 3 -

U.S. Patents Nos. 4,890,615; 4,935,027;
5,417,700; and 5,728,112 generally disclose suturing
instruments in which suture material is passed through
the end of a hollow needle after that needle has been
5 passed through a subject.

With all of the foregoing devices, a needle must
be passed through the subject in order to deploy the
suture. This has the disadvantage that the needle
typically leaves a larger hole in the subject than is
10 necessary to accommodate only the suture material
itself. In this respect it should be appreciated that
it is generally desirable to alter each portion of the
material being sutured (e.g., tissue) as little as
possible during the suturing process.

15 A suturing instrument has been devised which
permits the suture material itself to pierce the
subject without the use of a needle. However, this
device does not permit adequate flexibility with
regard to the type of fastening which may be effected.

20 More particularly, U.S. Patent No. 5,499,990
discloses a suturing instrument having a pair of jaws

- 4 -

at its distal end for clamping together two portions
of a subject. A 0.25 mm stainless steel suturing wire
is advanced to the distal end of the suturing
instrument, whereupon the distal end of the suturing
5 wire is caused to travel in a spiral direction so as
to create stitches joining together the two portions
of the subject. After the spiral is formed, the
beginning and end portions of the suture may be bent
toward the tissue in order to inhibit retraction of
10 the suture wire into the tissue upon removal of the
suturing instrument. The stainless steel wire is
sufficiently firm to hold this locking set. In
addition, after the spiral is formed, the radius of
the deployed suture spiral may then be decreased by
15 advancing an outer tube over a portion of the distal
end of the instrument. Again, the stainless steel
wire is sufficiently firm to hold this reducing set.

Unfortunately, however, such a system does not
permit adequate flexibility with regard to the type of
20 fastening which may be effected. More particularly,
the suturing instrument of U.S. Patent No. 5,499,990

- 5 -

must clamp the two portions of the subject between its two jaws in order to effect suturing. Such a construction can be inadequate where it is difficult or even impossible to clamp the two portions of the subject between the instrument's jaws, e.g., where the two portions of the subject are too thick to be spanned by the jaws, or where the angle of approach prevents the jaws from clamping together the two portions of the subject, etc.

U.S. Patent No. 4,453,661 discloses a surgical instrument having a pair of jaws at its distal end for clamping together two portions of a subject and applying staples thereto. The staples are formed from the distal end of a length of wire. More particularly, the distal end of the wire is passed through a subject and thereafter contacts a die that causes the wire to bend, thereby forming the staple. The wire is sufficiently firm to take on the set imposed by the die. The staple portion is then cut away from the remainder of the wire by a knife.

- 6 -

Again, such a system suffers from the fact that it does not permit adequate flexibility with regard to the type of fastening which may be effected, since the surgical instrument must clamp the two portions of the subject between its two jaws in order to effect stapling, and this can be difficult or even impossible to achieve in certain circumstances, e.g., where the two portions of the subject are too thick to be spanned by the jaws, or where the angle of approach prevents clamping, etc.

There is a need, therefore, for a new suturing device that permits minimally disruptive suturing and provides increased flexibility in the application of the suture material.

Summary Of The Invention

The present invention comprises a novel device and method for deploying a flexible elongated element through a subject so as to effect suturing.

In one embodiment of the invention, the device includes a proximal end and a distal end, and an

- 7 -

advancement unit for longitudinally advancing the flexible elongated element toward the distal end of the device such that a distal end of the flexible elongated element may exit from the distal end of the device with sufficient force to pass through the subject. The device also includes a curved die at the distal end of the device for imparting a looping configuration to portions of the flexible elongated element exiting the distal end of the device, and a curved guide at the distal end of the device for receiving the looped flexible elongated element as it returns to the distal end of the device. In a further feature of the invention, a cutting mechanism is provided to permit the looped flexible elongated element to be separated from the remainder of the flexible elongated element. And in a further feature of the invention, the cutting mechanism is adapted to deform the trailing end of the looped flexible elongated element so that the trailing end is forced distally, toward the subject being sutured.

- 8 -

In another form of the invention, there is provided a suturing instrument for joining a first portion of material to a second portion of material, the suturing instrument comprising:

5 a handle;

 an end effector mounted on the handle and defining therein:

 a channel for supporting suture wire, the channel being curved to impart a looping configuration to portions of the suture wire passed therethrough;

 an end recess adapted to receive the looped suture wire emerged from the channel; and

 a passageway for supporting a cutting bar, the passageway intersecting the channel so as to create an island between the channel and the passageway;

 a wire advancing actuator mounted on the handle for moving the suture wire through the channel, through the material first and second portions and back into the end recess;

- 9 -

a cutting bar movably disposed in the passageway for selectively engaging the suture wire, the cutting bar being adapted to (1) cut the looped suture wire from the remaining portions of the suture wire; and
5 (2) bend the trailing end of the looped suture wire around, and lift the looped suture wire over, the island; and

a cutting bar actuator mounted on the handle for moving the cutting bar into engagement with the suture
10 wire.

In another form of the invention, there is provided a structure for supporting suture wire during driving of the suture wire, the structure comprising:

a tube support having a first end and a second
15 end in opposition to one another, the first end being configured for receiving the suture wire from a wire spool;

an opening formed in the tube support between the first end and the second end, the opening being
20 configured for exposing the suture wire for driving; and

- 10 -

a tube disposed adjacent to the second end of the tube support, the tube being configured for receiving the suture wire driven through the tube support, and the tube being configured for closely surrounding and slideably supporting the suture wire.

In another form of the invention, there is provided a method for joining a first portion of material to a second portion of material, the method comprising:

providing a suturing instrument comprising:

a handle;

an end effector mounted on the handle and defining therein:

a channel for supporting suture wire, the channel being curved to impart a looping configuration to portions of the suture wire passed therethrough;

an end recess adapted to receive the looped suture wire emerged from the channel; and

a passageway for supporting a cutting bar, the passageway intersecting the channel so as to

- 11 -

create an island between the channel and the
passageway;

5 a wire advancing actuator mounted on the
handle for moving the suture wire through the channel,
through the material first and second portions and
back into the end recess;

10 a cutting bar movably disposed in the
passageway for selectively engaging the suture wire,
the cutting bar being adapted to (1) cut the looped
suture wire from the remaining portions of the suture
wire; and (2) bend the trailing end of the looped
suture wire around, and lift the looped suture wire
over, the island; and

15 a cutting bar actuator mounted on the handle for
moving the cutting bar into engagement with the suture
wire;

positioning the end effector against at least one
of the portions to be joined;

20 moving the suture wire through the channel,
through the material first and second portions and
back into the end recess; and

- 12 -

moving the cutting bar in the passageway so as to
(1) cut the looped suture wire from the remaining
portions of the suture wire; and (2) bend the trailing
end of the looped suture wire around, and lift the
5 looped suture wire over, the island.

In another form of the invention, there is
provided a method for driving wire, the method
comprising the steps of:

providing a structure for supporting suture wire
10 during driving of the suture wire, the structure
comprising:

a tube support having a first end and a
second end in opposition to one another, the first end
being configured for receiving the suture wire from a
15 wire spool;

an opening formed in the tube support
between the first end and the second end, the opening
being configured for exposing the suture wire for
driving; and

20 a tube disposed adjacent to the second end of the
tube support, the tube being configured for receiving

- 13 -

the suture wire driven through the tube support, and
the tube being configured for closely surrounding and
slideably supporting the suture wire; and

engaging the suture wire with a pair of opposing
5 rollers, each of the opposing rollers engaging the
suture wire by accessing the suture wire through one
of the second pair of diametrically opposed openings
and one of the first pair of diametrically opposed
openings.

10

Brief Description Of The Drawings

These and other objects and features of the
present invention will be more fully disclosed or
rendered obvious by the following detailed description
15 of the preferred embodiments of the invention, which
is to be considered together with the accompanying
drawings wherein like numbers refer to like parts, and
further wherein:

- 14 -

Fig. 1 is a side view showing a suturing instrument formed in accordance with the present invention;

5 Figs. 2-5 are various views showing various details of the suturing instrument's handle assembly;

Figs. 6-17 are various views showing various details of the suturing instrument's cannula assembly;

10 Figs. 18-21 are various views showing various details of the suturing instrument's wire drive assembly;

Figs. 22-25 are various views showing various details of the suturing instrument's wire supply cartridge;

15 Fig. 26 is a schematic view showing two portions being secured to one another with a suture loop deployed by the suturing instrument;

Figs. 27-33 show various steps in a suturing operation conducted with the suturing instrument;

20 Fig. 34 is a schematic view showing an alternative form of tissue attachment being effected with the suturing instrument;

- 15 -

Figs. 35-37 are schematic side views illustrating the interrelationship between the geometry of the cannula assembly's end effector portion and the leading tip of the suture wire;

5 Fig. 38 is a schematic view showing the suturing instrument securing a prosthetic cardiac valve to vascular tissue with suture loops;

Figs. 39 and 40 are schematic views of a cannula assembly of an alternative suturing instrument;

10 Fig. 41 is an illustration of a modified suture loop formed by the cannula assembly of the alternative suturing instrument shown in Figs. 39 and 40;

15 Fig. 42-51 are schematic views of an end effector of the alternative suturing instrument shown in Figs. 39 and 40; and

Figs. 52-55 are schematic views of an alternative wire supply cartridge.

- 16 -

Detailed Description Of The Preferred Embodiment

Overview

Looking first at Figs. 1-5, there is shown a
5 suturing instrument 2 which comprises one preferred
embodiment of the present invention. Suturing
instrument 2 generally comprises a handle assembly
100, a cannula assembly 200, a wire drive assembly 300
(Fig. 5) and a wire supply cartridge 400, as will
10 hereinafter be described in further detail.

Among other things, handle assembly 100 comprises
a handle 102 and a lever 104, and cannula assembly 200
comprises a shaft 202, an end effector 204 and a wire
cutting mechanism 206, as will also hereinafter be
15 described in further detail.

As will be discussed in further detail below,
generally during use, the suturing instrument's end
effector 204 is positioned adjacent to the subject
which is to be sutured. Then lever 104 is squeezed
20 towards handle 102, causing wire drive assembly 300 to
draw suture wire out of wire supply cartridge 400 and

- 17 -

push the suture wire distally through cannula assembly
200 to end effector 204, where the suture wire exits
the instrument with sufficient force to pass through
the subject. End effector 204 includes a curved die
5 for imparting a looping configuration to the portions
of the suture wire exiting the distal end of the
instrument, and a curved guide for receiving the
looped suture wire as it returns to the distal end of
the instrument. The looped suture wire may then be
10 cut off, at end effector 204, from the remaining
suture wire that extends back through the suturing
instrument. Such cutting is preferably automatically
effected by wire cutting mechanism 206 at the
conclusion of the lever's stroke.

15 As will be discussed in further detail below,
wire supply cartridge 400 may be supplied separately
from suturing instrument 2, with wire supply cartridge
400 being loaded into suturing instrument 2 prior to
commencing a suturing operation. As will also be
20 discussed in further detail below, wire supply

- 18 -

cartridge 400 may be disposable, such that the cartridge may be discarded after use.

Handle Assembly 100

5 Still looking at Figs. 1-5, handle assembly 100 comprises a housing 106, with the aforementioned handle 102 being fixedly attached to housing 106 and the aforementioned lever 104 being pivotally connected to housing 106 by a pivot pin 108.

10 The inner end of lever 104 includes a slot 110 for receiving a roll pin 112 therein. Roll pin 112 is also secured to a rack 114. Rack 114 is connected to a compression spring 116 at its distal end. Rack 114 includes a length of teeth 118 intermediate its
15 length, followed by a smooth wall 120 adjacent to its proximal end. As a result of this construction, compression spring 116 normally biases rack 114 proximally, so that lever 104 is biased away from handle 102; however, lever 104 may be squeezed toward
20 handle 102 so as to overcome the force of spring 116, whereby to move rack 114 distally. A pawl 122 (Fig.

- 19 -

3), riding on lever 104 and engaging a set of teeth
124, ensures that lever 104 cannot return to its
proximal starting position without moving through one
complete stroke. A removable shroud 126 selectively
5 closes off the proximal end of housing 106. The
removable nature of shroud 126 permits a fresh wire
supply cartridge 400 to be loaded into the suturing
instrument and an exhausted wire supply cartridge to
be removed from the instrument, as will hereinafter be
10 discussed in further detail.

Cannula Assembly 200

Cannula assembly 200 is shown in greater detail
in Figs. 6-16. As noted above, cannula assembly 200
15 (Fig. 6) comprises shaft 202, end effector 204 and
wire cutting mechanism 206.

More particularly, shaft 202 comprises a tube 208
having a distal end 210 and a proximal end 212. A
mount 214 is secured to tube 208 near its proximal end
20 whereby shaft 202, and hence the entire cannula
assembly 200, may be removably attached to housing 106

- 20 -

of handle assembly 100. Mount 214 includes a flushing
port 216 (Fig. 7), communicating with the interior of
tube 208 via an opening 218 (Fig. 8), for cleaning the
interior of cannula assembly 200. A cap 220
5 selectively closes off flushing port 216.

End effector 204 is secured to the distal end of
tube 208.

End effector 204 is configured so as to form a
modified suture loop 422 (Fig. 26), sometimes referred
10 to as a "suture clip" or a "Q-form loop" or a "Q-form
clip", as will hereinafter be discussed.

More particularly, end effector 204 comprises a
fixed first portion 222 (Figs. 10, 11 and 12) and a
fixed second portion 224 (Figs. 10, 11, and 17).

15 As seen in Fig. 12, fixed first portion 222
includes a first channel 226 for receiving the distal
end of the aforementioned wire supply cartridge 400, a
smaller diameter second channel 228 for supporting
suture wire as the suture wire emerges from wire
20 supply cartridge 400, and a third channel 230 for
receiving the suture wire after the suture wire passes

- 21 -

by cutting bar channel 232 and for imparting a selected curvature to the suture wire, whereby to form the suture loop, as will hereinafter be discussed in further detail. Second channel 228 and third channel 5 230 are coplanar. In addition to the foregoing, material is removed from fixed first portion 222 at the location 234 so as to effectively form an island 236 at the distal end of end effector 204.

In order to assist the controlled retention of 10 suture wire during its travel within second channel 228 and third channel 230, one or both of these channels may be given an undercut profile such as the dovetail profile 238 shown in Fig. 13 with respect to third channel 230. At the same time, in order to 15 minimize harmful friction between the suture wire and fixed first portion 222, second channel 230 may be widened slightly at locations other than 240 (Fig. 12); locations 240 are, for this particular clip form, the operative contact points for effecting wire 20 bending (in this respect it should be appreciated that other particular clip forms may have other contact

- 22 -

points). In addition, in order to facilitate the release of a formed suture clip from the instrument, the proximal end of island 236 may be relieved slightly at 242 (Fig. 12).

5 In addition to the foregoing, fixed first portion 222 may be relieved as shown as 244 (Fig. 10) so as to form a curved guide at the distal end of the instrument for receiving the looped suture wire as it returns to the distal end of the instrument.

10 Wire cutting mechanism 206 comprises a cutting bar 246 (Figs. 8, 12 and 14-16). The distal end of cutting bar 246 is disposed in the aforementioned cutting bar channel 232 (Fig. 12) and the proximal end of cutting bar 246 protrudes from the proximal end 212
15 of tube 208 (Fig. 8).

 The distal end of cutting bar 246 (Figs. 12, and 14-16) preferably comprises a plurality of distinct faces, i.e., a cutting face 248 defining a cutting edge 250, a relief face 252 set at an angle α to
20 cutting face 248, an ejection ramp face 254, and an ejection push face 258. As will hereinafter be

- 23 -

discussed in further detail, when cutting bar 246 is driven distally so as to encounter suture wire extending between second channel 228 and third channel 230 (and hence across cutting bar channel 232), cutting edge 250 will sever the suture wire, ejection ramp face 254 will lift the trailing end of the severed suture wire out of cutting bar channel 232 and up over island 236 so that the loop may be released from the distal end of the suturing instrument, and ejection push face 258 will push the suture loop free from the distal end of suturing instrument 2.

The proximal end of cutting bar 246 comprises a pusher element 260 (Figs. 2 and 8) adapted to be engaged by lever 104 when cannula assembly 200 is mounted to handle assembly 100 and lever 104 is pulled toward handle 102, whereby to move cutting bar 246 distally within cannula assembly 200. A compression spring 262 is located between pusher element 260 and mount 214 so as to bias cutting bar 246 proximally. As will hereinafter be discussed in further detail, the operations of lever 104 and wire cutting mechanism

- 24 -

206 are preferably coordinated with one another so that pusher element 260 is not engaged by lever 104 until the later part of the lever's stroke, so that advancement of the suture wire will have ceased by the time cutting bar 246 is activated.

Looking next at Figs. 10, 11 and 17, fixed second portion 224 includes the second half of the aforementioned first channel 226 for receiving the distal end of the aforementioned wire supply cartridge 400, the second half of the aforementioned cutting bar channel 232, and a slot 264 which extends proximally from the distal end of the instrument. Slot 264 is sized so that when first fixed portion 222 is engaging second fixed portion 224, a gap slightly wider than the diameter of the suture wire will be formed between the top of island 236 and the opposing material of fixed second portion 224, in order to permit a formed loop of suture wire to be released from the end of the suturing instrument, as will also hereinafter be discussed in further detail. Slot 264 is configured so that the suture wire will be maintained in third

- 25 -

channel 230 until after the suture wire has been cut and partially bent so as to keep the suture wire in position for proper cutting and bending.

Fixed first portion 222 and fixed second portion 224 are preferably formed out of material which is harder than the suture wire passing through channels 228 and 230, so as to minimize wear on the instrument. In one preferred form of the invention, first fixed portion 222 and fixed second portion 224 are formed out of a carbide alloy.

Preferably a loading guide 268 (Figs. 8, 9 and 11) is positioned in tube 208 between end effector 204 and mount 214, so as to provide guidance and support for cutting bar 246 and the distal end of wire supply cartridge 400.

In one preferred form of the invention, end effector 204 includes a recess 270 (Figs. 12 and 17) at its front end. Recess 270 permits soft tissue to protrude into the interior of end effector 204 (see Fig. 27) and provides a pair of projections 272, 274 for pressing into the tissue and stabilizing the

- 26 -

suturing instrument thereagainst. If desired, one or both of the projections 272, 274 can be made relatively sharp so as to enhance tissue engagement or manipulation of prosthetic material (e.g., surgical mesh), and/or one of the projections (e.g., projection 274) can be made slightly longer than the other projection, so as to facilitate an oblique approach to a tissue surface (see, for example, Fig. 26).

10 Wire Drive Assembly 300

Looking next at Figs. 4, 5 and 18-21, wire drive assembly 300 comprises a fixed block 302, a movable block 304, a first drive shaft roller 306 connected to a spur gear 308 via an axle 310 passing through fixed block 302 and a one way clutch 312, and a second drive shaft roller 314 connected to a spur gear 316 via an axle 318 and a one way clutch 320. A pair of capture blocks 322 and 324 rotatably capture drive shaft rollers 306 and 314 to blocks 302 and 304, respectively.

- 27 -

Movable block 304 is slidably mounted to fixed block 302 via a pair of rods 326 and 328 that pass through movable block 304, fixed block 302 and are secured to a cam follower 330, with springs 332 and 334 biasing movable block 304 into engagement with fixed block 302. A lever 336 and cam 338 are provided for manually forcing movable block 304 away from fixed block 302, and hence drive shaft roller 314 away from drive shaft roller 306, and hence spur gear 316 away from spur gear 308.

Wire drive assembly 300 is normally disposed in handle assembly 100 so that spur gears 308 and 316 engage the teeth 118 of rack 114, and so that drive shaft roller 314 is in substantial engagement with drive shaft roller 306.

However, depressing lever 336 will cause cam follower 338 to pivot, whereby to force movable block 304 away from fixed block 302 and whereby to separate roller 314 from roller 306 (and to separate spur gear 316 from spur gear 308). Wire supply cartridge 400 may then be inserted between rollers 314 and 306 and,

- 28 -

by then restoring lever 336 to its inboard position,
cause the suture wire to be gripped by rollers 306 and
314, whereupon the suture wire may be driven by
rollers 306 and 314 out the distal end of the suturing
instrument.

More particularly, after a fresh wire supply
cartridge 400 has been installed in the instrument,
suture wire may be driven out the distal end of the
instrument by depressing lever 104 toward handle 102.
Depressing lever 104 toward handle 102 causes roll pin
112 (Fig. 2) to ride within slot 110. More
particularly, as the top end of lever 104 moves about
pivot pin 108, roll pin 112 moves through slot 110.
This causes rack 114 to move distally, which in turn
causes spur gears 308 and 316 to rotate, which in turn
causes rollers 306 and 314 to rotate, which in turn
causes a length of suture wire to be advanced out the
distal end of the suturing instrument.

As lever 104 continues to rotate, the toothless
region of rack 114 (i.e., the smooth wall 120 at the
proximal end of rack 114) is advanced to spur gears

- 29 -

308 and 316, whereby rotation of rollers 306 and 314 will cease and suture wire will no longer be advanced out the distal end of the suturing instrument. Thus it will be seen that by carefully regulating the length of the rack's teeth 118, the length of suture wire ejected from the instrument can also be regulated.

Further movement of lever 104 will then cause the cutting bar's pusher element 260 (Fig. 2) to be engaged, whereby cutting bar 246 will be advanced distally so as to sever the formed loop of suture wire from the suture wire remaining in the instrument, lift the trailing end of the suture loop over island 236 and then push the suture loop free from the suturing instrument.

At the completion of the stroke, lever 104 is released, thereby allowing the aforementioned parts to return to their starting position under the influence of spring 116. However, one way clutches 312 and 320 (Fig. 19) interposed between drive rollers 306 and 314, and the drive rollers 306 and 314, respectively,

- 30 -

prevent reverse movement of the drive rollers, thereby preventing any retraction of the suture wire.

Thus, a single throw of lever 104 will result in a pre-determined degree of movement of drive rollers 306 and 314, which will in turn result in a pre-determined length of suture wire being advanced out of the distal end of the suturing instrument.

It should be appreciated that each drive roller and axle assembly (i.e., drive roller 306 and axle 310, and drive roller 314 and axle 318) is preferably machined (i.e., turned) from a single, continuous piece of metal, using the same tool setup, so that the alignment of both is immune from the inaccuracies which might occur if they were turned at different occasions and assembled using holes and holding means. This construction is important, because the drive rollers are approximately 30 times the diameter of the suture wire they are driving and even the slightest alignment inaccuracies can rotate the wire as it is moved forward. Since the wire is permanently curved by the exit path in the end effector 204, any such

- 31 -

wire rotation may cause the wire to swerve from its normal trajectory from the end effector and possibly prevent the leading tip of the wire from properly returning to the end effector after it has passed through the subject.

It should also be appreciated that peripheral grooves may be formed in drive rollers 306 and 314. Such grooves provide a seat for the suture wire being driven and help increase the surface area contact between the drive rollers and the suture wire.

Wire Supply Cartridge 400

Looking next at Figs. 22-25, wire supply cartridge 400 generally comprises a spool housing 402, a wire spool 404, a spool retainer spring 406, a spool cover 408, a molded tube support 410 and a wire support tube 412. A length of suture wire 416 extends from spool 404 and through molded tube support 410 and wire support tube 412.

More particularly, a supply coil of suture wire 416 (comprising wire formed of metal or any other

- 32 -

suitable material having the required flexibility and stiffness) may be supplied in the base of cartridge 400 and is fed into wire support tube 412. Wire support tube 412 surrounds suture wire 416 from spool housing 402 to the distal end of suturing instrument 2 where, with the distal end of wire support tube 412 received in channel 226 (Fig. 12), the suture wire enters second channel 228 in end effector 204. Wire support tube 412 ensures that suture wire 416 does not bend or buckle as the suture wire is pushed through handle assembly 100 and cannula assembly 200. More particularly, wire support tube 412 preferably forms a sufficiently close sliding fit with suture wire 416 such that suture wire 416 cannot bend or buckle as the suture wire is advanced through suturing instrument 2. At the same time, wire support tube 412 is also formed so as to present a minimum of friction to suture wire 416 as the suture wire is advanced through the instrument. The foregoing characteristics are important, inasmuch as suture wire 416 is extremely thin and flexible and highly susceptible to bending or

- 33 -

buckling in the absence of some sort of lateral support.

By way of example but not limitation, where suture wire 416 is formed out of stainless steel and has a diameter of 0.017 inch, wire support tube 412 might have an inside diameter of 0.185 inch and an outside diameter of 0.050 inch. In addition, wire support tube 412 is preferably formed out of 316 stainless steel, however, it may alternatively be formed out of some other material. If desired, the interior of wire support tube 412 may be coated with a lubricant so as to facilitate closely-supported, low-friction passage of the suture wire through the wire support tube.

Wire support tube 412 and its surrounding molded tube support 410 have aligned openings 418 and 420, respectively, on opposite sides thereof. Openings 418 and 420 expose diametrically opposed portions of the suture wire 416 so that rollers 306 and 314 may contact suture wire 416 and urge the suture wire

- 34 -

forward toward the distal end of suturing instrument
2, as will hereinafter be discussed in further detail.

As noted above, wire supply cartridge 400 may be
loaded into wire drive assembly 300 by actuating lever
5 336 so as to force movable block 304 away from fixed
block 302 and thereby separate rollers 306 and 314.
Once roller 314 is separated from roller 306 by a
sufficient distance, wire support tube 412 may be
inserted between rollers 306 and 314, and then roller
10 314 returned towards roller 306 such that rollers 306
and 314 contact either side of suture wire 416 through
the aligned openings 418 and 420 formed in either side
of wire support tube 412 and its surrounding molded
support tube 410, respectively.

15

Operation

Suturing instrument 2 may be used to apply loops
422 (Fig. 26) of wire suture 416 to a subject so as to
effect a desired suturing operation.

20

By way of example but not limitation, and looking
now at Figs. 26-33, suturing instrument 2 may be used

- 35 -

to suture together two portions 500, 502 of a subject which is to be sutured. In a typical case, portions 500, 502 might comprise two sections of severed tissue which need to be re-attached to one another, or two
5 pieces of previously unattached tissue which need to be attached to one another. However, one or the other of the portions 500, 502 might also comprise artificial mesh or some other object which is to be attached to tissue, etc. (e.g., it might comprise
10 "hernia mesh" of the sort attached to the interior of the abdominal wall during hernia repair surgery). In addition, in a typical case, portions 500, 502 might be located relatively deep within a patient, and might be accessed during an endoscopic or a so-called
15 "minimally invasive" or a so-called "closed surgery", procedure; however, in other circumstances, portions 500, 502 might be accessed during a conventional, or so-called "open surgery", procedure. This latter situation might include procedures done at the outer
20 surface of the patient's body, i.e., where portions 500, 502 comprise surface elements.

- 36 -

In any case, suturing instrument 2 is initially prepared for use by installing a wire supply cartridge 400 into the suturing instrument, if a cartridge 400 is not yet installed. As noted above, wire supply cartridge 400 is installed in suturing instrument 2 by (1) removing shroud 126, (2) moving the wire drive assembly's release lever 336 to its open position, so as to move rollers 306 and 314 apart; (3) passing the distal end of the cartridge (i.e., the distal end of wire support tube 412) through wire drive assembly 300 and cannula assembly 200 until the distal end of wire support tube 412 is located in the end effector's first channel 226, at which point the cartridge's molded tube support 410 will be positioned intermediate rollers 306 and 314; and (4) moving the wire drive assembly's release lever 336 back to its closed position, so that rollers 306 and 314 engage the suture wire 416 through openings 420 and 418, and so that spur gears 308 and 316 engage the teeth 118 of rack 114.

- 37 -

At this point suturing instrument 2 will be ready for use.

When suturing instrument 2 is to apply a suture loop 422 to a subject, the distal end of the suturing instrument is positioned against the subject, e.g., it is positioned against portions 500, 502 (Figs. 26 and 27).

Once the distal end of suturing instrument 2 has been placed against subject portions 500, 502, lever 104 is pulled back against handle 102. As the top end of lever 104 moves distally, rack 114 is also moved distally, whereby rack teeth 118 will cause spur gears 308 and 316, and hence rollers 306 and 314, to rotate. Rotation of rollers 306 and 314 in turn causes suture wire 416 to advance out of the distal end of wire support tube 412 (Fig. 27). The suture wire advances down second channel 228, across cutter bar channel 232 (Fig. 28), through second channel 230 and then out of the instrument (Fig. 29). Due to the curved geometry of channel 230, the suture wire emerging from end effector 204 will take on a set, causing it to curl in

- 38 -

a loop fashion, whereby the suture wire will pass through the material to be sutured and then back into slot 264 in the end effector's fixed second portion 224 (Fig. 30). To assist the returning wire into slot 264, the guide surface 244 may be provided at the distal end of end effector 204.

If desired, the proximal end 276 (Fig. 17) of slot 264 in the end effector's fixed second portion 224 can act as a sort of deflecting anvil to receive and redirect the suture wire 416 received from third channel 230. In such a case, slot 264 actually helps form loop 422. However, in accordance with the present invention, it is not necessary for slot 264 to act as a deflecting anvil for suture wire 416, since the curvature of loop 422 can be imparted solely by the geometry of third channel 230 if desired.

Suture wire 416 is advanced a predetermined amount, i.e., the correct amount to form the desired loop construct. In other words, where a "Q-form loop" 422 is to be formed, suture wire 416 is advanced so that the leading end 424 (Fig. 30) of the

- 39 -

suture wire passes across cutting bar passageway 232
(Fig. 31) and back out of the instrument until the
leading end 424 of the suture wire is intermediate the
front end of the tool (Fig. 32). At this point the
5 advancement of suture wire 416 is stopped.

As noted above, in the preferred embodiment of
the invention, the length of suture wire advanced out
of the distal end of the instrument is regulated by
the length of the teeth 118 placed on rack 114. More
10 particularly, the initial movement of lever 104 toward
handle 102 causes the toothed portion 118 of rack 114
to move past spur gears 308 and 316, whereby to rotate
drive rollers 306 and 314 and hence advance suture
wire 416. Further movement of lever 104 toward handle
15 102 causes the smooth wall 120 of rack 114 to move
past spur gears 308 and 316, which results in no
movement of spur gears 308 and 316 and hence no
advancement of suture wire 416. Thus, the length of
toothed portion 118 of rack 114 regulates the extent
20 of suture wire drive.

- 40 -

However, in accordance with the present invention, continued movement of lever 104 toward handle 102 causes the distal end of the lever to engage the proximal end 260 of the cutting bar 246, whereby to drive the cutting bar distally (Fig. 32). This causes the cutting bar 246 to (i) first encounter, and then sever, the proximalmost portion 426 of the suture wire extending across cutting bar passageway 232, whereby to separate loop 422 from the remainder of the suture wire carried by the suturing tool, and (ii) then drive against the end 426 of loop 422 whereby, with the assistance of island 236, to bend the end 426 toward the material being joined.

Significantly, at the same time that this bending is occurring, inasmuch as cutting bar 246 includes ejection ramp face 254 and ejection push face 258 at the distal end thereof, and inasmuch as the end effector's fixed second portion 224 includes the slot 264 to form a gap in the end of the end effector, distal movement of cutting bar 246 will also serve to lift loop 422 up over island 236 and push it free from

- 41 -

the suturing instrument, whereby to disengage the
formed loop 422 from the distal end of suturing
instrument 2. Furthermore, if desired, cutting bar
channel 232 may be offset from the plane of wire
5 channels 228 and 232 so as to further assist lifting
loop 422 up over island 236. In addition, if desired,
island 236 may be formed so as to be mechanically
retractable into the body of fixed first portion 222,
whereby to further facilitate disengagement of the
10 formed loop 422 from the suturing instrument.

Due to the manner in which loop 422 is formed,
the trailing end 426 of the loop will project
distally, into the material being formed (Fig. 33).
This feature is generally highly desirable, since it
15 produces a secure, low profile fixation.

Various factors can affect how the wire element
loops in the tissue. These factors include
instrument-related factors (e.g., the curvature of
third channel 230, etc.), wire-related factors (e.g.,
20 wire tensile strength, wire yield stress, wire
diameter, etc.) and tissue-related factors (e.g.,

- 42 -

tissue density, tissue elasticity, tissue thickness, tissue stabilization, etc.).

5 The aforementioned factors are preferably taken into account when forming wire loops in tissue. For example, when forming a loop in intestine, which tends to be a relatively delicate tissue, it is generally preferable to use a relatively "soft" wire; correspondingly, when forming a loop in the abdominal wall, which tends to be a relatively tough tissue, it is generally preferable to use a relatively "hard" wire.

10 In general, it has been found that suture wire formed out of 316 LVM stainless steel, having a tensile strength of 230-260 kpsi and a diameter of about 0.006-0.019 inch, is advantageous in particular applications. In general, when forming suture loops with a diameter of about 0.140-0.165 inch, it has been found acceptable to provide third channel 230 with a radius of 0.050-0.075 inch.

- 43 -

It should be appreciated that the suture loop 422 can, if desired, have a diameter which exceeds the diameter of suturing instrument.

It should also be appreciated that, due to the fact that cannula assembly 200 can be dismounted from handle assembly 100, a set of different cannula assemblies, each having different loop-forming characteristics, can be provided to the user for appropriate selection at the time of use.

In a similar fashion, due to the fact that wire supply cartridge 400 can be dismounted from suturing instrument 2, a set of different wire supply cartridges, each having different suture wire characteristics (e.g., material, hardness, diameter, etc.) can be provided to the user for appropriate selection at the time of use.

If desired, loop 422 can be used to secure mesh 502 to tissue 500, or to attach other objects to tissue, or to attach objects other than tissue together, etc. In this respect it should be appreciated that where the suturing instrument is to

- 44 -

be used to secure mesh to tissue, and where end
effector 204 is provided with stabilizing projections
272, 274 (Figs. 12 and 17), projections 272, 274 are
preferably formed narrow enough and long enough to
5 extend completely through the mesh and contact the
underlying tissue.

In addition to the foregoing, in Figs. 26-33,
suturing instrument 2 is shown securing one layer of
material 502 to an underlying layer of material 500.
10 However, it should also be appreciated that other
types of attachments may also be formed with suture
loop 422. Thus, for example, in Fig. 34 two portions
500, 502 are shown being secured to one another in a
so-called "end to end" configuration.

15 As noted above, channels 228 and 230 are
positioned on opposing sides of cutting bar channel
232, whereby a length of suture wire 416, extending
between channels 228 and 230, may be severed by
cutting bar 246. In this respect it will be
20 appreciated that the angle at which cutting bar
channel 232 intersects channel 228 has a bearing on

- 45 -

the angle imparted to the leading tip 424 of suture wire 416. More particularly, in Fig. 35 it will be seen that cutting bar channel 232 intersects second channel 228 at the angle θ ; as a result, the leading tip of suture wire 416 will also be set at the angle θ .

In general, when considered solely from the standpoint of tissue penetration, it is typically desirable that the angle θ be as small as possible, in order that the suture wire have the sharpest possible tip to facilitate tissue penetration. At the same time, however, it must also be appreciated that the leading tip of suture wire 416 must traverse the substantial curvature of third channel 230 and, if the angle θ is too small, the sharp leading tip of the suture wire will strike the wall of third channel 230 (Fig. 36) and thereby become damaged and/or blunted. On the other hand, if the angle θ is increased, the heel of the tip will engage the wall of third channel 230 (Fig. 37), thereby leaving the sharp tip of the suture wire undamaged. Thus, it is generally

- 46 -

preferred that the angle θ be set so that the leading tip of suture wire 416 be formed as sharp as possible while still being able to traverse the curvature of third channel 230 without damage.

5 As noted above, suture loop 422 can be used to secure tissue to tissue, or to secure an inanimate object to tissue, or to secure an inanimate object to an inanimate object, etc. In this respect it should be appreciated that one anticipated application for
10 suture loop 422 is to secure a prosthetic cardiac valve to a valve seat within the heart. See, for example, Fig. 38, where suturing instrument 2 is shown securing a prosthetic cardiac valve 504 to vascular tissue 508 (in this respect it should be appreciated
15 that in Fig. 38, a portion of the vascular tissue 508 has been removed so as to illustrate how suture loops 422 penetrate a portion of cardiac valve 504).

 In the foregoing description, suture wire 416 is described as comprising an elongated length which is
20 cut into specific lengths at the time of use by the action of cutting bar 246. In this respect it should

- 47 -

also be appreciated, however, that suture wire 416 may be pre-cut into selected lengths prior to use, and the pre-cut lengths then stored in a magazine or the like, for deployment at the time of use. In such a case, cutting bar 246 will act as a forming and ejecting tool rather than as a cutting, forming and ejecting tool.

As noted above, suture wire 416 may comprise a wire formed out of a metal or any other suitable material having the required flexibility and stiffness. By way of example but not limitation, suture wire 416 may comprise stainless steel, titanium, tantalum, etc.

If desired, suture wire 416 may also be coated with various active agents. For example, suture wire 416 may be coated with an anti-inflammatory agent, or an anti-coagulant agent, or an antibiotic, or a radioactive agent, etc.

- 48 -

Cannula Assembly 200A

In an alternative form of the invention, cannula assembly 200 may be replaced by a cannula assembly 200A. Cannula assembly 200A is substantially the same as cannula assembly 200 described above, except as will hereinafter be described. Cannula assembly 200A is shown in greater detail in Figs. 39 and 40. Cannula assembly 200A comprises shaft 202, end effector 204A and wire cutting mechanism 206A.

Shaft 202 is substantially the same as the shaft 202 discussed above with respect to cannula assembly 200.

End effector 204A is secured to the distal end of shaft tube 202.

End effector 204A is configured so as to form a modified suture loop 422A (Fig. 41), sometimes referred to as a "modified suture clip" or a "modified Q-form loop" or a "Q-form clip", as will hereinafter be discussed.

- 49 -

More particularly, end effector 204A comprises a fixed first portion 222A (Figs. 39 and 40) and a fixed second portion 224A.

As seen in Figs. 42 and 43, fixed first portion
5 222A includes a first channel 226A for receiving the distal end of the aforementioned wire supply cartridge 400, a smaller diameter second channel 228A for supporting suture wire as the suture wire emerges from wire supply cartridge 400, and a third channel 230A
10 for receiving the suture wire after the suture wire passes by cutting bar channel 232A and for imparting a selected curvature to the suture wire, whereby to form the suture loop, as will hereinafter be discussed in further detail. Second channel 228A and third channel
15 230A are coplanar. Third channel 230A and cutting bar channel 232A effectively form an island 236A at the distal end of end effector 204A.

In order to assist the controlled retention of suture wire during its travel within second channel
20 228A and third channel 230A, one or both of these channels may be given an undercut profile such as the

- 50 -

dovetail profile 238A shown in Fig. 43 with respect to
third channel 230A. At the same time, in order to
minimize harmful friction between the suture wire and
fixed first portion 222A, second channel 230A may be
5 widened slightly at locations other than 240A (Fig.
42); locations 240A are, for this particular clip
form, the operative contact points for effecting wire
bending (in this respect it should be appreciated that
other particular clip forms may have other contact
10 points).

In addition, in order to facilitate the release
of a formed suture clip from the instrument, the
proximal end of island 236A may be relieved at 242A
(Fig. 42), and the remaining portions of island 236A
15 may be radiused as shown at 243A so as to facilitate
the release of a formed suture clip from the
instrument.

In addition to the foregoing, fixed first portion
222A may be relieved as shown as 244A (Fig. 43) so as
20 to form a curved guide at the distal end of the

- 51 -

instrument for receiving the looped suture wire as it returns to the distal end of the instrument.

Wire cutting mechanism 206A comprises a cutting bar 246A (Figs. 44-47). The distal end of cutting bar 246A is disposed in the aforementioned cutting bar channel 232A and the proximal end of cutting bar 246A protrudes from the proximal end 212 of tube 208 (Fig. 8).

The distal end of cutting bar 246A (Figs. 43-46) preferably comprises a plurality of distinct faces, i.e., a cutting face 248A defining a cutting edge 250A, a relief face 252A set at an angle α to cutting face 248A, and an ejection ramp face 254A. When cutting bar 246A is driven distally so as to encounter suture wire extending between second channel 228A and third channel 230A (and hence across cutting bar channel 232A), cutting edge 250A will sever the suture wire, ejection ramp face 254A will, in conjunction with the island's relieved surface 242A, lift the trailing end of the severed suture wire out of cutting bar channel 232A and up over island 236A so that the

- 52 -

loop may be released from the distal end of the suturing instrument.

Looking next at Figs. 39, 40 and 48, fixed second portion 224A includes the second half of the
5 aforementioned first channel 226A for receiving the distal end of the aforementioned wire supply cartridge 400, the second half of the aforementioned cutting bar channel 232A, and a relief 264A which extends proximally from the distal end of the instrument.

10 Relief 264A is sized so that when first fixed portion 222A is engaging second fixed portion 224A, third channel 230A and island 236A will be exposed, in order to permit a formed loop of suture wire to be released from the end of the suturing instrument.

15 Fixed first portion 222A and fixed second portion 224A are preferably formed out of material which is harder than the suture wire passing through channels 228A and 230A, so as to minimize wear on the instrument. In one preferred form of the invention,
20 first fixed portion 222A and fixed second portion 224A are formed out of a carbide alloy.

- 53 -

In one preferred form of the invention, fixed first portion 222A includes a recess 270A (Fig. 39) at its front end. Recess 270A in fixed first portion 222A and relief 264A in fixed second portion 224A together permit soft tissue to protrude into the interior of end effector 204A. If desired, one or both of fixed first portion 222A and/or fixed second portion 224A can be relieved such as is shown at 271A in Fig. 40 so as to facilitate engagement of the instrument with the material to be joined.

If desired, and looking now at Figs. 29-56, the floor 231A of third channel 230A may be inclined so as to move the looping suture wire out of the plane of second channel 228A, whereby to facilitate forming the loop of suture wire. By way of example, the distal end of the floor 231A can be inclined so as to move the looping suture wire out of the plane of the floor of second channel 228A (see Figs. 49-51).

- 54 -

Wire Supply Cartridge 400A

In an alternative form of the invention, wire supply cartridge 400 may be replaced by a wire supply cartridge 400A. Looking next at Figs. 52-55, wire supply cartridge 400A generally comprises a spool housing 402, a wire spool 404, a spool retainer spring 406, a spool cover 408, a molded tube support 410A and a wire support tube 412A. A length of suture wire 416 extends from spool 404 and through molded tube support 410A and wire support tube 412A.

More particularly, a supply coil of suture wire 416 (comprising wire formed of metal or any other suitable material having the required flexibility and stiffness) may be supplied in the base of cartridge 400A and is fed into wire support tube 412A. Wire support tube 412A surrounds suture wire 416 from molded tube support 410A to the distal end of suturing instrument 2 where, with the distal end of wire support tube 412A received in channel 226 (Fig. 12), the suture wire enters second channel 228 in end effector 204. Wire support tube 412A ensures that

- 55 -

suture wire 416 does not bend or buckle as the suture wire is pushed through handle assembly 100 and cannula assembly 200. More particularly, wire support tube 412A preferably forms a sufficiently close sliding fit with suture wire 416 such that suture wire 416 cannot bend or buckle as the suture wire is advanced through suturing instrument 2. At the same time, wire support tube 412A is also formed so as to present a minimum of friction to suture wire 416 as the suture wire is advanced through the instrument. The foregoing characteristics are important, inasmuch as suture wire 416 is extremely thin and flexible and highly susceptible to bending or buckling in the absence of some sort of lateral support.

By way of example but not limitation, where suture wire 416 is formed out of stainless steel and has a diameter of 0.018 inch, wire support tube 412A might have an inside diameter of 0.020 inch and an outside diameter of 0.050 inch. In addition, wire support tube 412A is preferably formed out of 316 stainless steel, however, it may alternatively be

- 56 -

formed out of some other material. If desired, the interior of wire support tube 412A may be coated with a lubricant so as to facilitate closely-supported, low-friction passage of the suture wire through the wire support tube.

Wire support tube 412A begins at an opening 418A adjacent to an opening 420A of molded tube support 410A. Opening 420A exposes diametrically opposed portions of the suture wire 416 so that rollers 306 and 314 may contact suture wire 416 and urge the suture wire forward toward the distal end of suturing instrument 2, as hereinabove discussed in further detail.

As noted above, wire supply cartridge 400A may be loaded into wire drive assembly 300 by actuating lever 336 so as to force movable block 304 away from fixed block 302 and thereby separate rollers 306 and 314. Once roller 314 is separated from roller 306 by a sufficient distance, wire support tube 412A may be inserted between rollers 306 and 314, and then roller 314 returned towards roller 306 such that rollers 306

- 57 -

and 314 contact either side of suture wire 416 through the opening 420A formed in molded support tube 410A.

In other alternative forms of the invention (not shown), wire supply cartridge 400 may be replaced by a wire supply cartridge which does not include a spool retainer spring, and/or the wire supply may be provided as a coil within a housing and the spool itself omitted.

Modifications

It will be appreciated by those skilled in the art that numerous modifications and variations may be made to the above-disclosed embodiments without departing from the spirit and scope of the present invention.

Thus, for example, shaft 202 has been shown as being substantially straight; however, it is also anticipated that shaft 202 may be curved along its length. Furthermore, shaft 202 may be substantially rigid, or it may be flexible so that it can be bent along its length. It is also possible to form shaft

- 58 -

202 so that it has two or more articulating sections
so as to aid in the positioning of end effector 204.

- 59 -

What Is Claimed Is:

1. A suturing instrument for joining a first
portion of material to a second portion of material,
5 said suturing instrument comprising:

a handle;

an end effector mounted on said handle and
defining therein:

a channel for supporting suture wire, said
10 channel being curved to impart a looping configuration
to portions of the suture wire passed therethrough;

an end recess adapted to receive the looped
suture wire emerged from said channel; and

a passageway for supporting a cutting bar,
15 said passageway intersecting said channel so as to
create an island between said channel and said
passageway;

a wire advancing actuator mounted on said handle
for moving the suture wire through said channel,
20 through the material first and second portions and
back into said end recess;

- 60 -

a cutting bar movably disposed in said passageway
for selectively engaging the suture wire, said cutting
bar being adapted to (1) cut the looped suture wire
from the remaining portions of the suture wire; and
5 (2) bend the trailing end of the looped suture wire
around, and lift the looped suture wire over, said
island; and

a cutting bar actuator mounted on said handle for
moving the cutting bar into engagement with the suture
10 wire.

2. A suturing instrument according to claim 1
wherein at least a portion of said end recess extends
out of the plane of said channel.

15 3. A suturing instrument according to claim 1
wherein said end recess includes a curved surface for
guiding the looped suture wire emerged from said
channel.

20

- 61 -

4. A suturing instrument according to claim 1 wherein said end effector is provided with an inclined surface for guiding the looped suture wire out of the plane of said channel.

5

5. A suturing instrument according to claim 1 wherein said end effector is provided with a recessed cutout therein such that pressing said end effector against a pliable portion of material causes the bulging portion of material into the recessed cutout, to permit deep penetration of the suture wire.

10

6. A suturing instrument according to claim 1 wherein said end effector includes at least one projection extending out of said end effector for engaging the portion of material.

15

7. A suturing instrument according to claim 6 wherein said end effector includes two projections extending out of said end effector for engaging the portion of material.

20

- 62 -

8. A suturing instrument according to claim 7 wherein one of said projections is longer than the other of said projections.

5

9. A suturing instrument according to claim 1 wherein said island comprises a relieved surface thereon.

10

10. A suturing instrument according to claim 9 wherein said cutting bar comprises (1) a cutting edge for cutting the looped suture wire from the remaining portions of the suture wire; (2) a relief face for bending the trailing end of the looped suture wire around said island; and (3) an ejection ramp face for lifting the looped suture wire over said island, wherein the looped suture wire is lifted over said island with said ejection ramp in conjunction with a relieved surface of said island.

15

20

- 63 -

11. A suturing instrument according to claim 1 wherein said first portion of material comprises tissue and said second portion of material comprises tissue.

5

12. A suturing instrument according to claim 1 wherein said first portion of material comprises a prosthesis and said second portion of material comprises tissue.

10

13. A suturing instrument according to claim 13 wherein said first portion of material comprises surgical mesh and said second portion of material comprises tissue.

15

14. A suturing instrument according to claim 1 wherein said island is separated from said passageway by at least the thickness of the suture wire.

- 64 -

15. A suturing instrument according to claim 1 wherein said channel is undercut so as to help retain the suture wire in said channel.

5 16. A suturing instrument according to claim 1 wherein said wire advancing actuator is adapted to advance a predetermined length of suture wire.

10 17. A suturing instrument according to claim 1 wherein said wire advancing actuator and said cutting bar actuator are sequentially activated by a single element.

15 18. A suturing instrument according to claim 1 wherein said end recess has a geometry such that the suture wire is maintained in said channel until after the suture wire has been cut and partially bent.

20 19. A suturing instrument according to claim 1 wherein said cutting bar cuts the suture wire so as to form a sharp point.

- 65 -

20. A suturing instrument according to claim 1
wherein said end effector is detachable from said
handle so as to allow a different end effector to be
5 mounted to said handle.

21. A suturing instrument according to claim 1
further comprising a wire supply cartridge for
housing, dispensing and supporting the suture wire
10 being advanced to said channel.

22. A suture instrument according to claim 1
further comprising an inclined portion of said channel
for supporting the suture wire, said inclined portion
15 being configured distal of said passageway for
supporting said cutting bar, wherein said inclined
portion projects the suture wire out of the plane of
said channel proximal of said passageway for
supporting said cutting bar.

20

- 66 -

23. A structure for supporting suture wire during driving of the suture wire, said structure comprising:

5 a tube support having a first end and a second end in opposition to one another, said first end being configured for receiving the suture wire from a wire spool;

10 an opening formed in said tube support between said first end and said second end, said opening being configured for exposing the suture wire for driving; and

15 a tube disposed adjacent to said second end of said tube support, said tube being configured for receiving the suture wire driven through said tube support, and said tube being configured for closely surrounding and slidably supporting the suture wire.

24. A method for joining a first portion of material to a second portion of material, said method comprising:

20 providing a suturing instrument comprising:

- 67 -

a handle;

an end effector mounted on said handle and
defining therein:

a channel for supporting suture wire,
5 said channel being curved to impart a looping
configuration to portions of the suture wire passed
therethrough;

an end recess adapted to receive the
looped suture wire emerged from said channel; and

10 a passageway for supporting a cutting
bar, said passageway intersecting said channel so as
to create an island between said channel and said
passageway;

a wire advancing actuator mounted on said
15 handle for moving the suture wire through said
channel, through the material first and second
portions and back into said end recess;

a cutting bar movably disposed in said
passageway for selectively engaging the suture wire,
20 said cutting bar being adapted to (1) cut the looped
suture wire from the remaining portions of the suture

- 68 -

wire; and (2) bend the trailing end of the looped suture wire around, and lift the looped suture wire over, said island; and

5 a cutting bar actuator mounted on said handle for moving the cutting bar into engagement with the suture wire;

positioning said end effector against at least one of the portions to be joined;

10 moving the suture wire through said channel, through the material first and second portions and back into said end recess; and

moving the cutting bar in said passageway so as to (1) cut the looped suture wire from the remaining portions of the suture wire; and (2) bend the trailing end of the looped suture wire around, and lift the looped suture wire over, said island.

15

25. A method according to claim 24 wherein at least a portion of said end recess extends out of the plane of said channel, and further wherein the step of moving the suture wire through said channel, through

20

- 69 -

the material first and second portions and back into said recess includes moving a portion of the suture wire out of the plane of said channel.

5 26. A method according to claim 24 wherein said end recess includes a curved surface for guiding the looped suture wire emerged from said channel, and further wherein the step of moving the suture wire through said channel, through the material first and
10 second portions and back into said recess includes engaging said curved surface with a portion of the suture wire.

15 27. A method according to claim 24 wherein said end effector is provided with an inclined surface for guiding the looped suture wire out of the plane of said channel, and further wherein the step of moving the suture wire through said channel, through the material first and second portions and back into said
20 recess includes engaging said inclined surface with a portion of the suture wire.

- 70 -

28. A method according to claim 24 wherein said
end effector is provided with a recessed cutout
therein, and further wherein the step of positioning
said end effector against at least one of the portions
to be joined causes a bulging portion of material to
enter the recessed cutout, to permit deep penetration
of the suture wire

29. A method according to claim 24 wherein said
end effector includes at least one projection
extending out of said end effector for engaging the
portion of material, and further wherein the step of
positioning said end effector against at least one of
the portions to be joined includes engaging said at
least one of the portions with said at least one
projection.

30. A method according to claim 24 wherein the
step of positioning said end effector against at least
one of the portions to be joined includes positioning

- 71 -

said end effector at an acute angle to the surface of the portion.

5 31. A method according to claim 24 wherein said first portion of material comprises tissue and said second portion of material comprises tissue.

10 32. A method according to claim 24 wherein said first portion of material comprises a prosthesis and said second portion of material comprises tissue.

15 33. A method according to claim 24 wherein said first portion of material comprises surgical mesh and said second portion of material comprises tissue.

20 34. A method according to claim 24 wherein said island is separated from said passageway by at least the thickness of the suture wire, and further wherein the step of moving the cutting bar in said passageway includes bending the trailing end of the looped suture

- 72 -

wire so that the trailing end of the suture wire is located between said island and said passageway.

5 35. A method according to claim 24 wherein the step of moving said suture wire includes advancing a predetermined length of suture wire.

10 36. A method according to claim 24 wherein said wire advancing actuator and said cutting bar actuator are sequentially activated by a single element.

 37. A method according to claim 24 wherein the suture wire is cut so as to form a sharp point.

15 38. A method according to claim 24 wherein the step of providing a suturing instrument comprises selecting a particular end effector from a set of different end effectors and mounting the selected end effector on said handle.

- 73 -

39. A method according to claim 24 wherein the suture wire is initially contained in a wire supply cartridge for housing, dispensing and supporting the suture wire being advanced to said channel, and
5 further wherein the step of providing a suturing instrument includes loading the wire supply cartridge into said housing.

40. A method for driving wire, said method
10 comprising the steps of:

providing a structure for supporting suture wire during driving of the suture wire, said structure comprising:

a tube support having a first end and a
15 second end in opposition to one another, said first end being configured for receiving the suture wire from a wire spool;

an opening formed in said tube support between said first end and said second end, said
20 opening being configured for exposing the suture wire for driving;

- 74 -

a tube disposed adjacent to said second end of
said tube support, said tube being configured for
receiving the suture wire driven through said tube
support, and said tube being configured for closely
5 surrounding and slideably supporting the suture wire;
and

engaging the suture wire with a pair of opposing
rollers, each of the opposing rollers engaging the
suture wire by accessing the suture wire through one
10 of said pair of diametrically opposed openings.

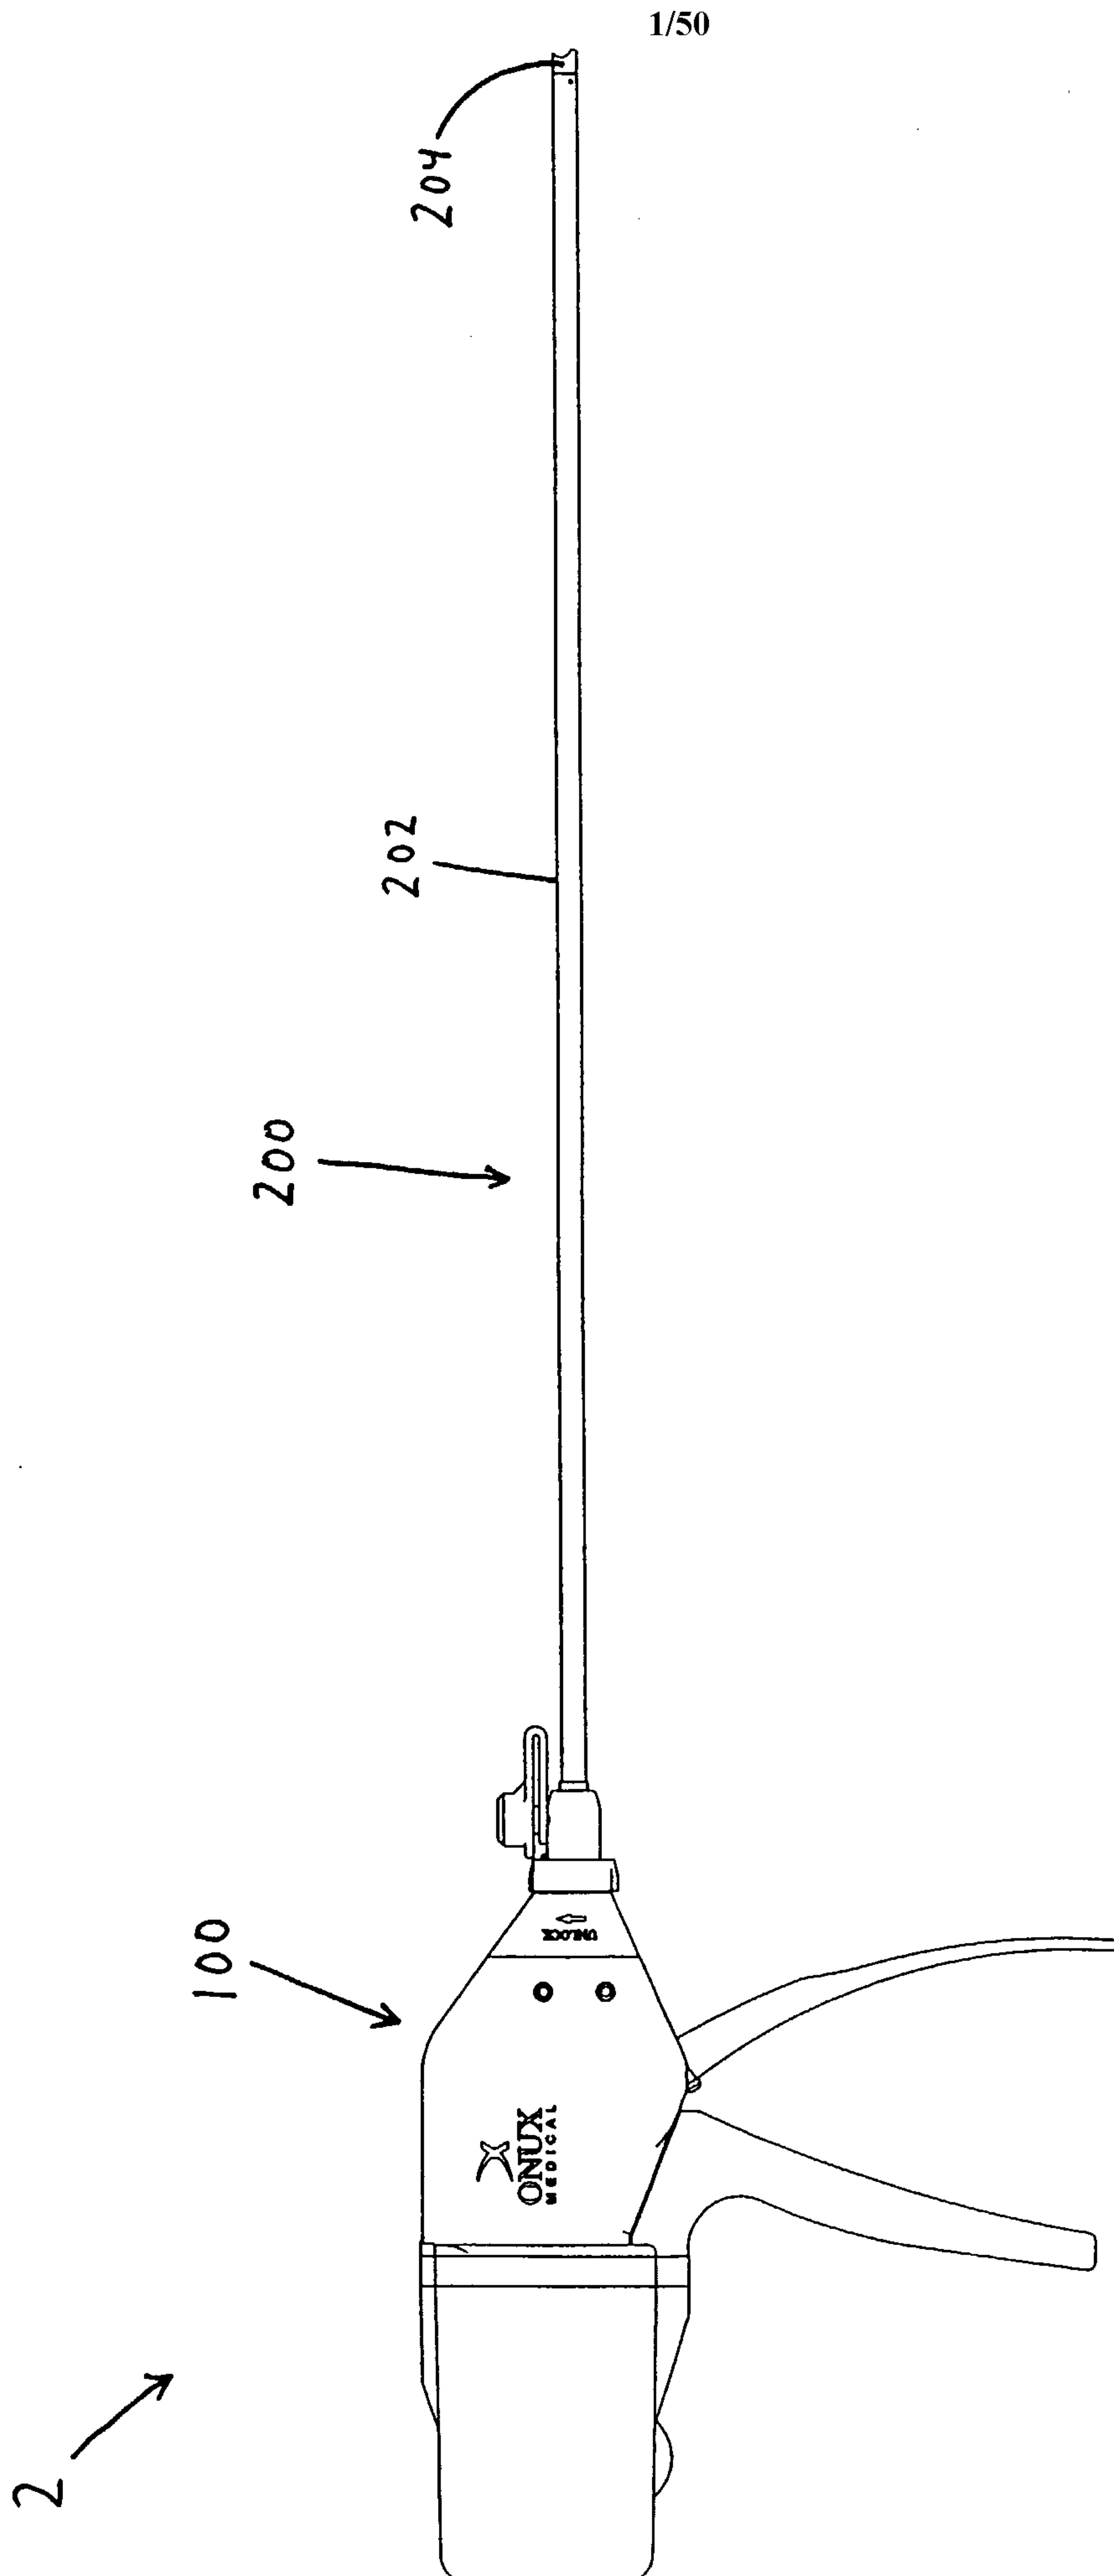


FIG. 1

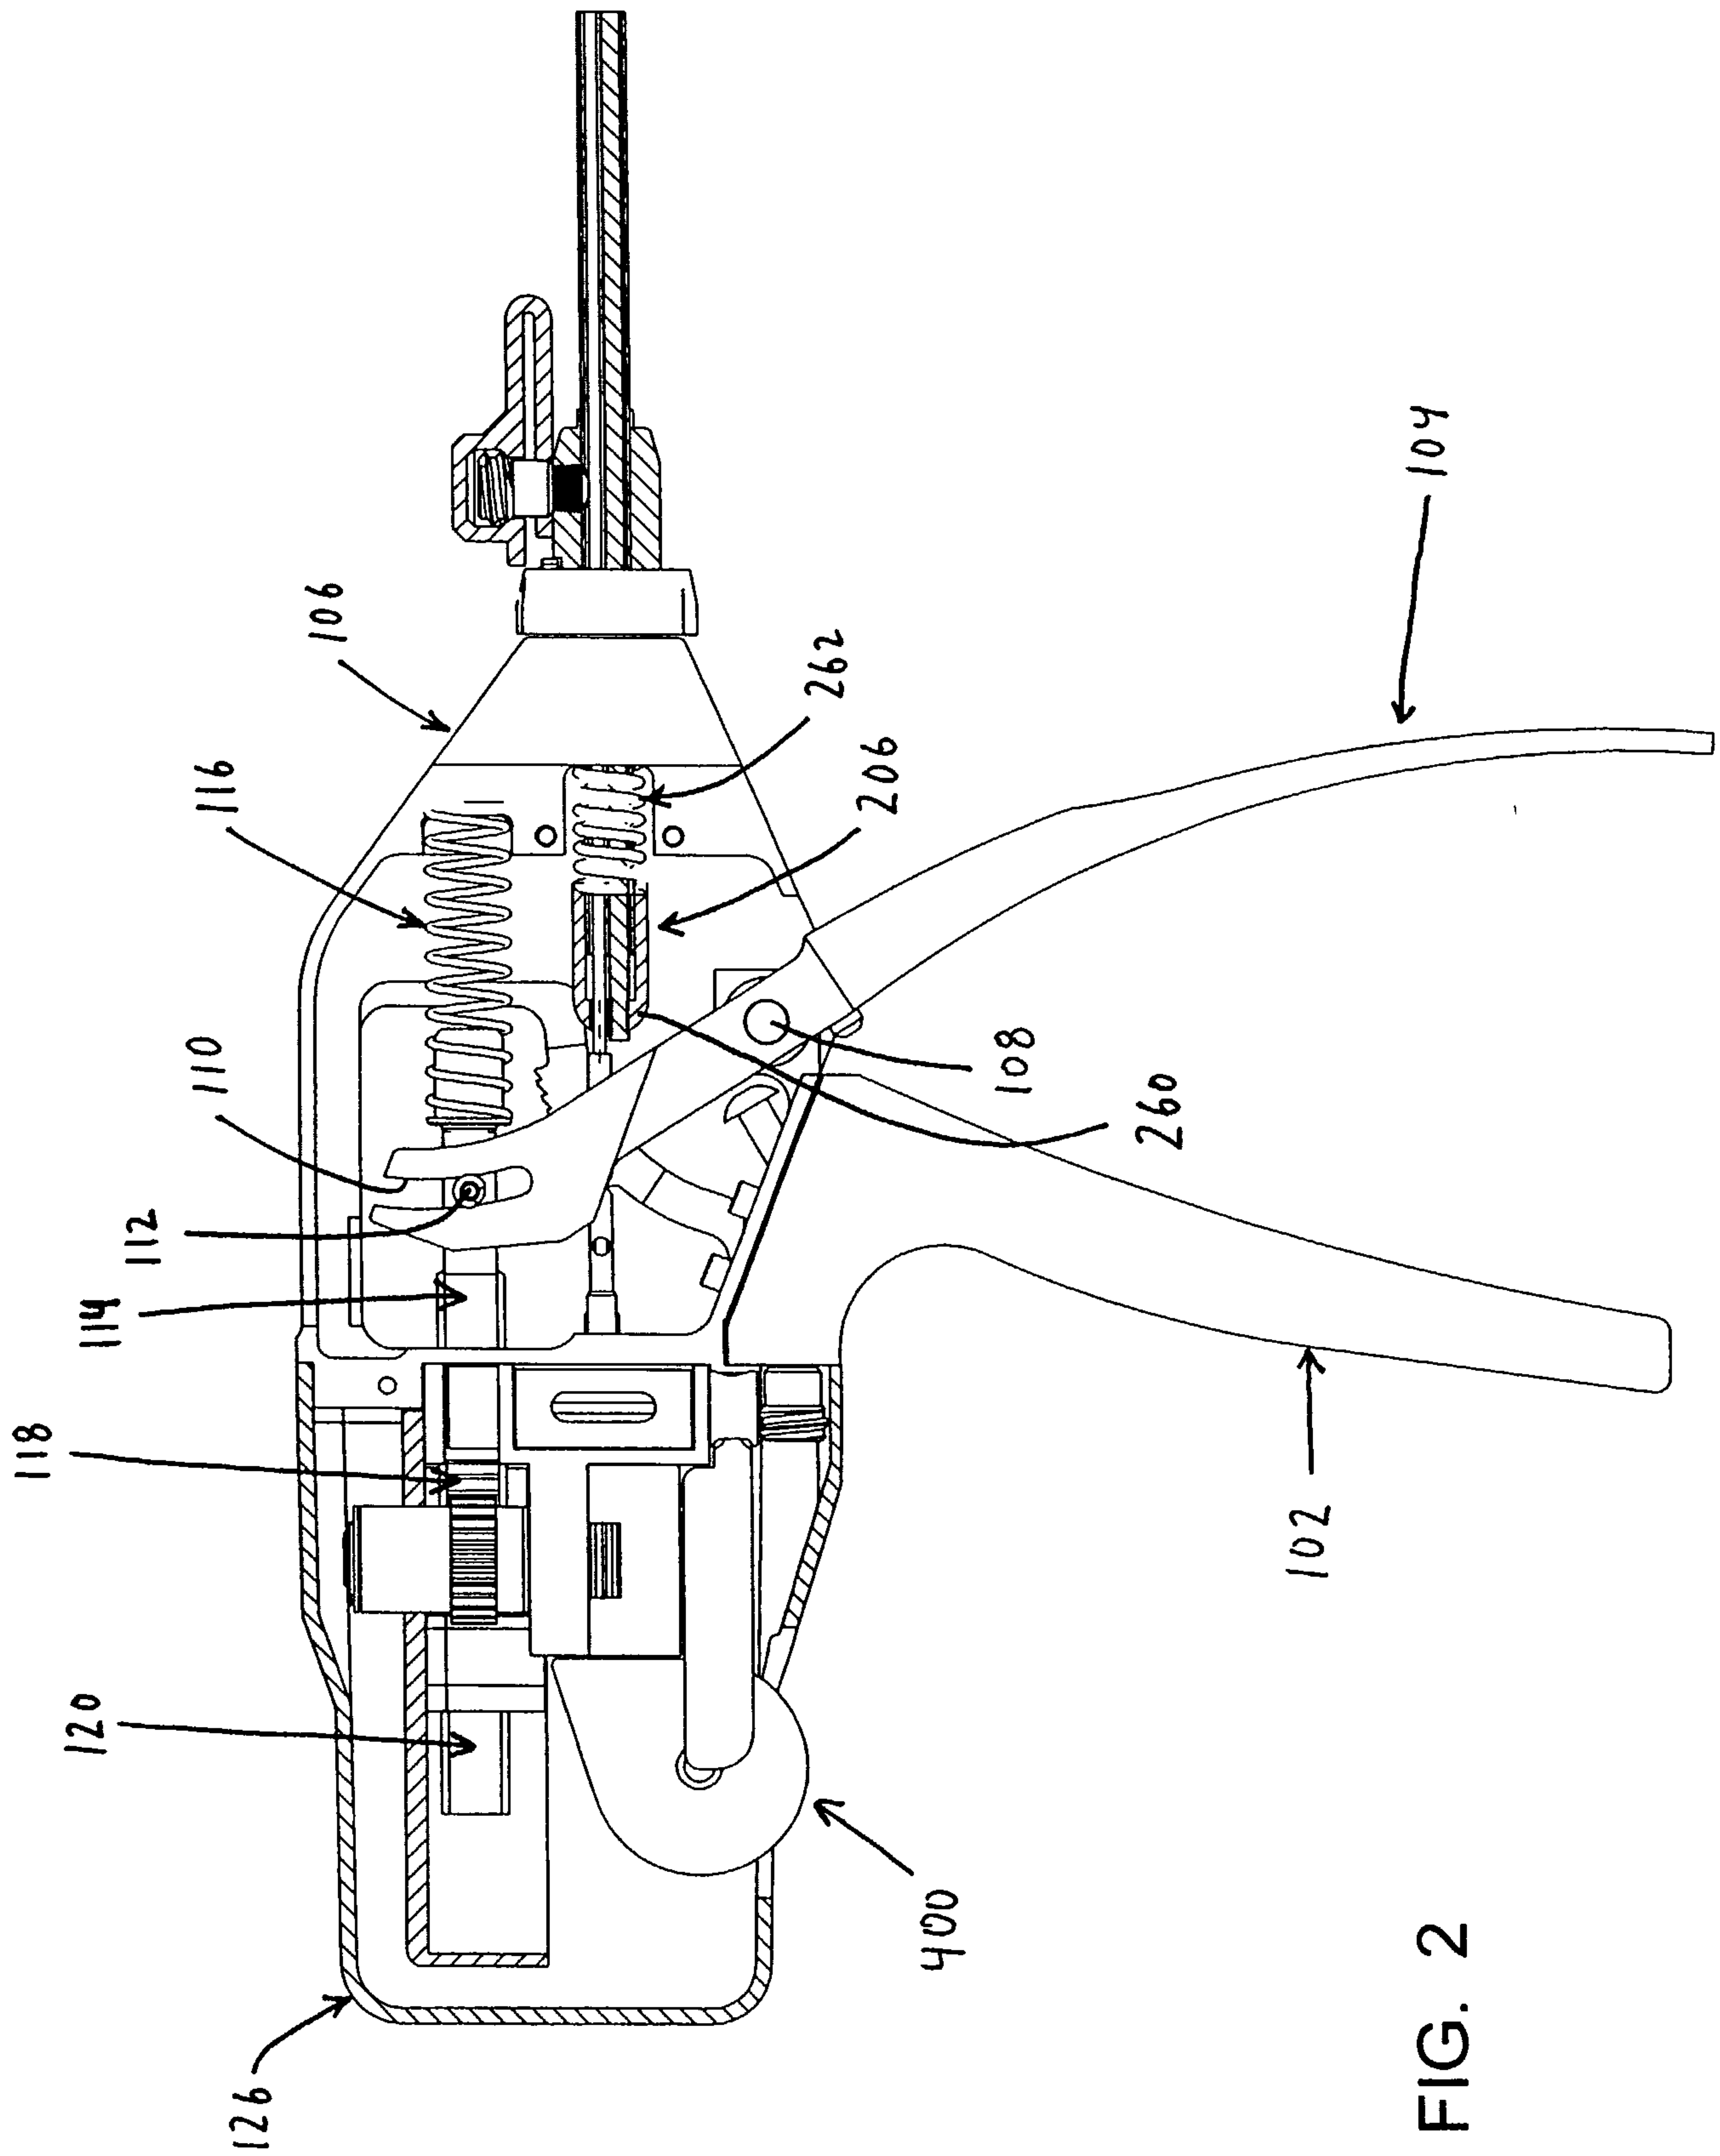


FIG. 2

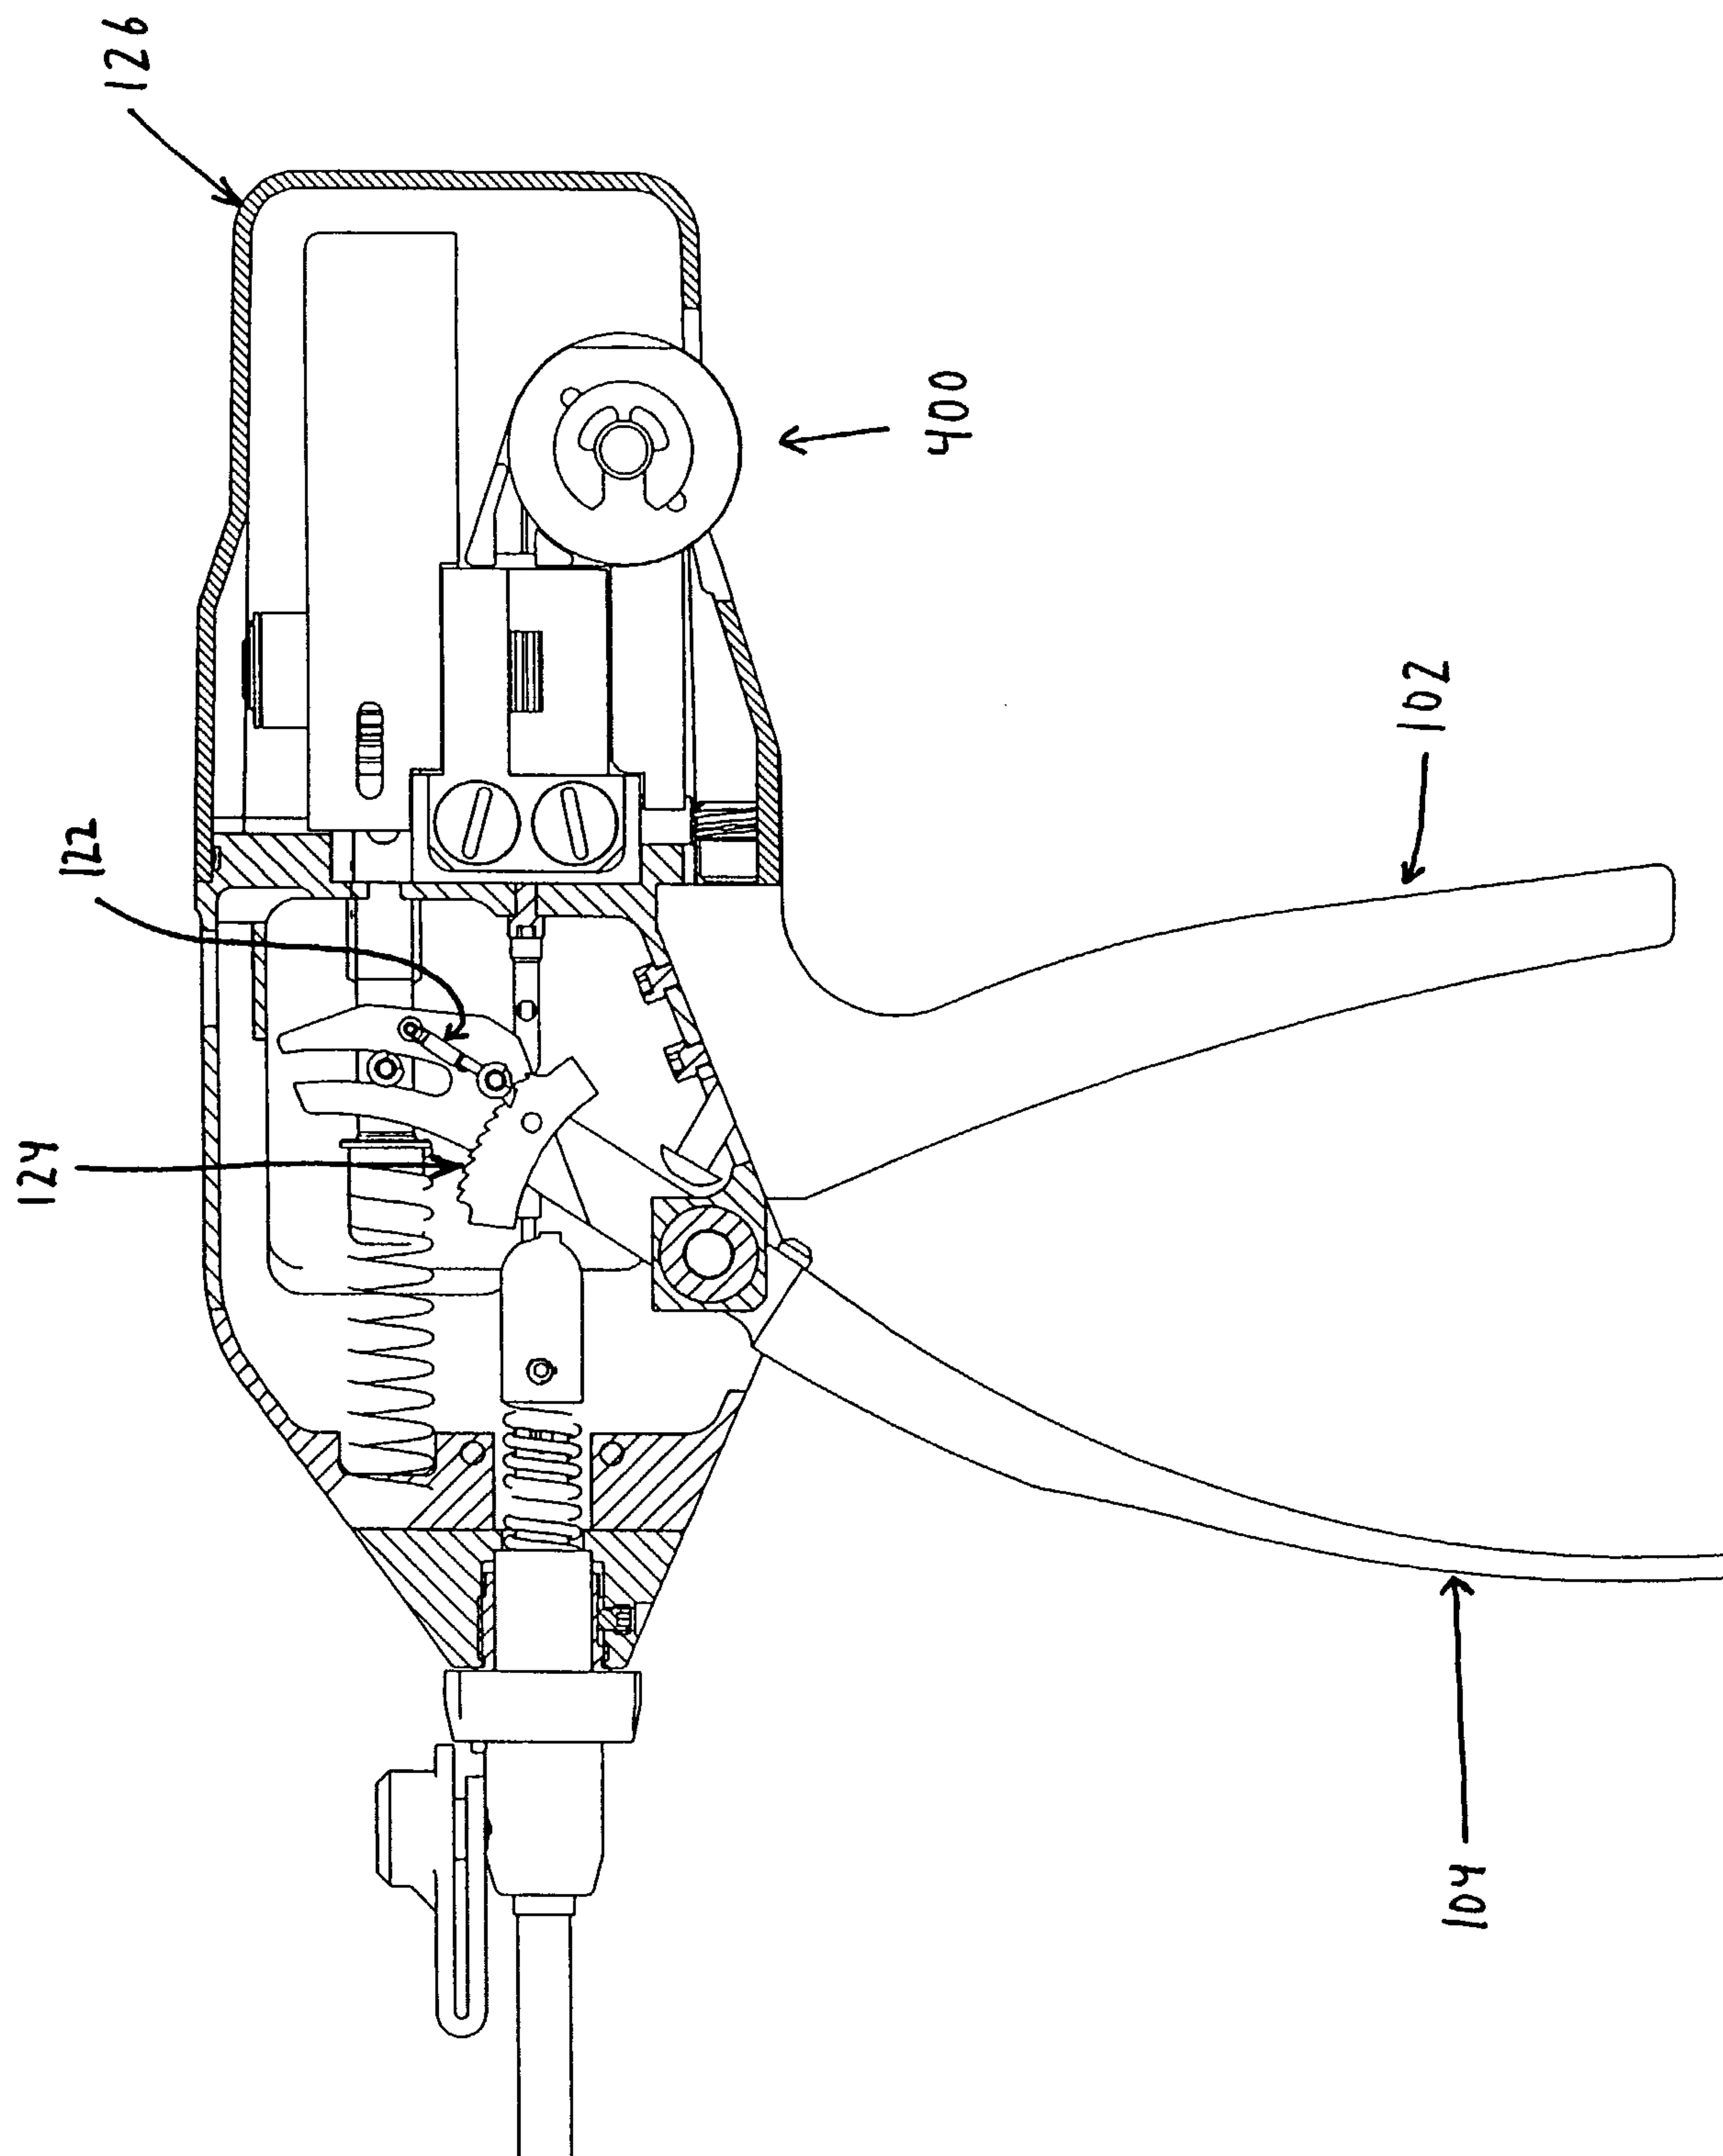


FIG. 3

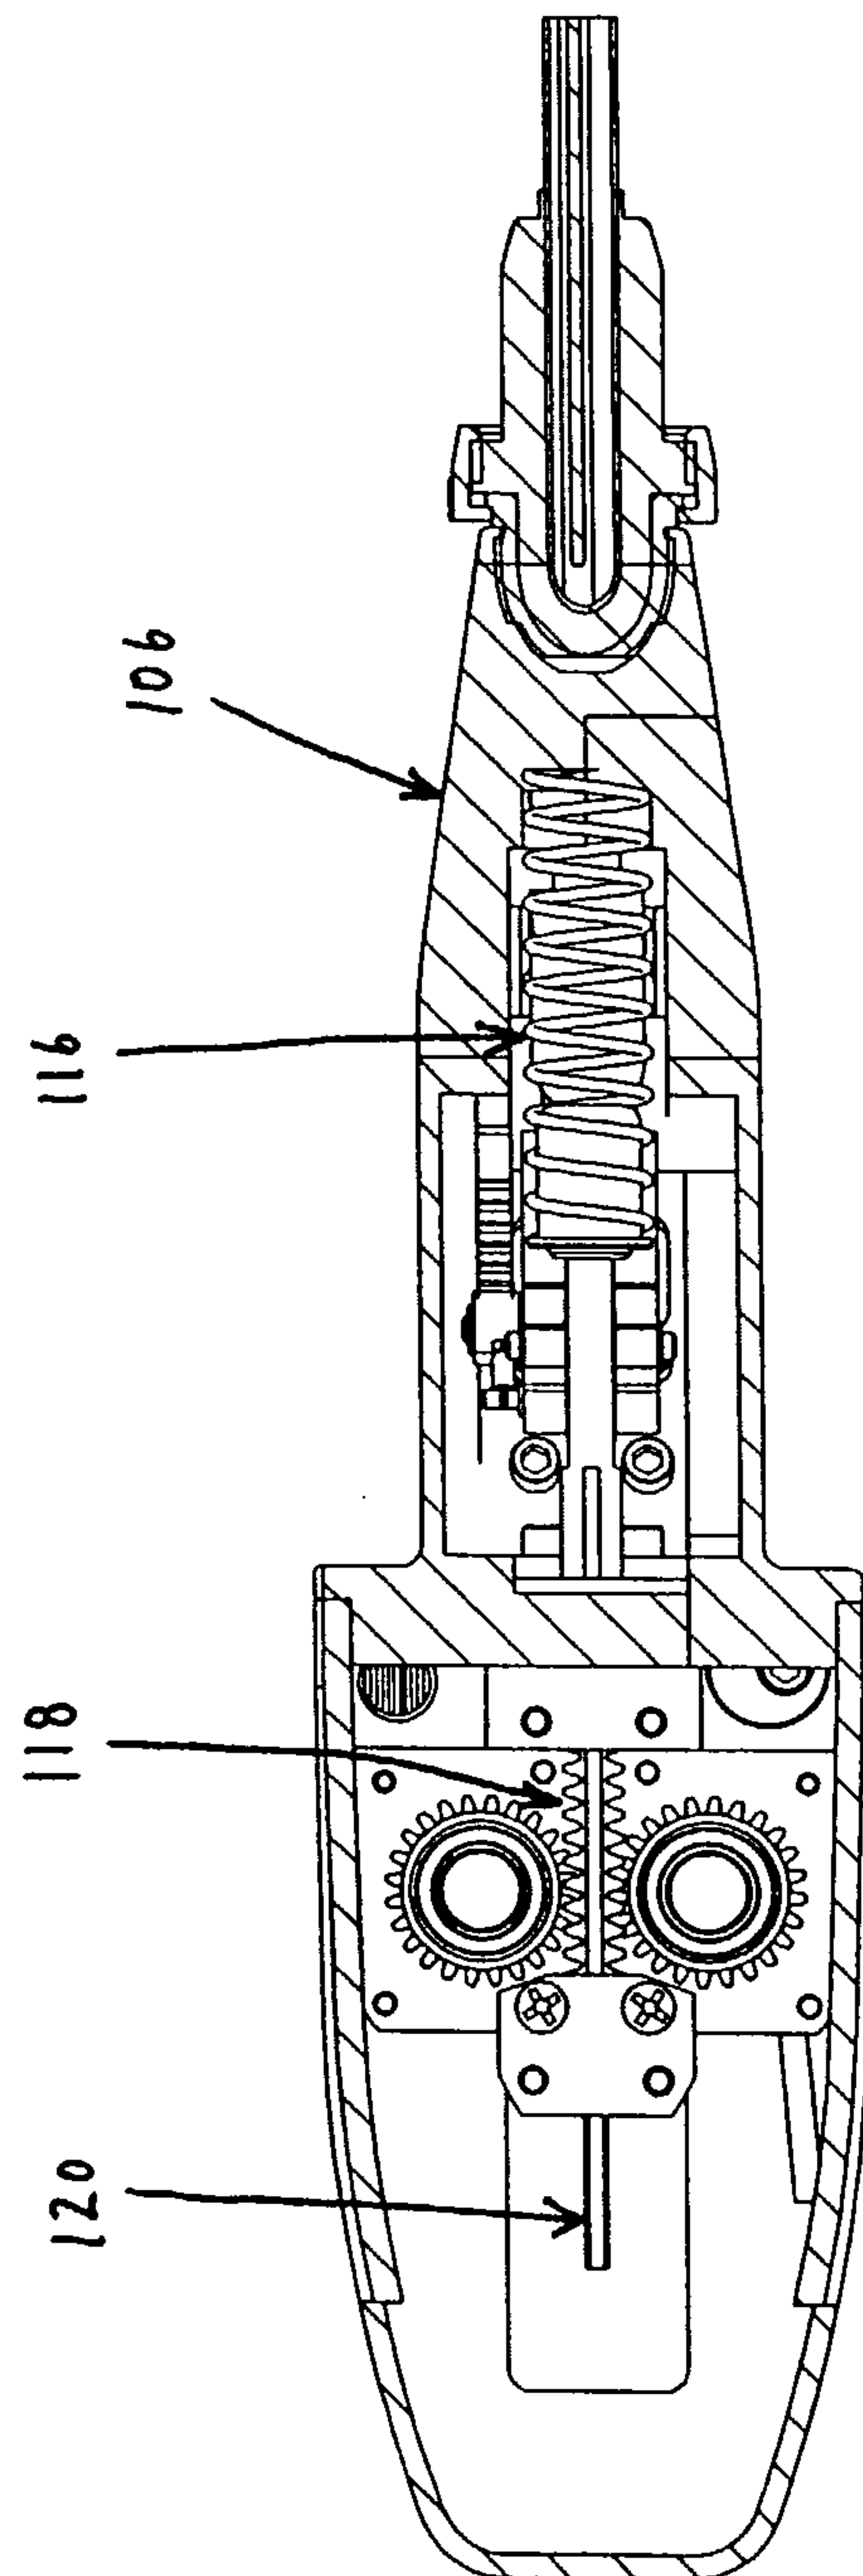


FIG. 4

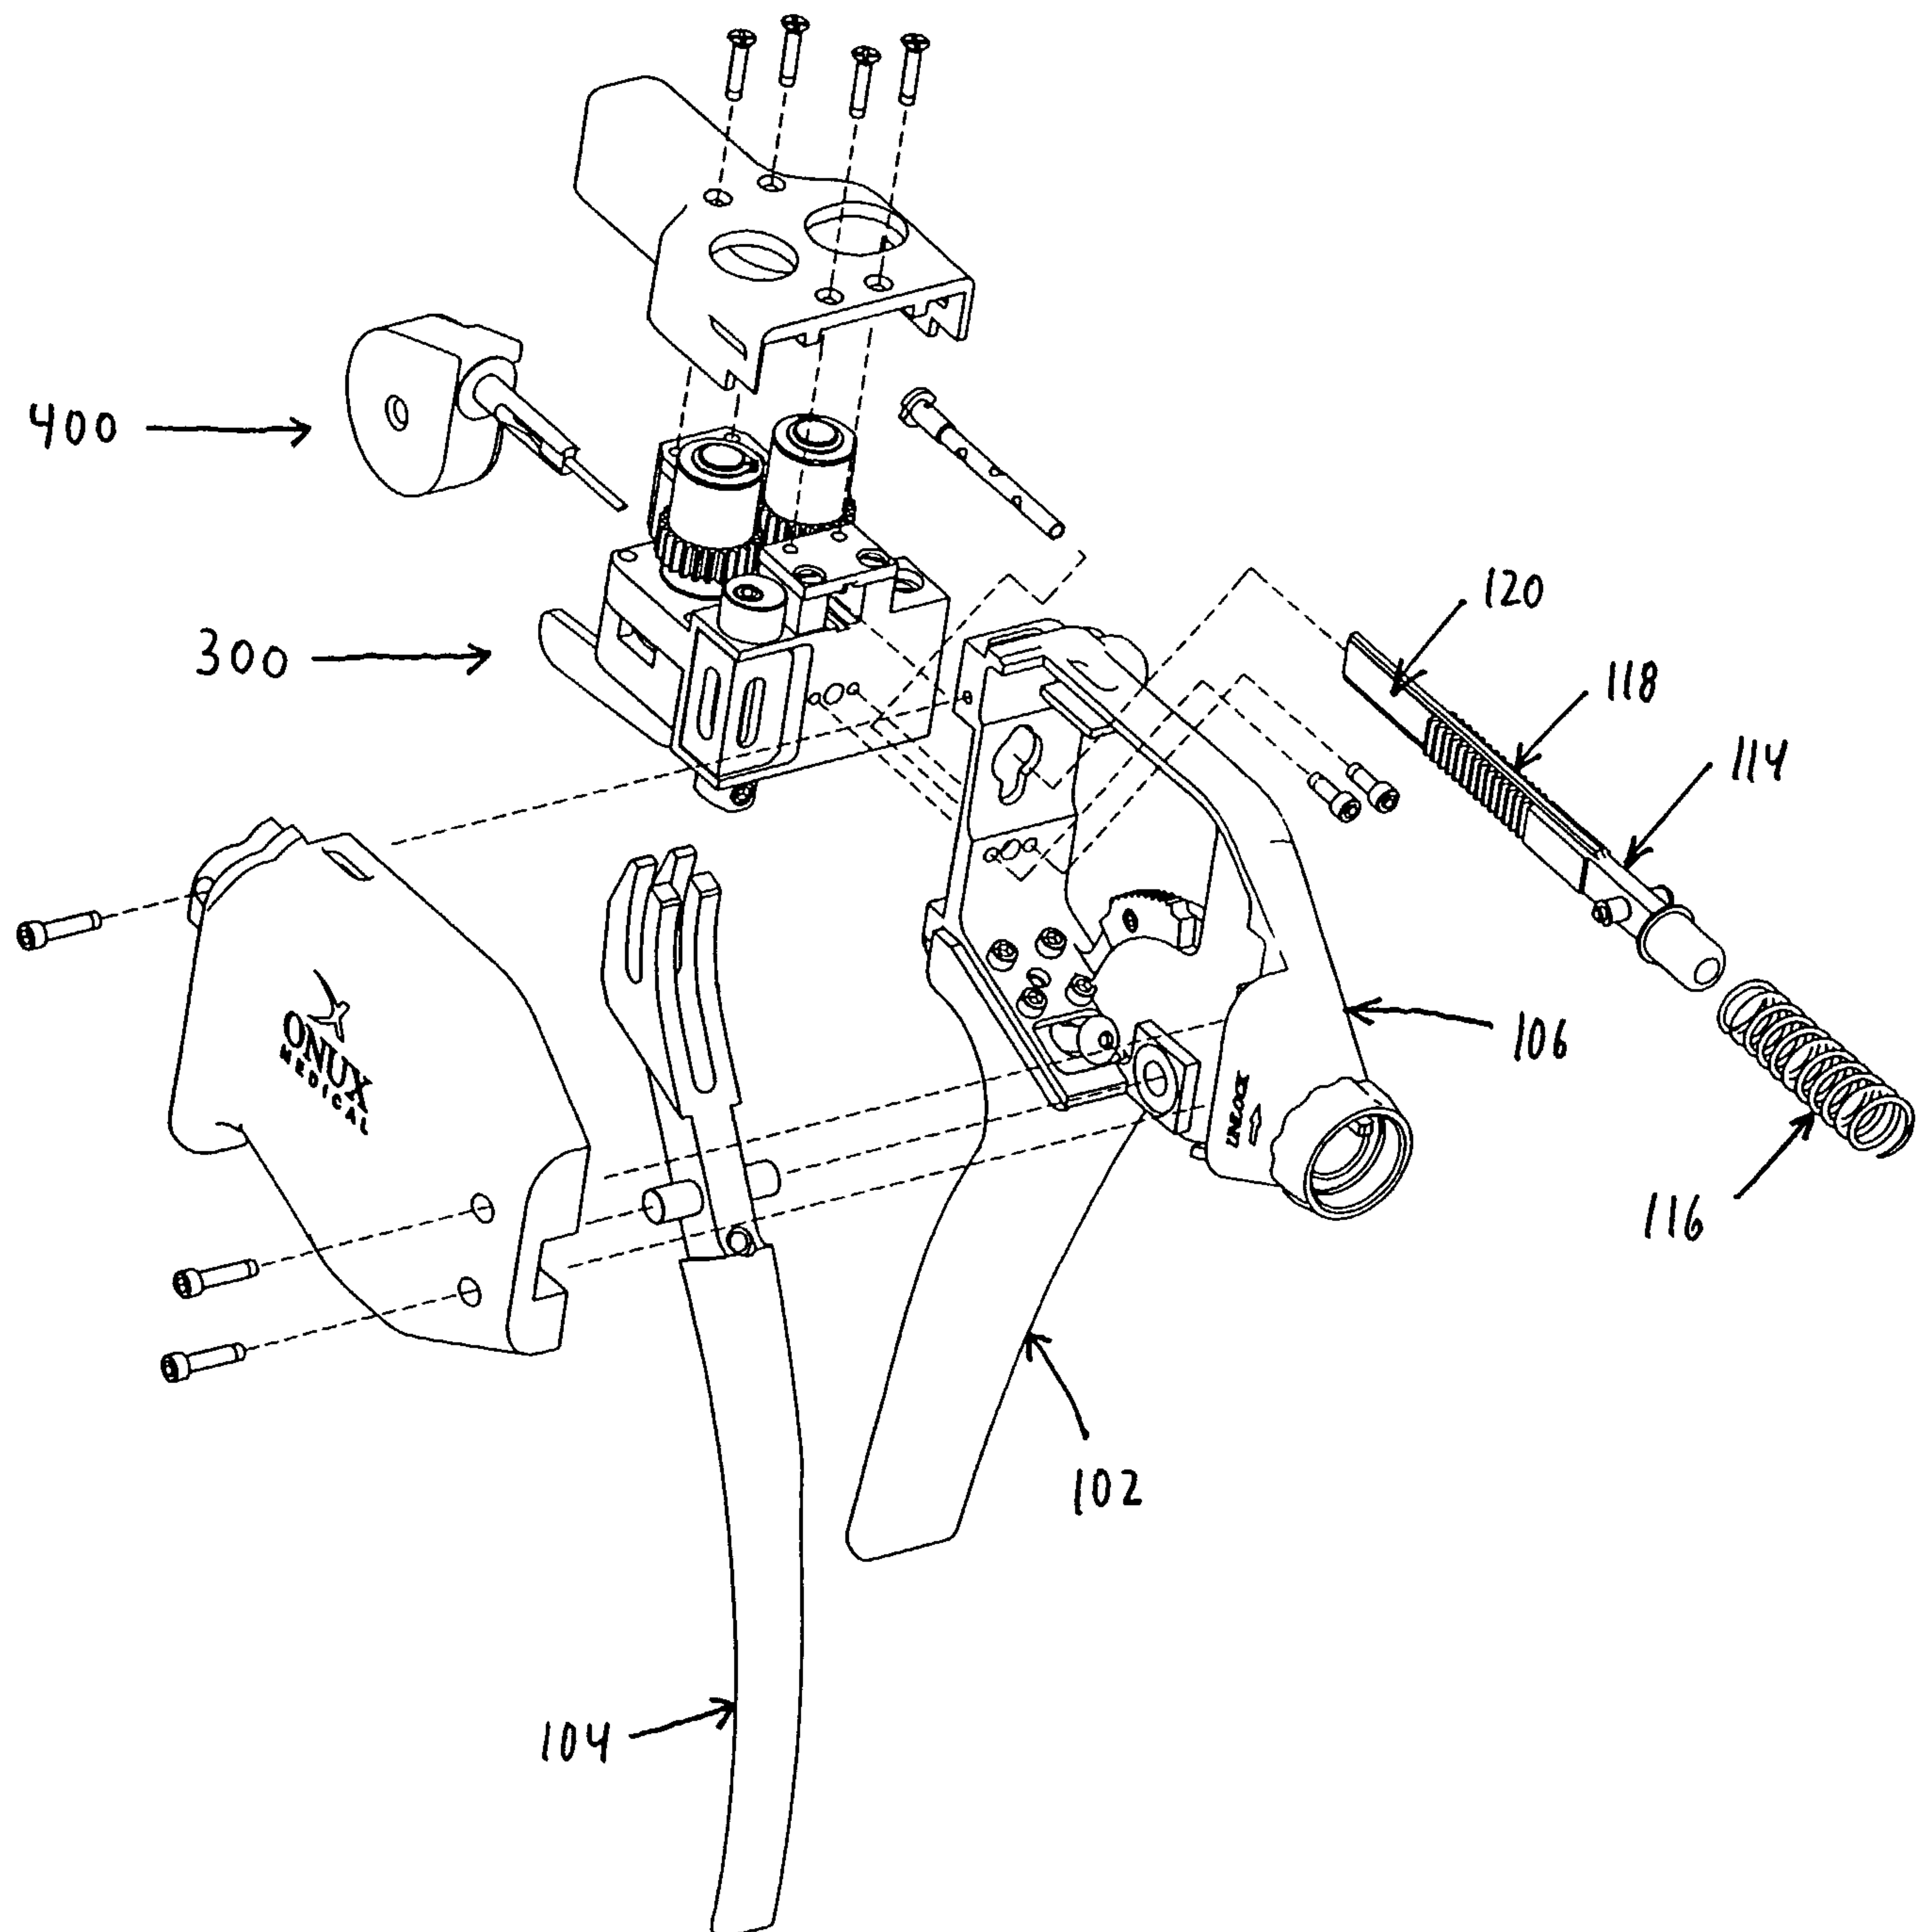


FIG. 5

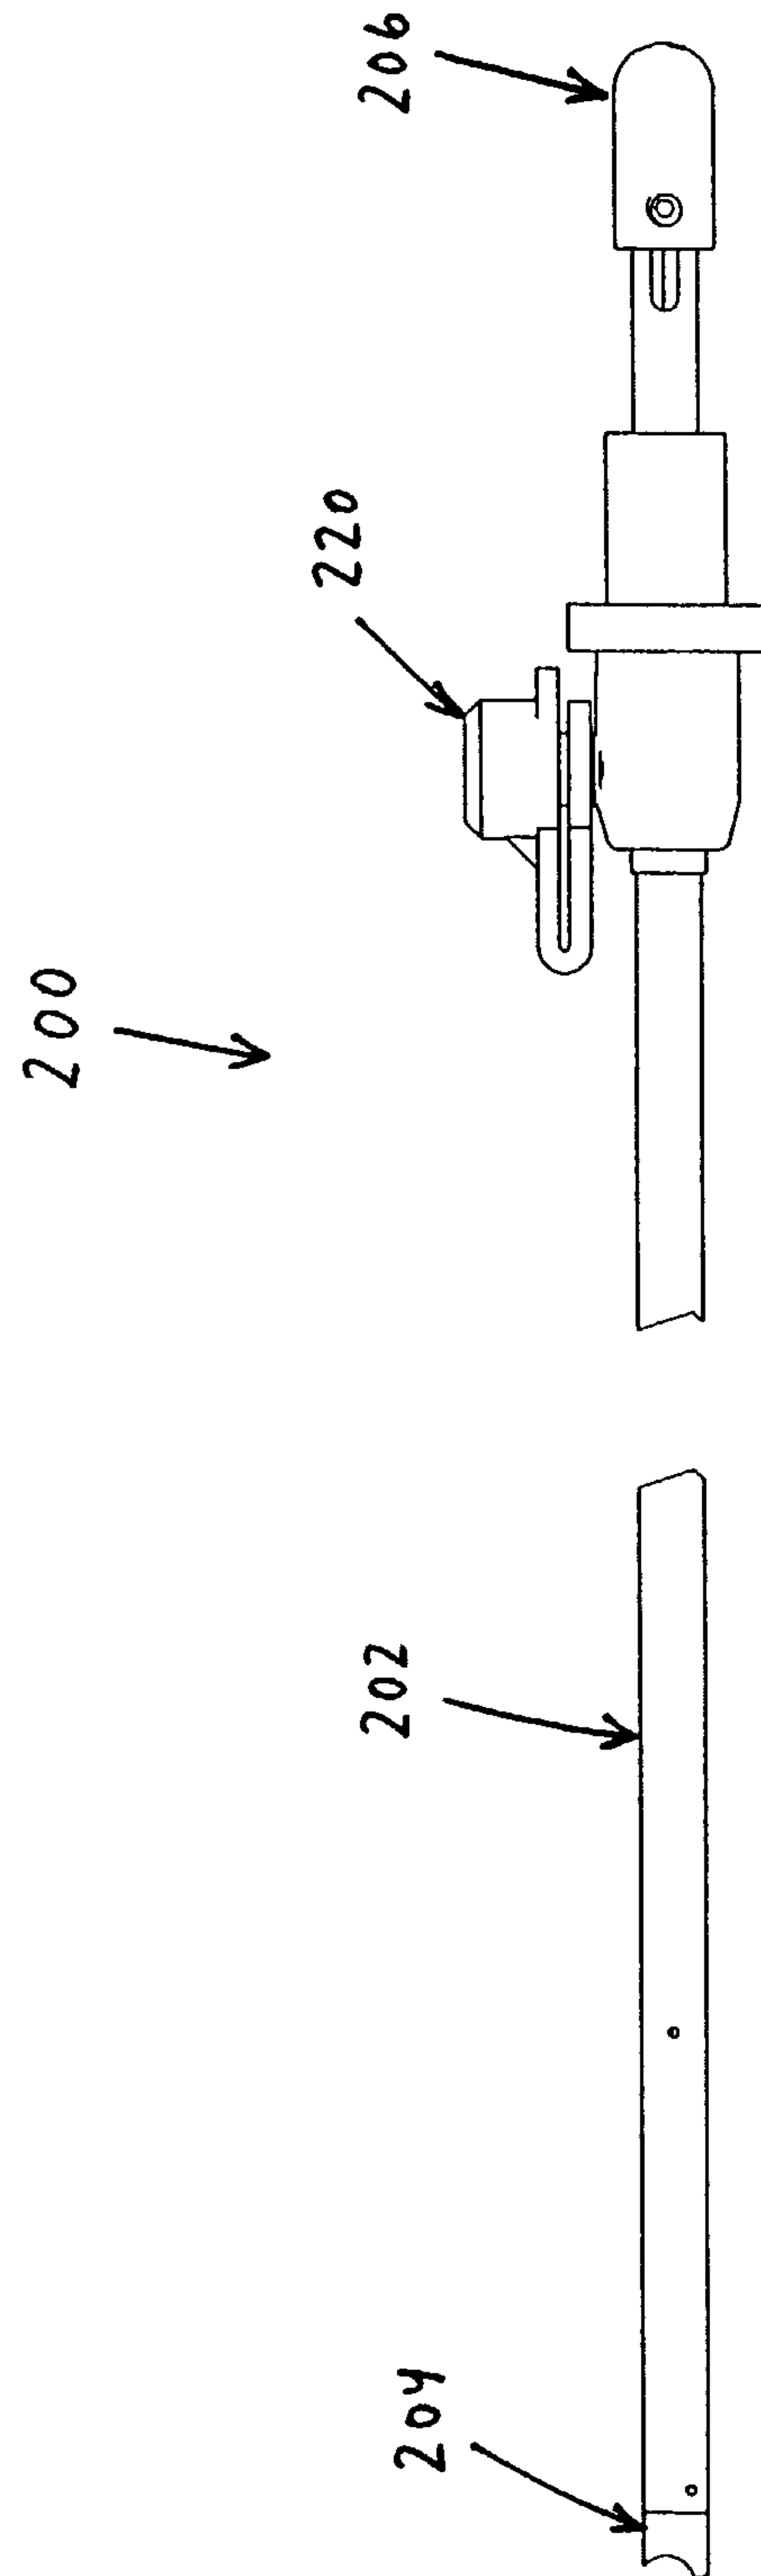
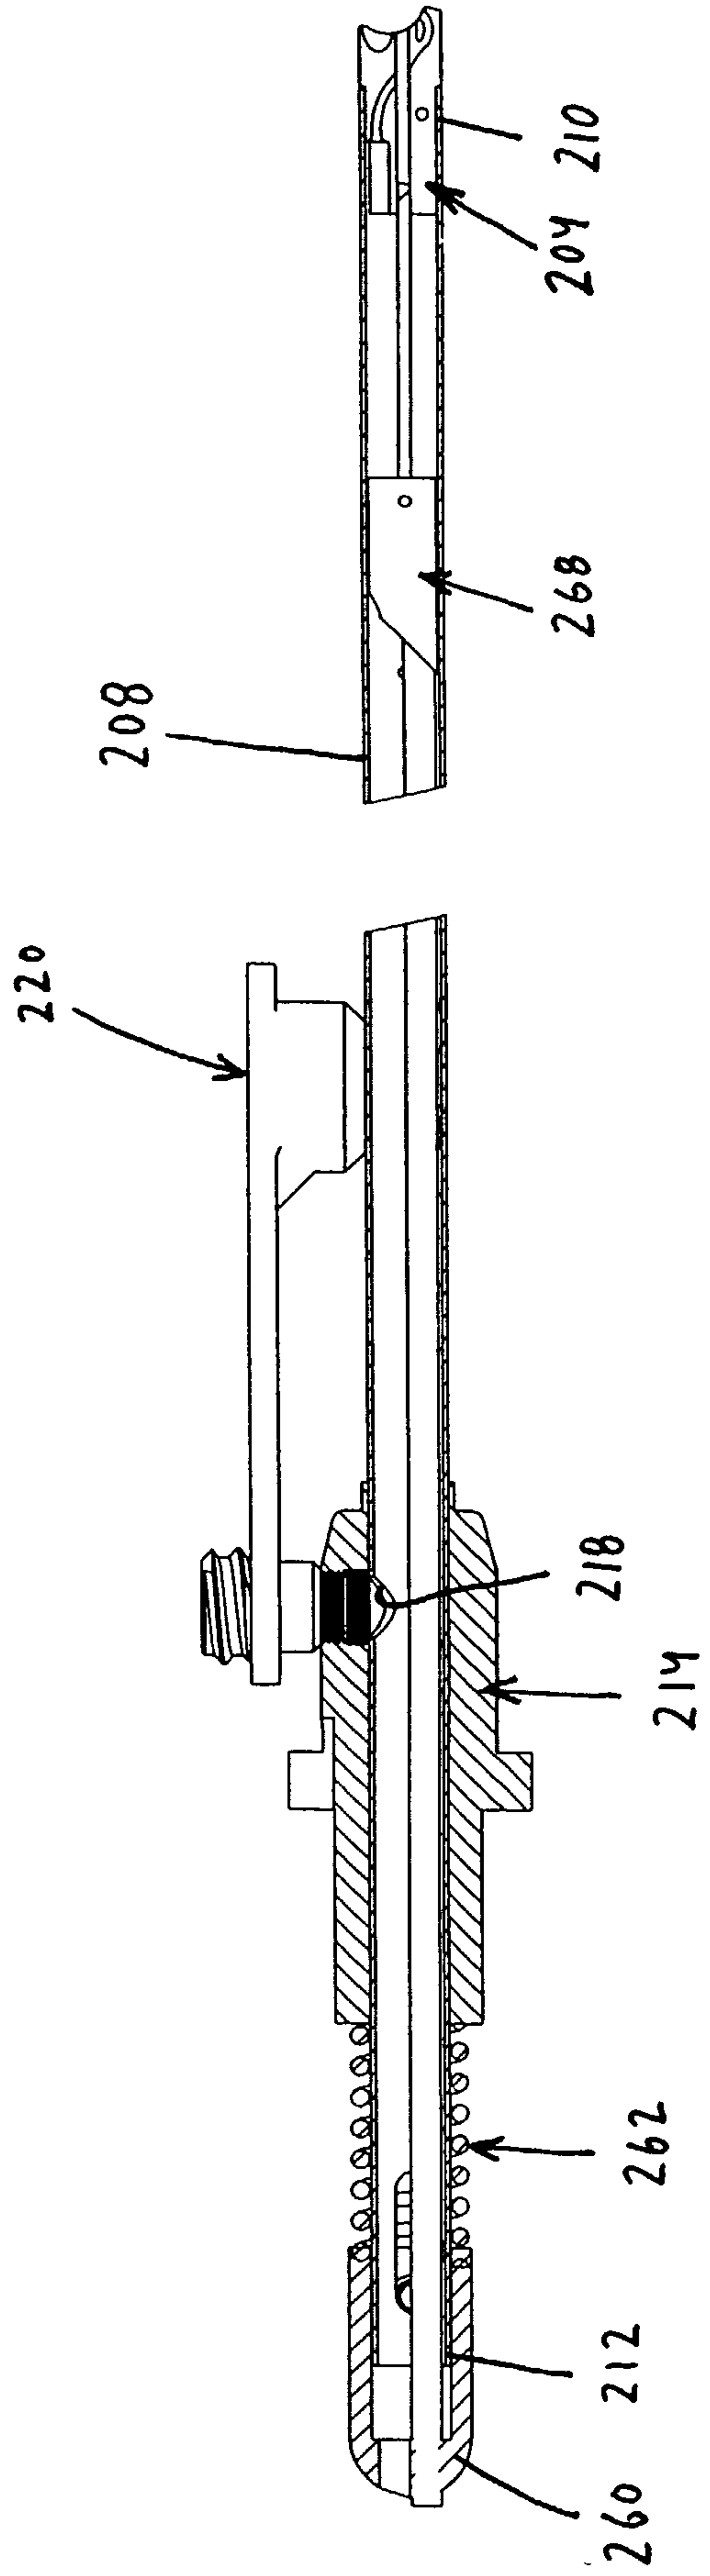
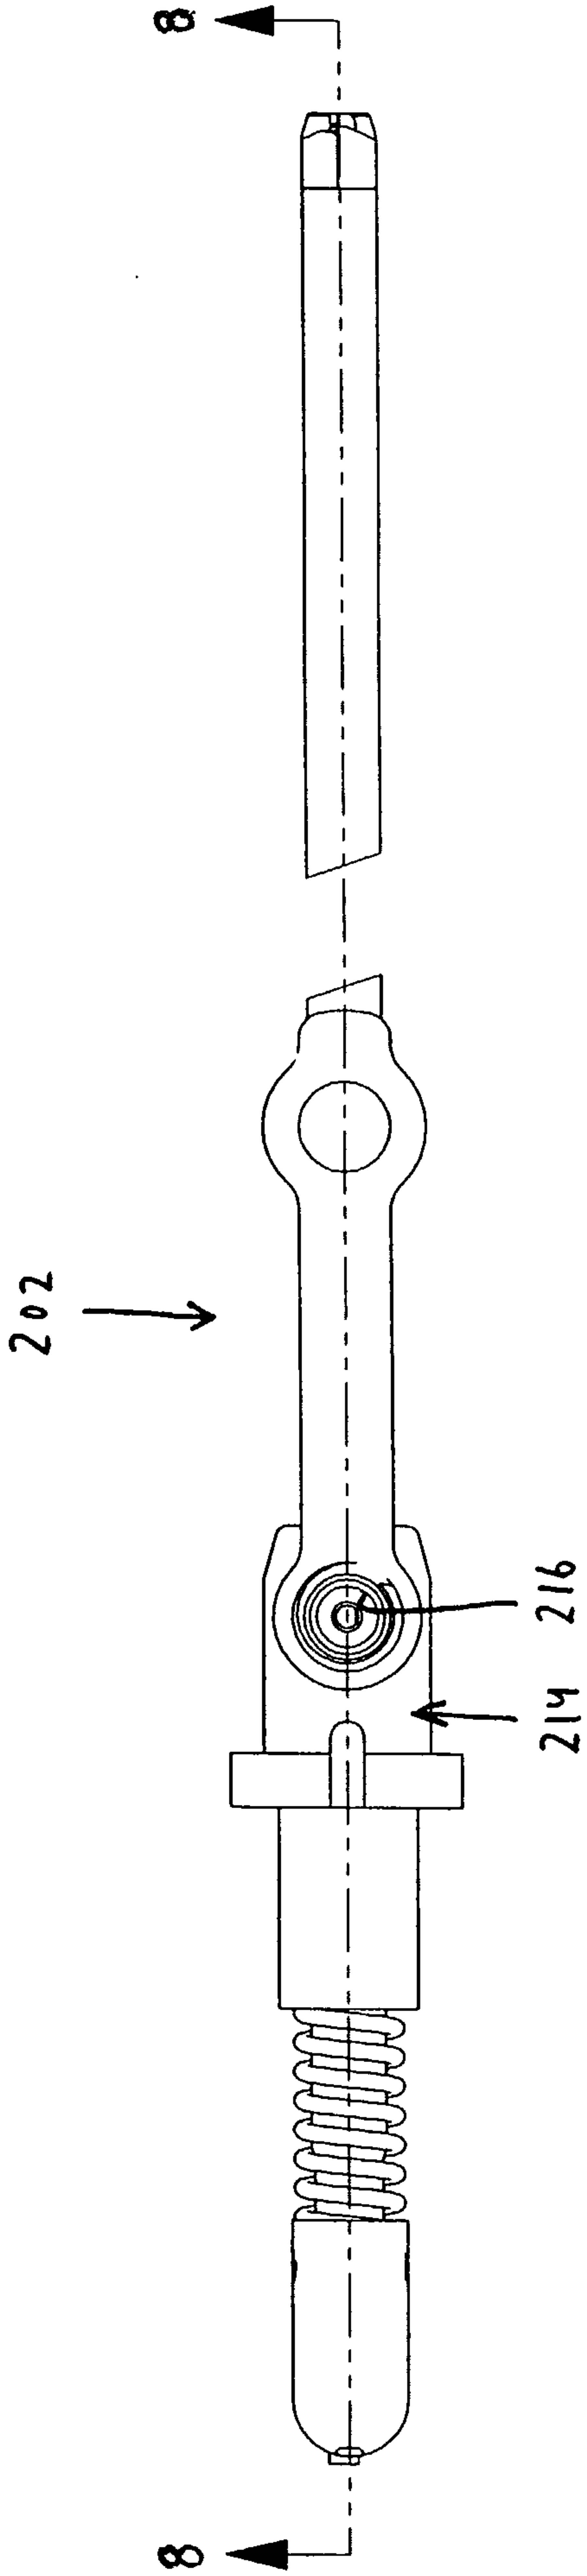


FIG. 6



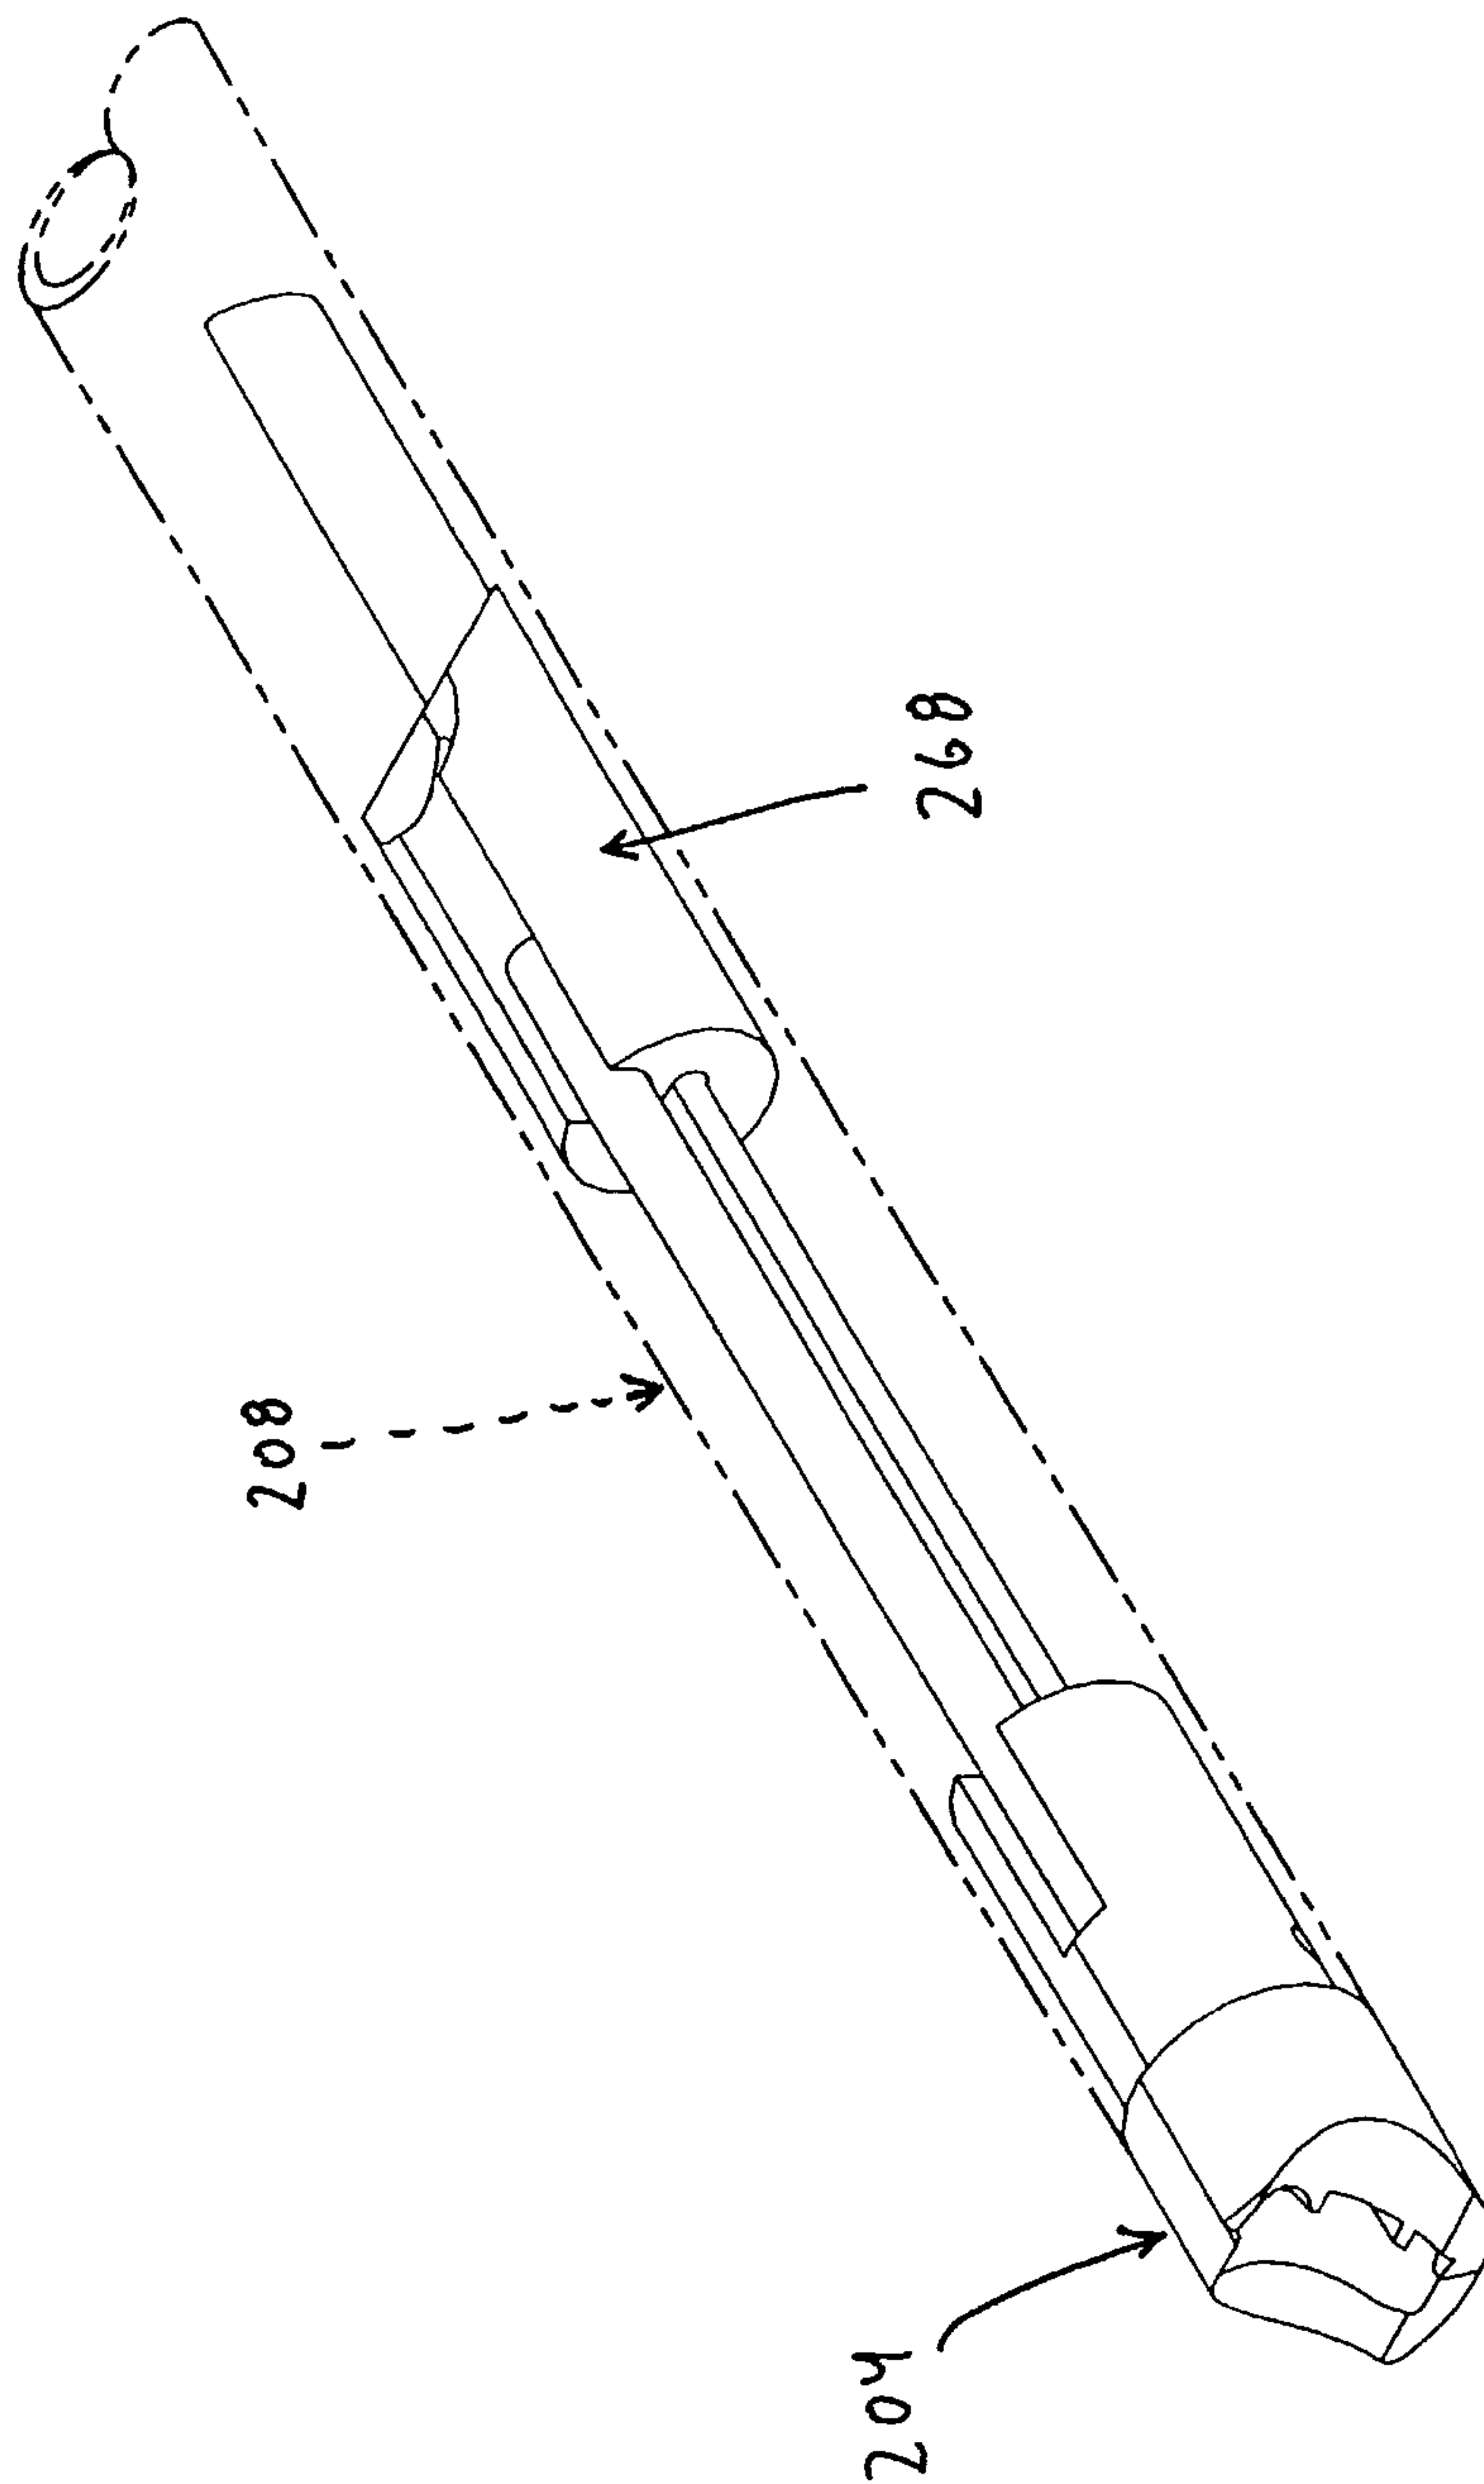
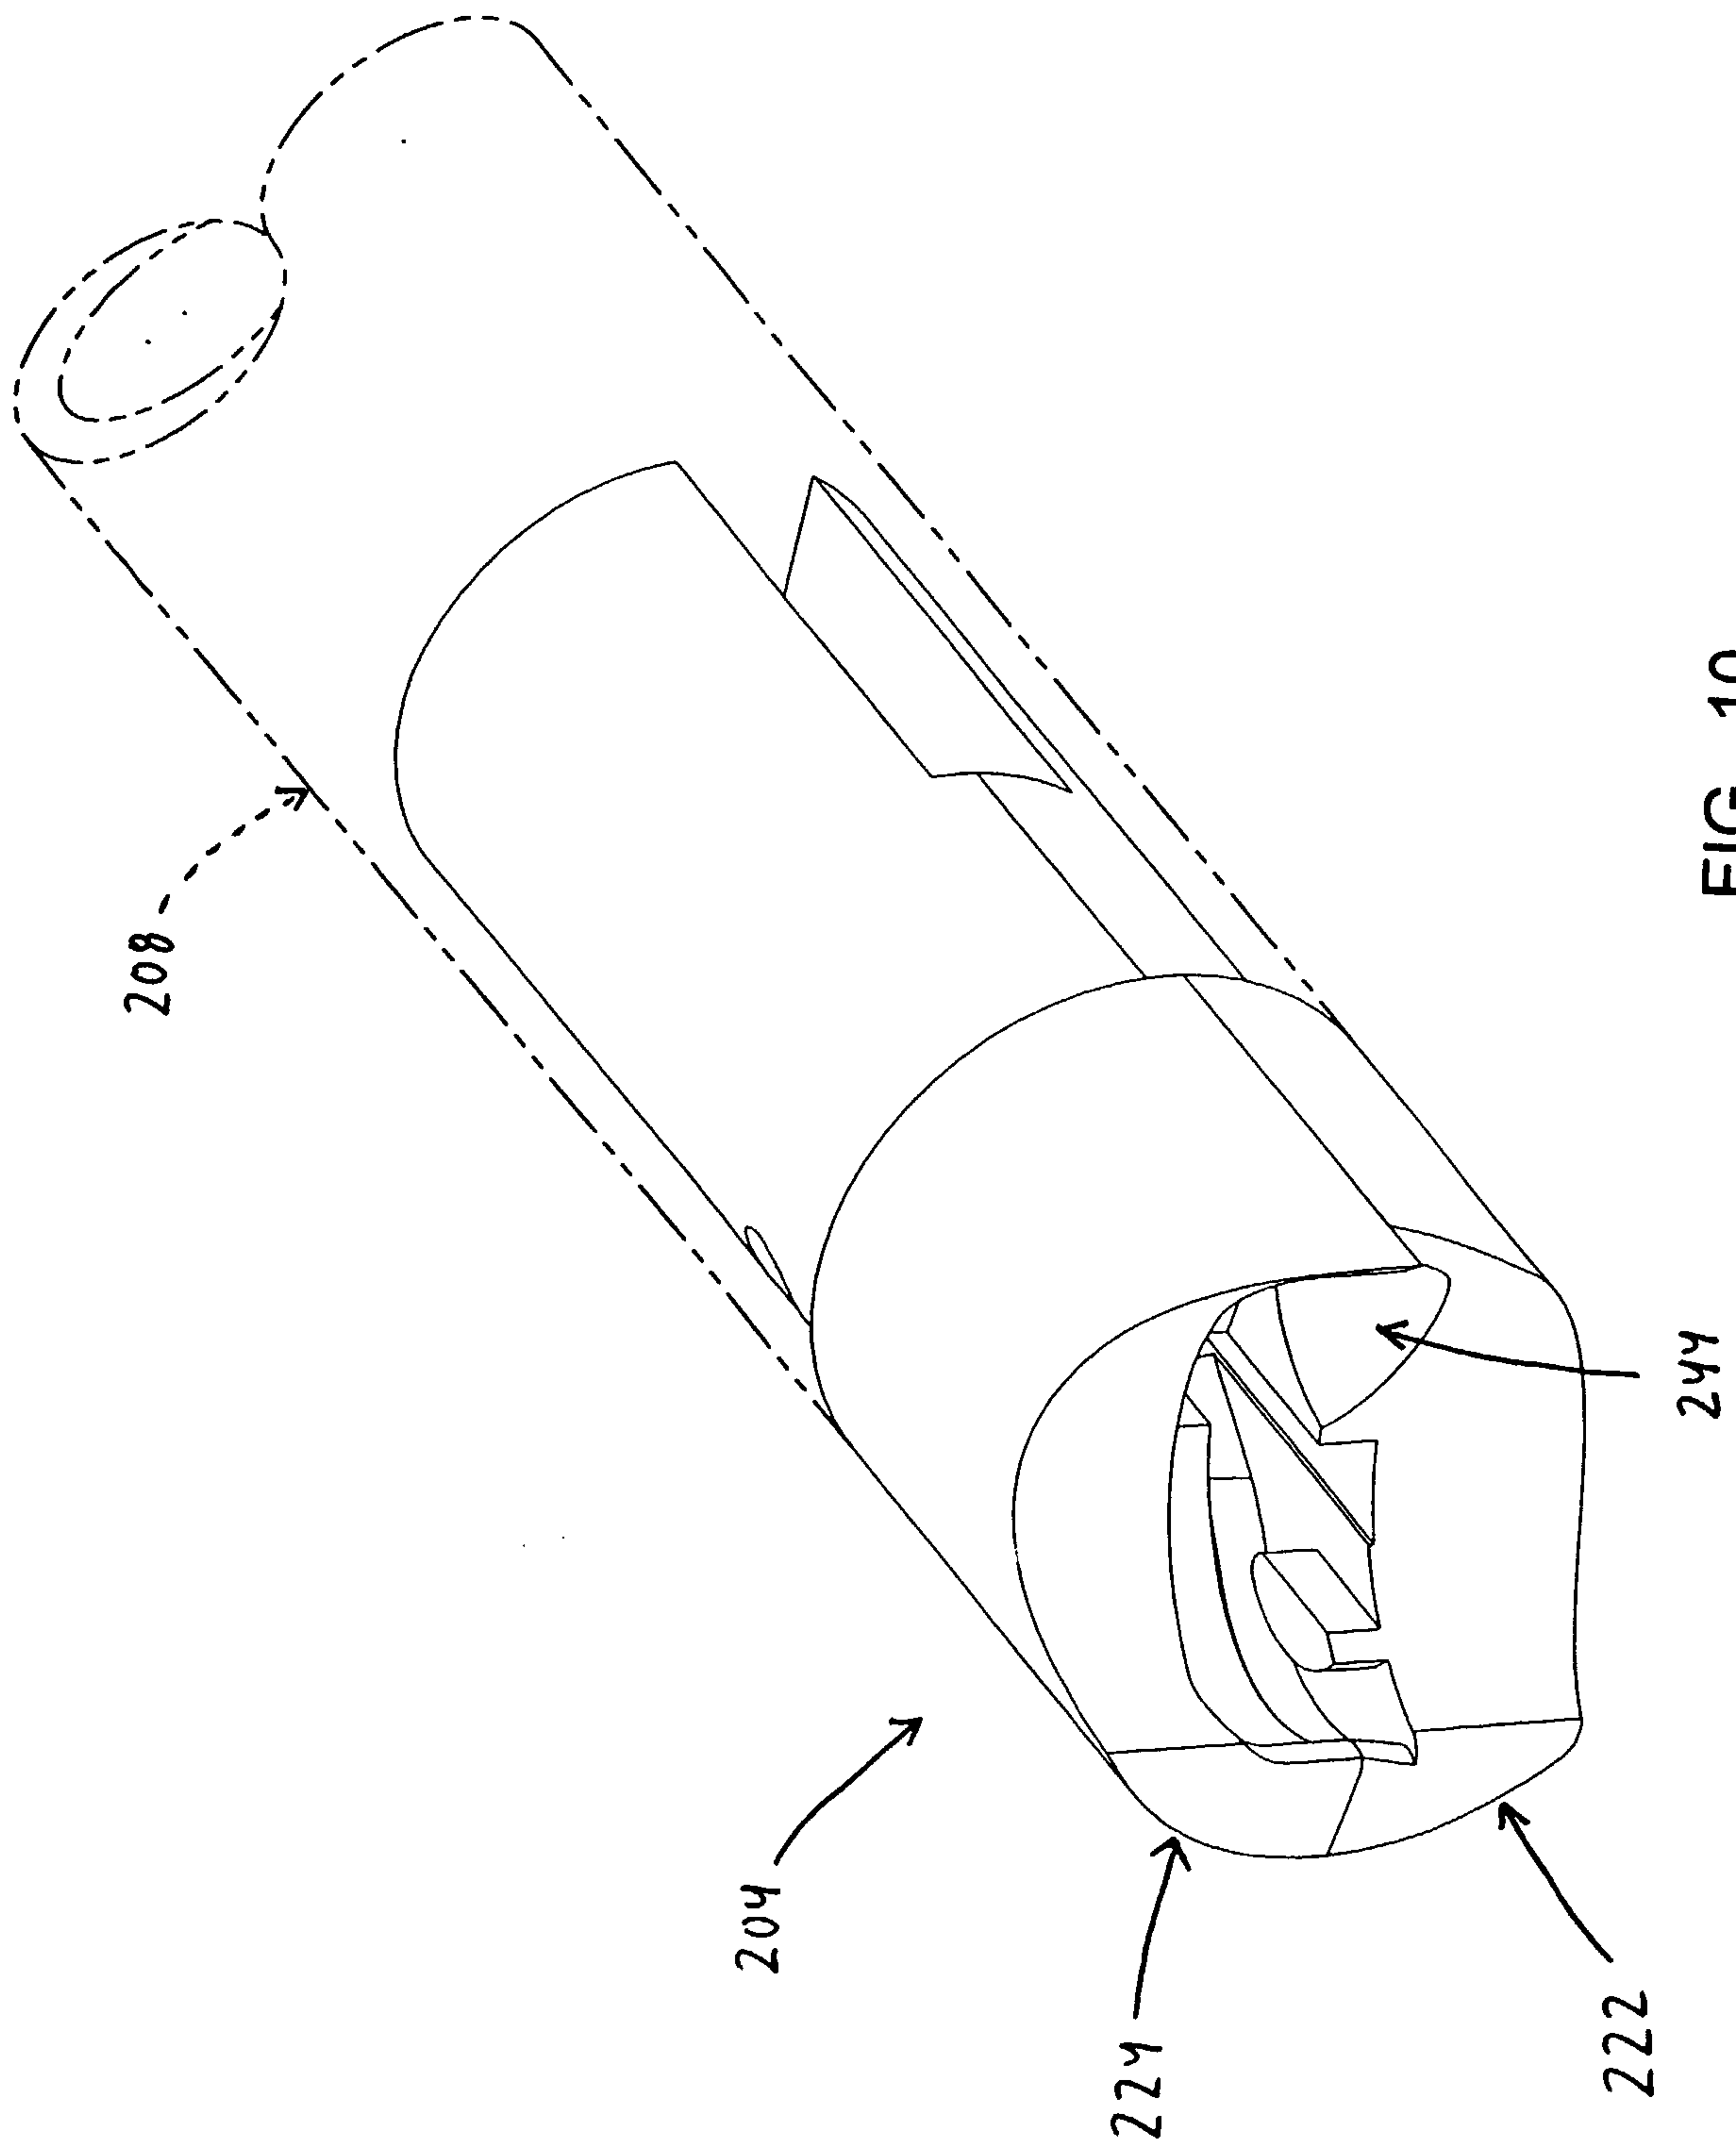


FIG. 9



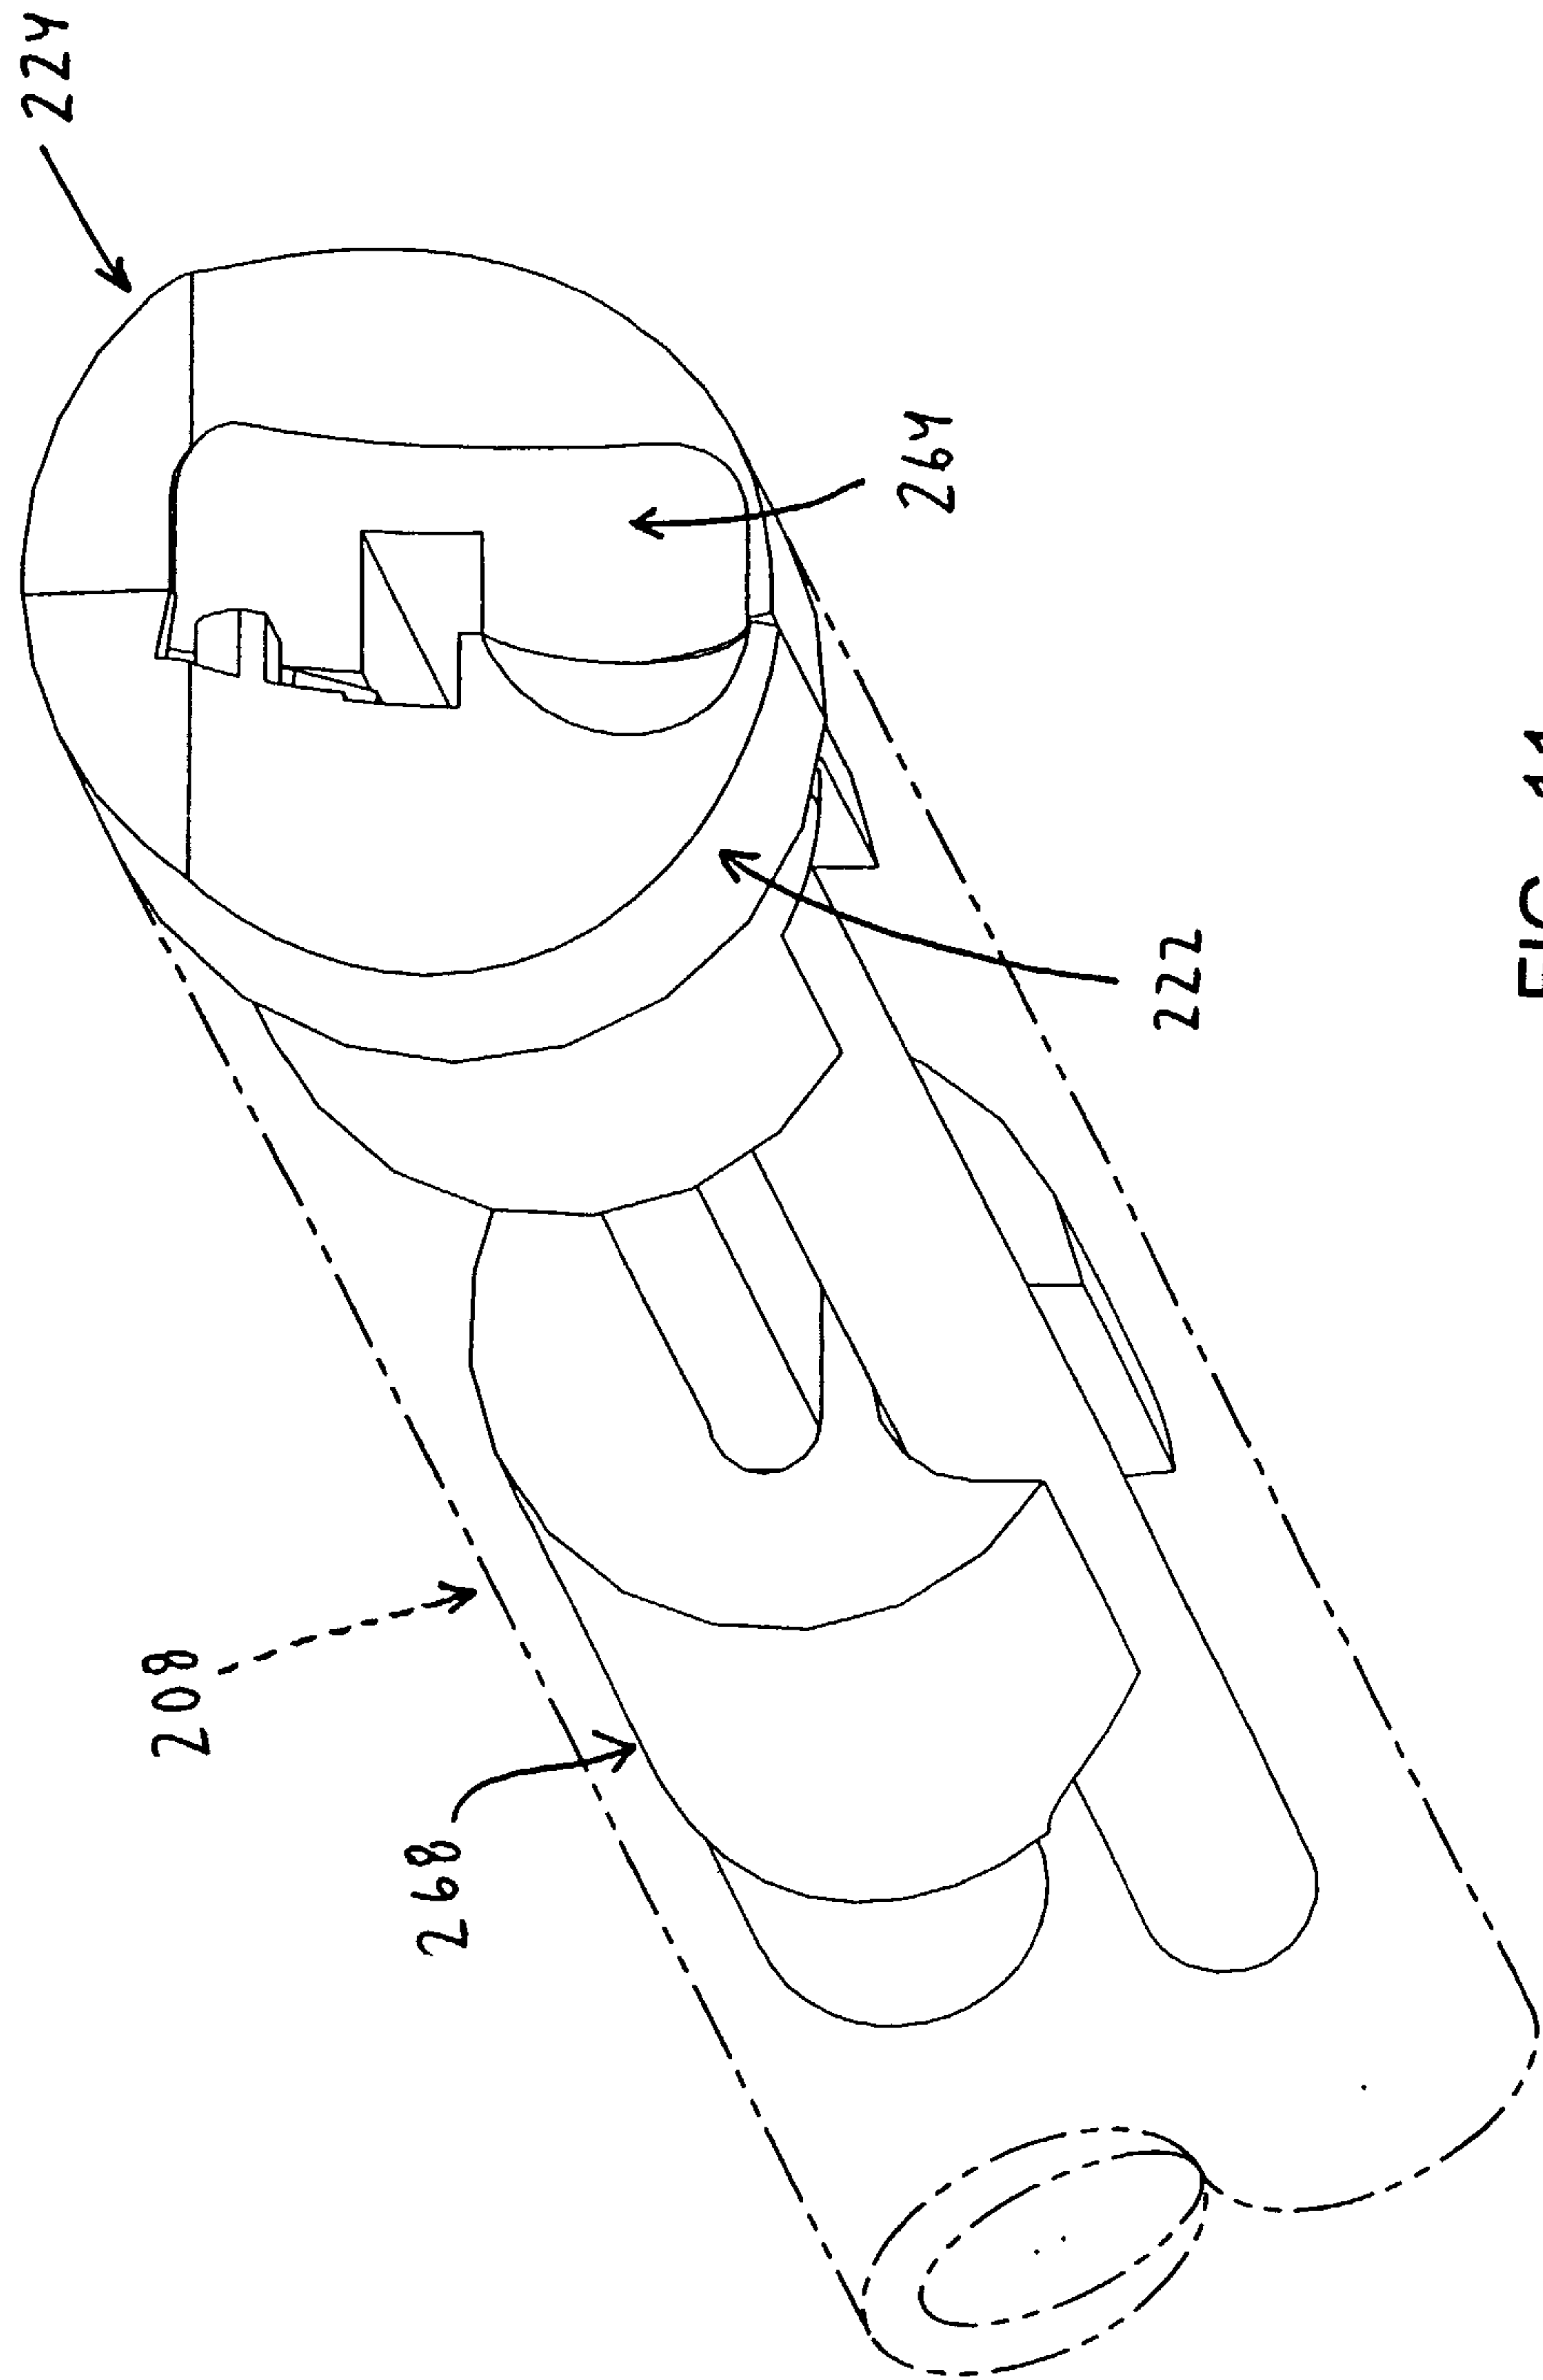


FIG. 11

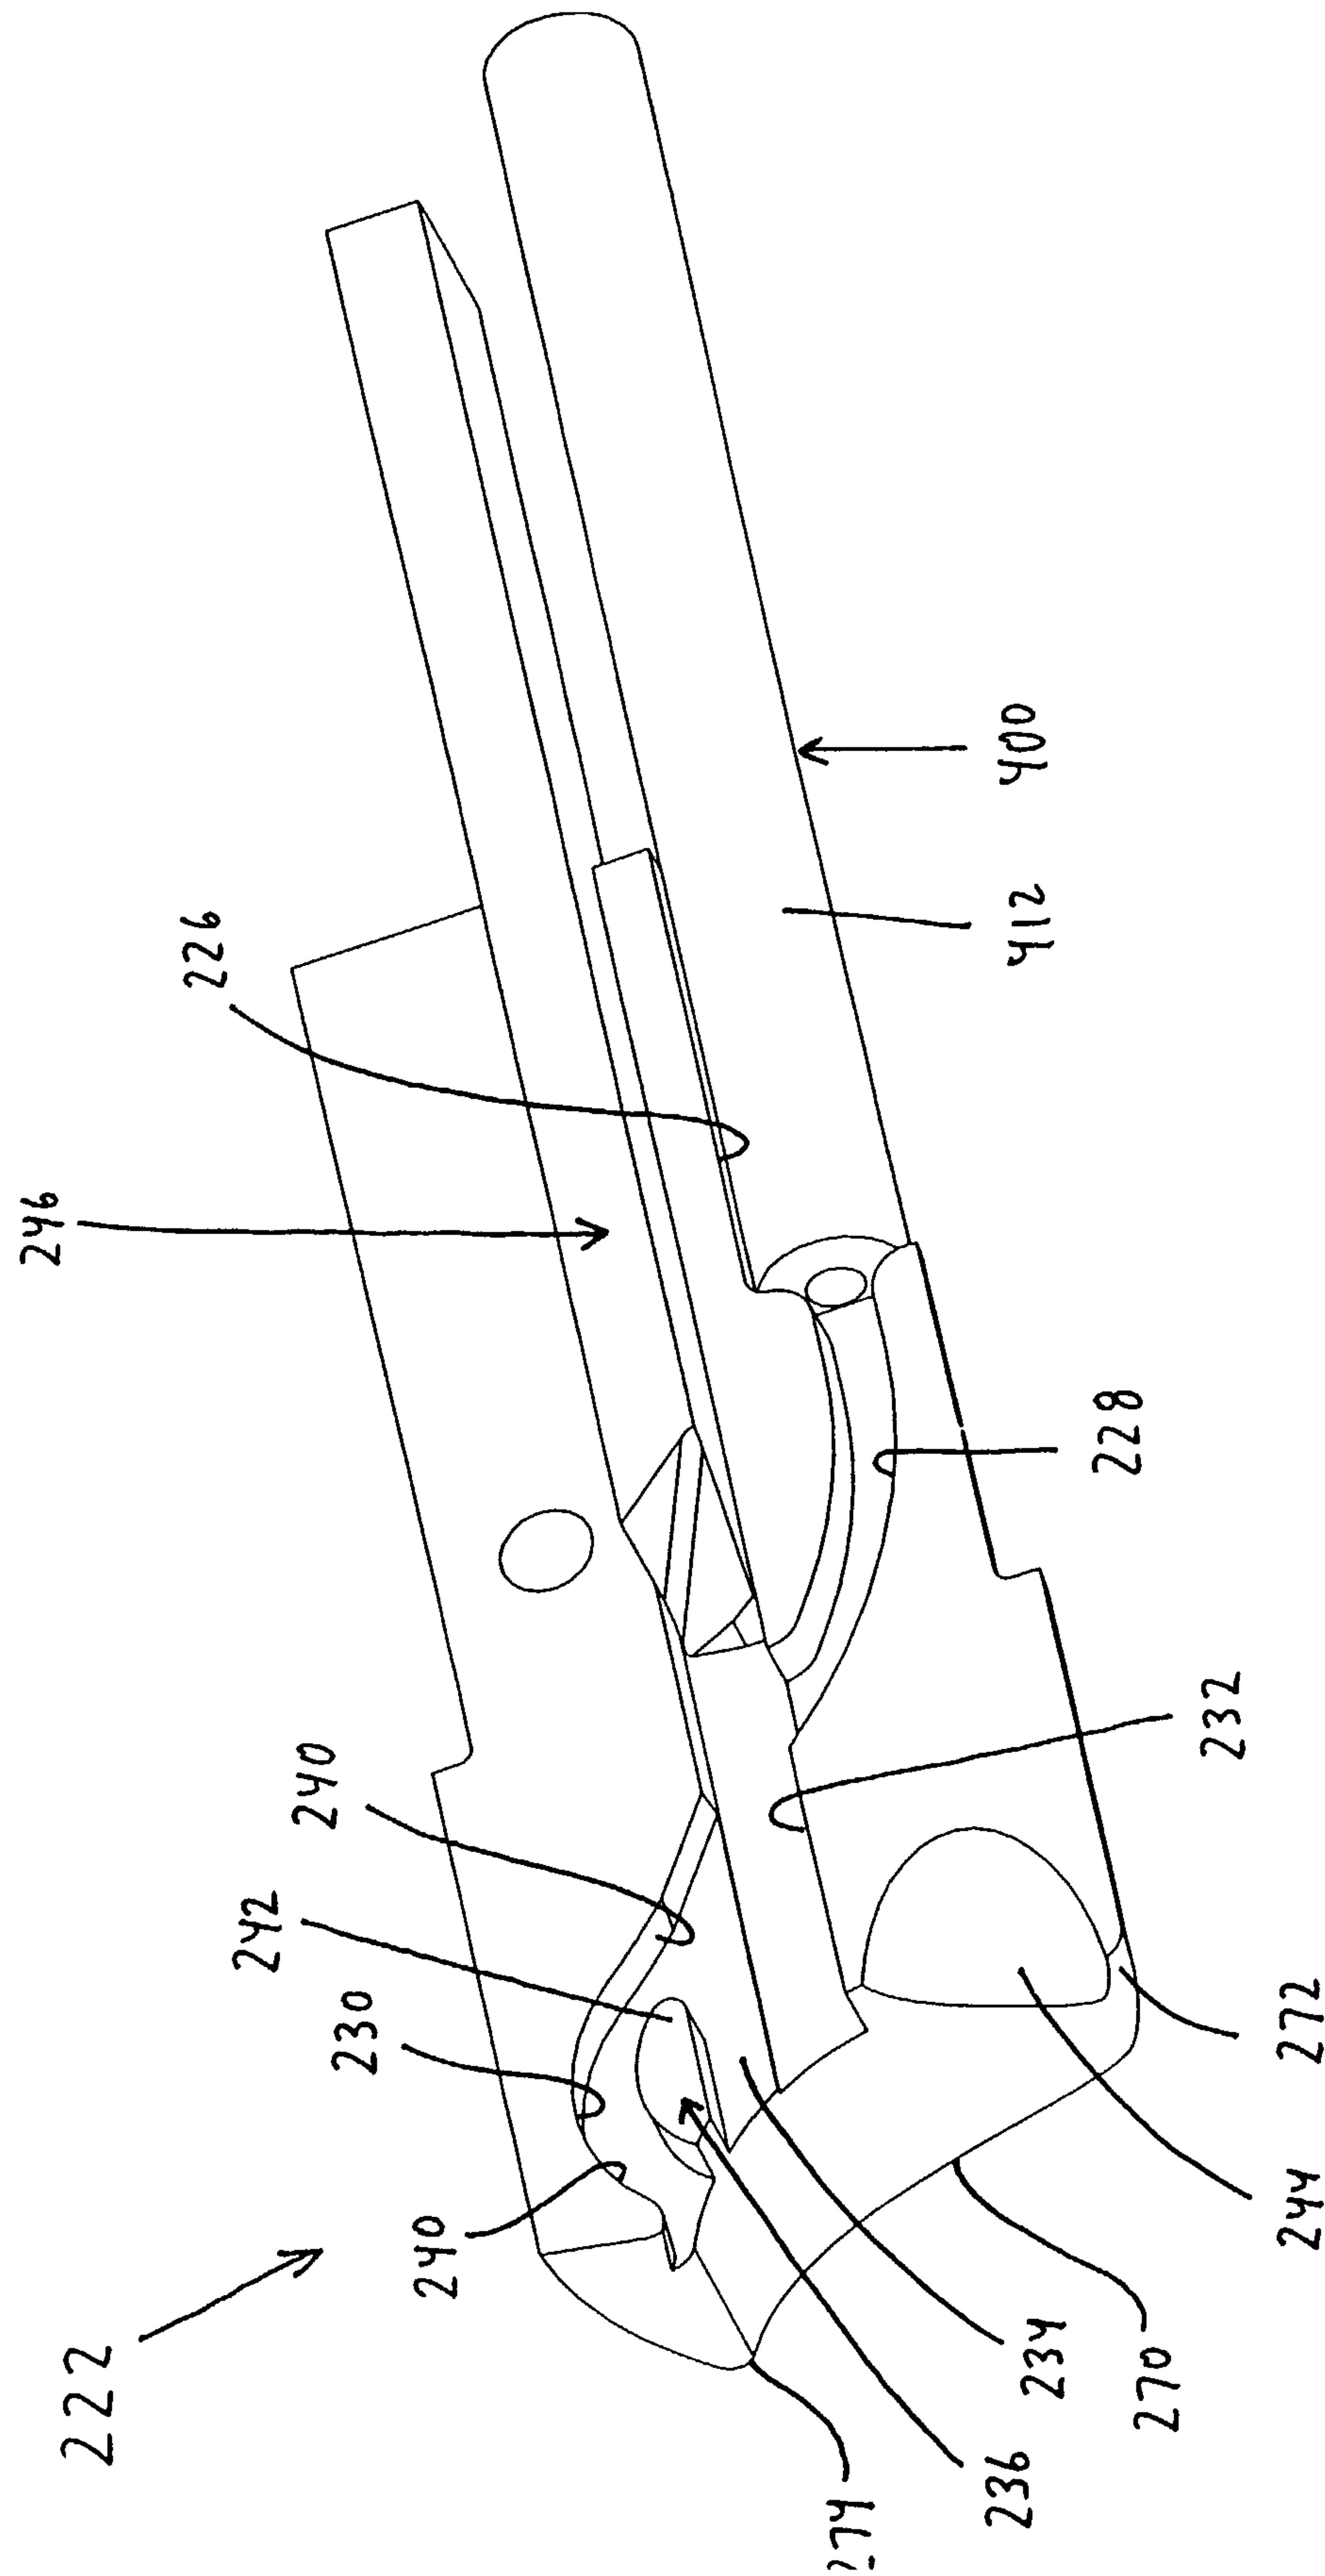


FIG. 12

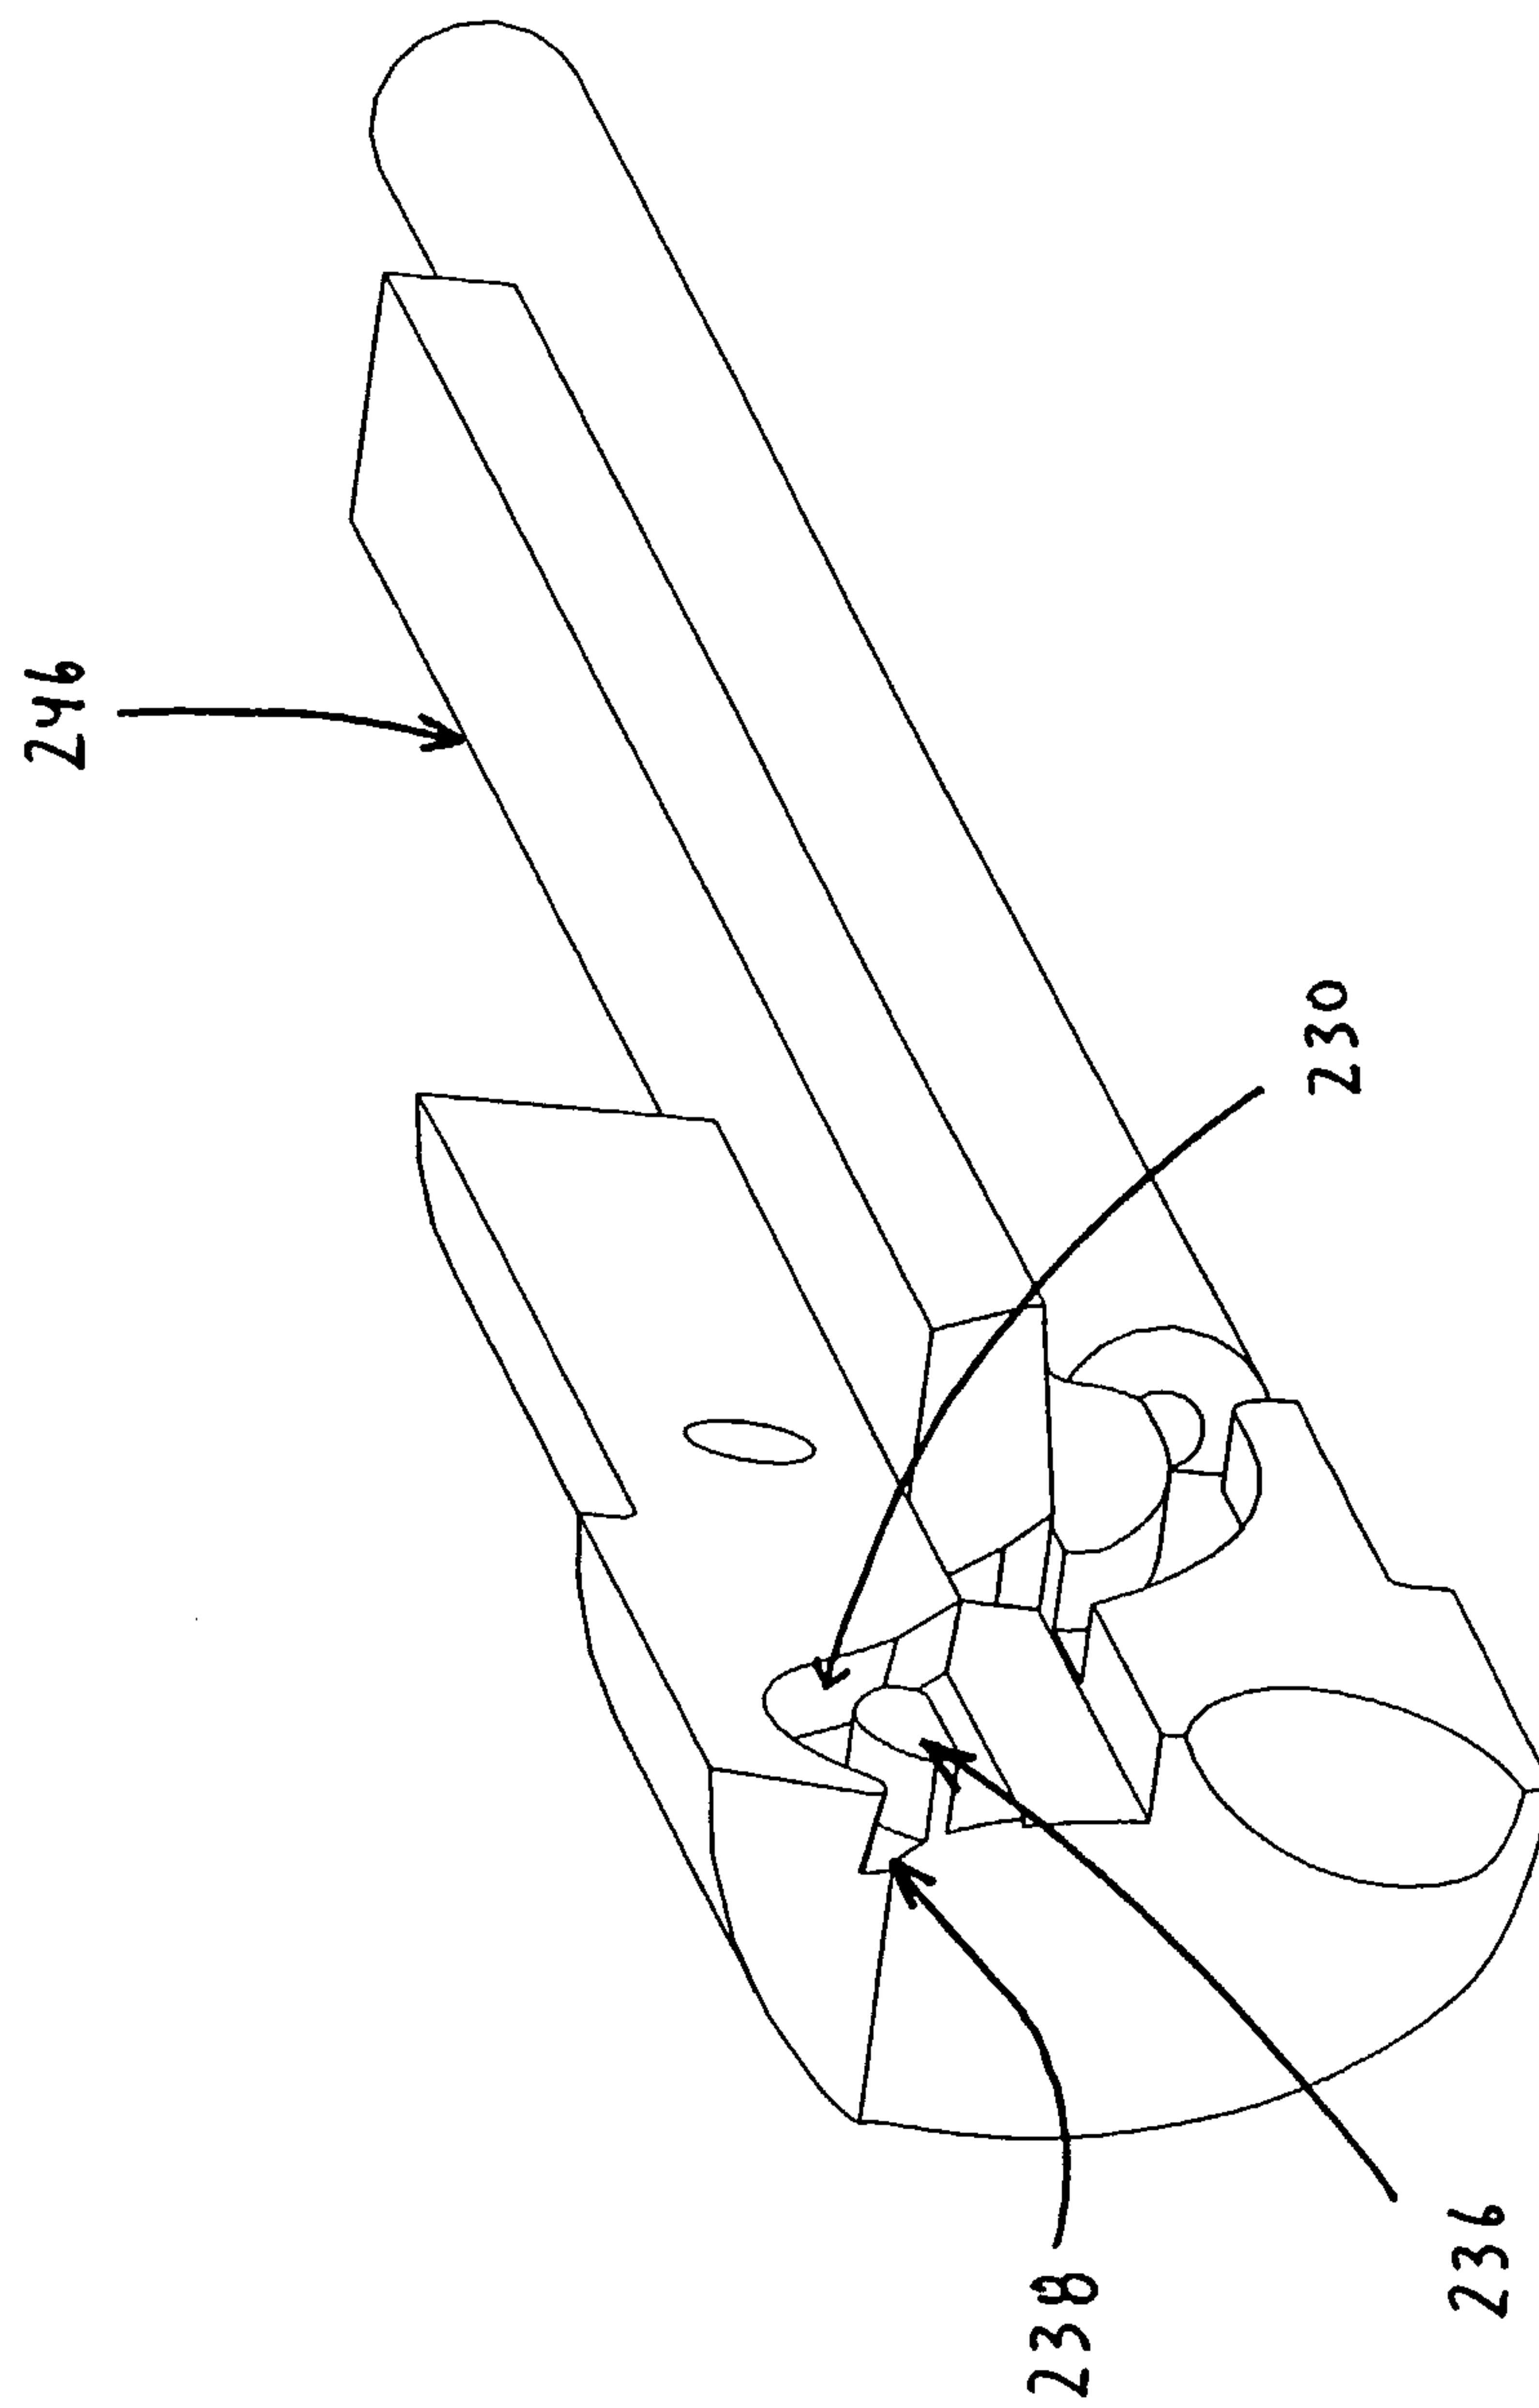


FIG. 13

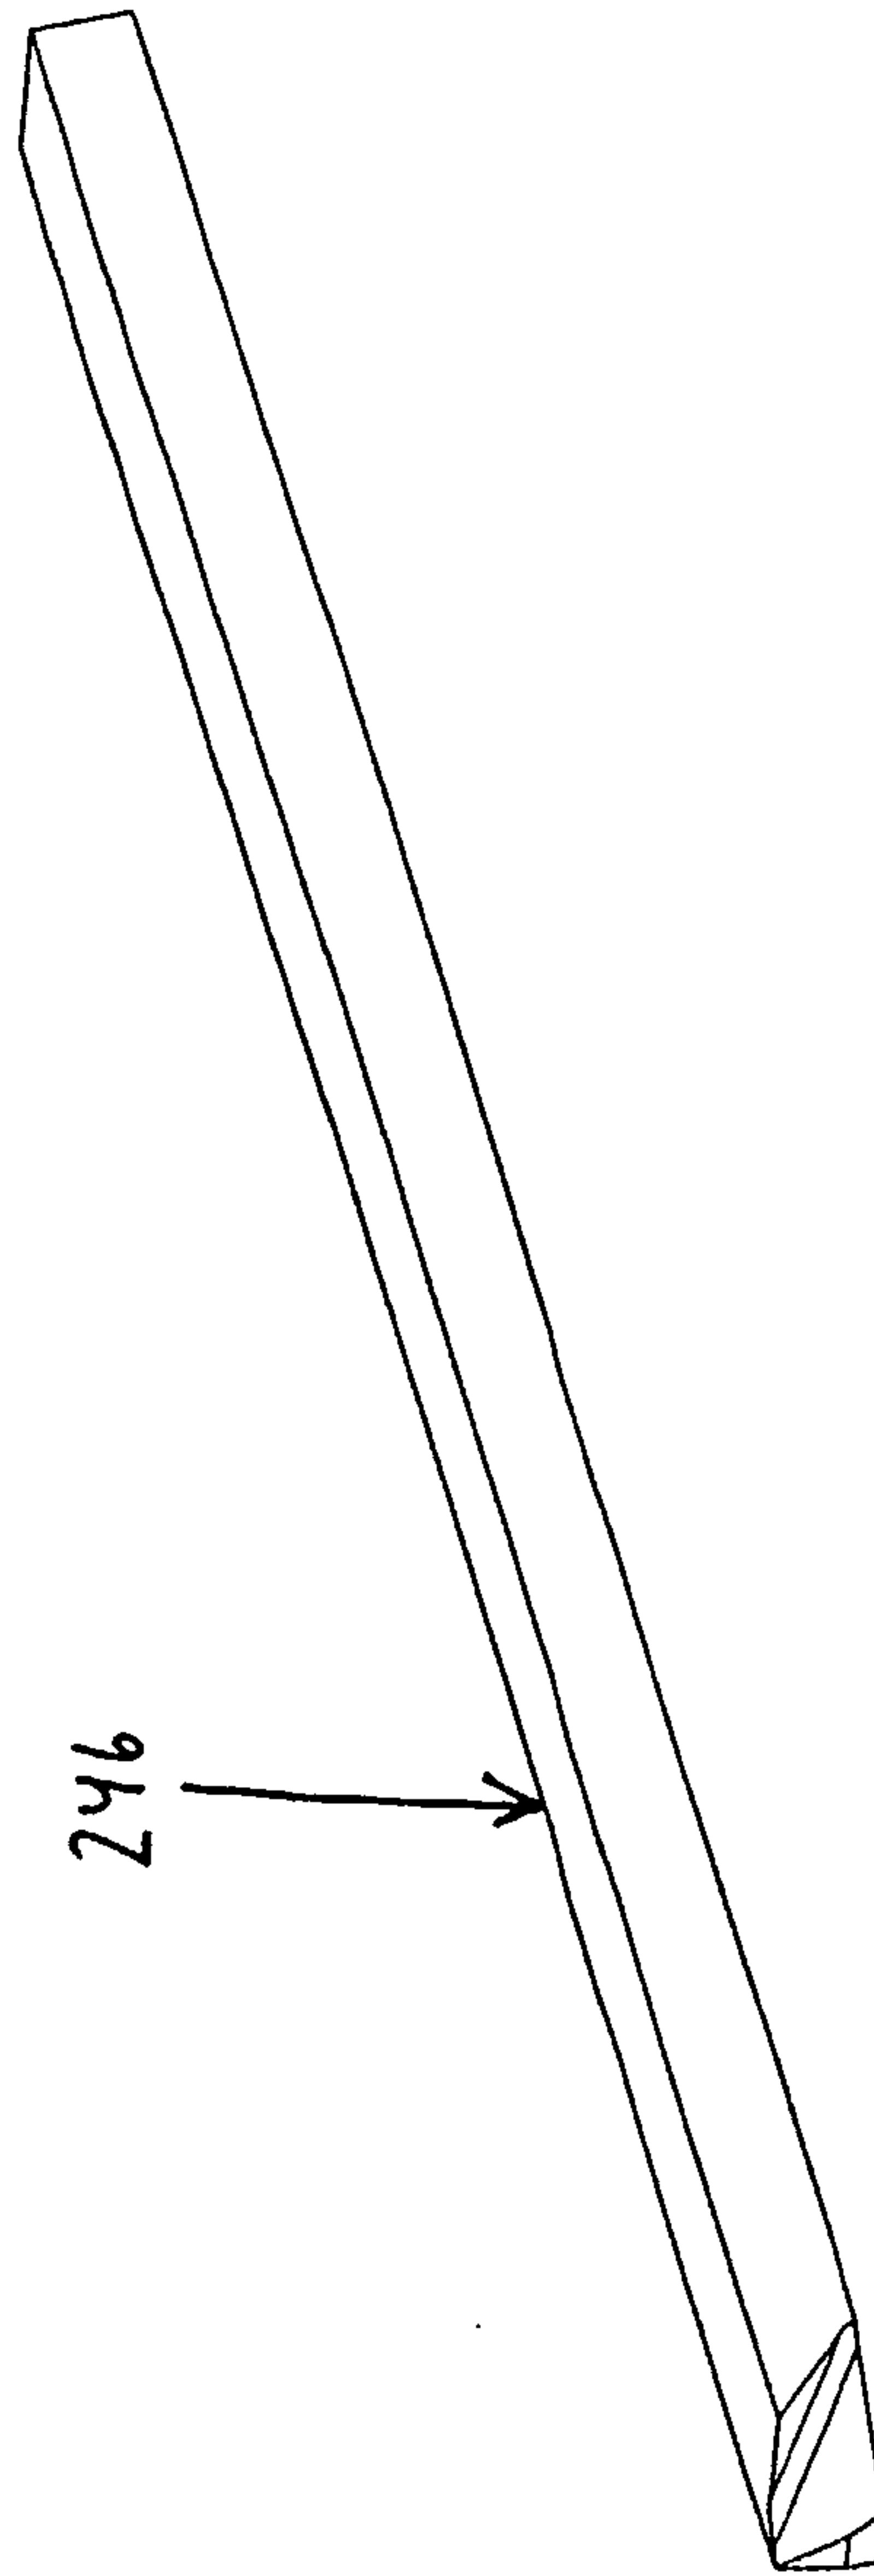


FIG. 14

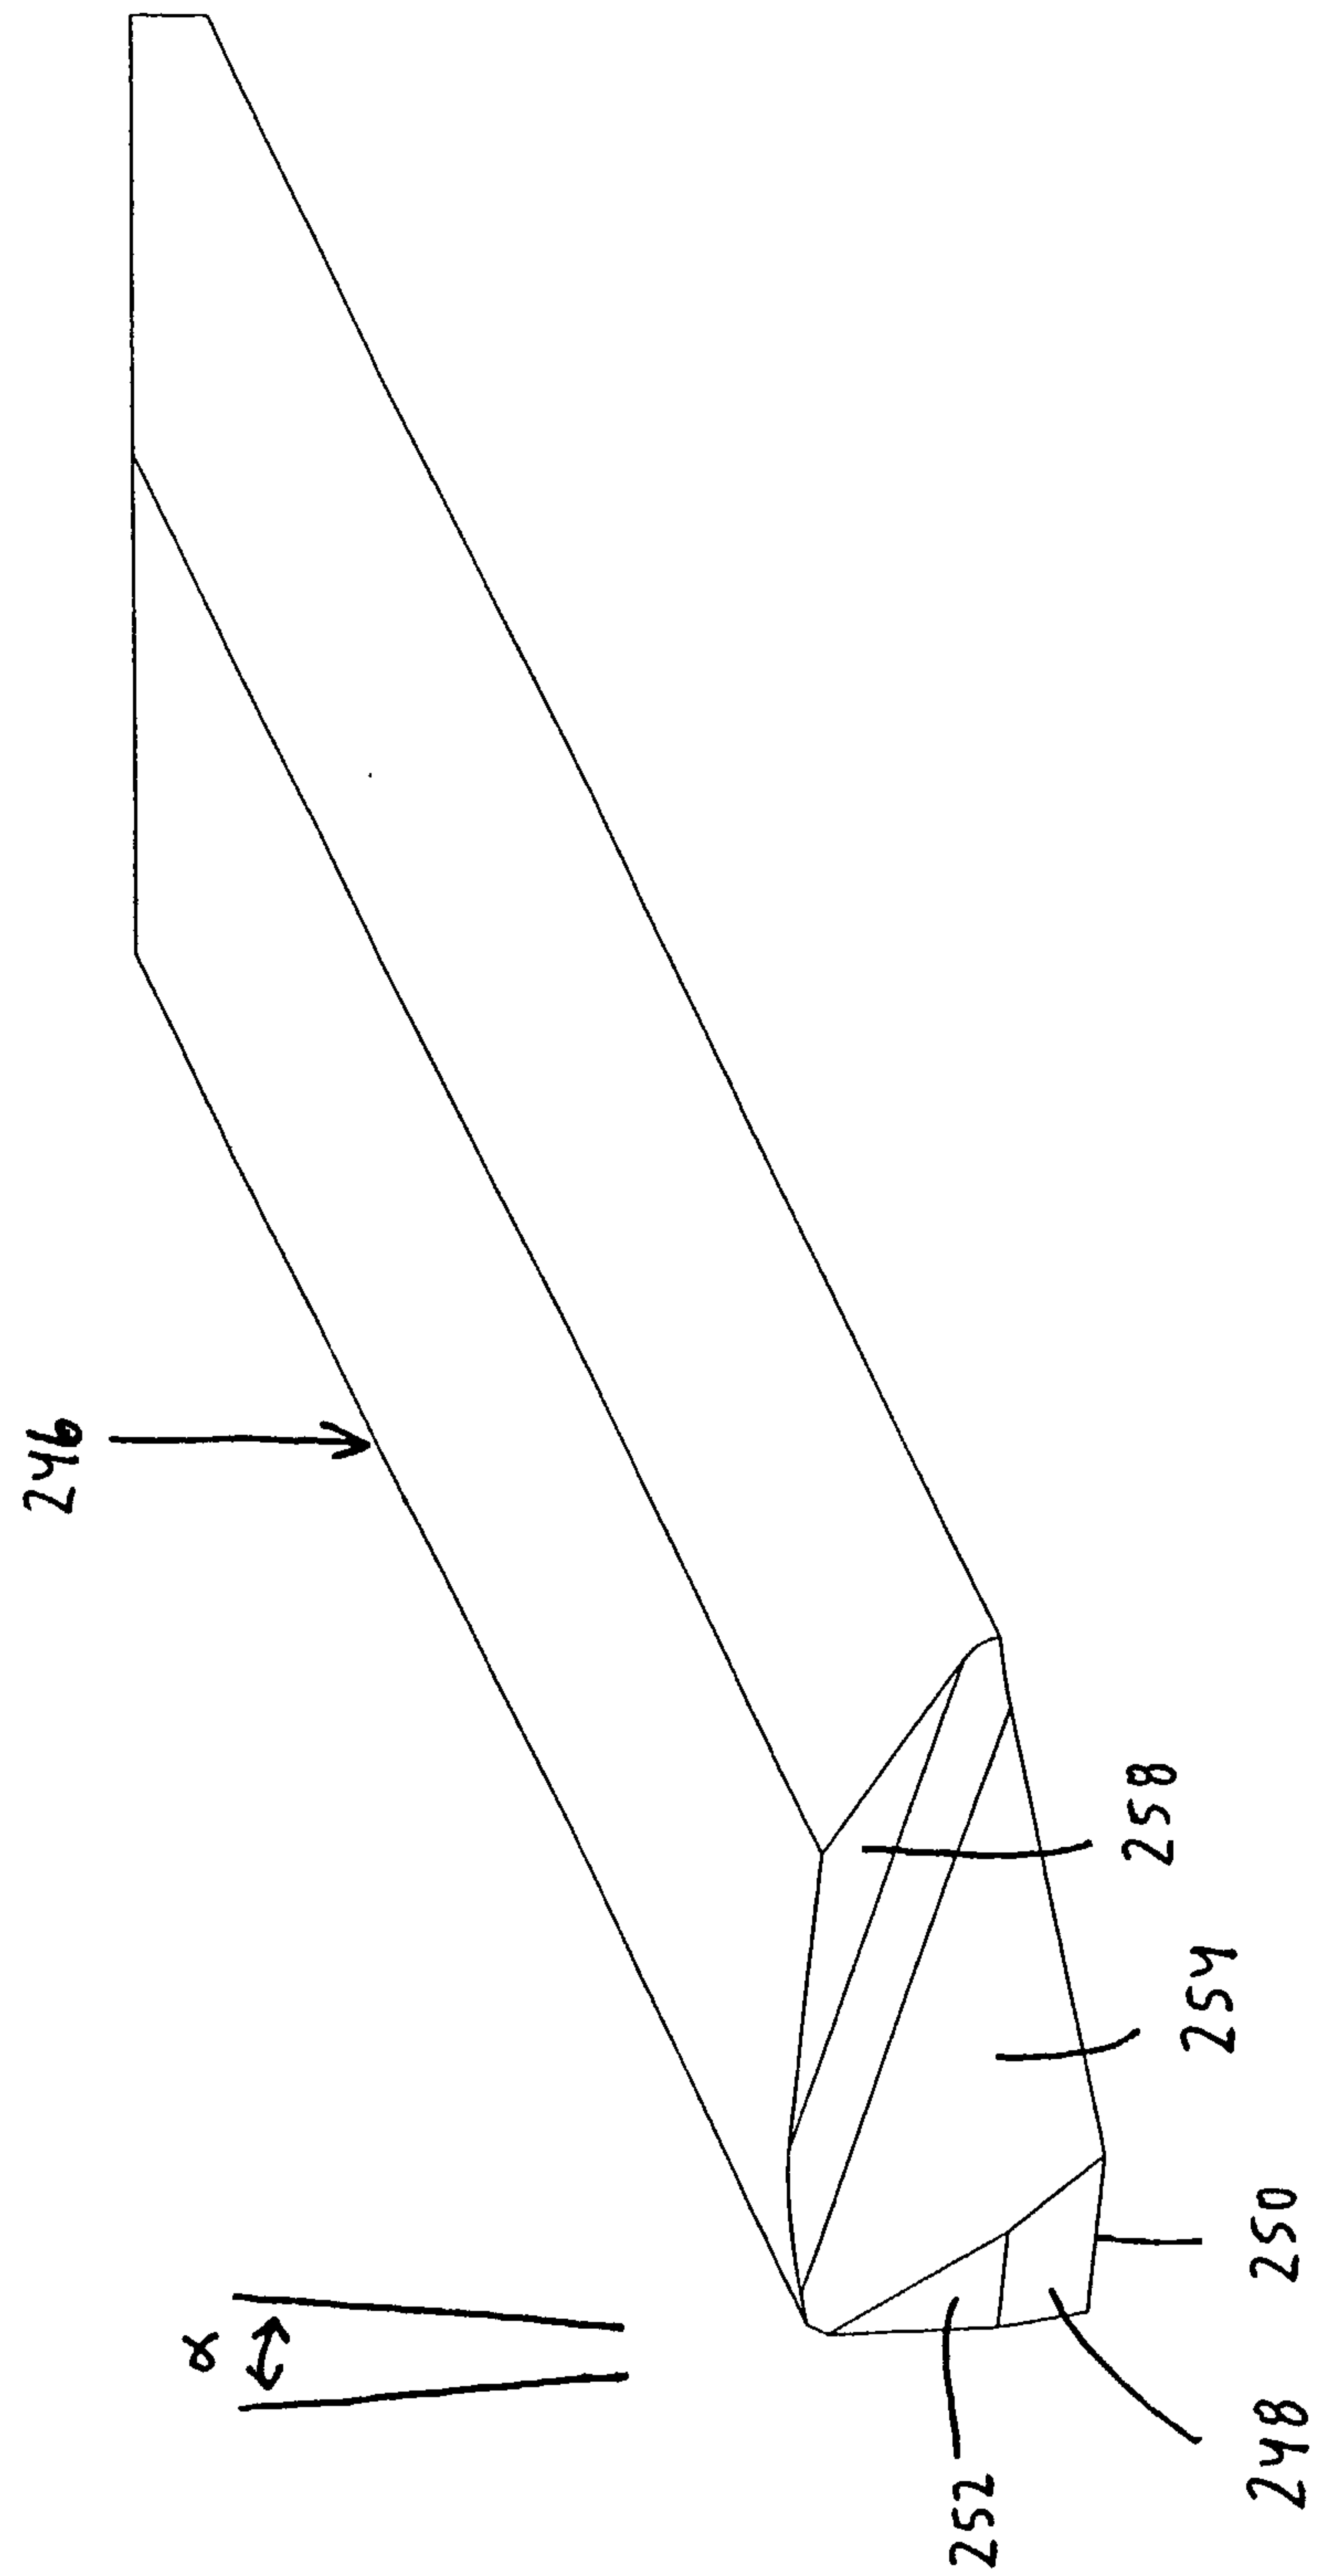


FIG. 15

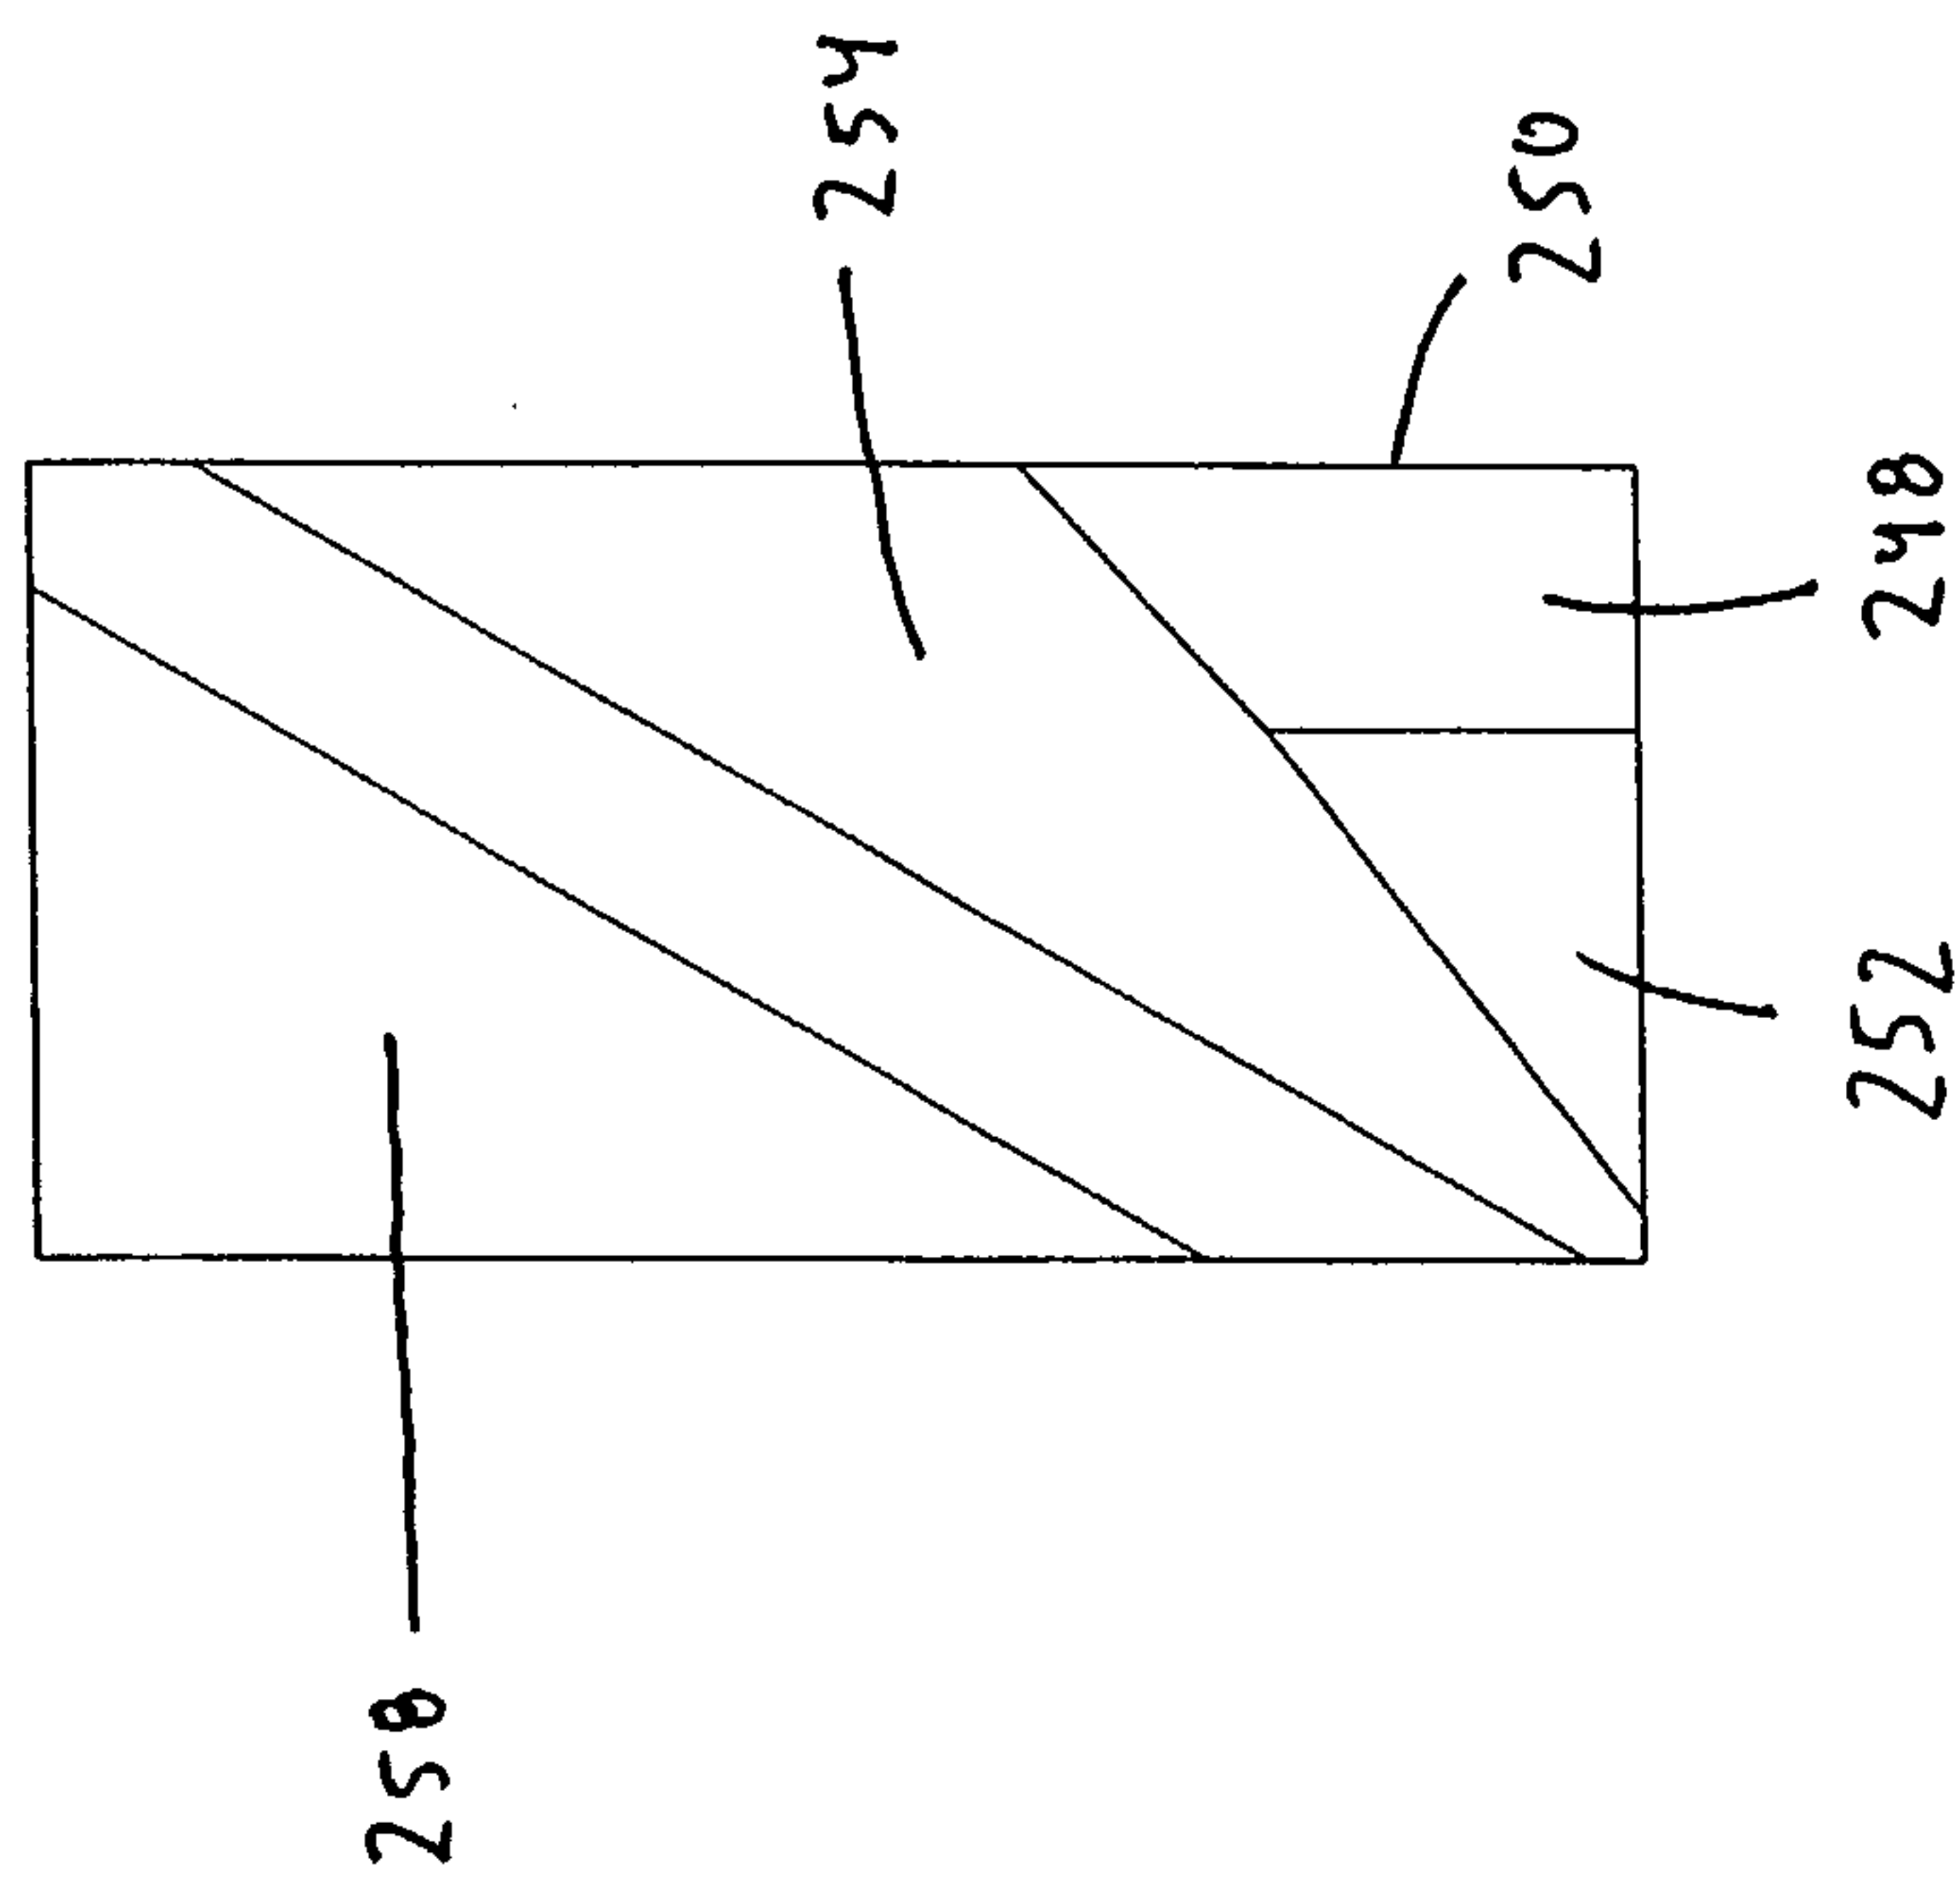


FIG. 16

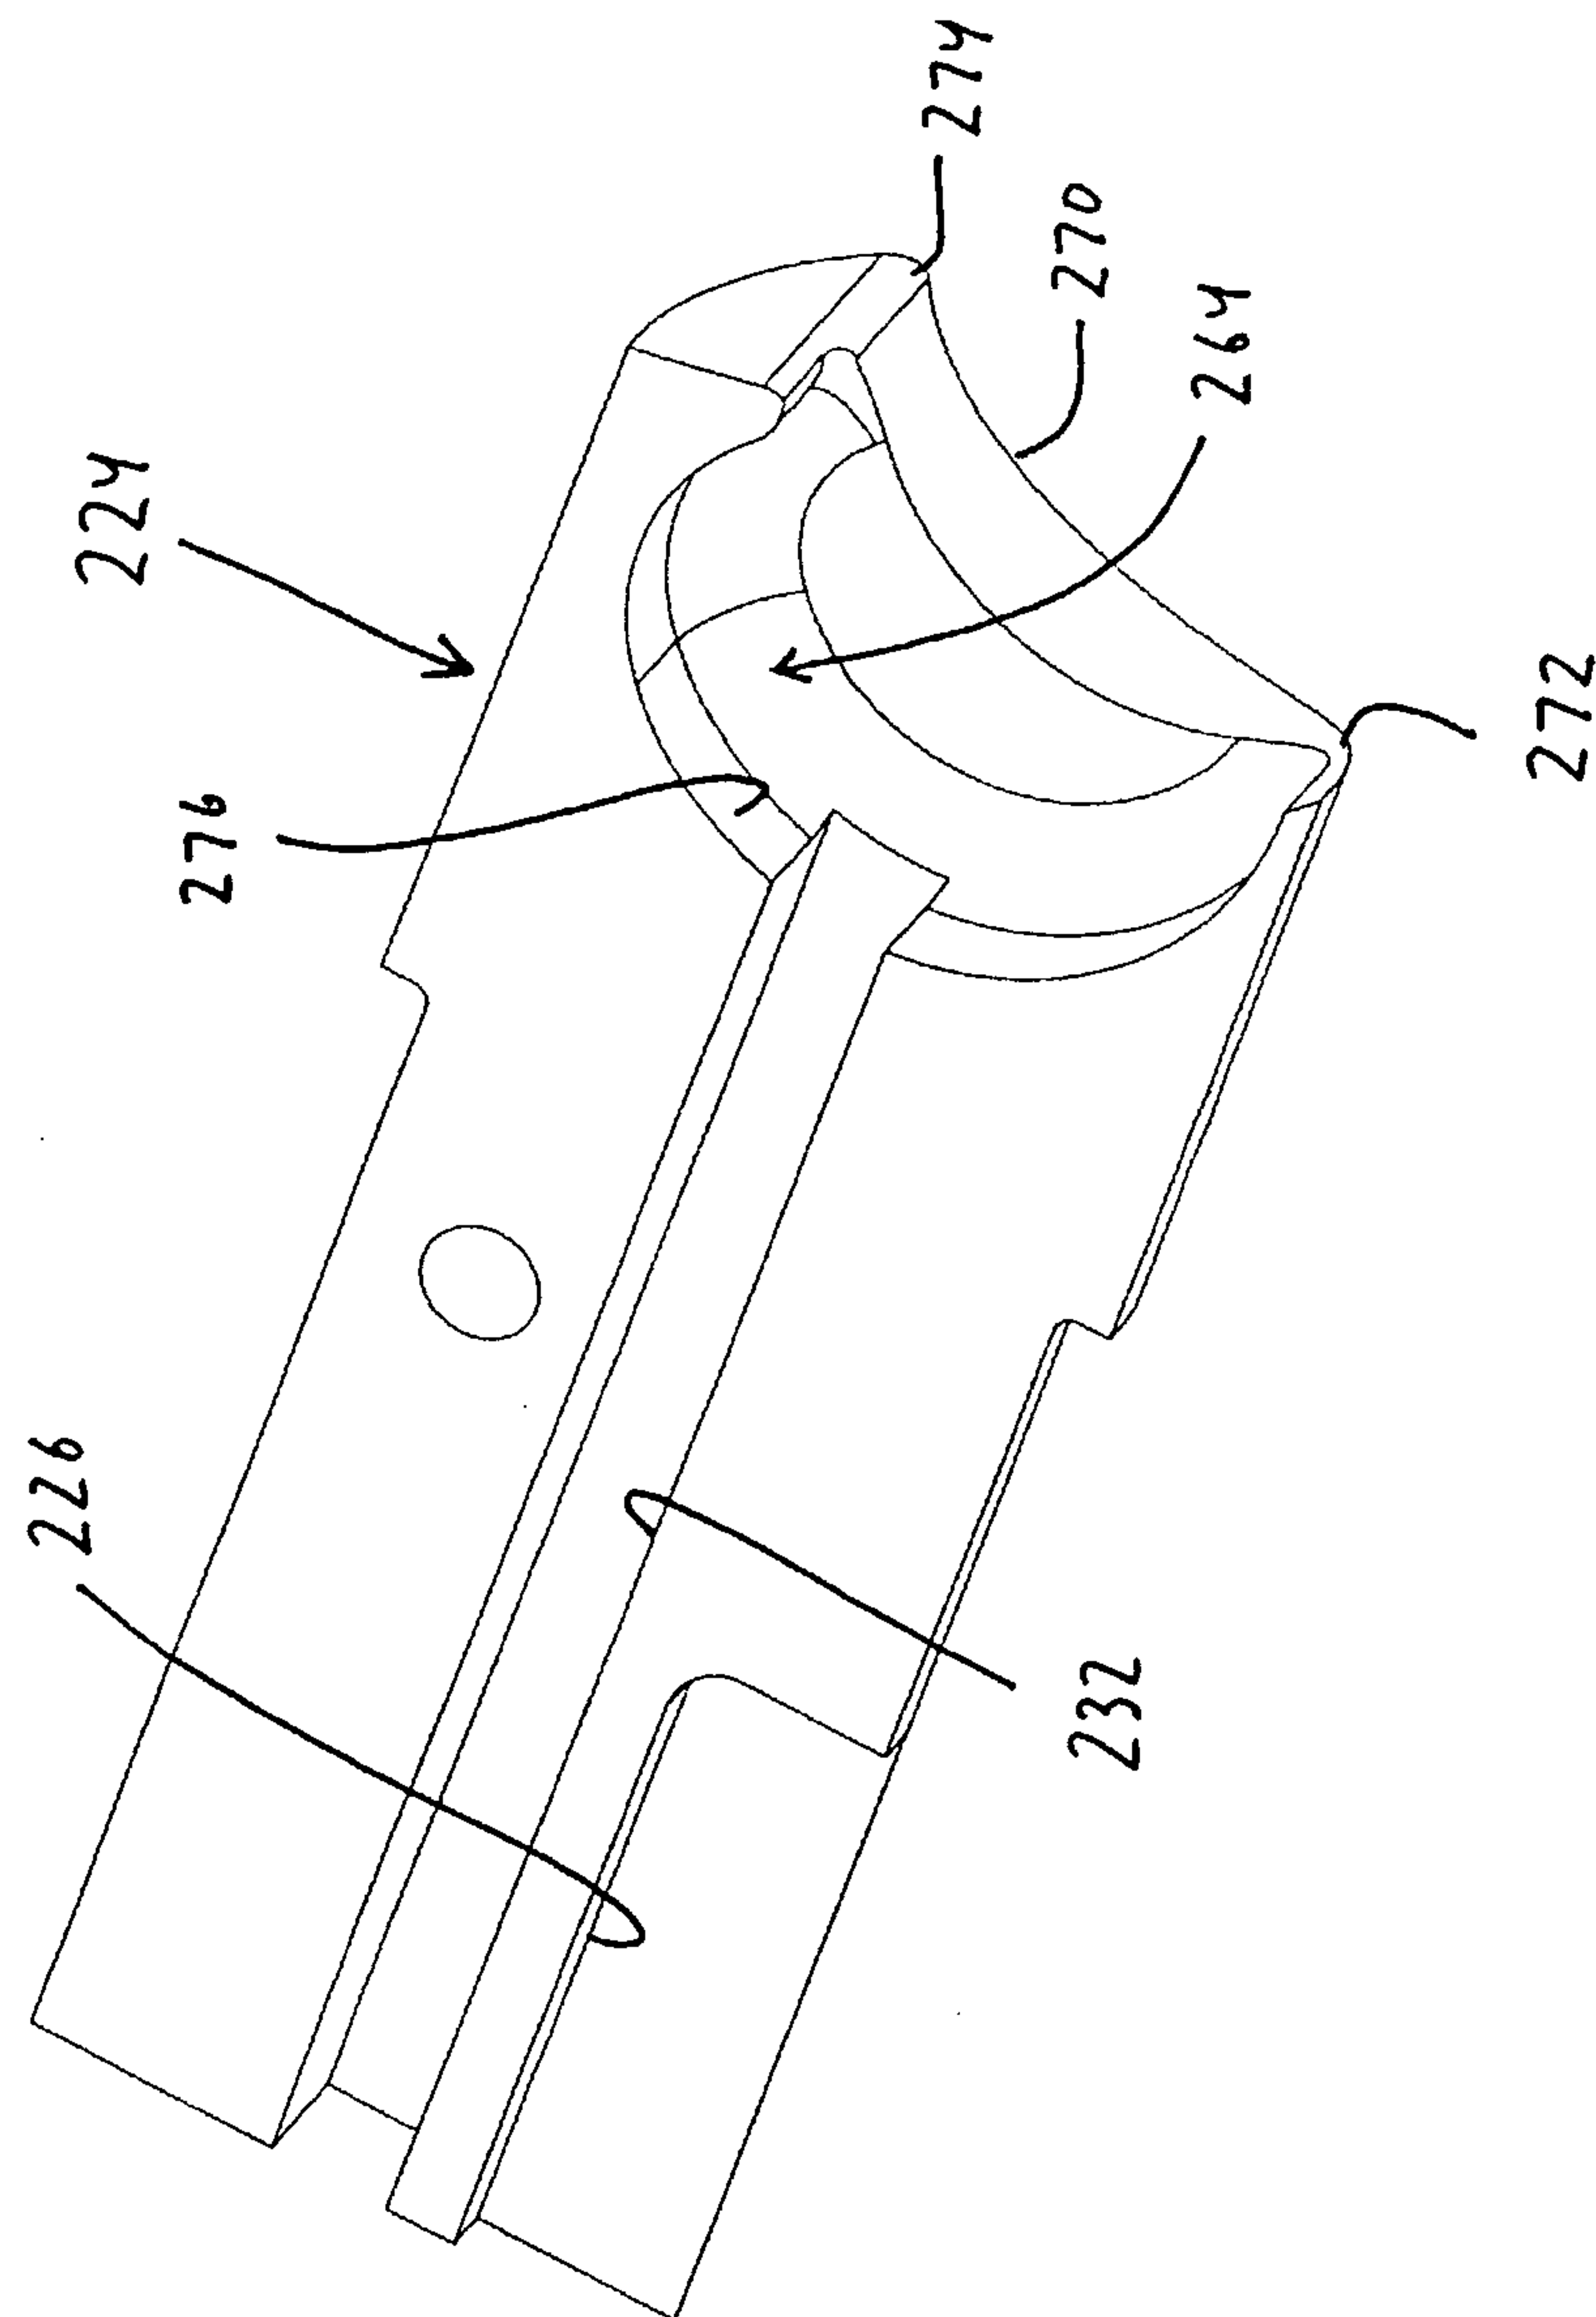


FIG. 17

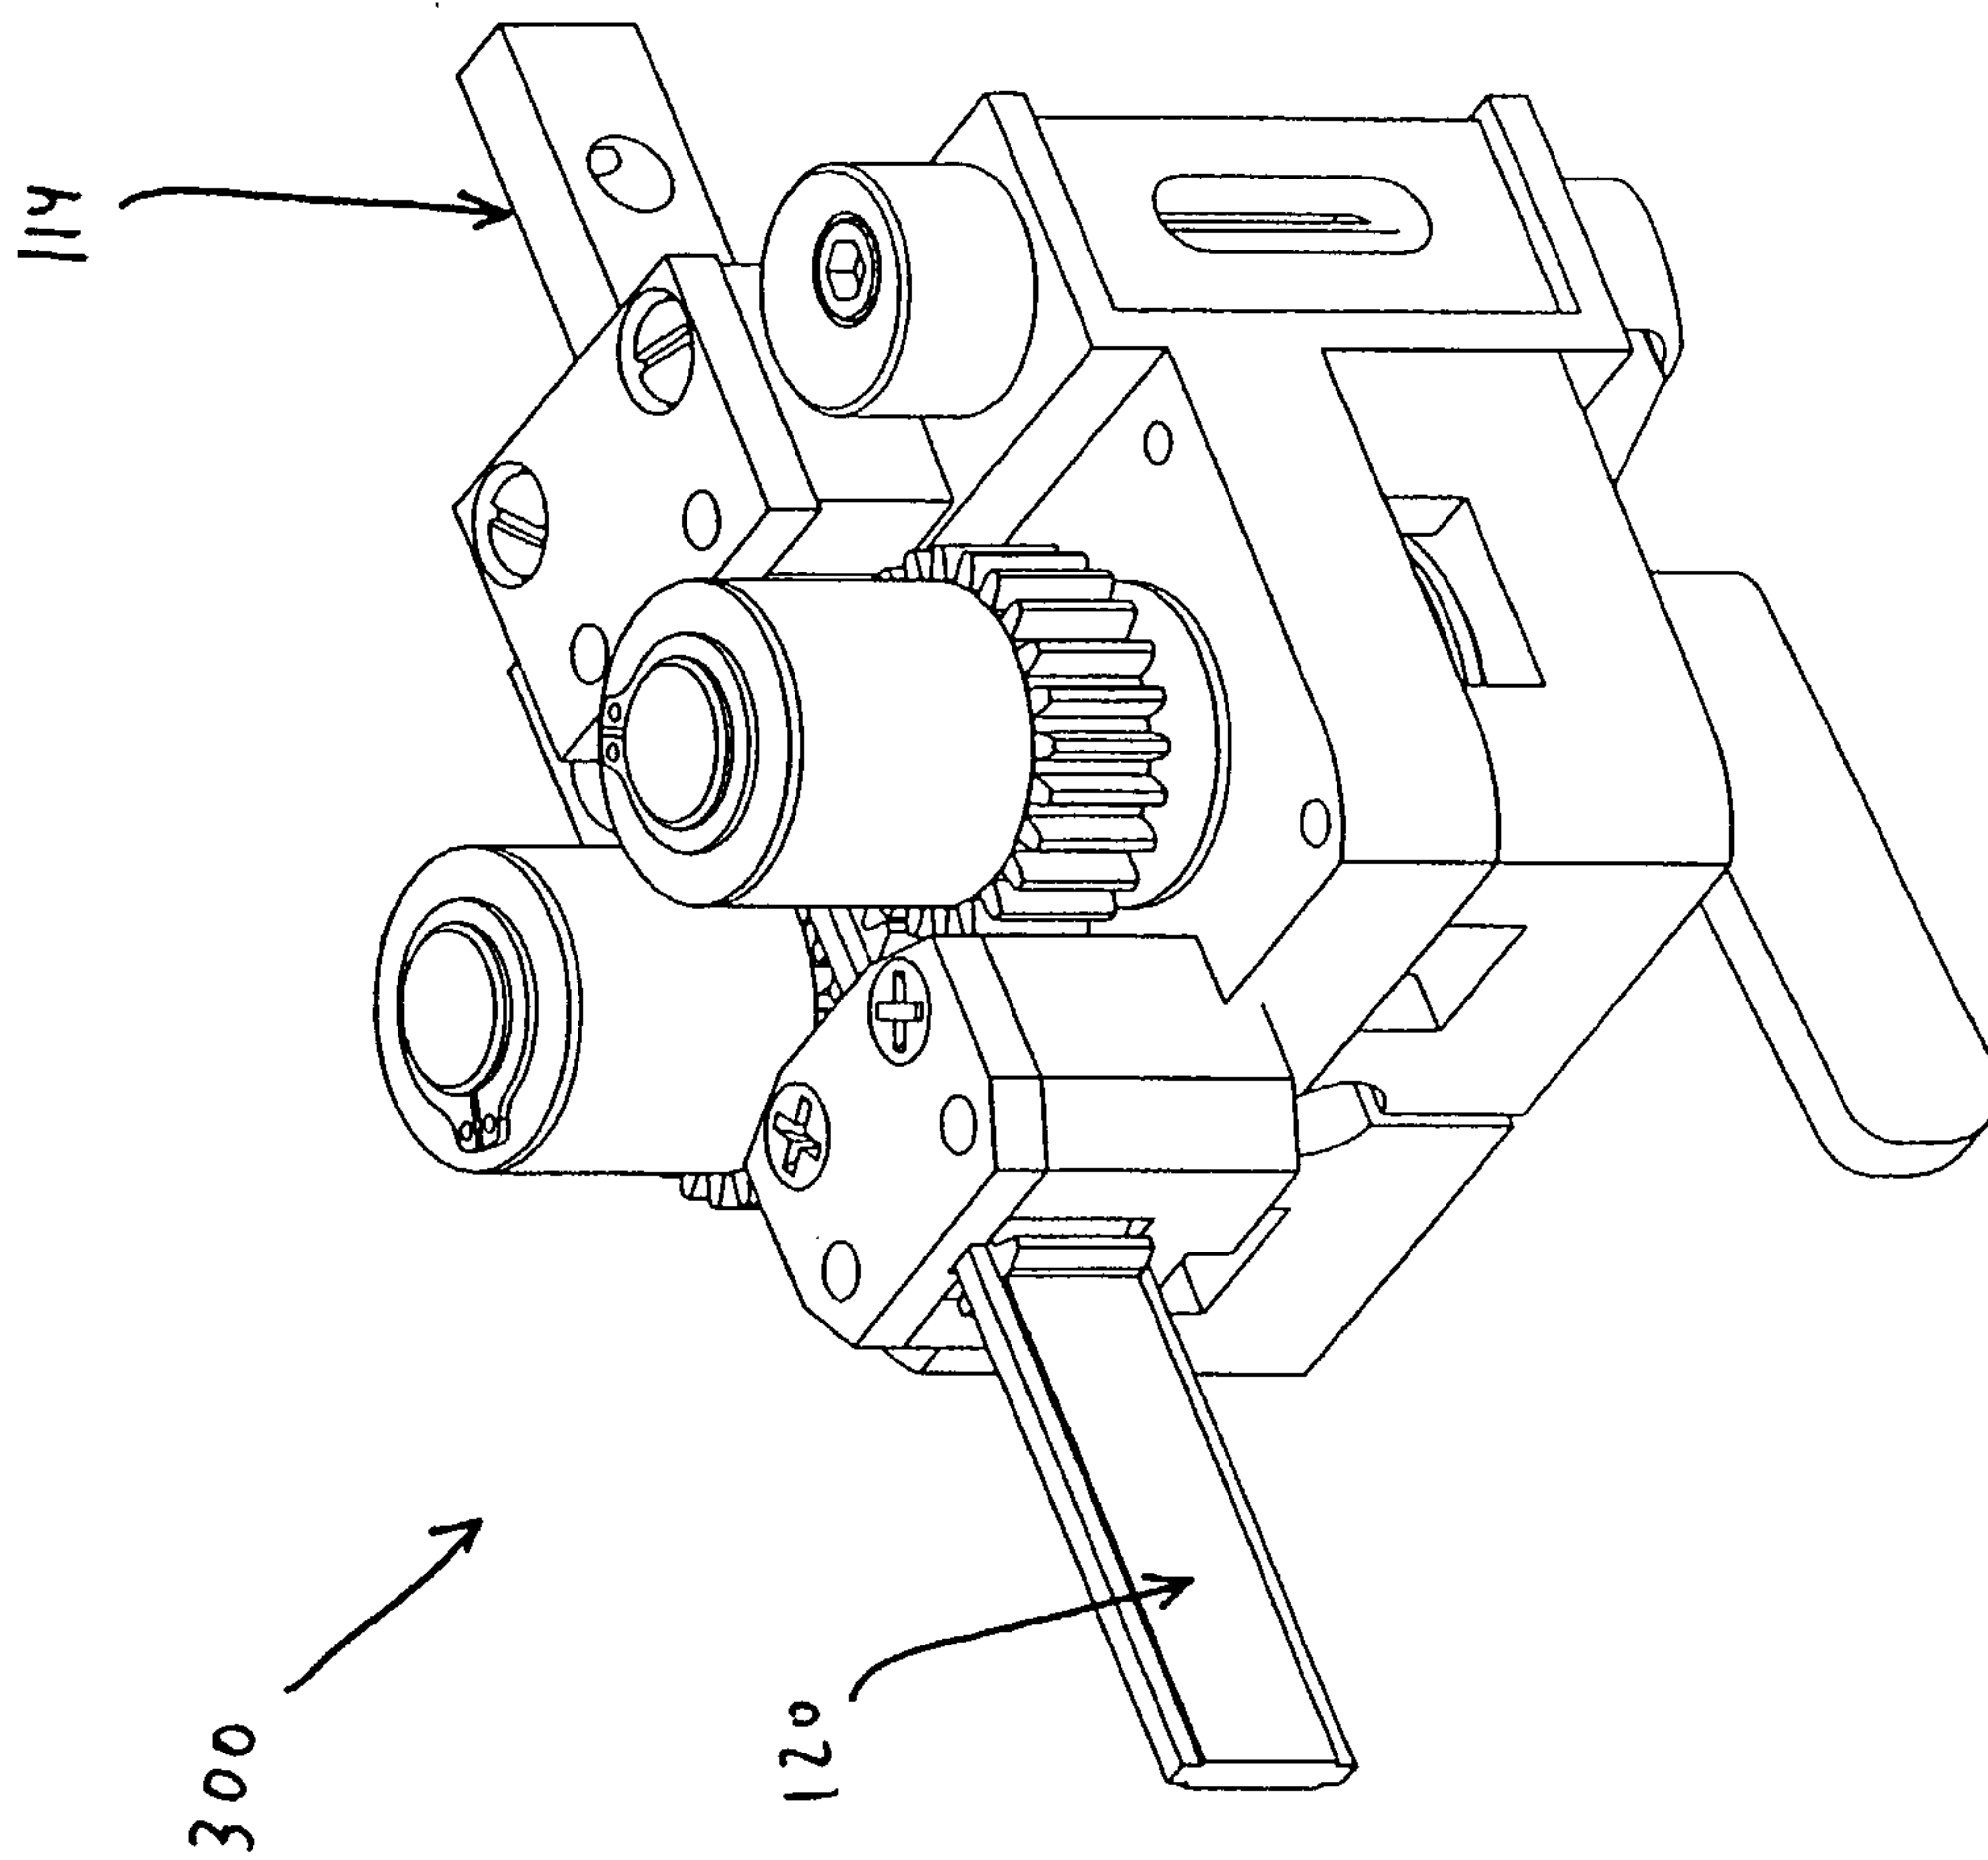
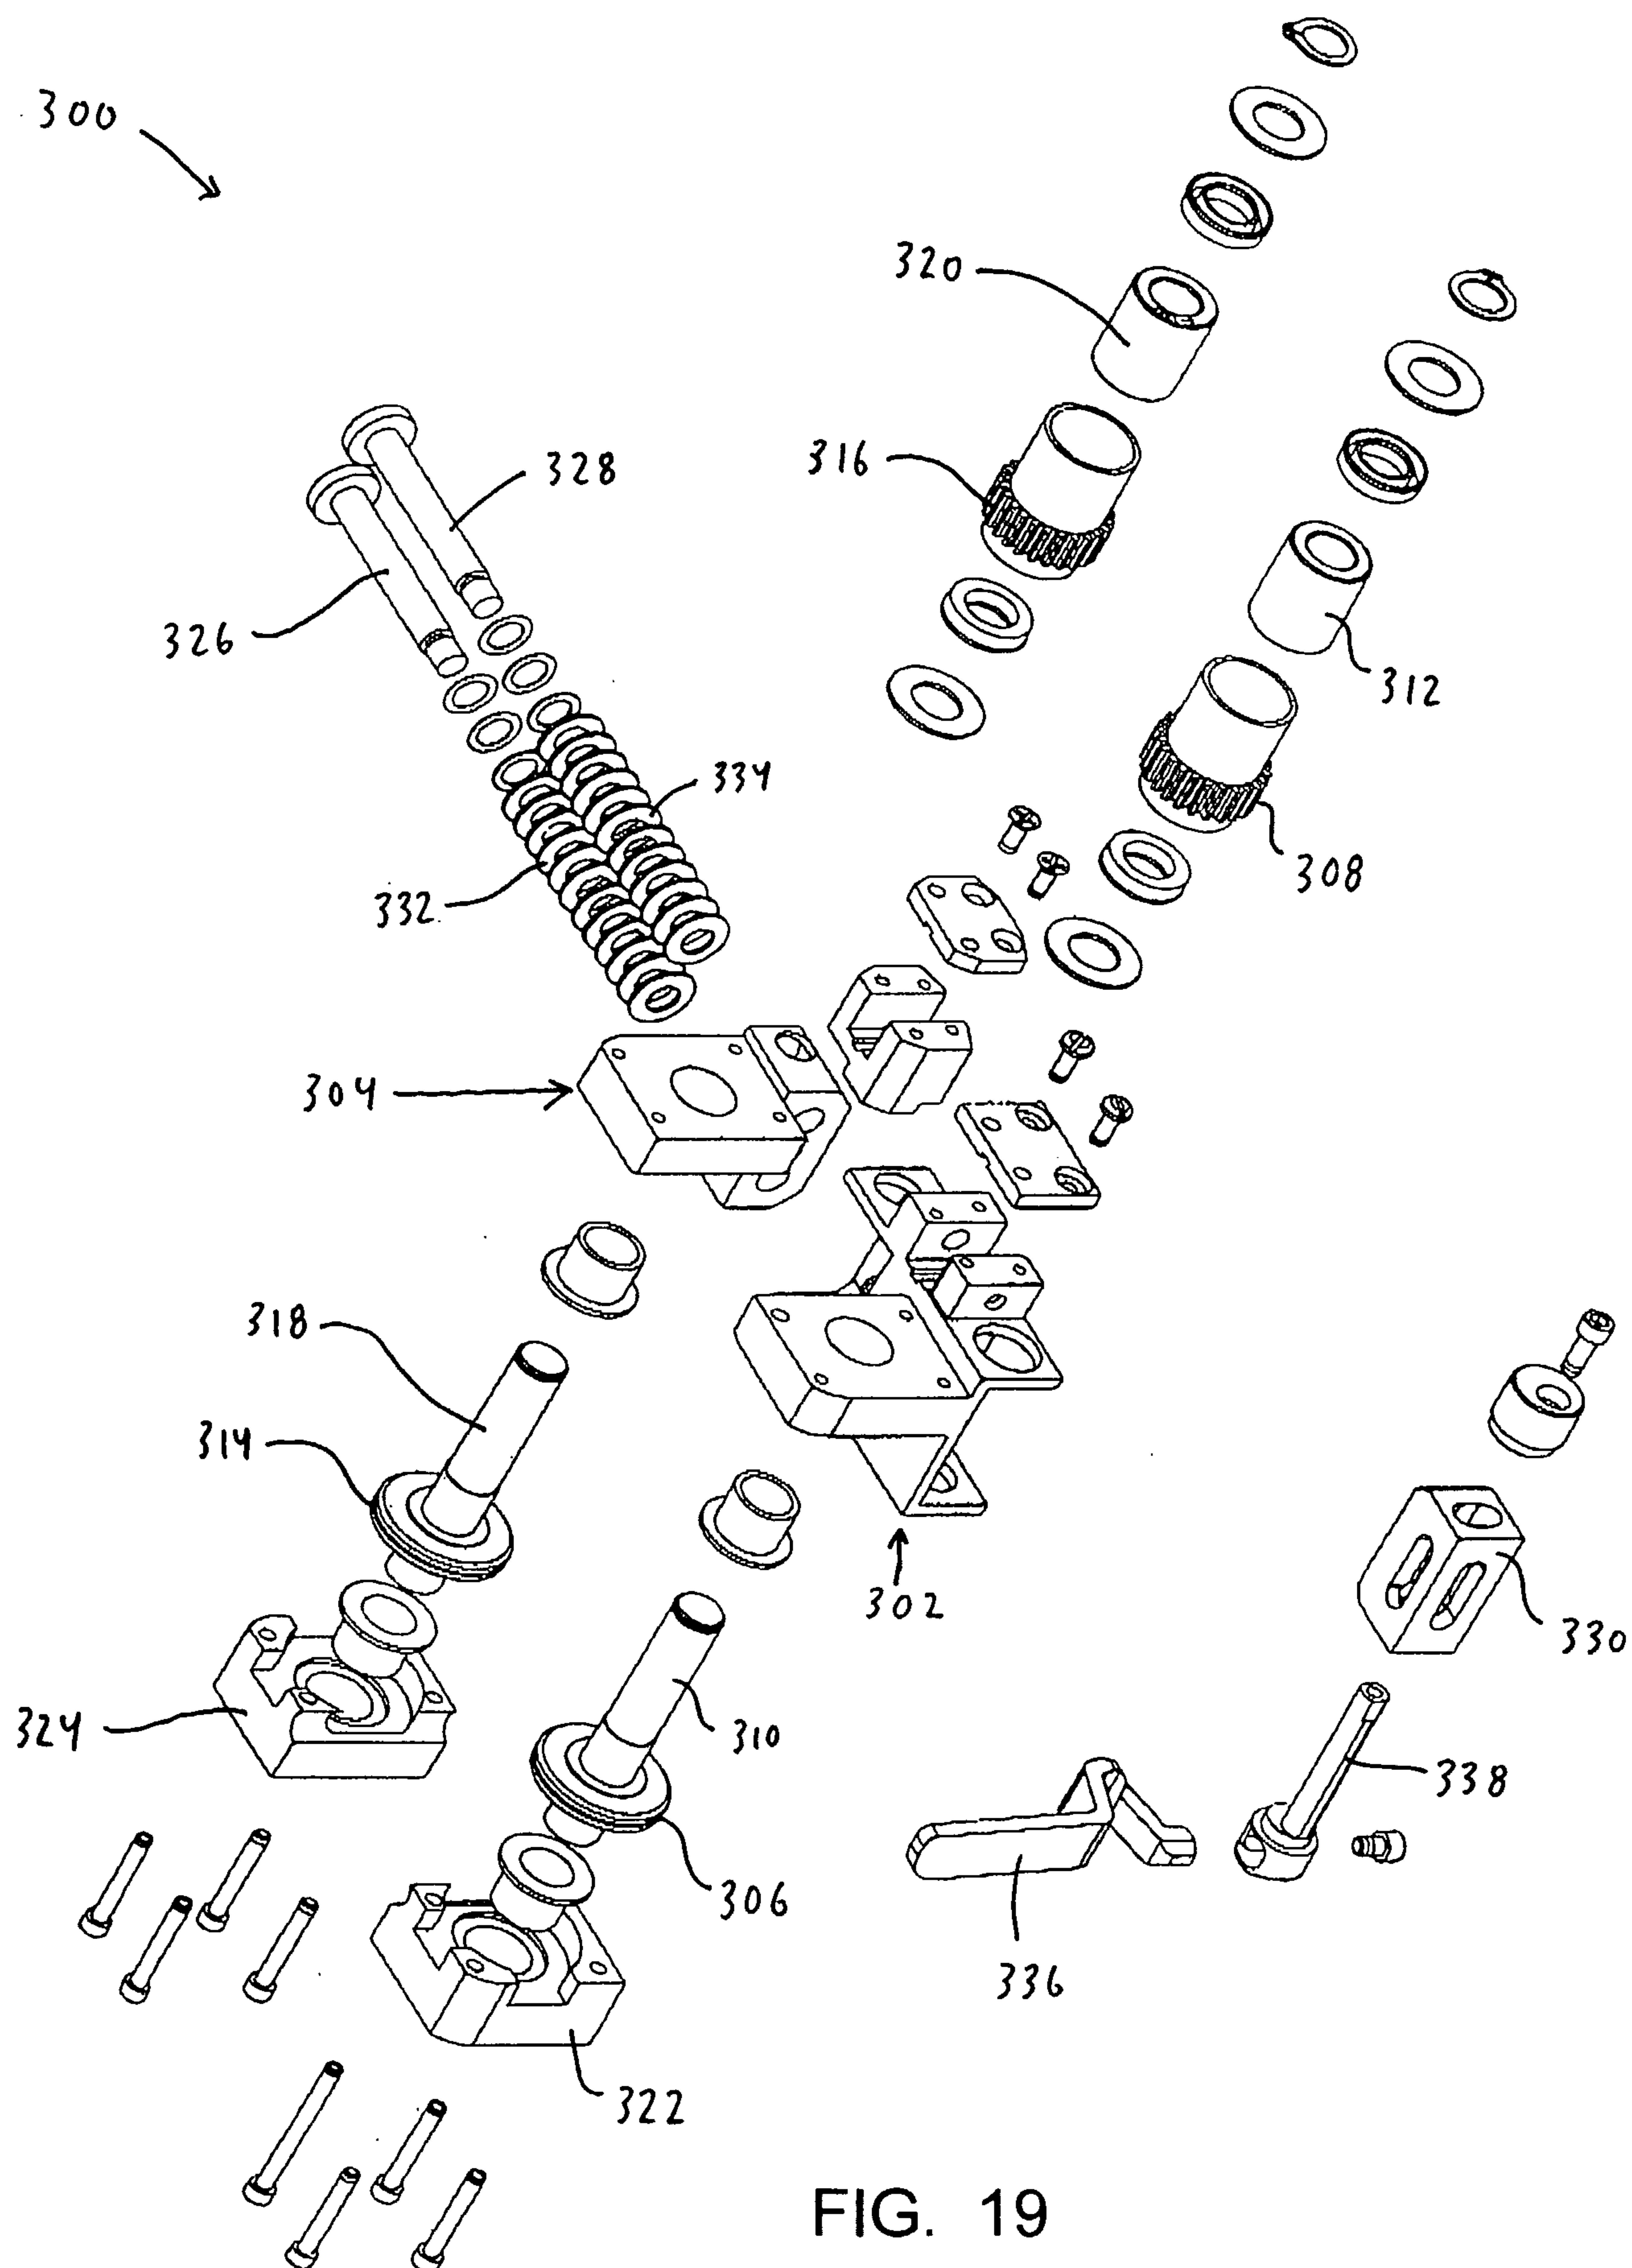


FIG. 18



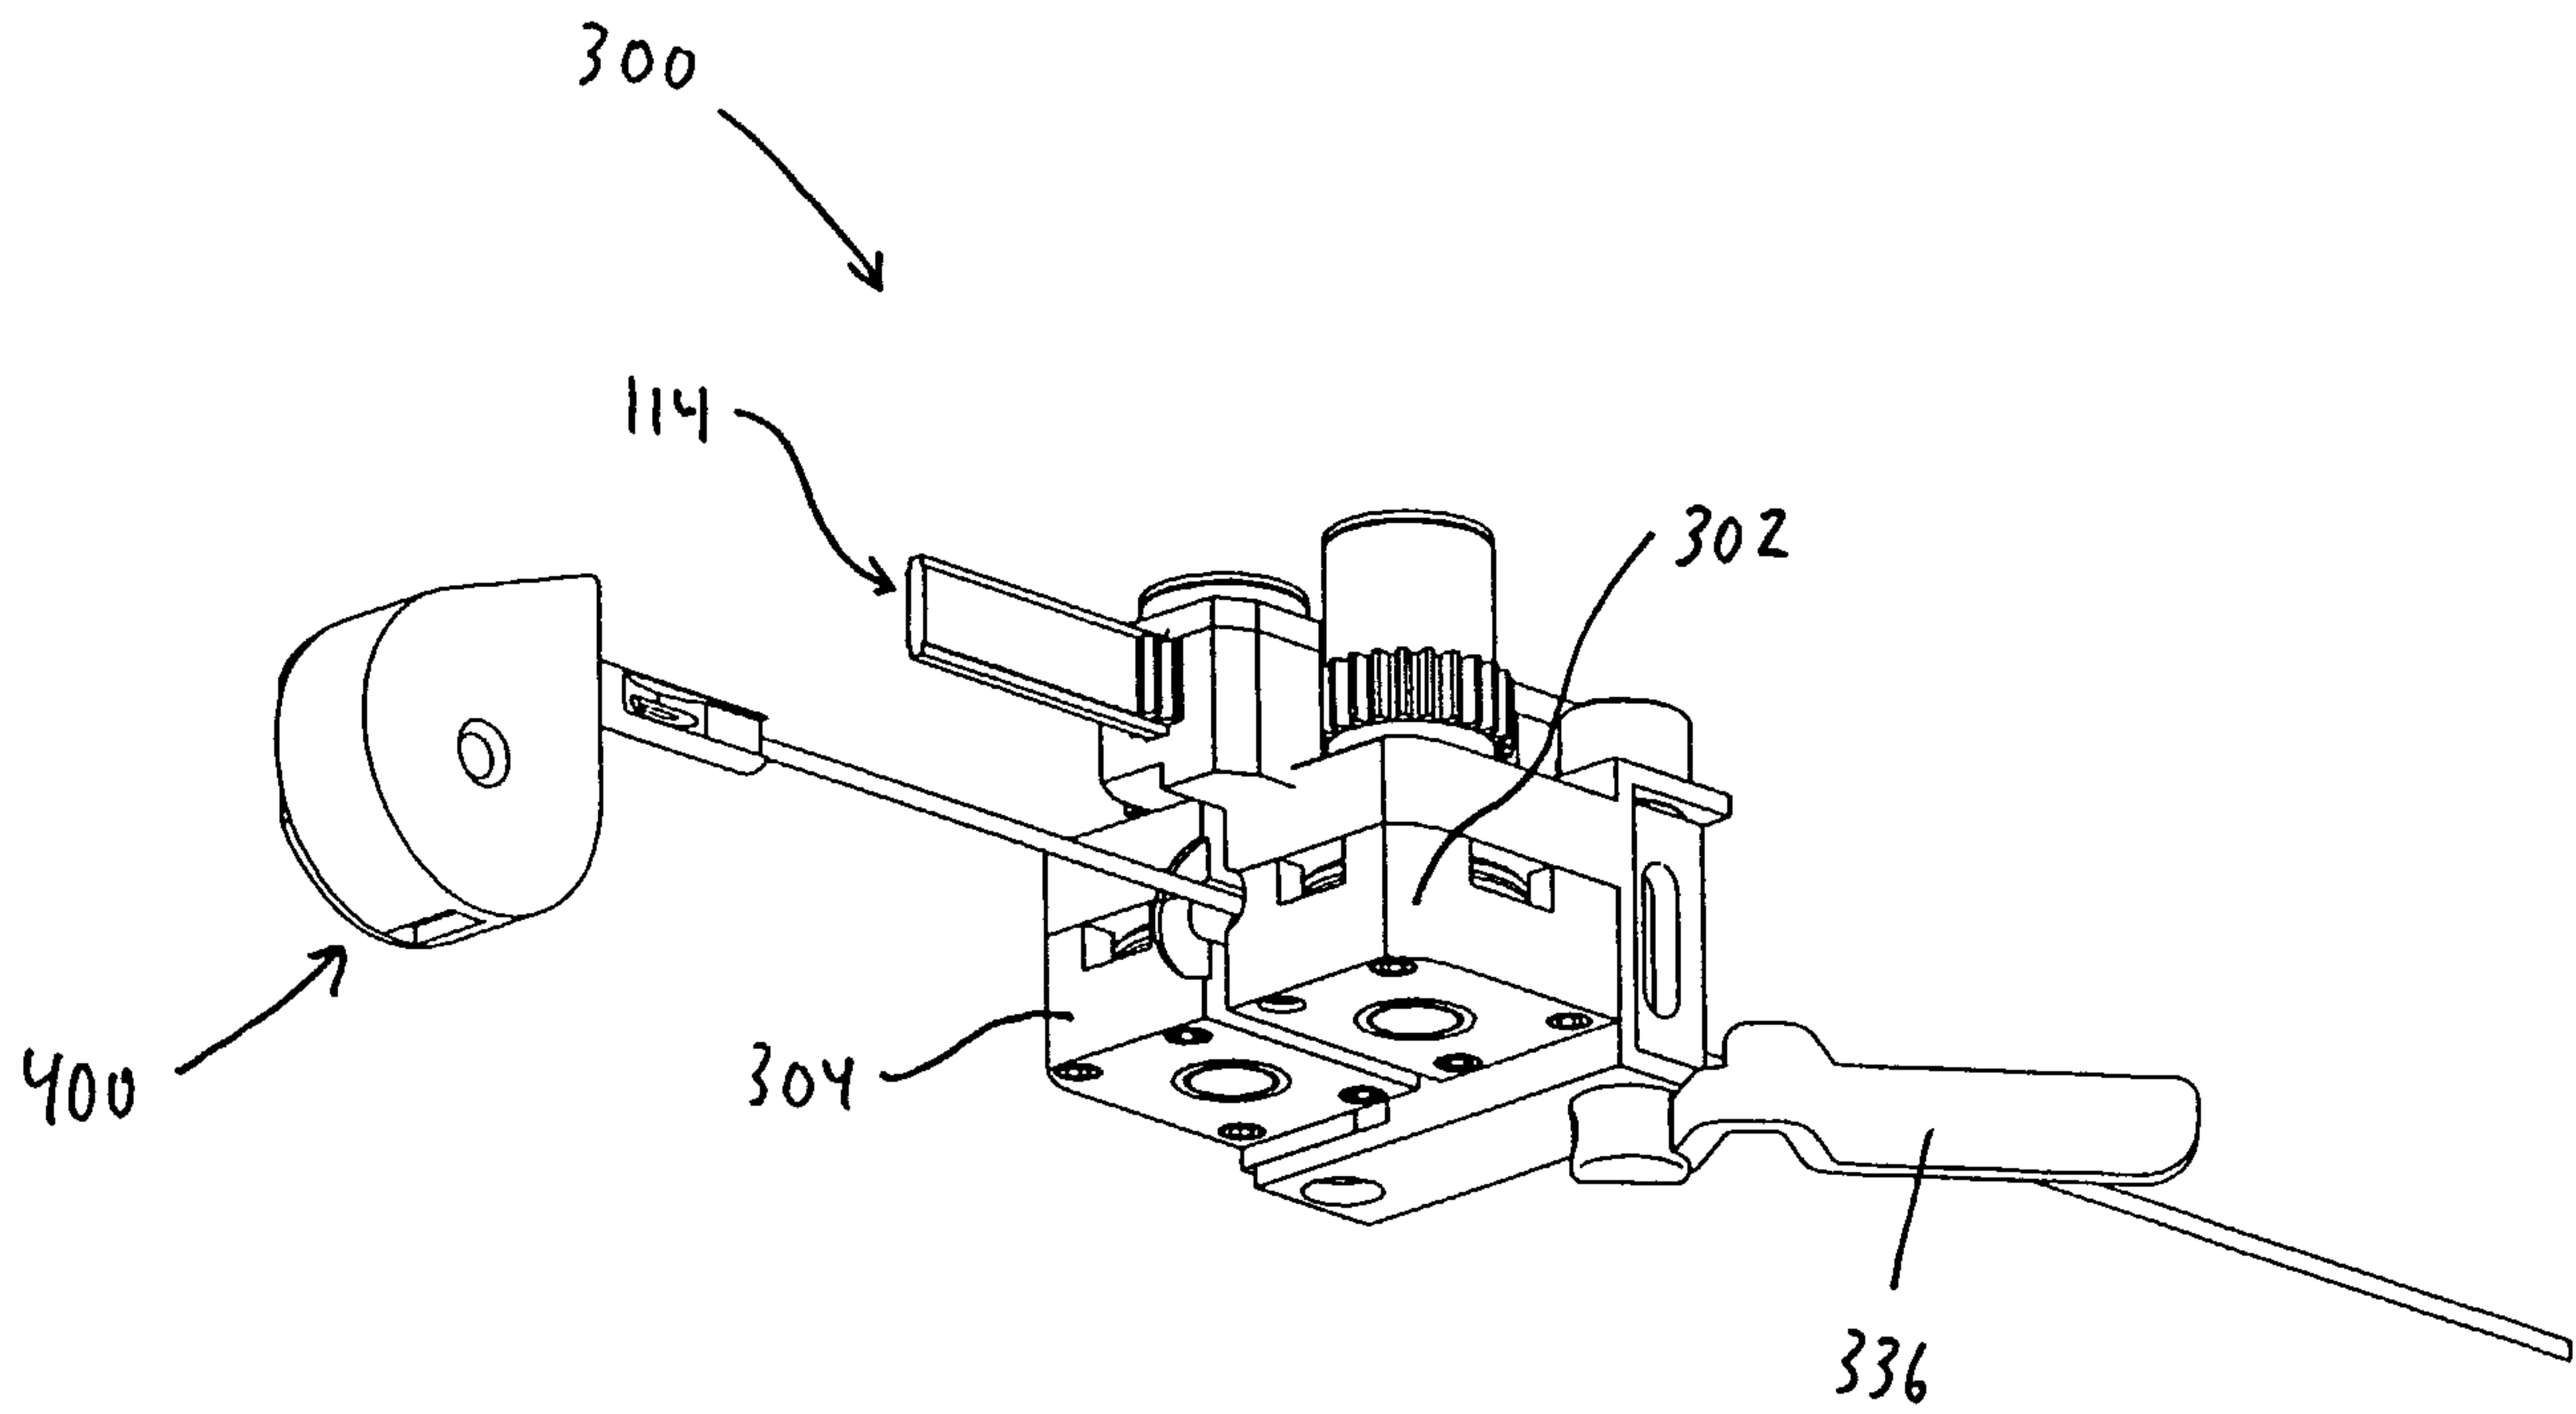


FIG. 20

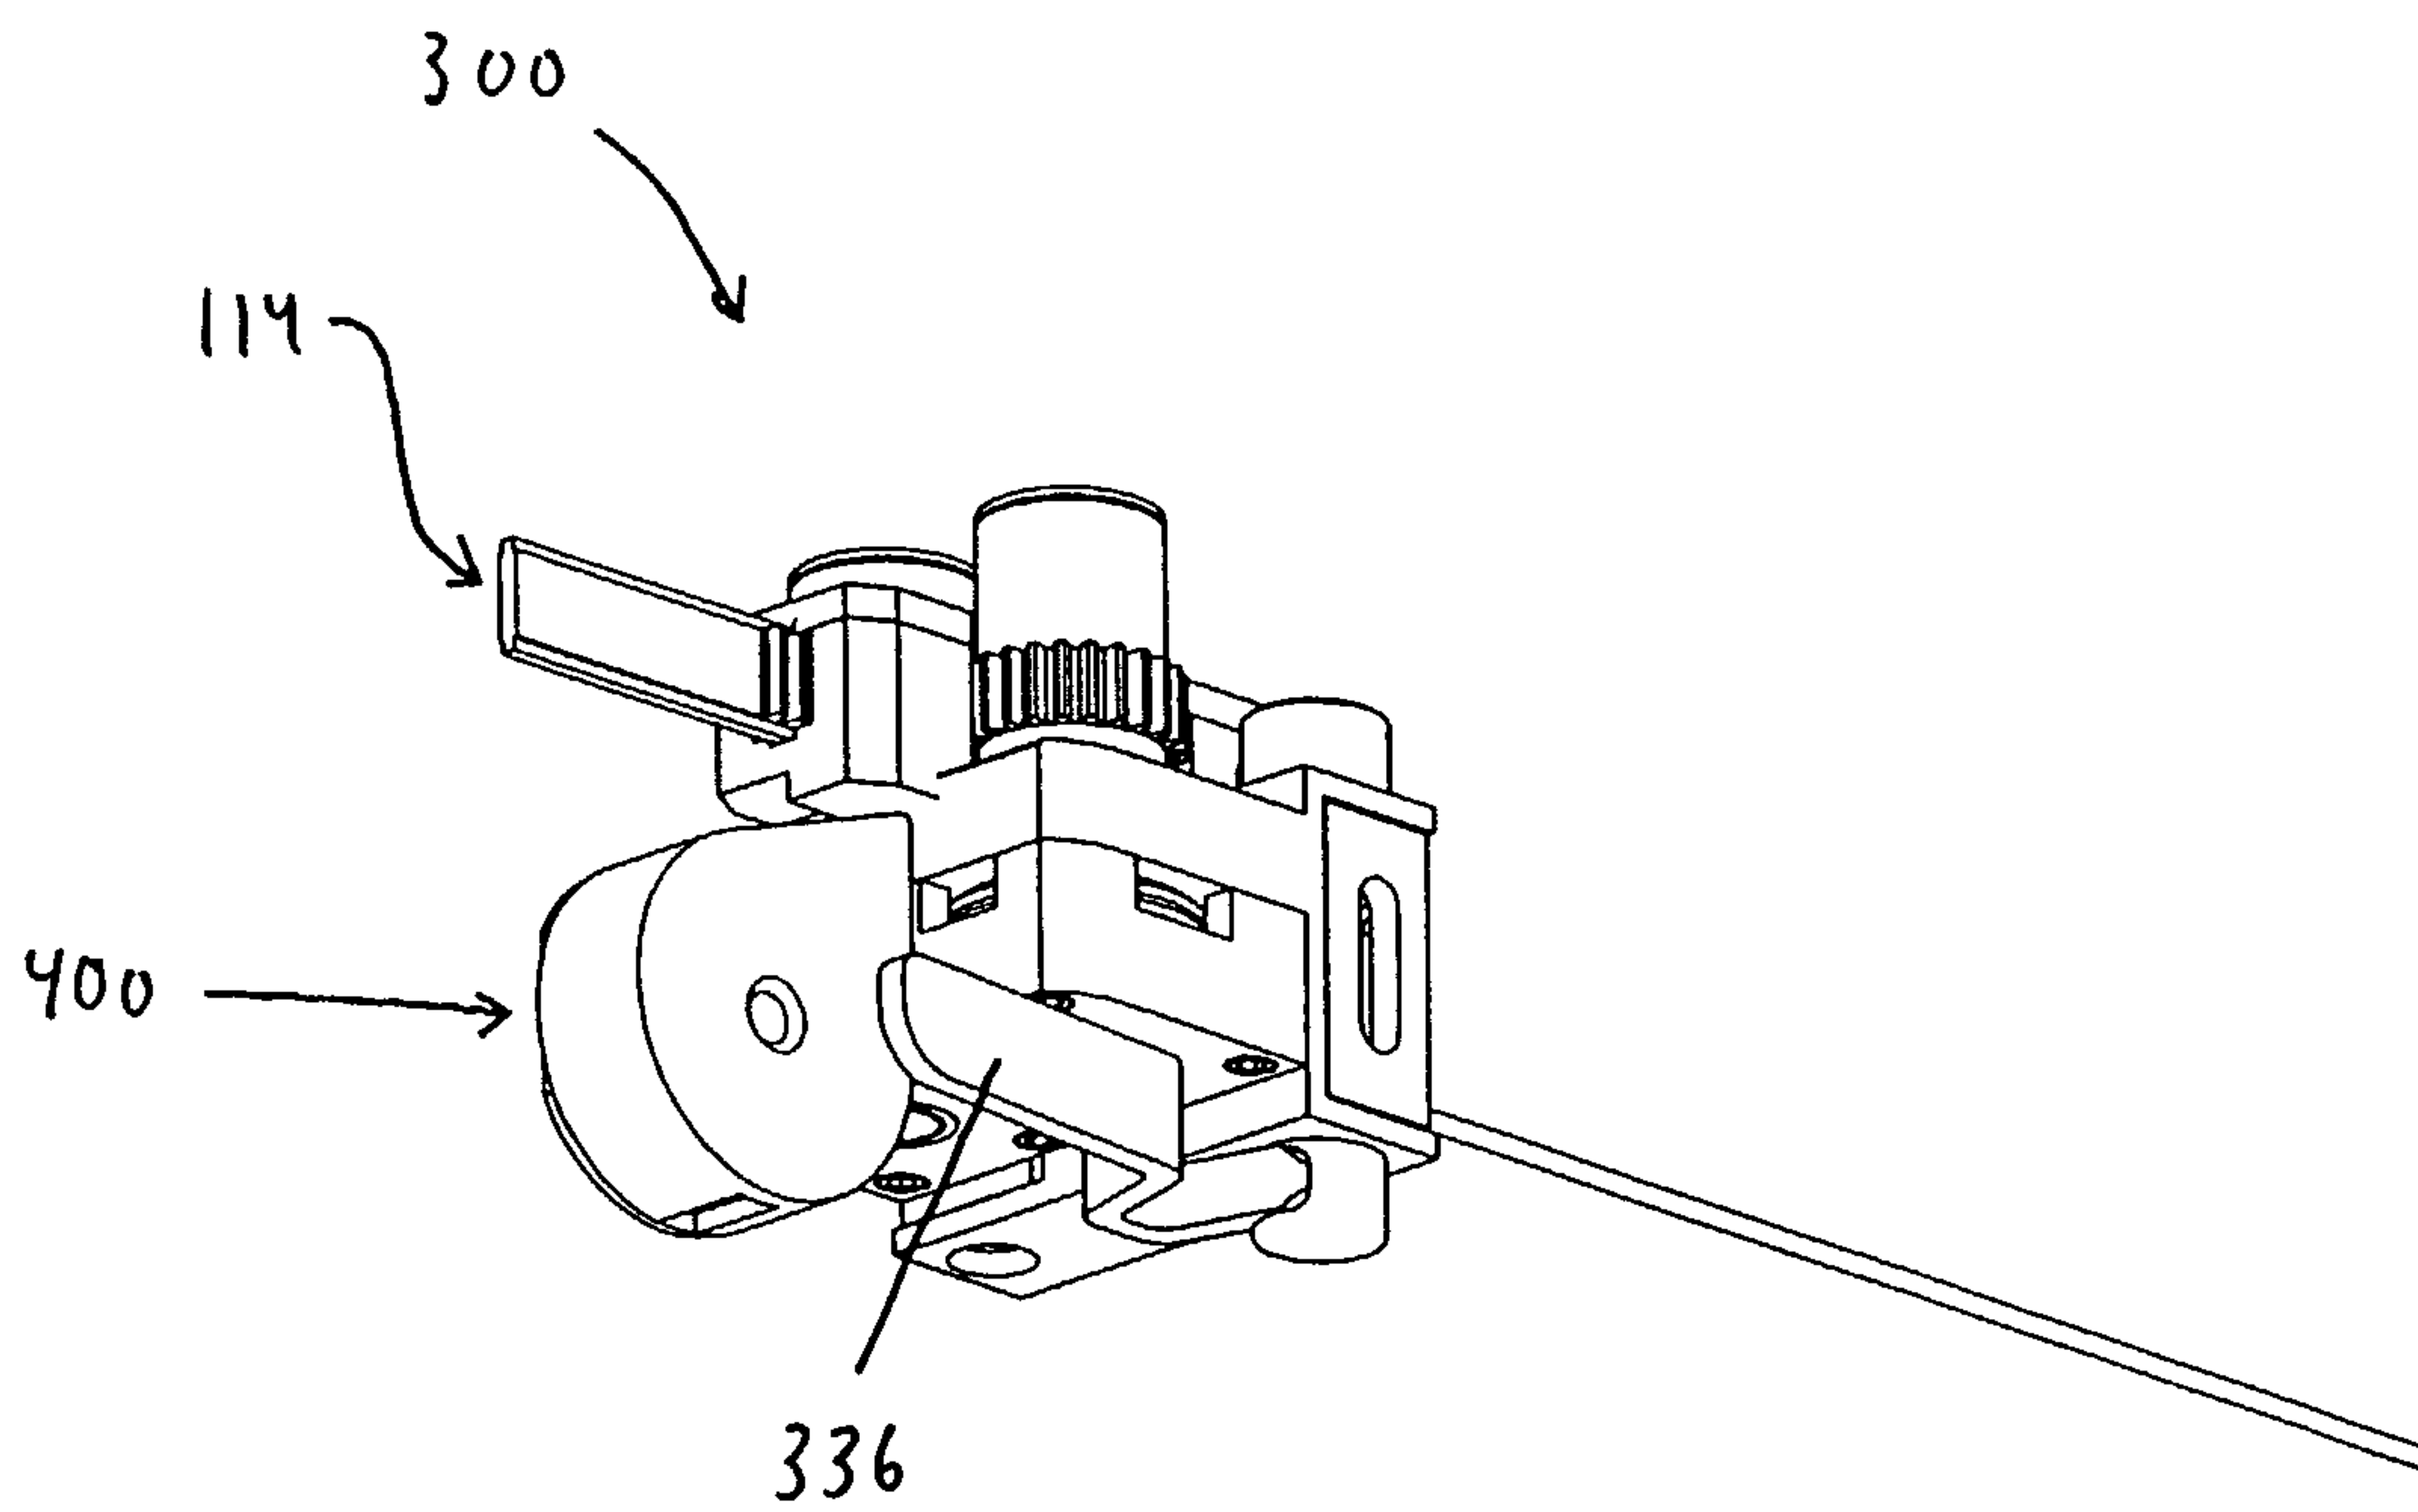


FIG. 21

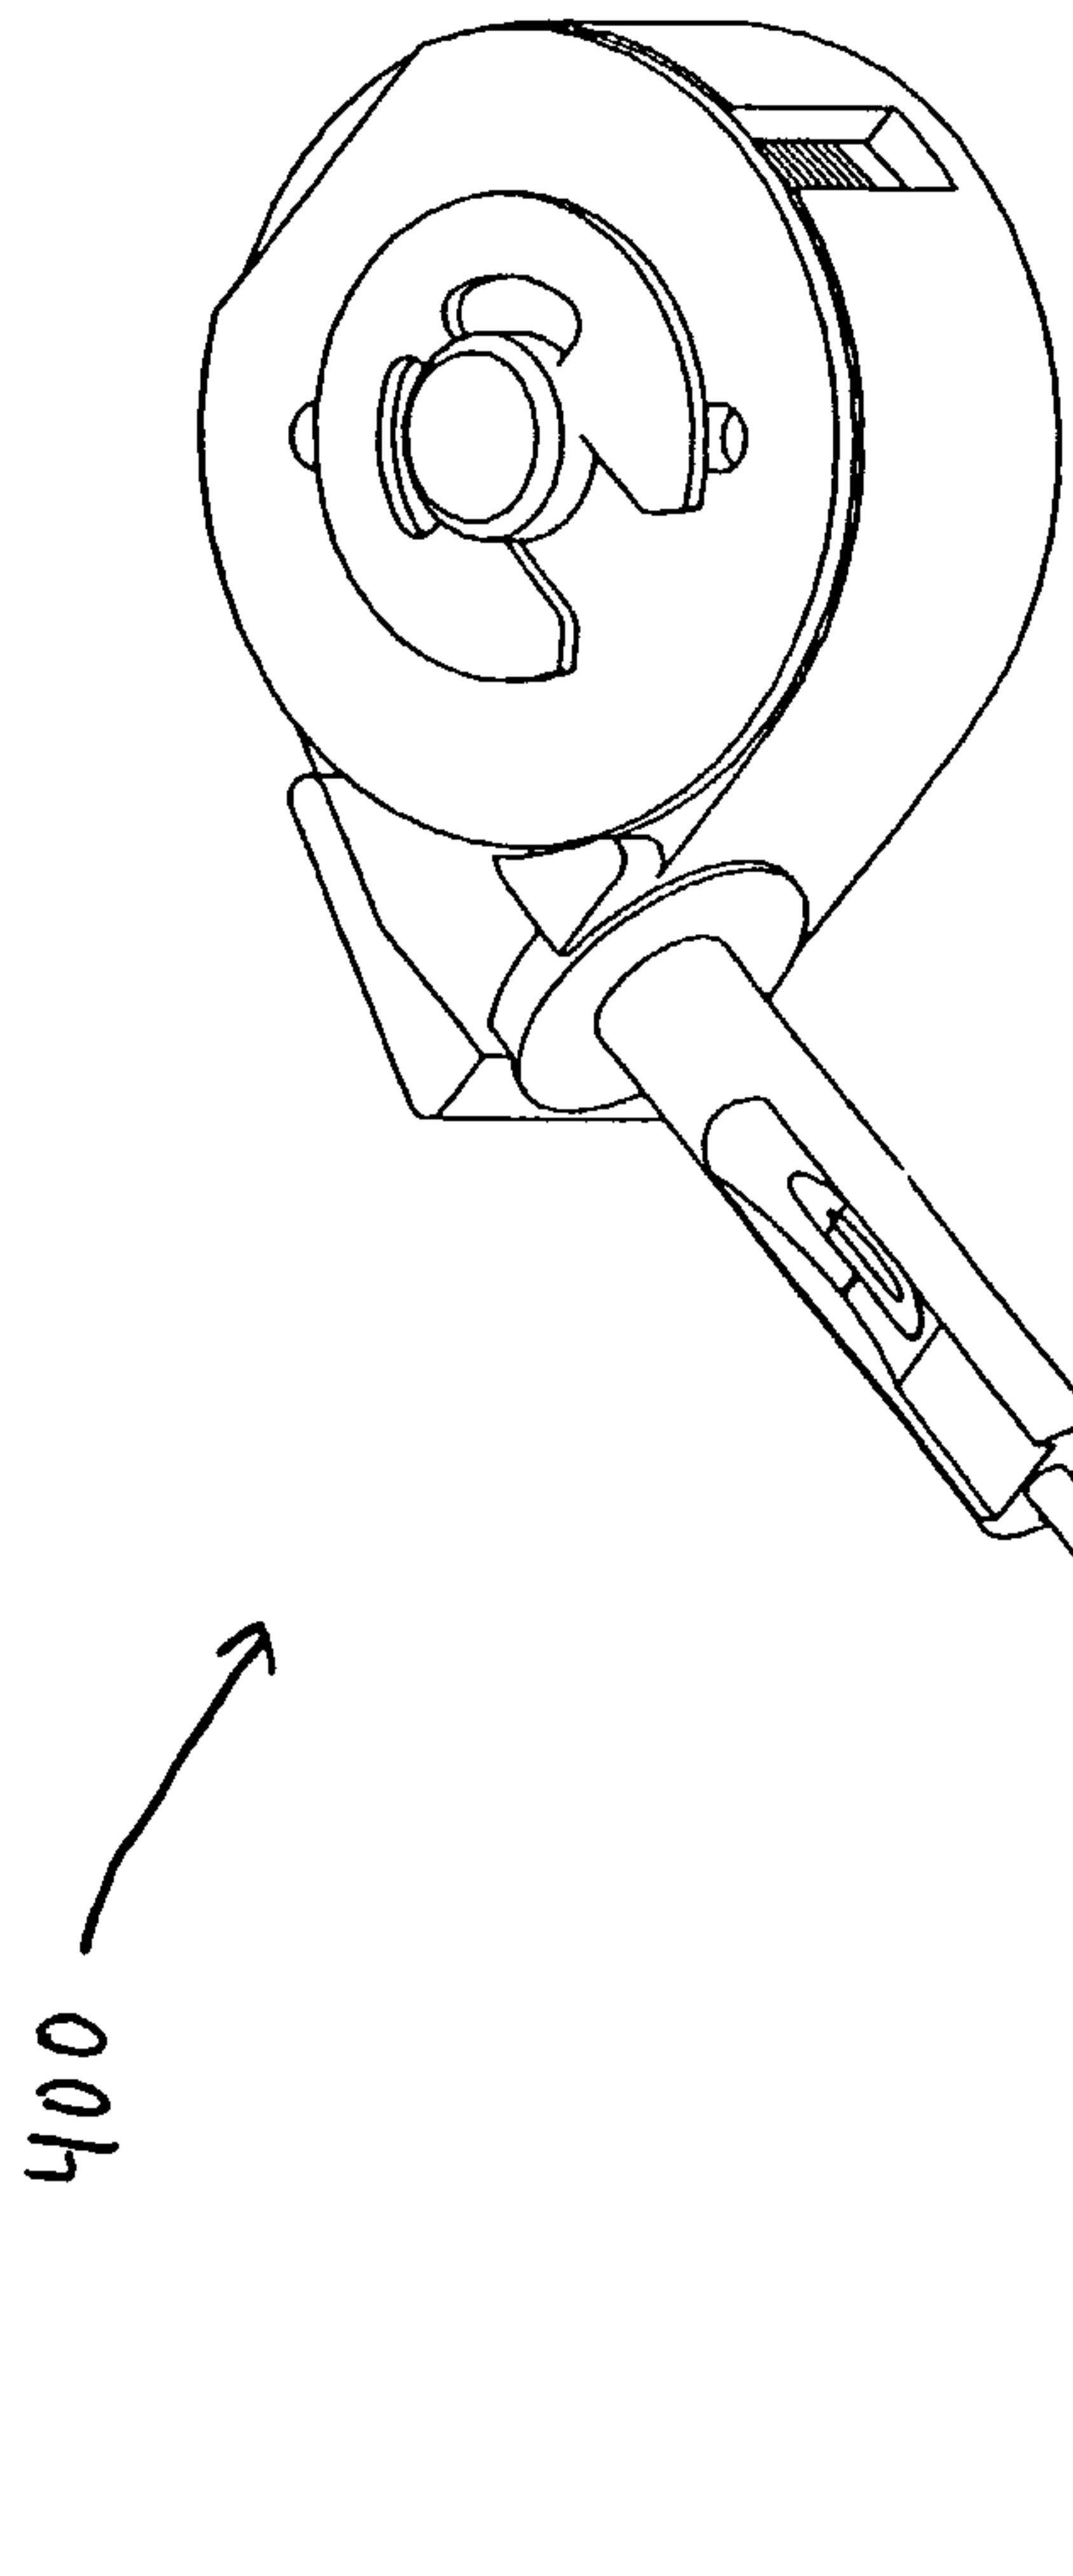


FIG. 22

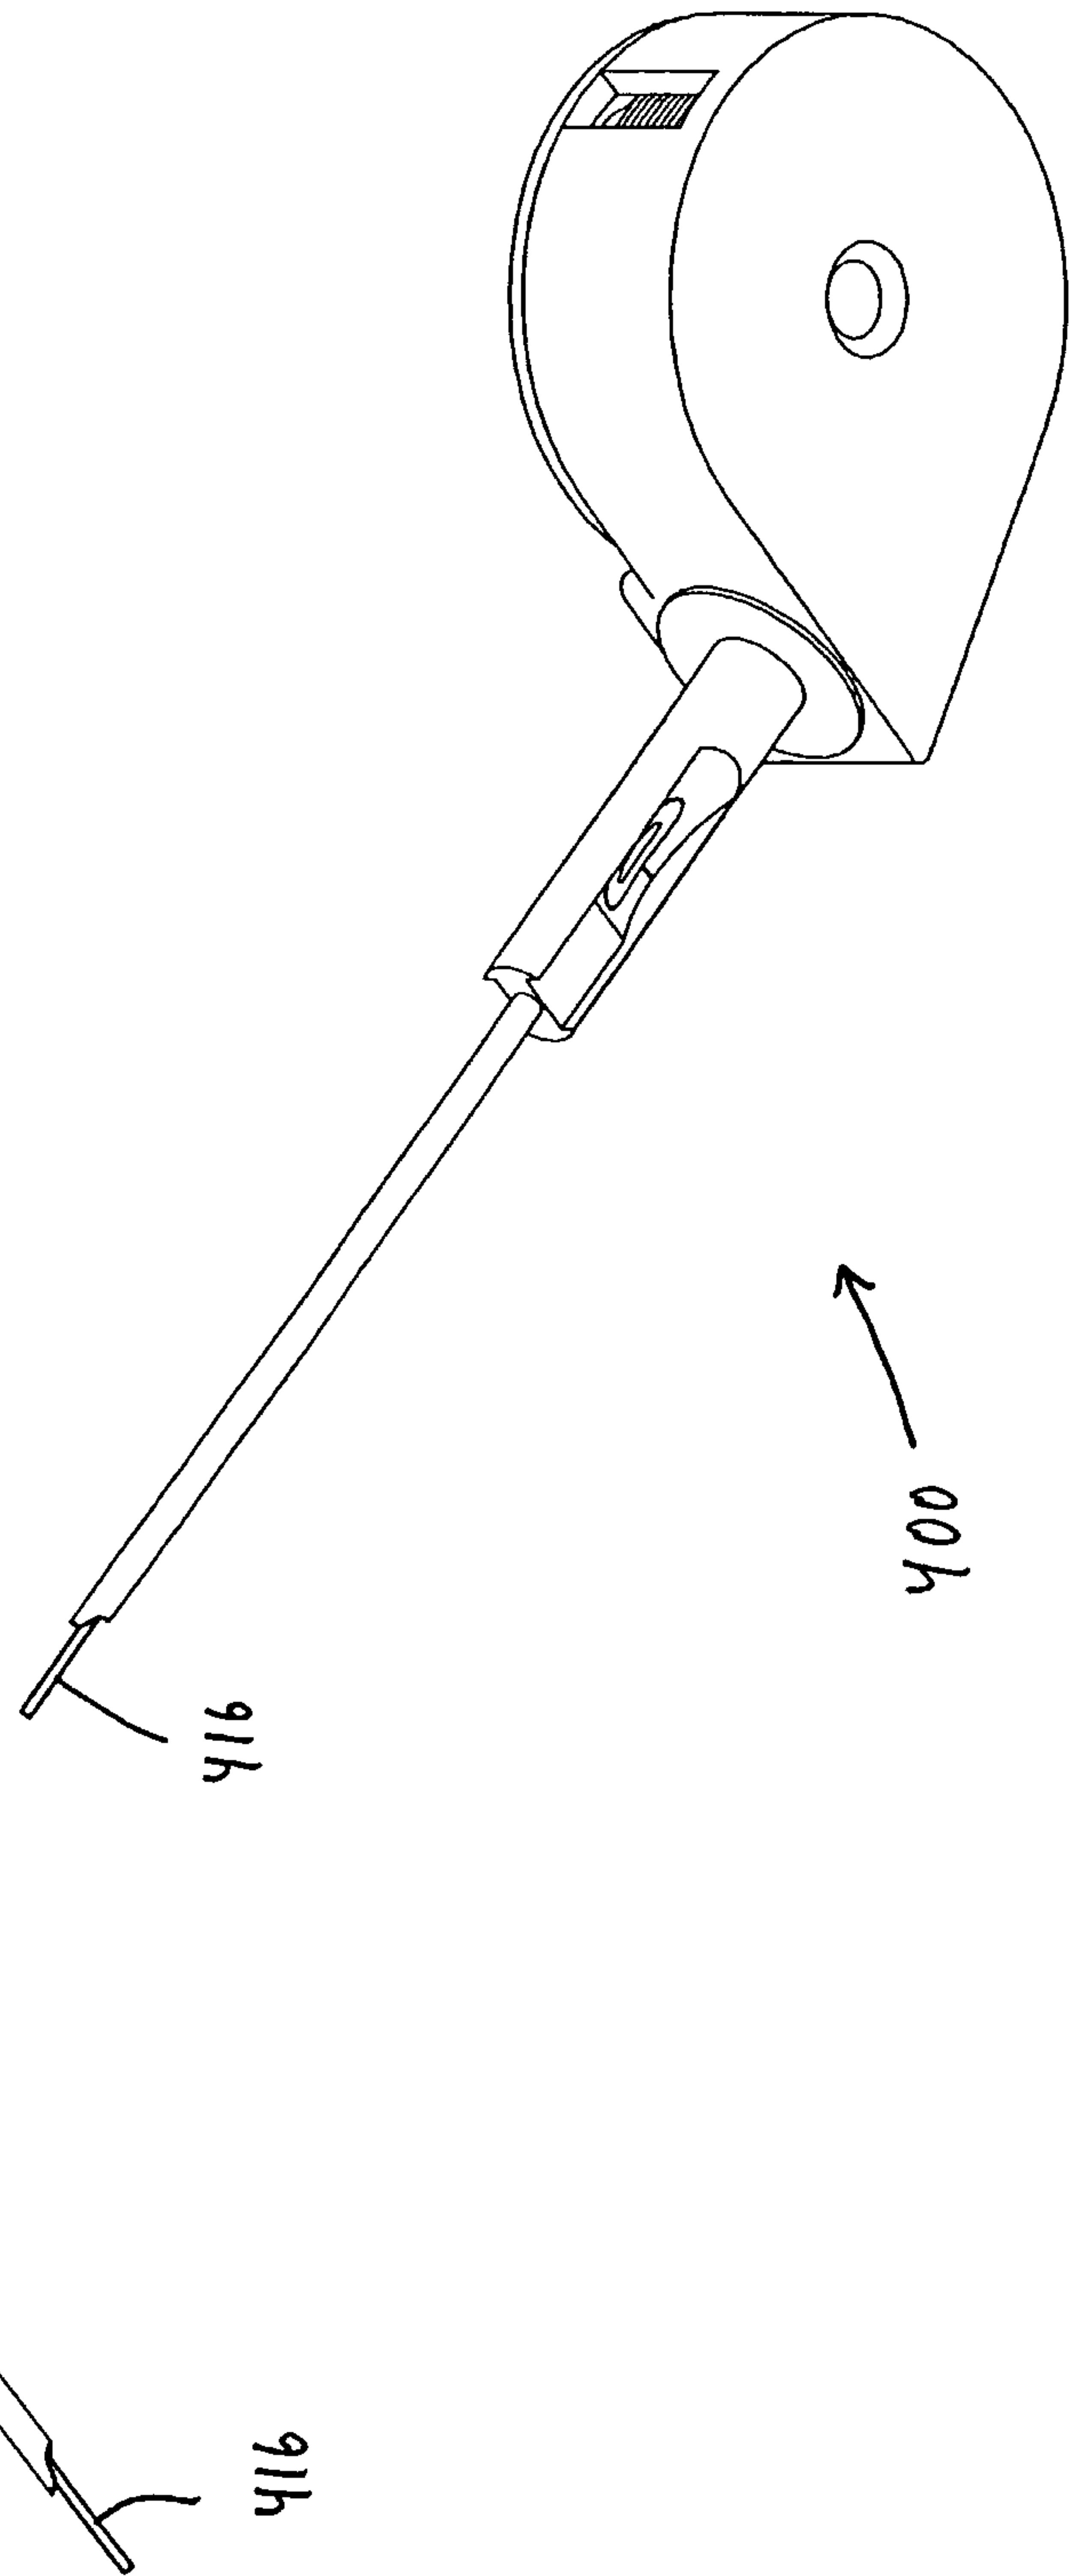


FIG. 23

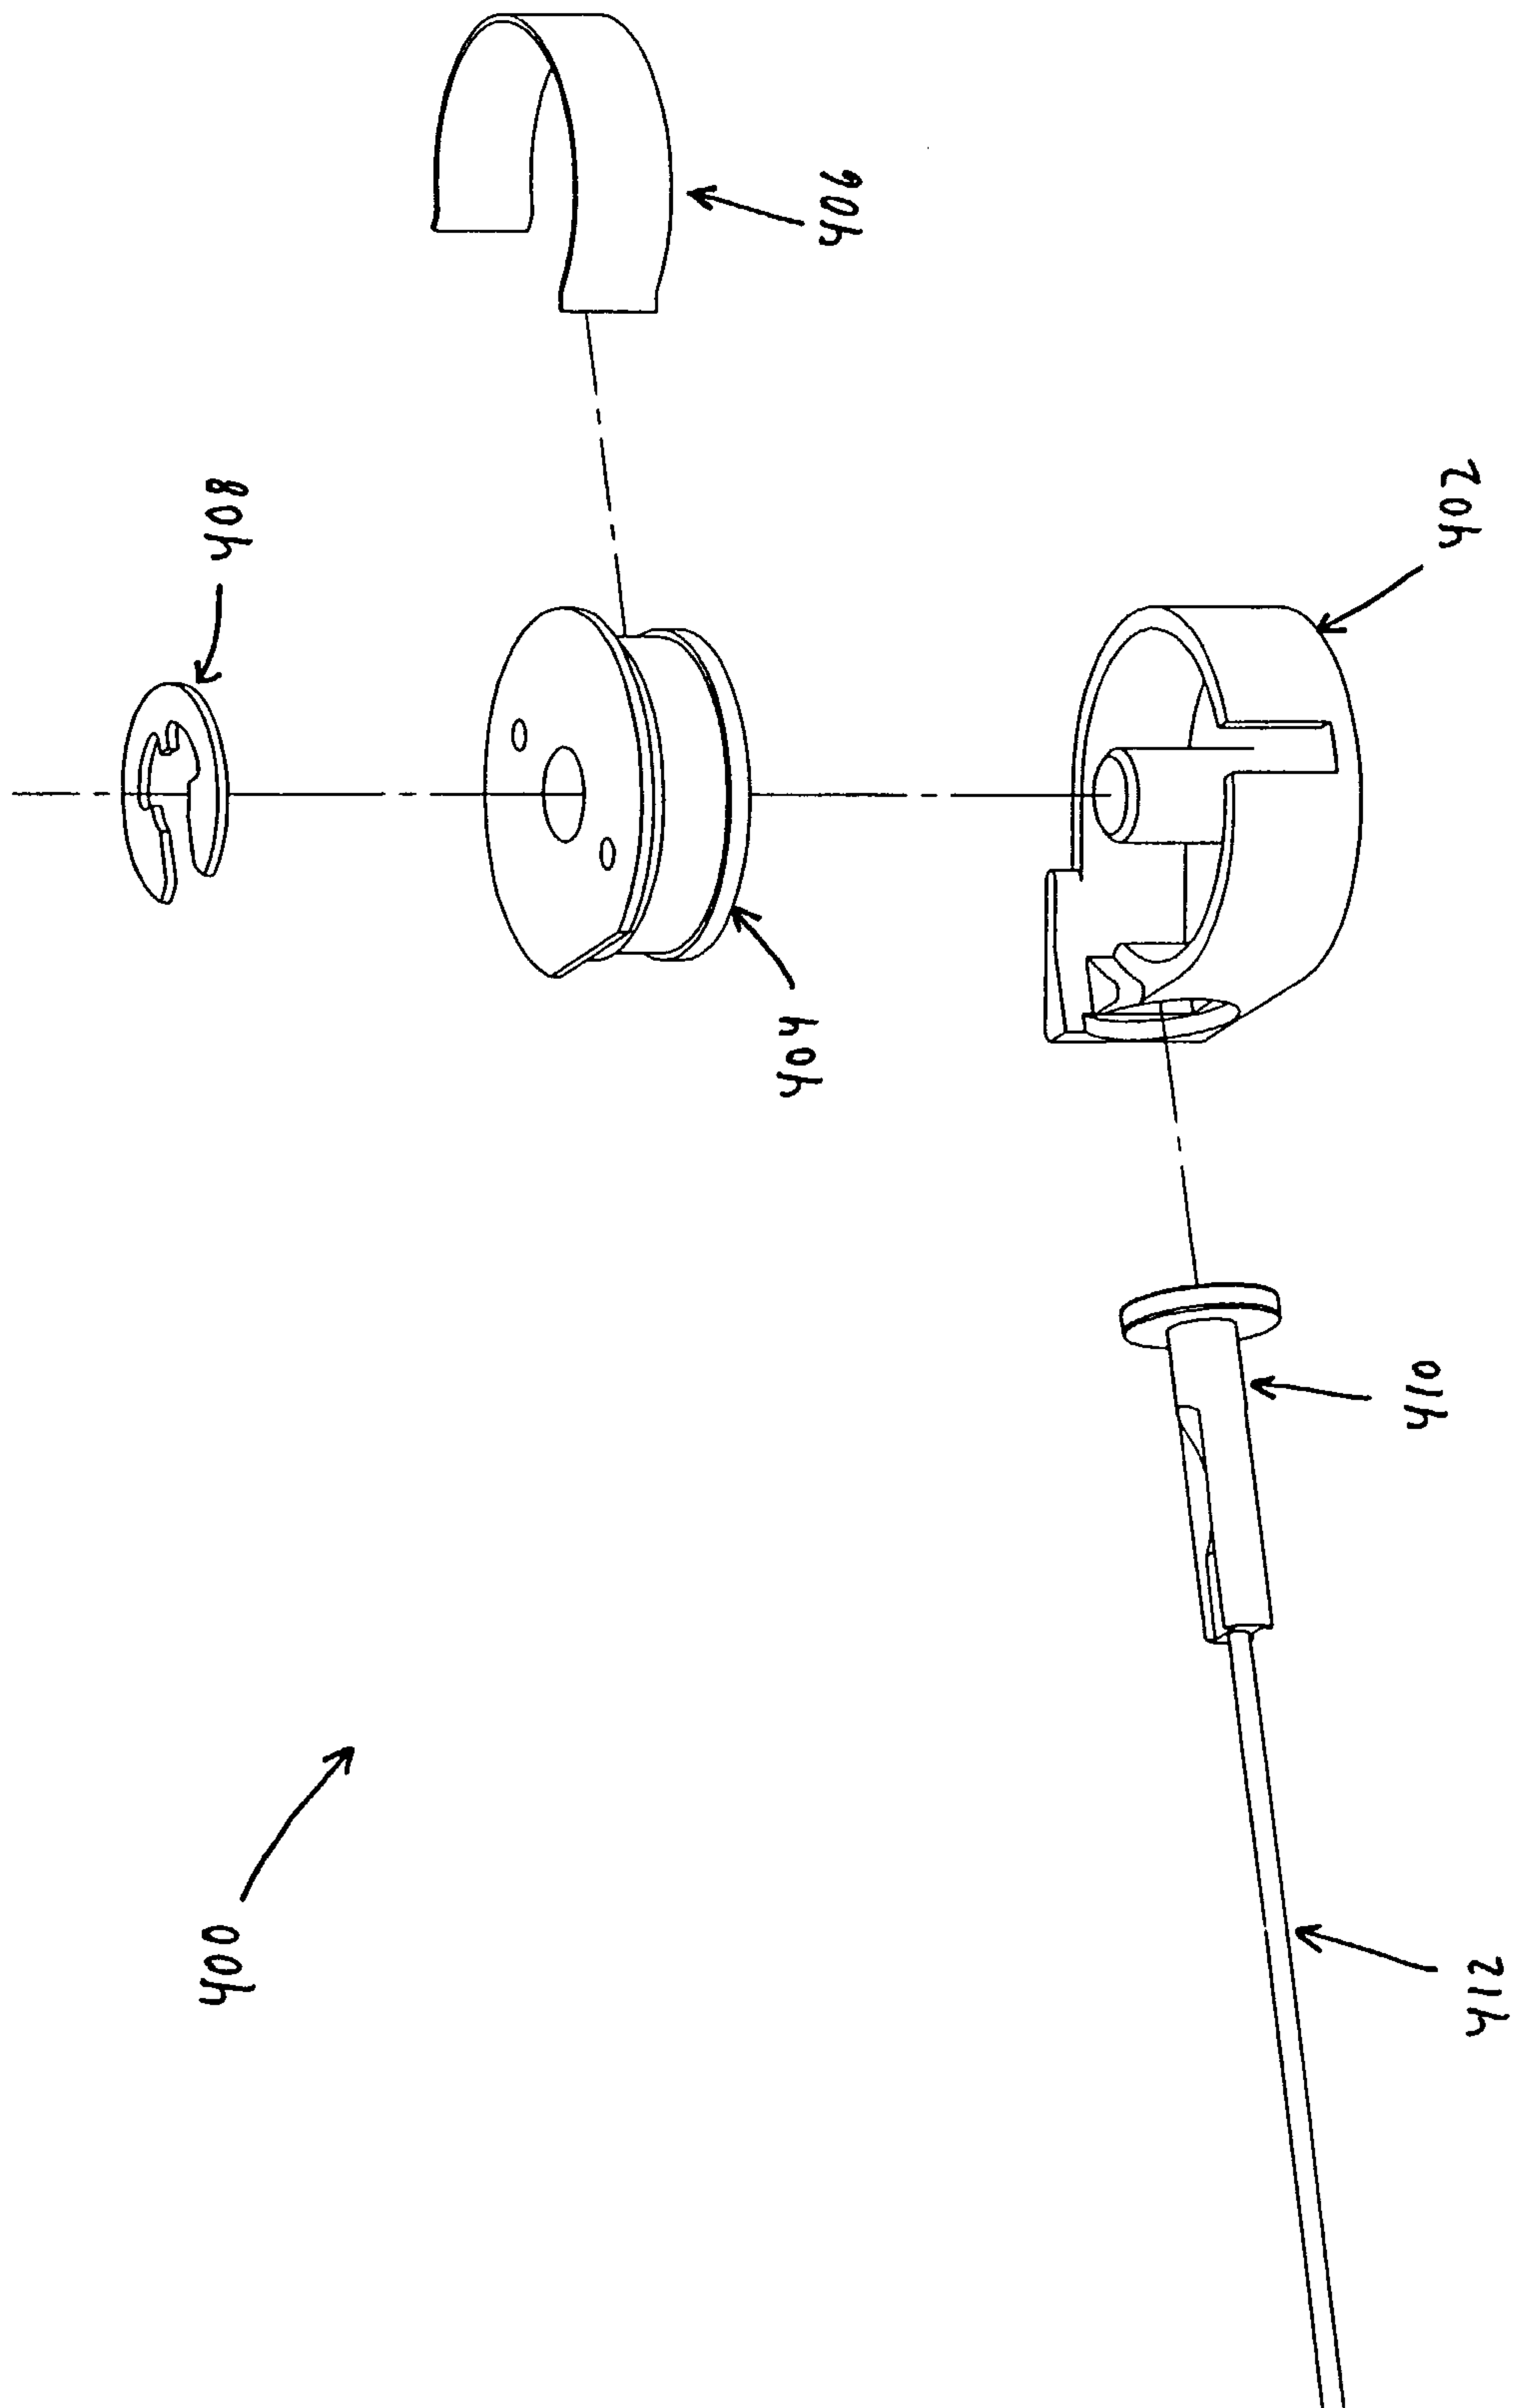


FIG. 24

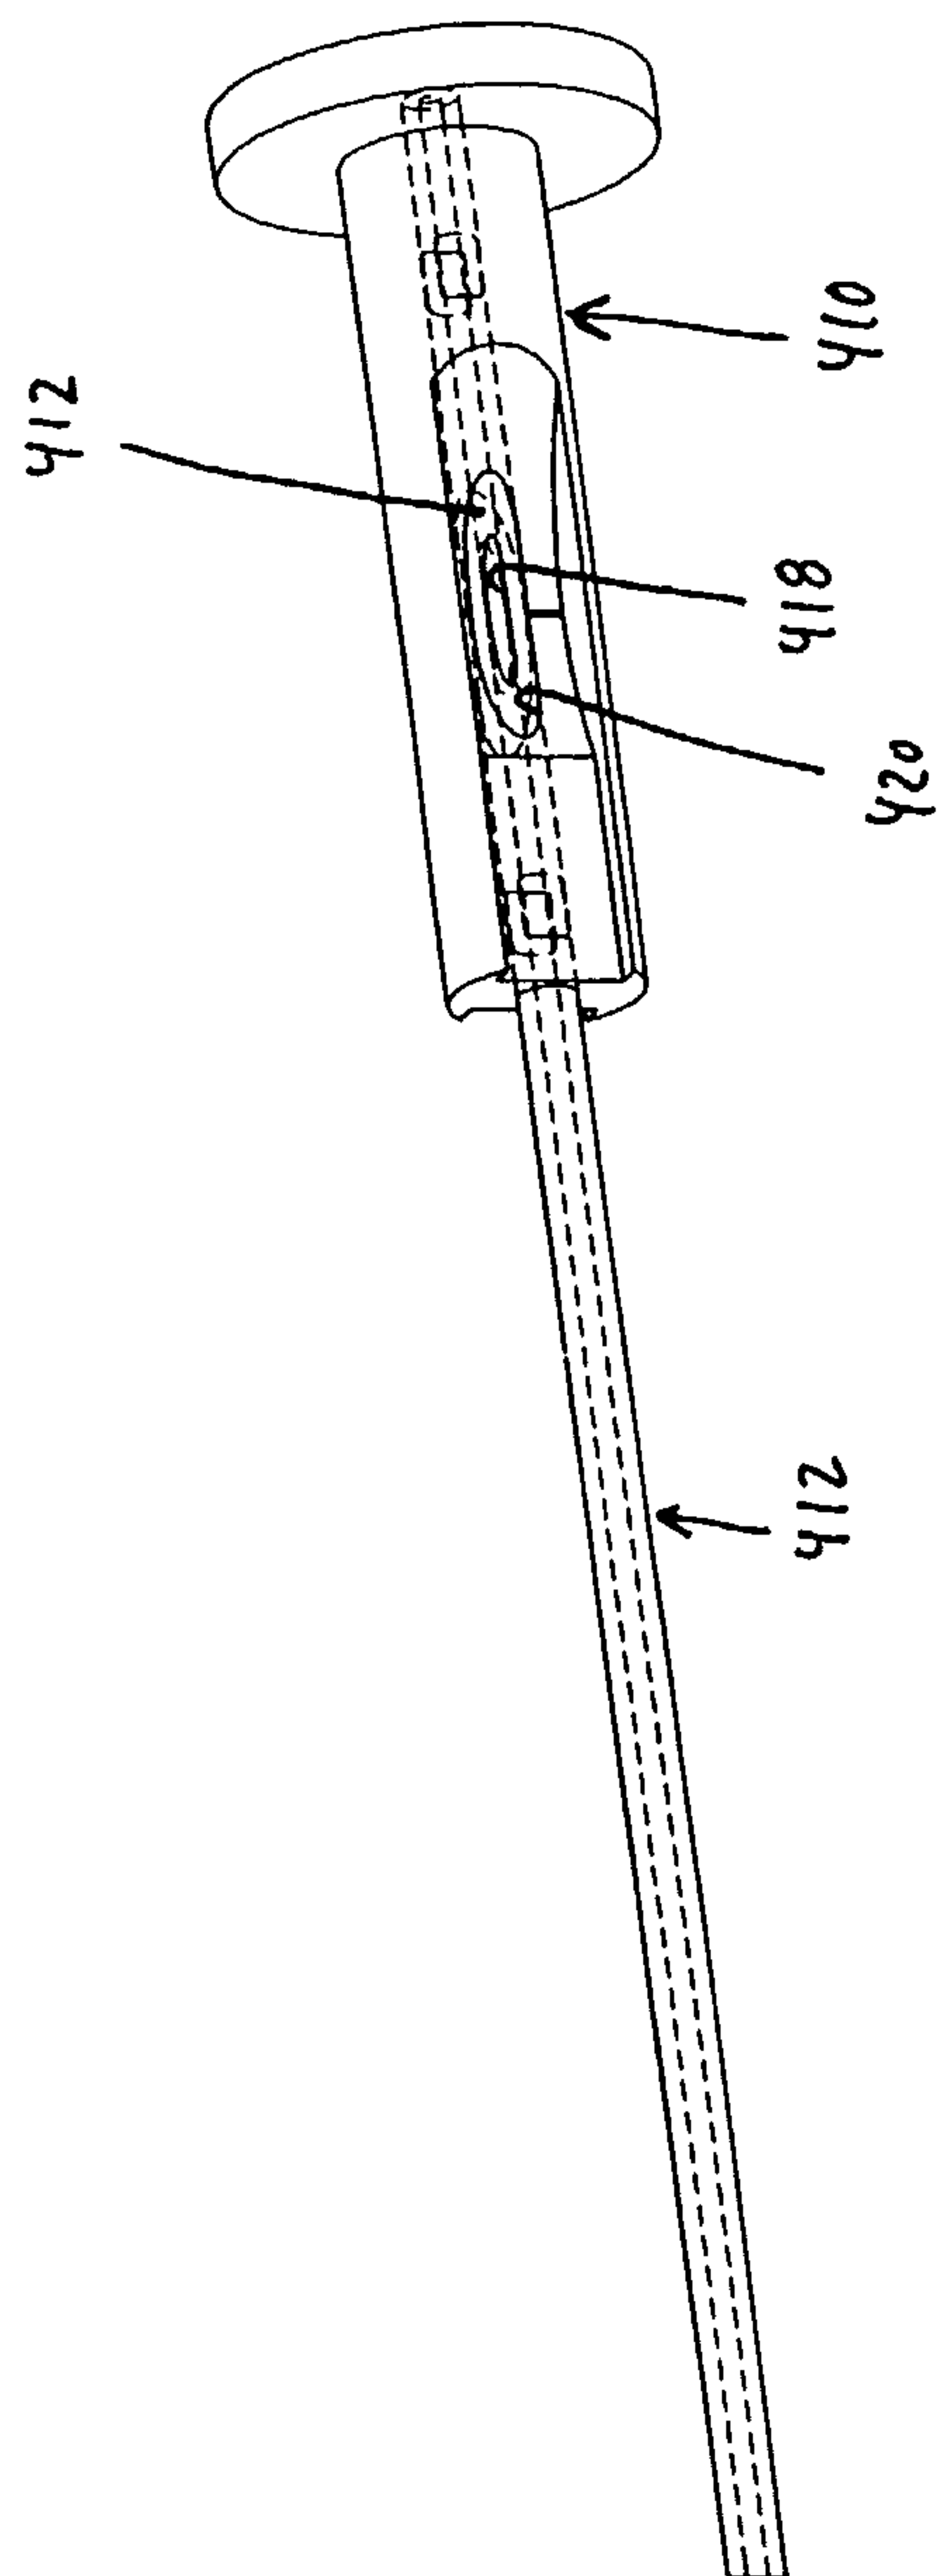


FIG. 25

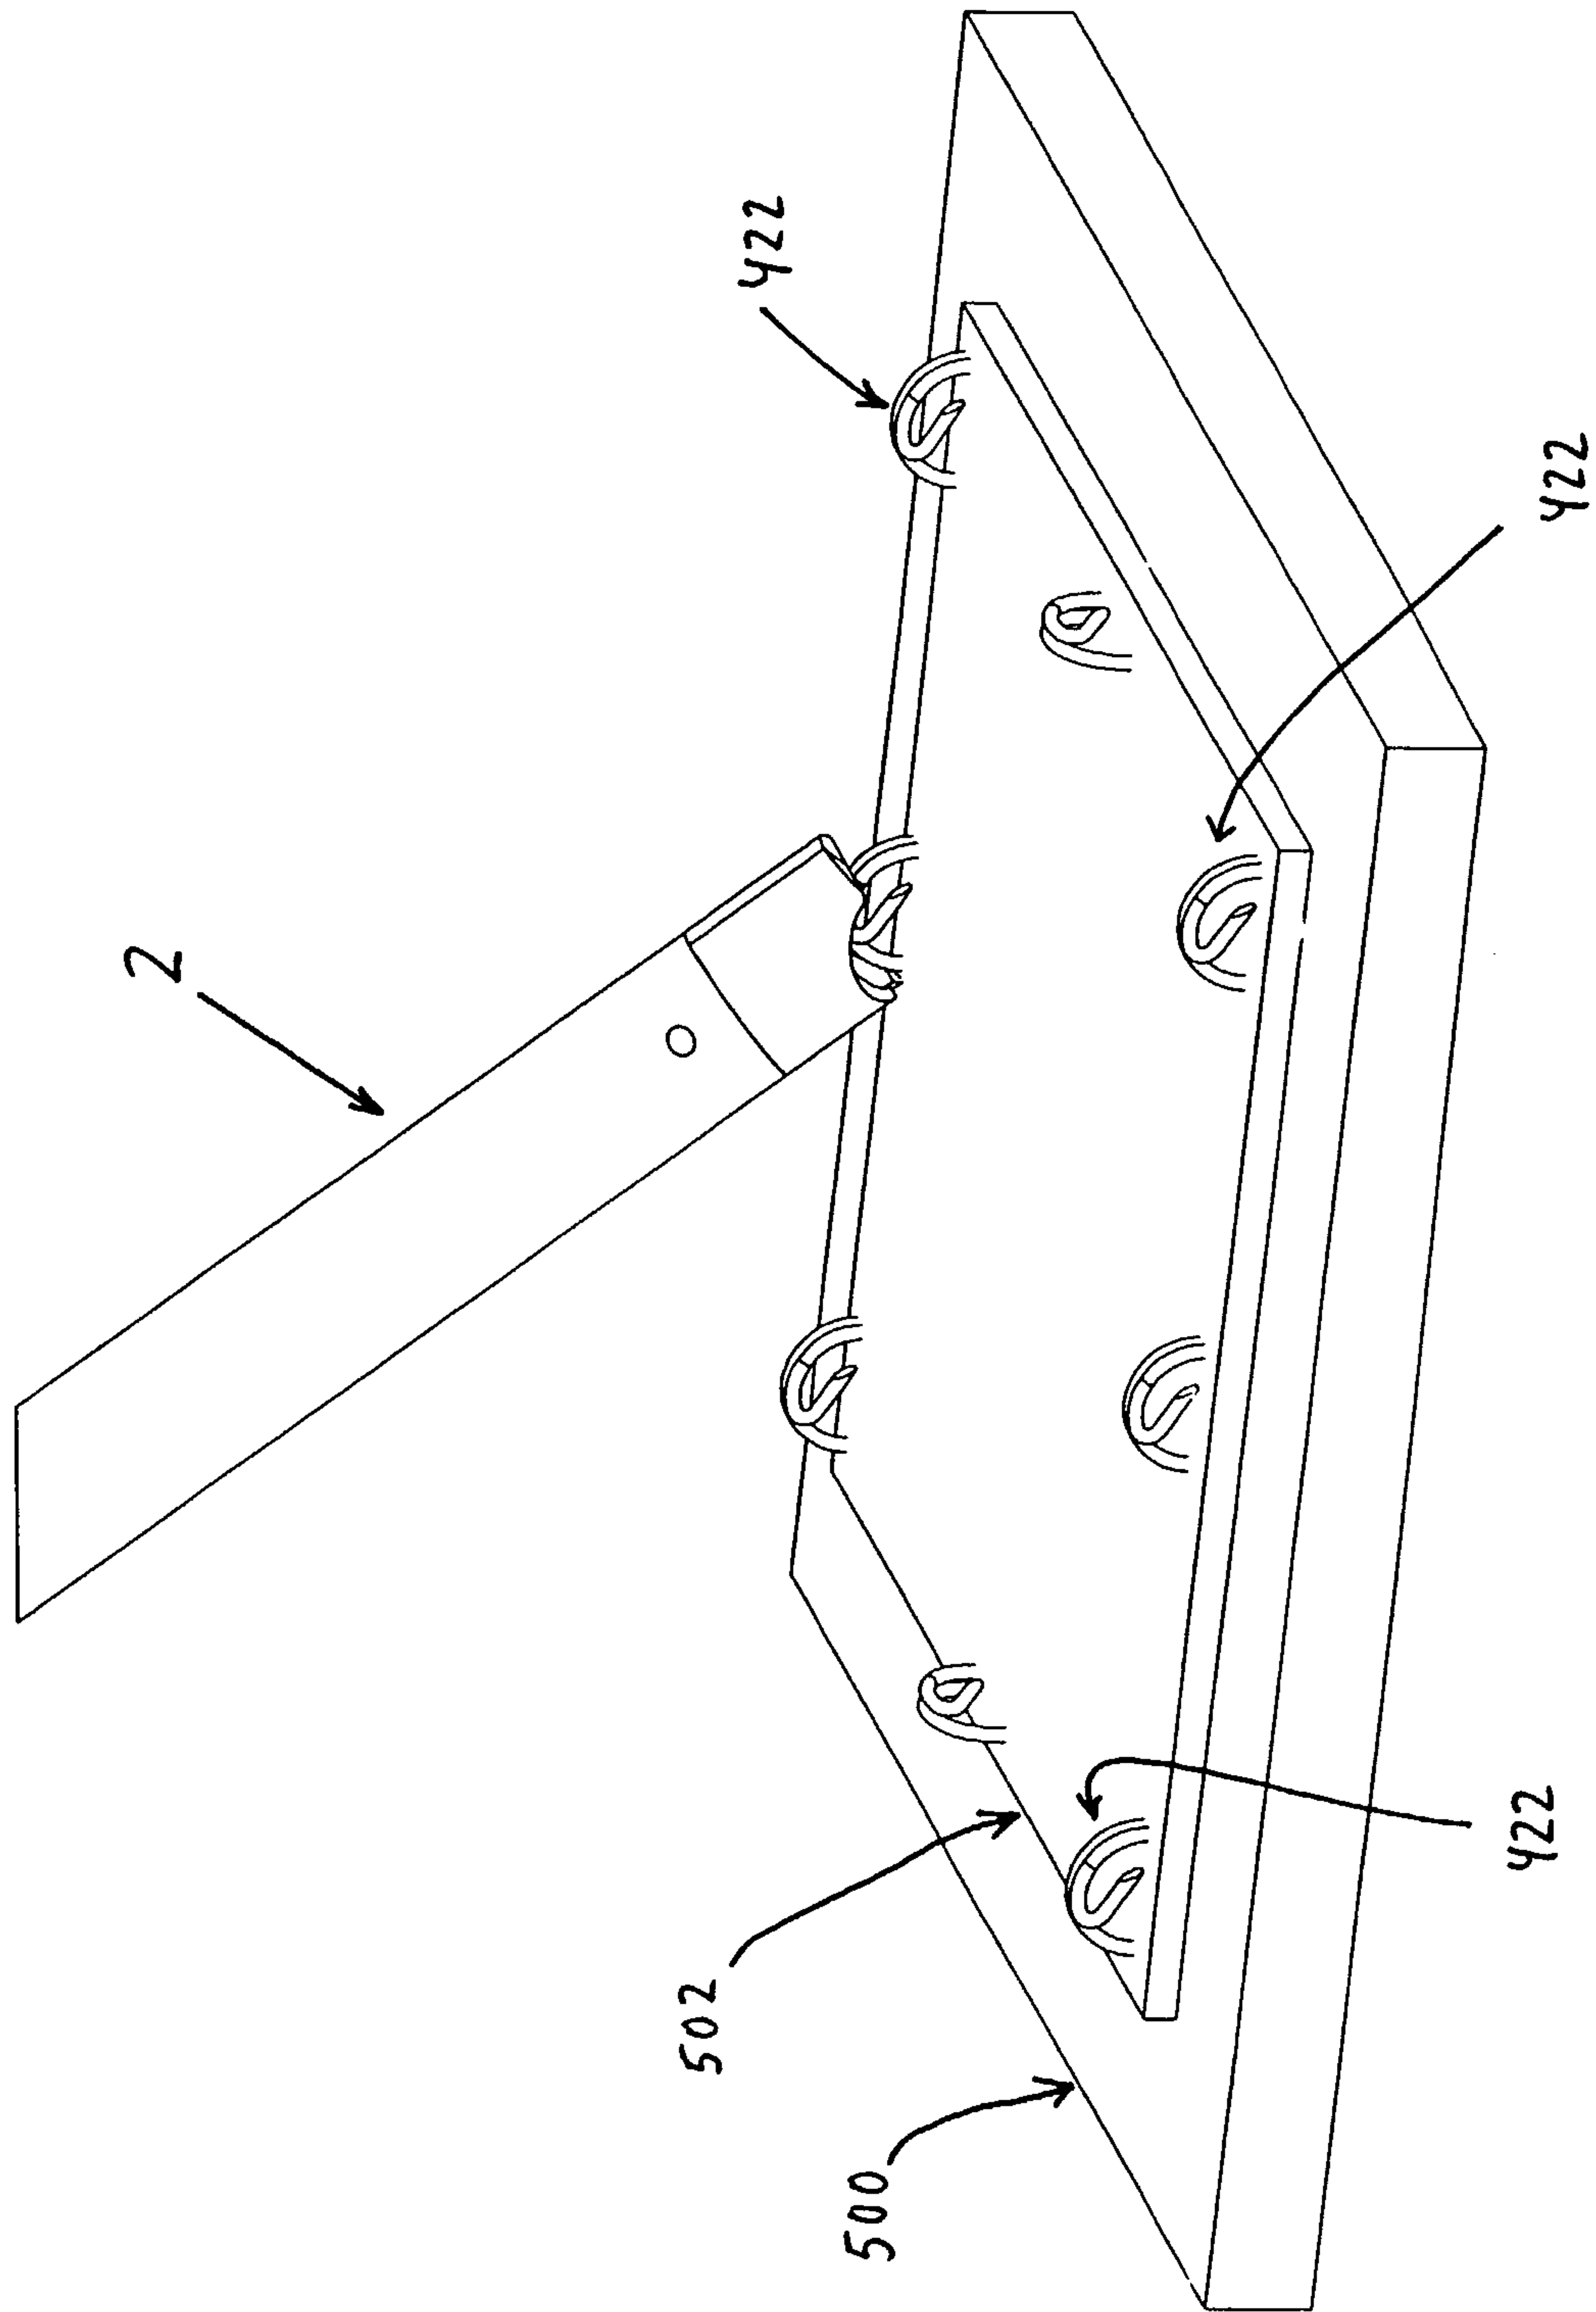


FIG. 26

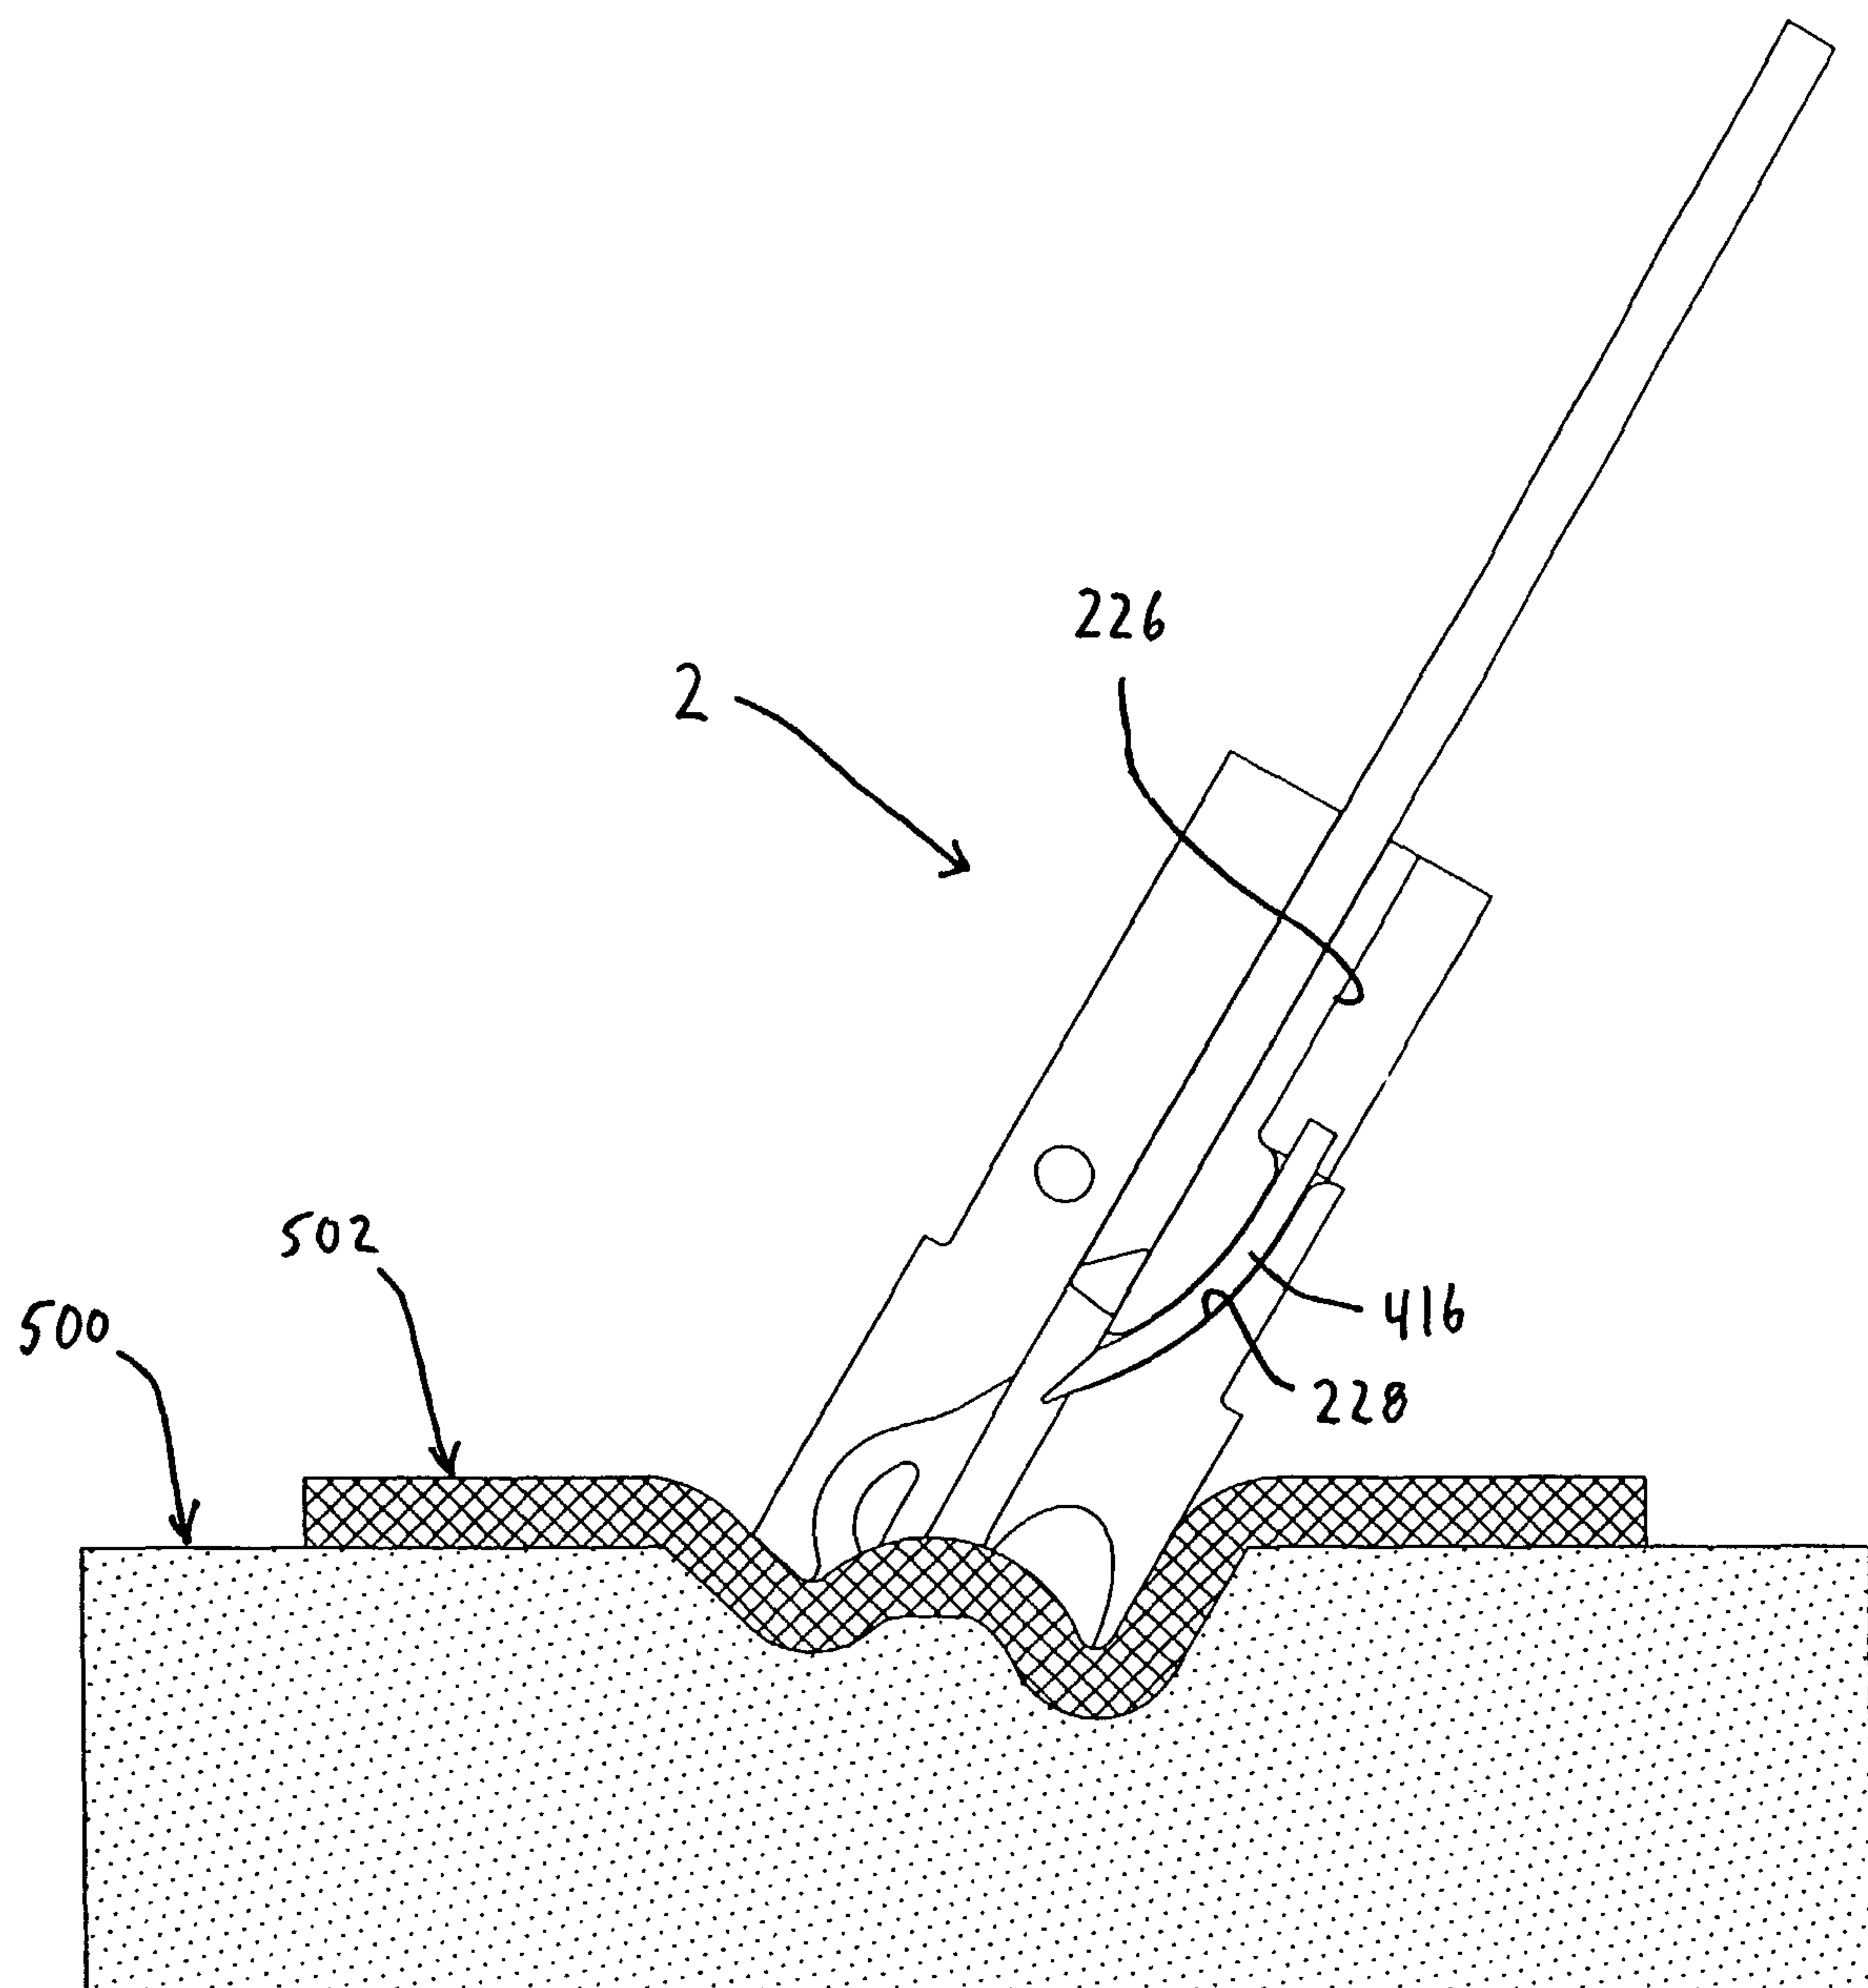


FIG. 27

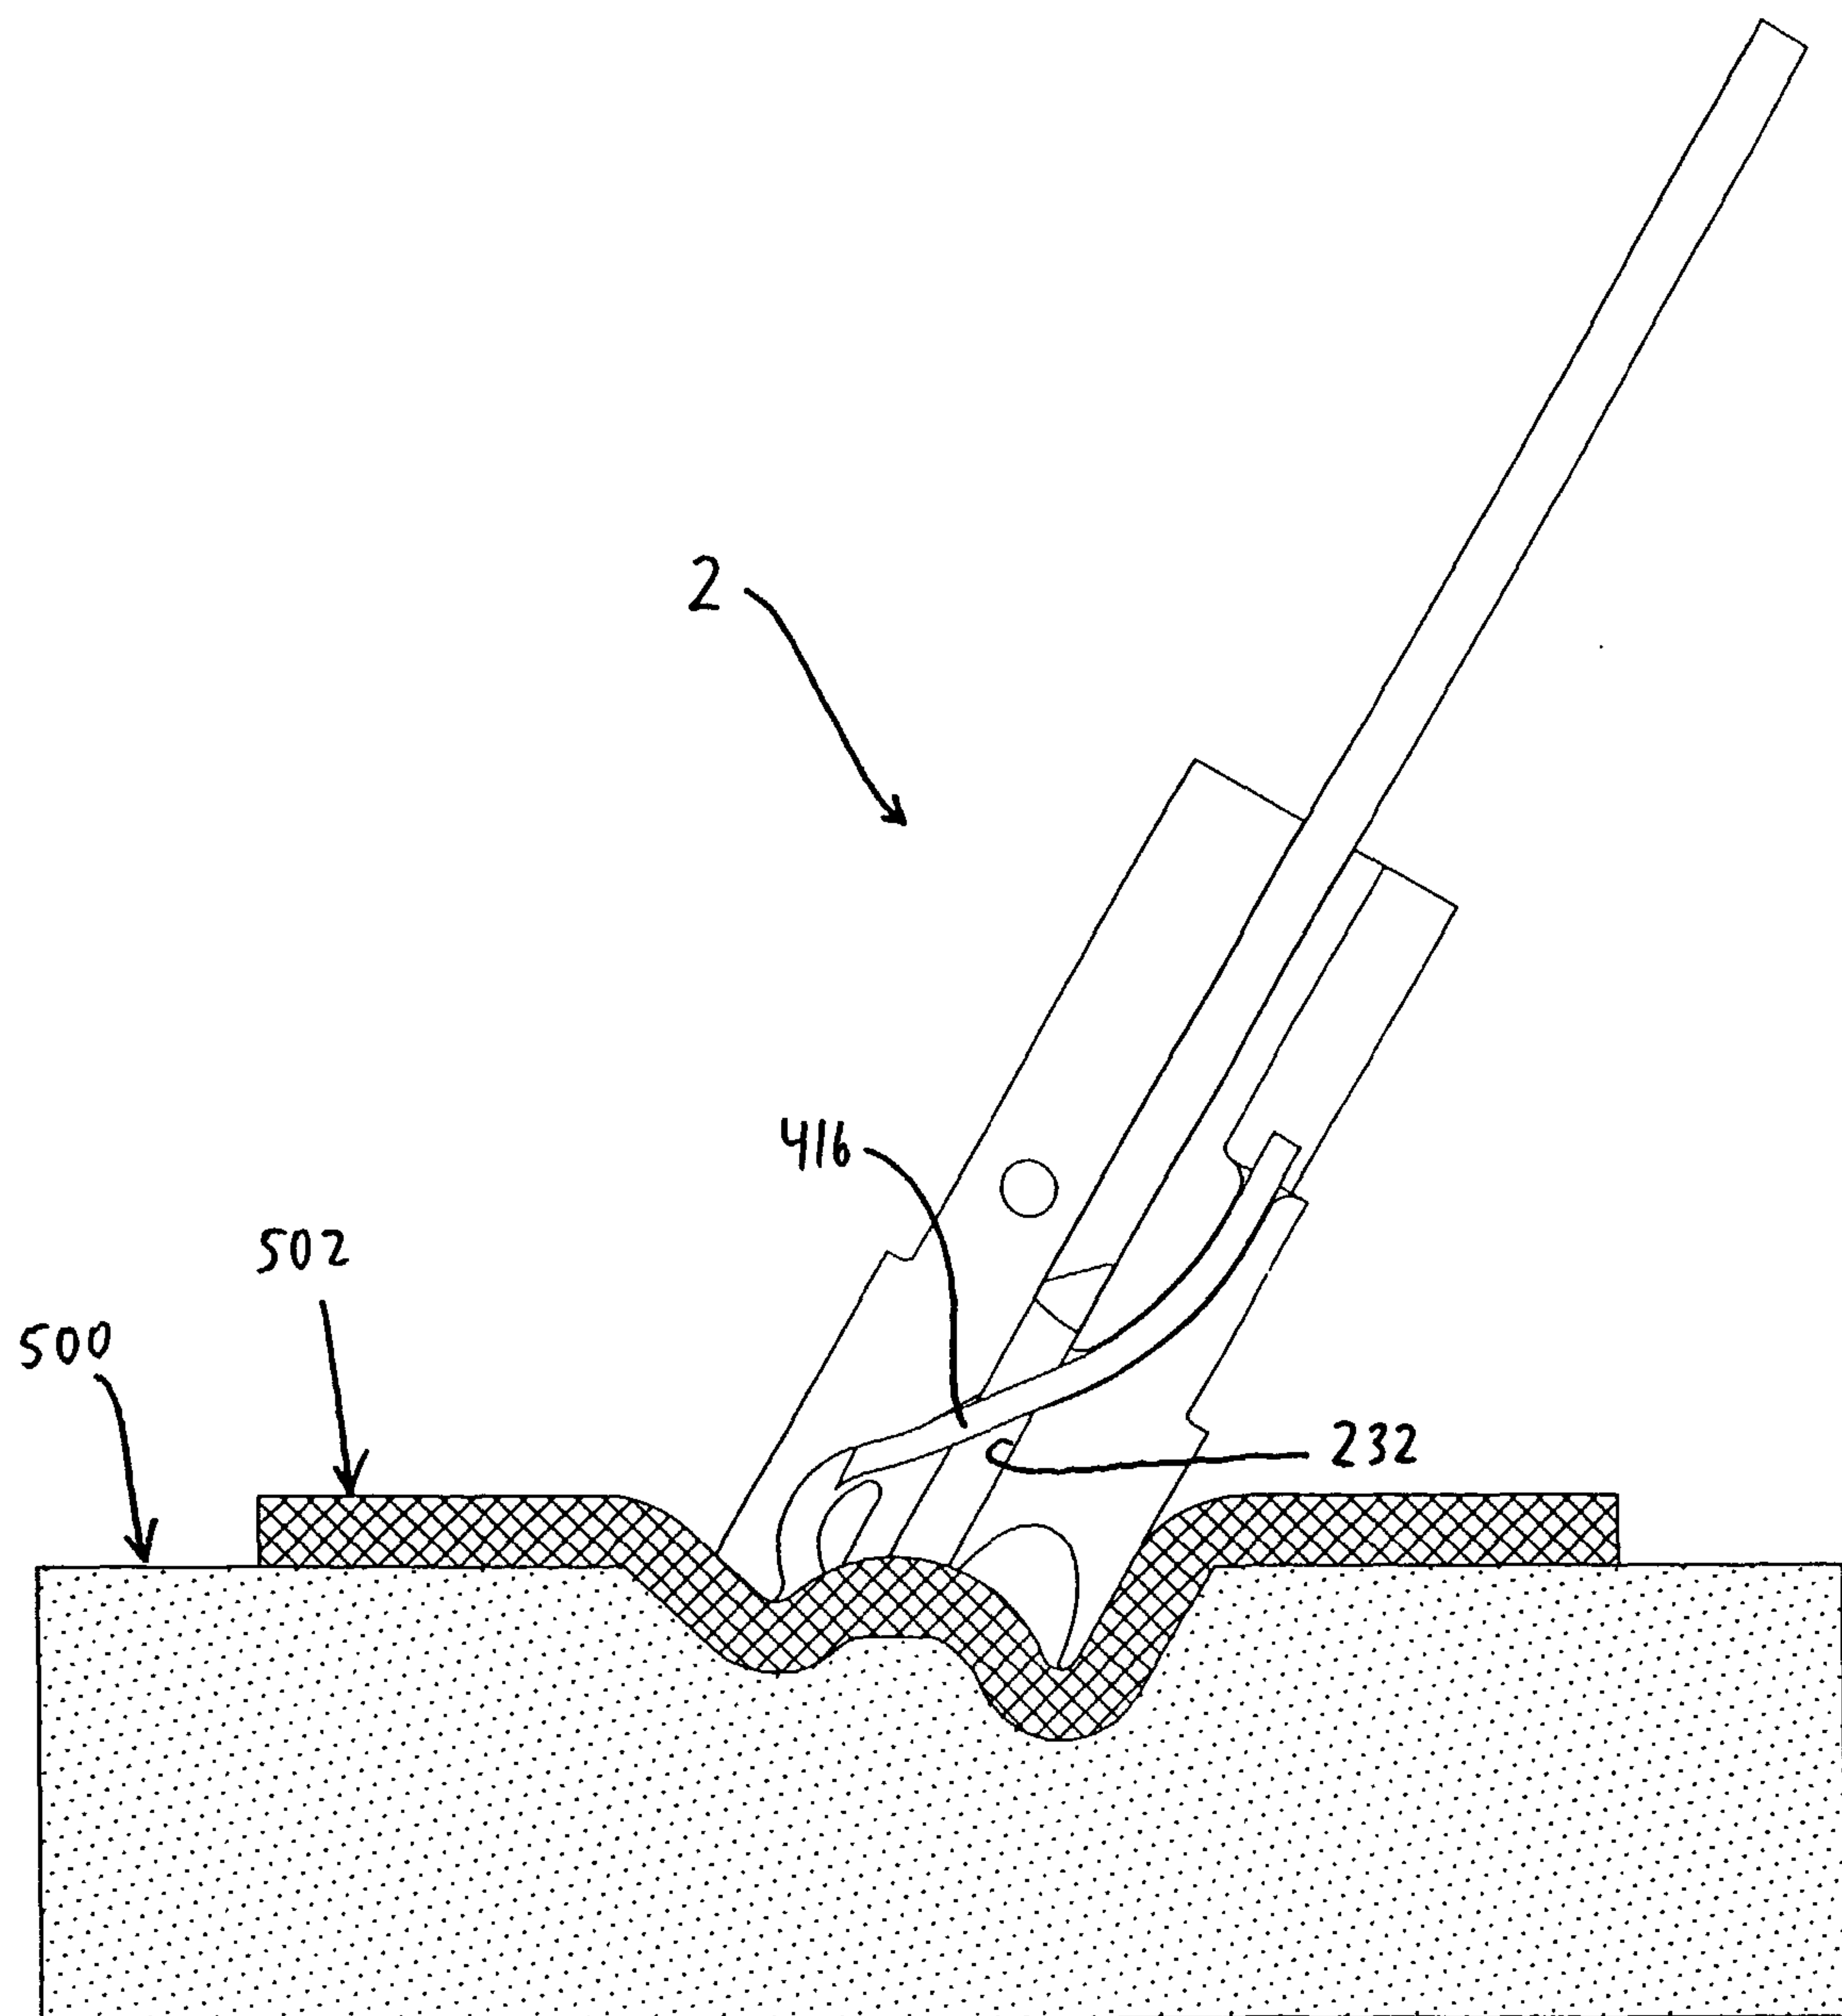


FIG. 28

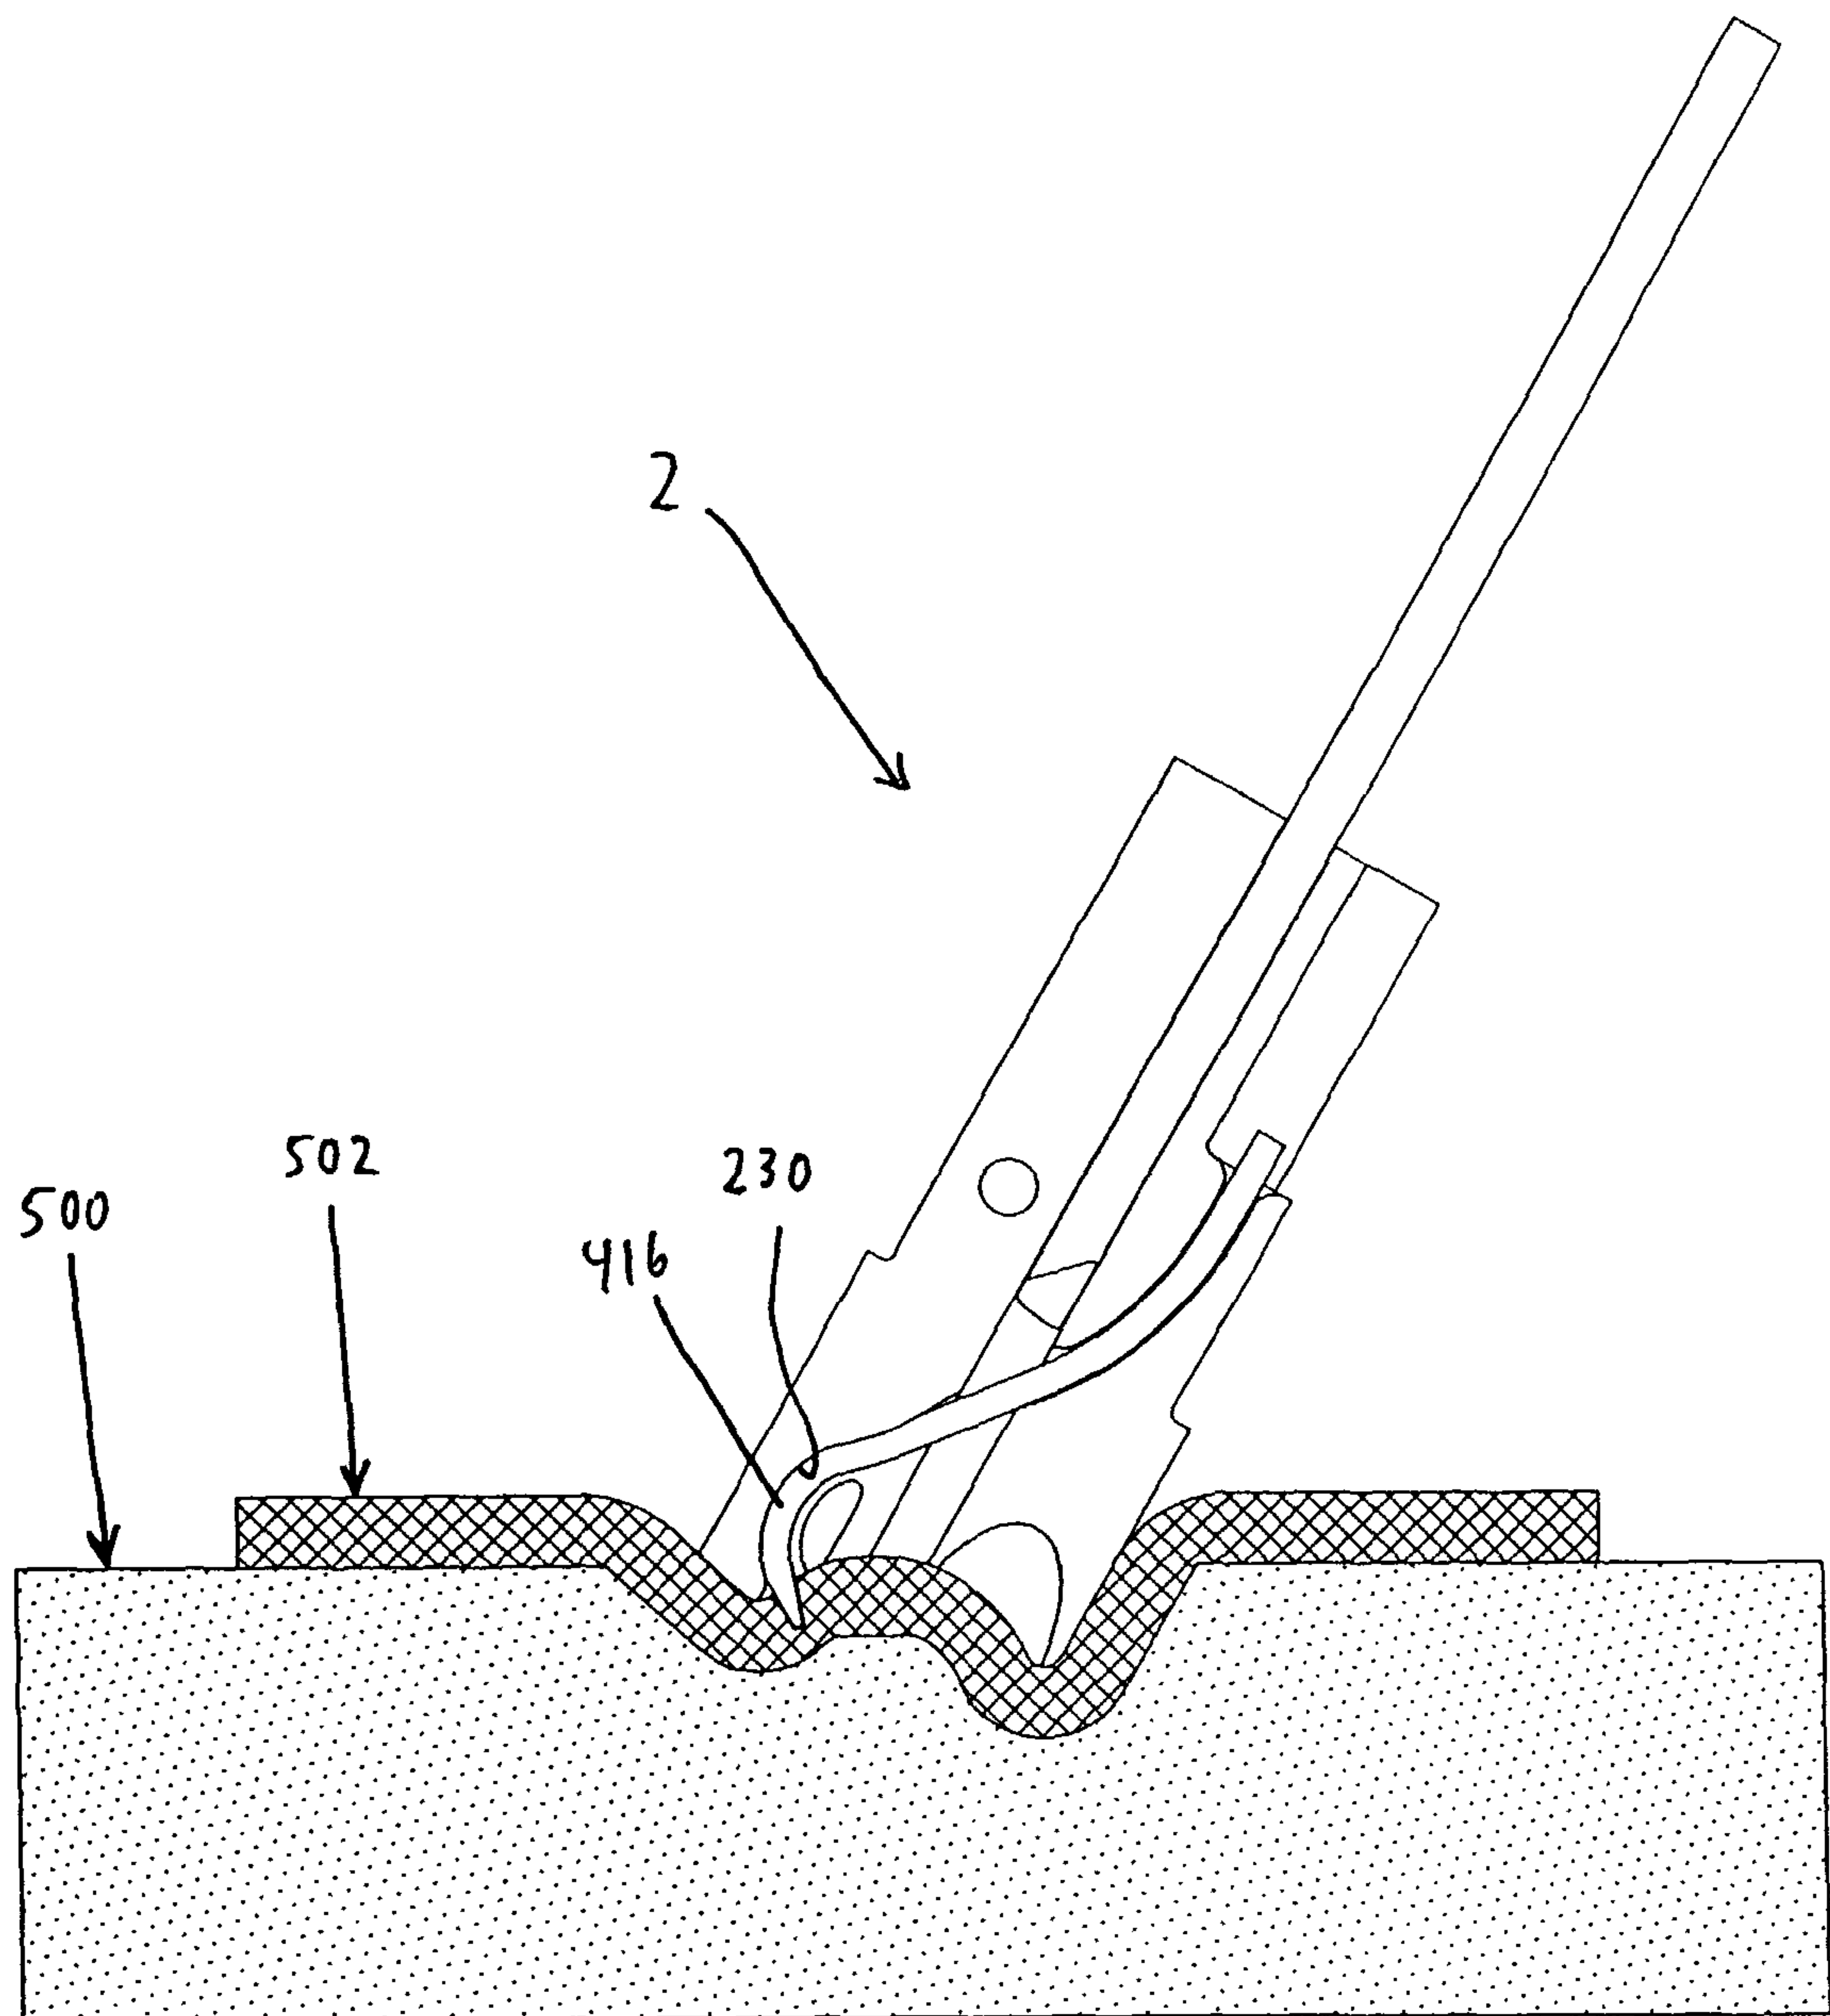


FIG. 29

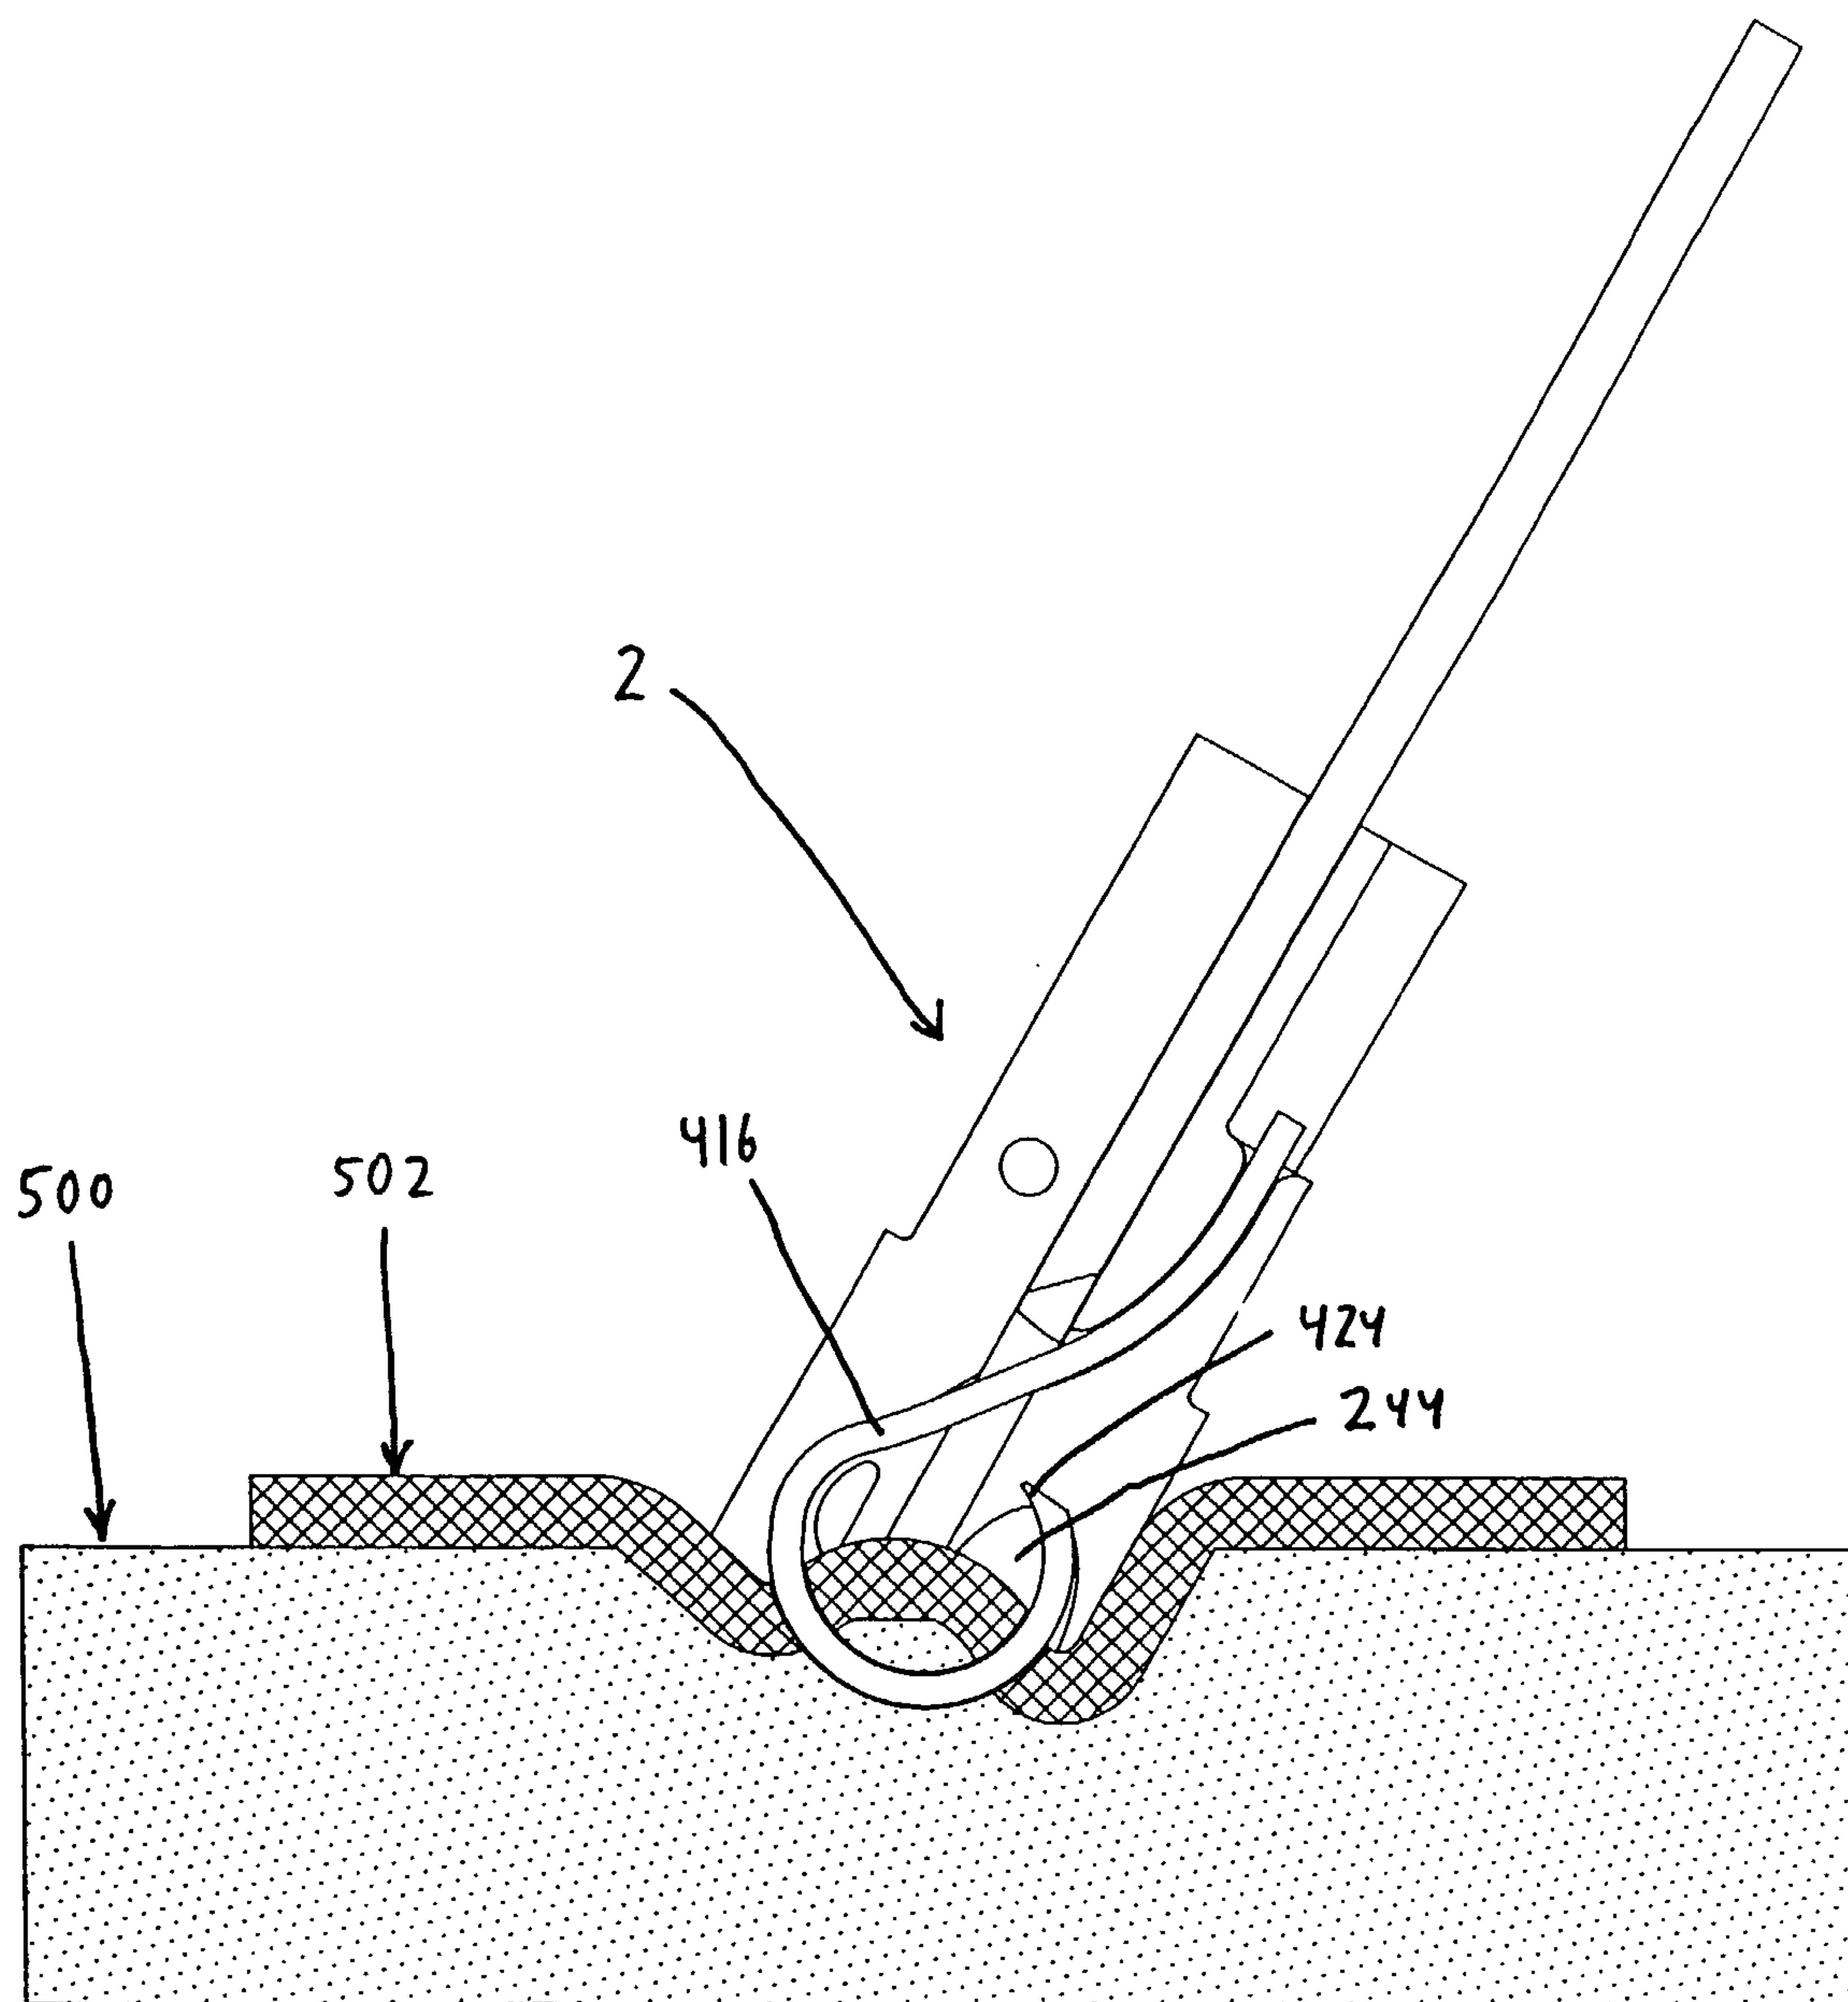


FIG. 30

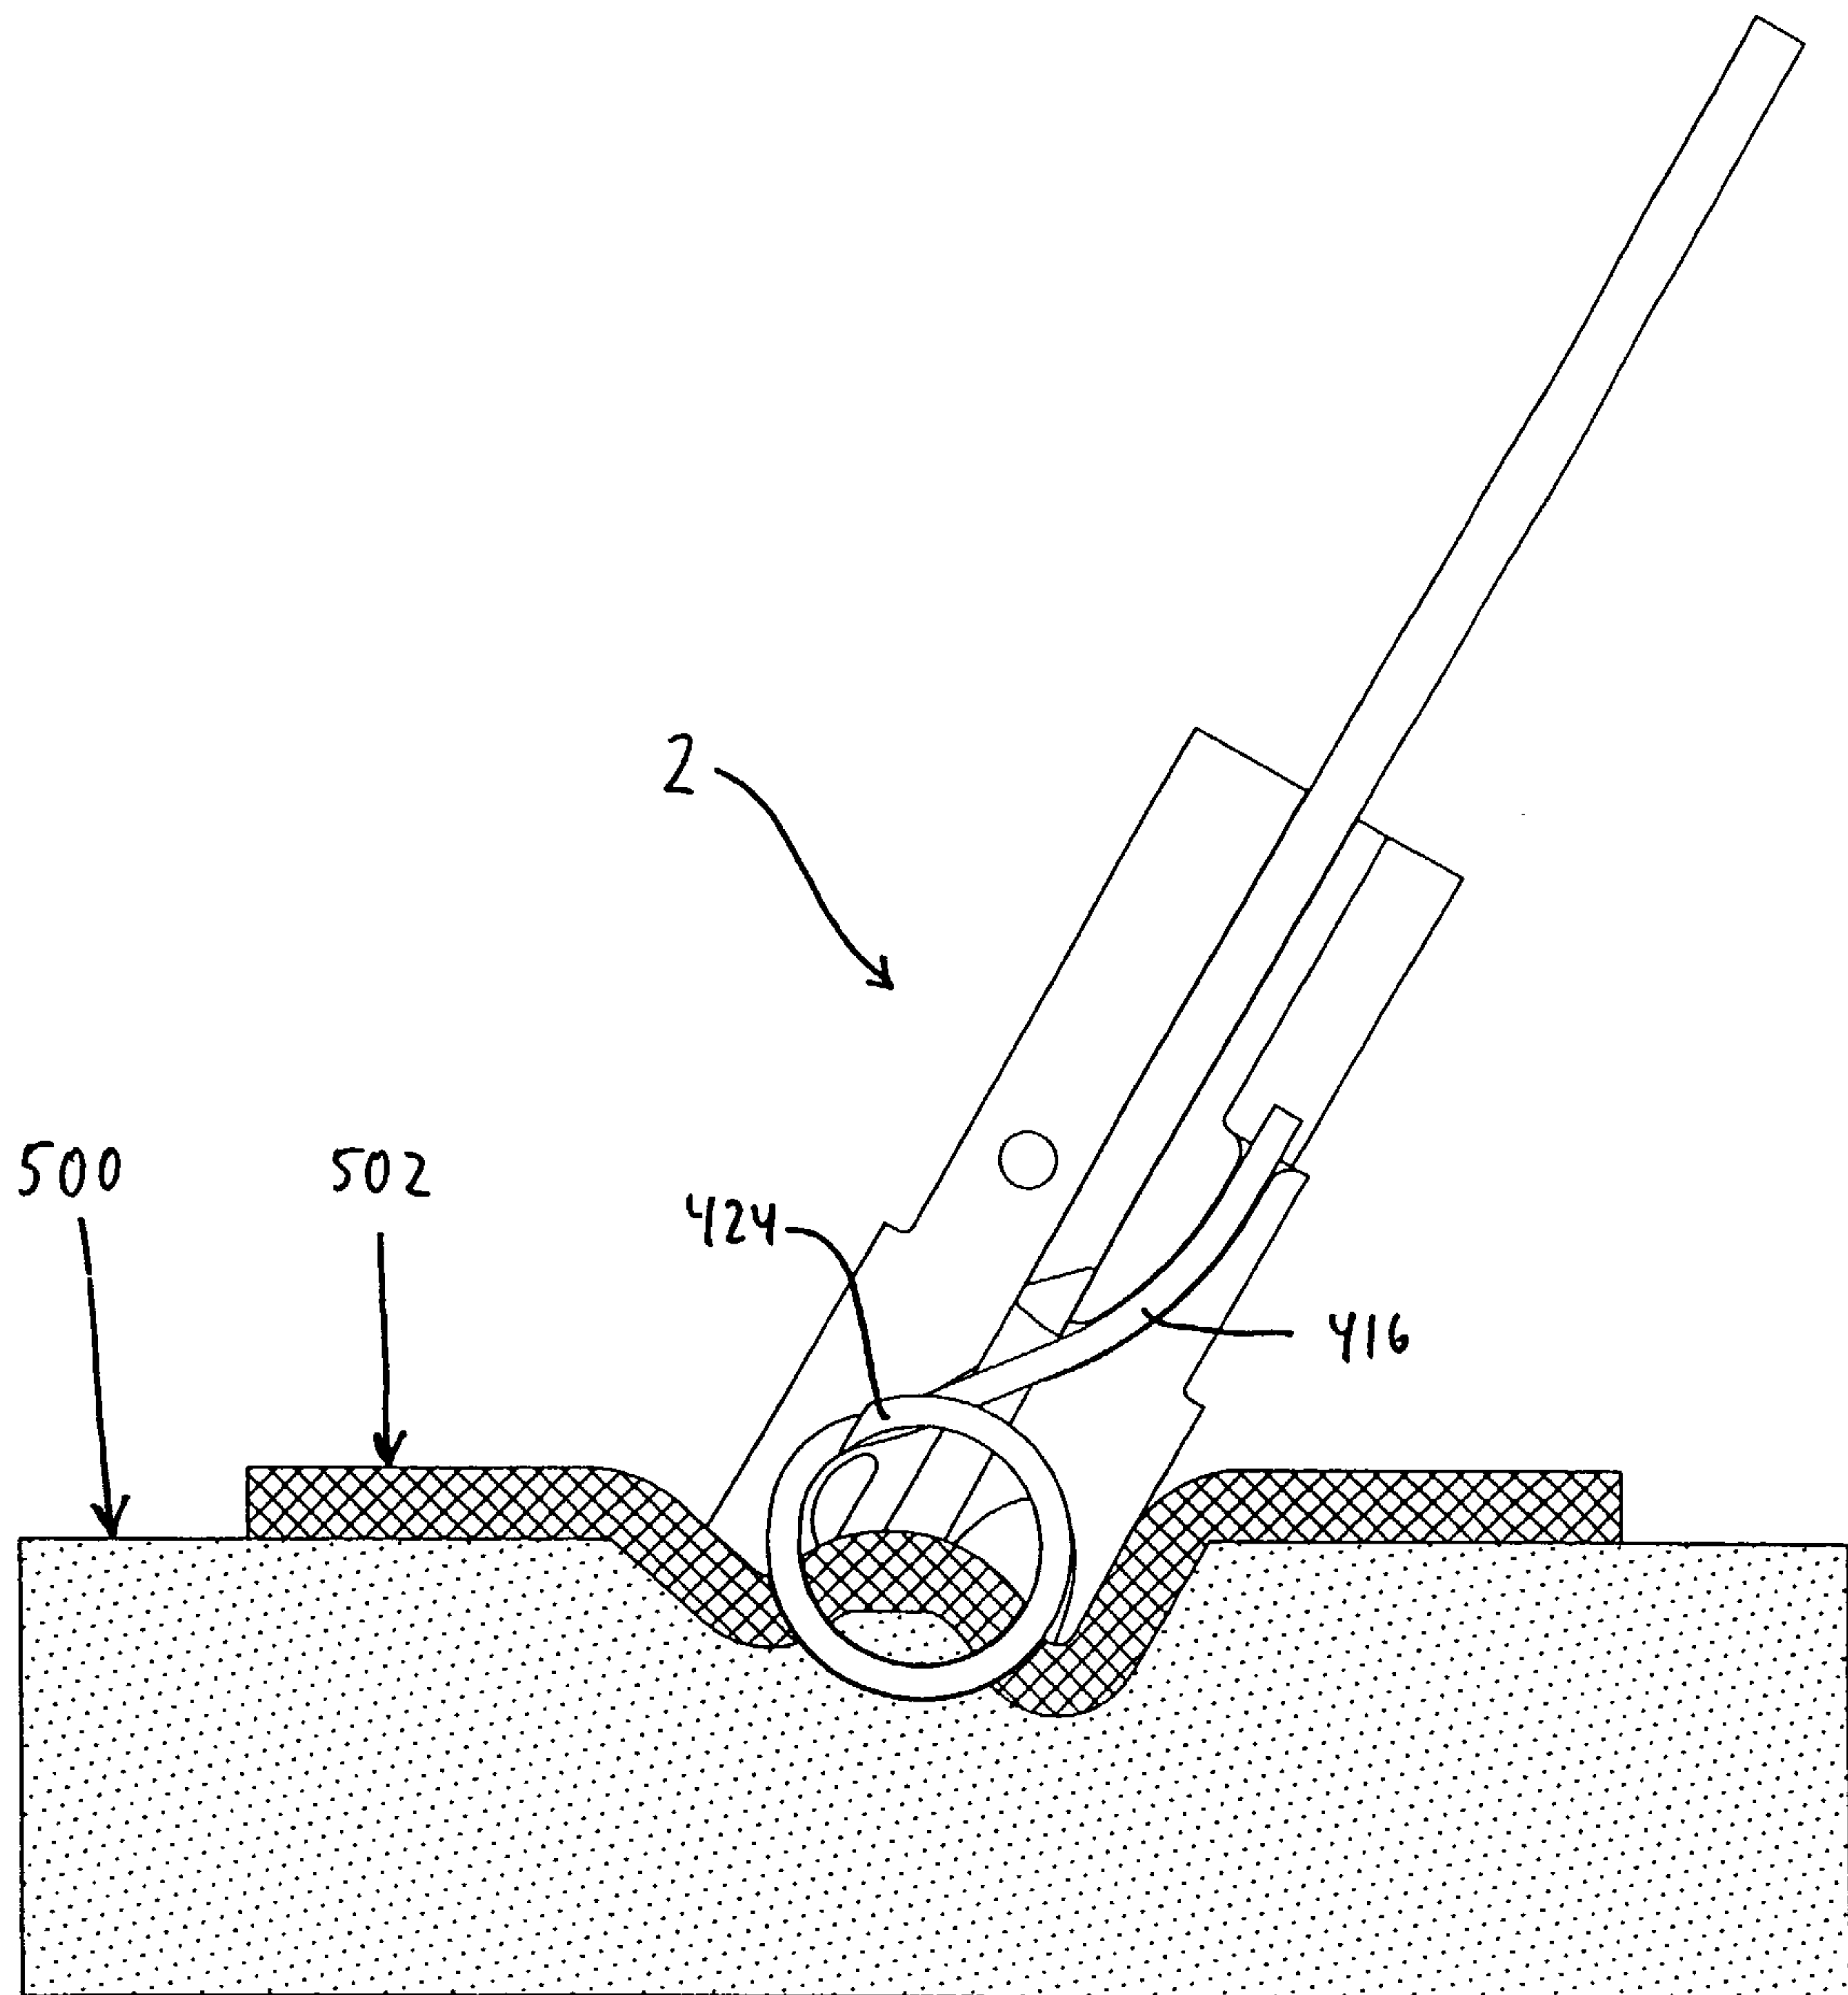


FIG. 31

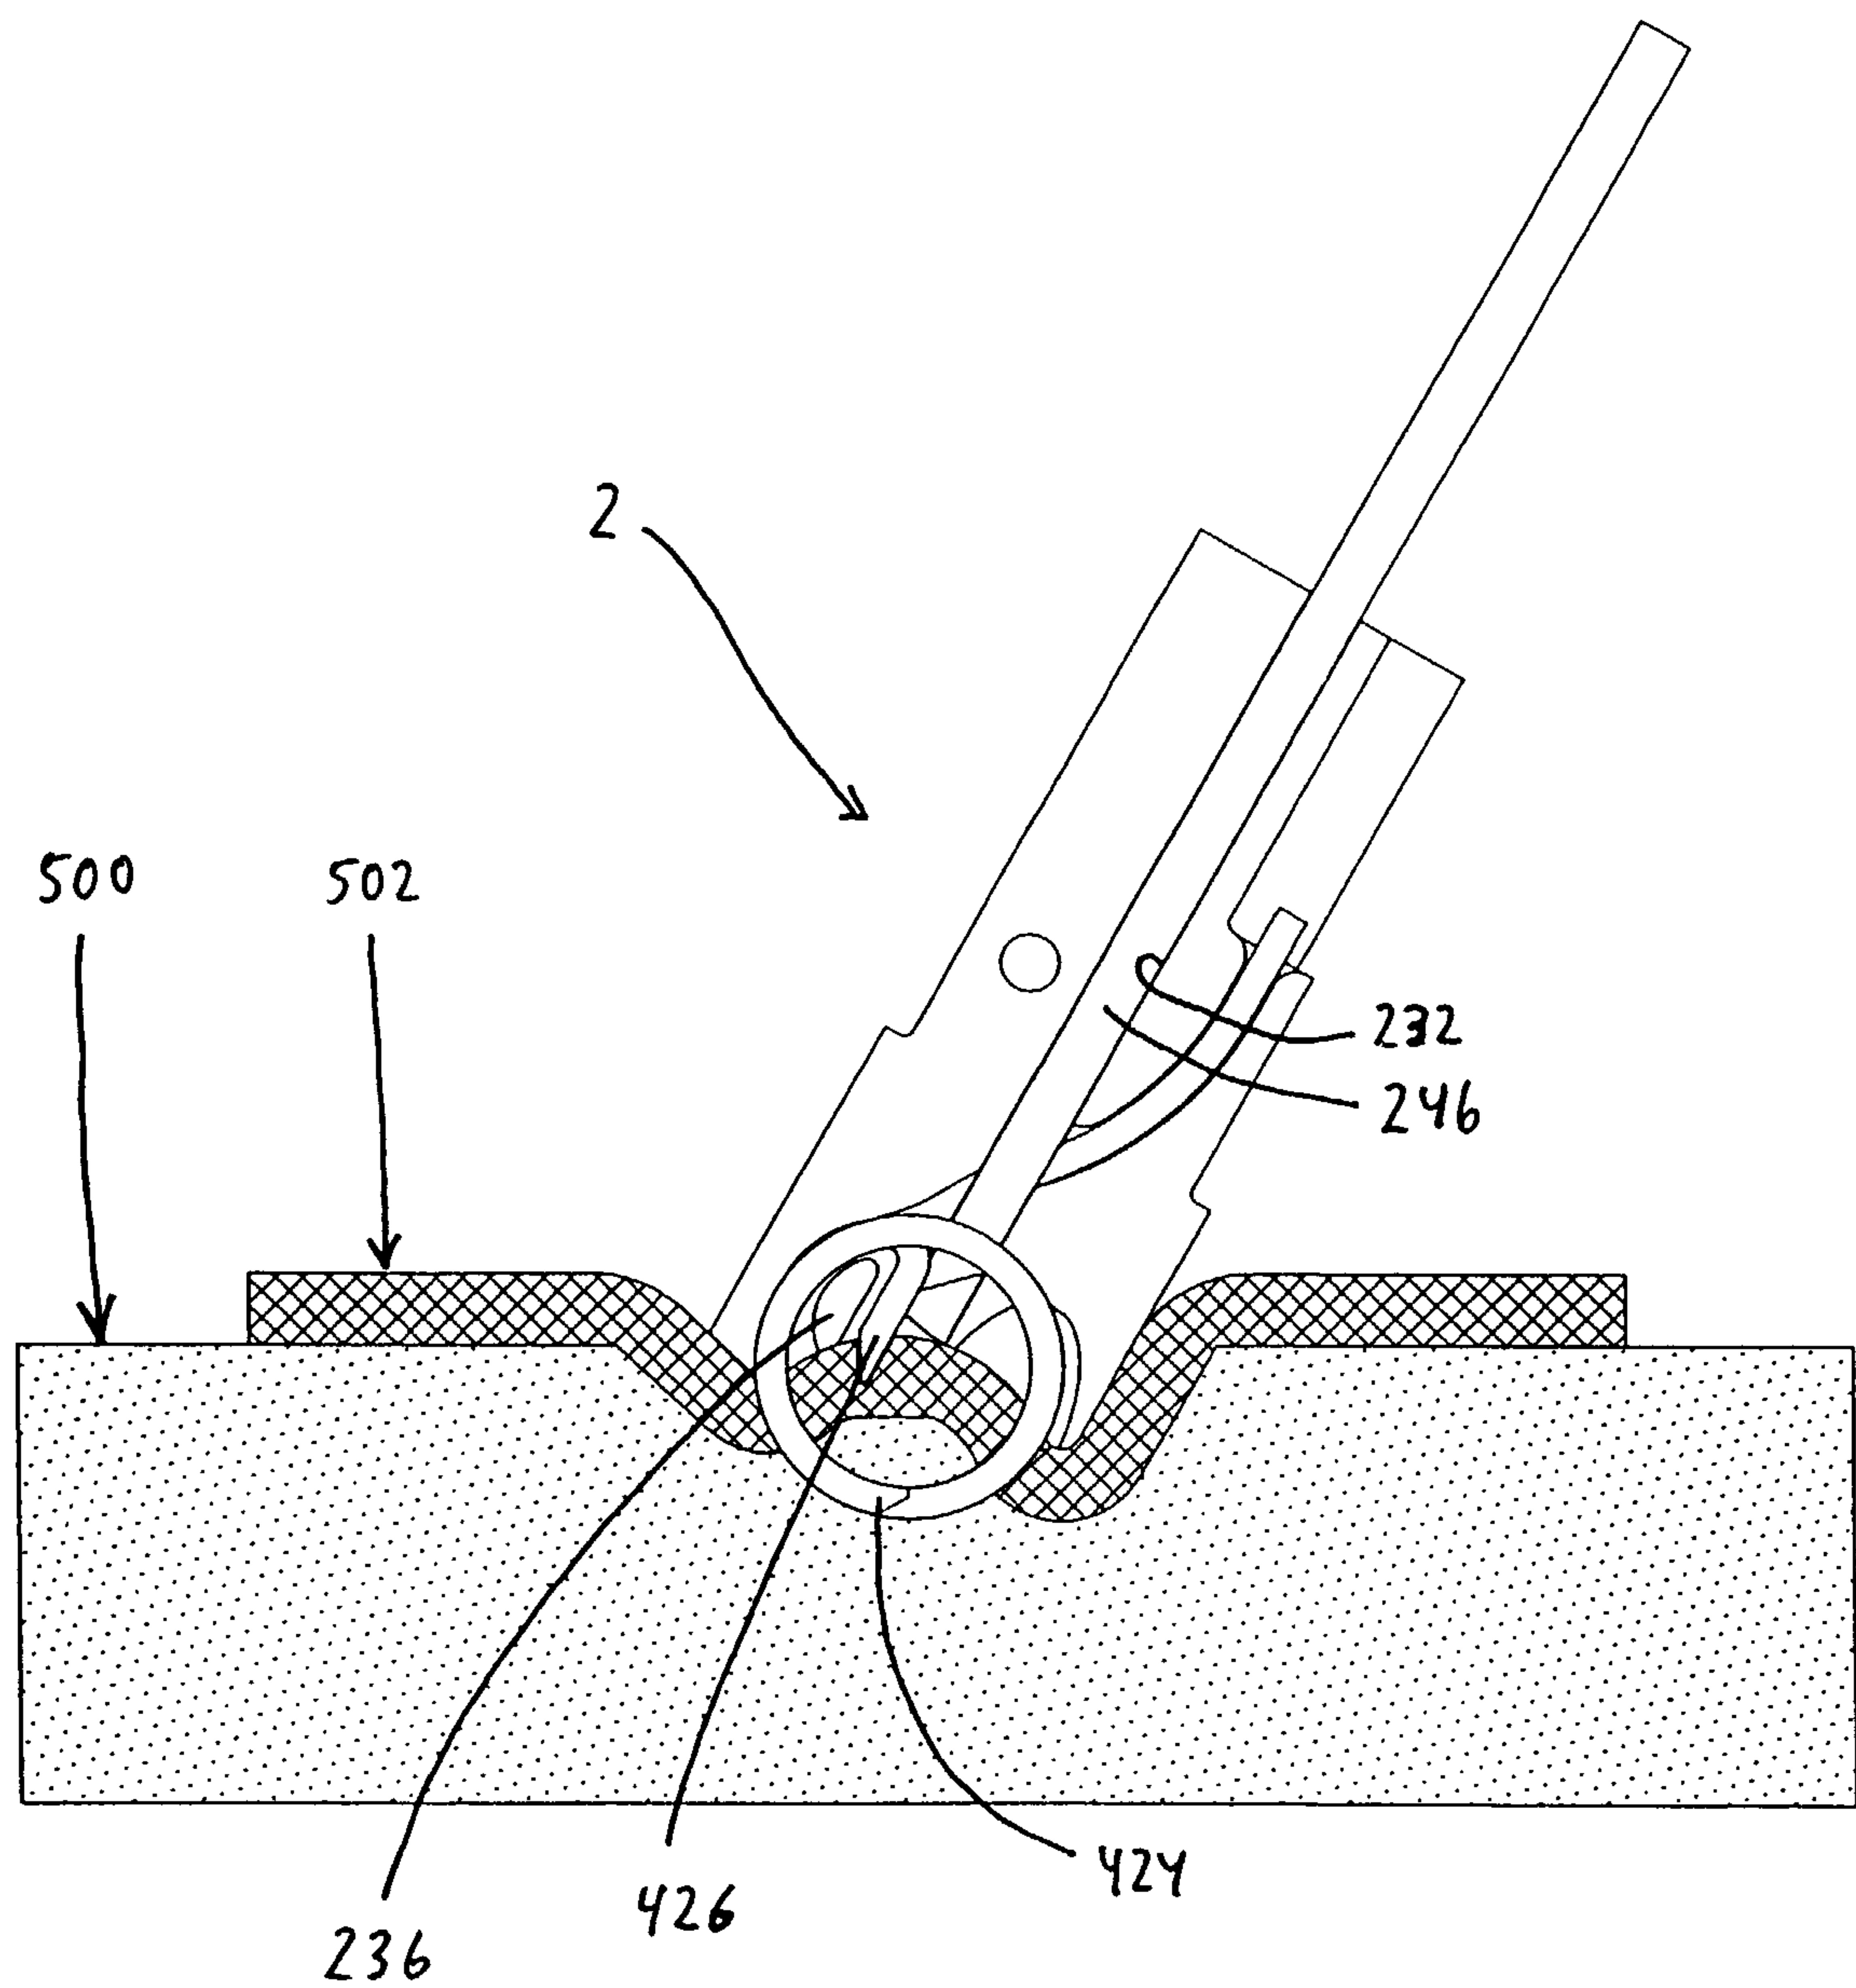


FIG. 32

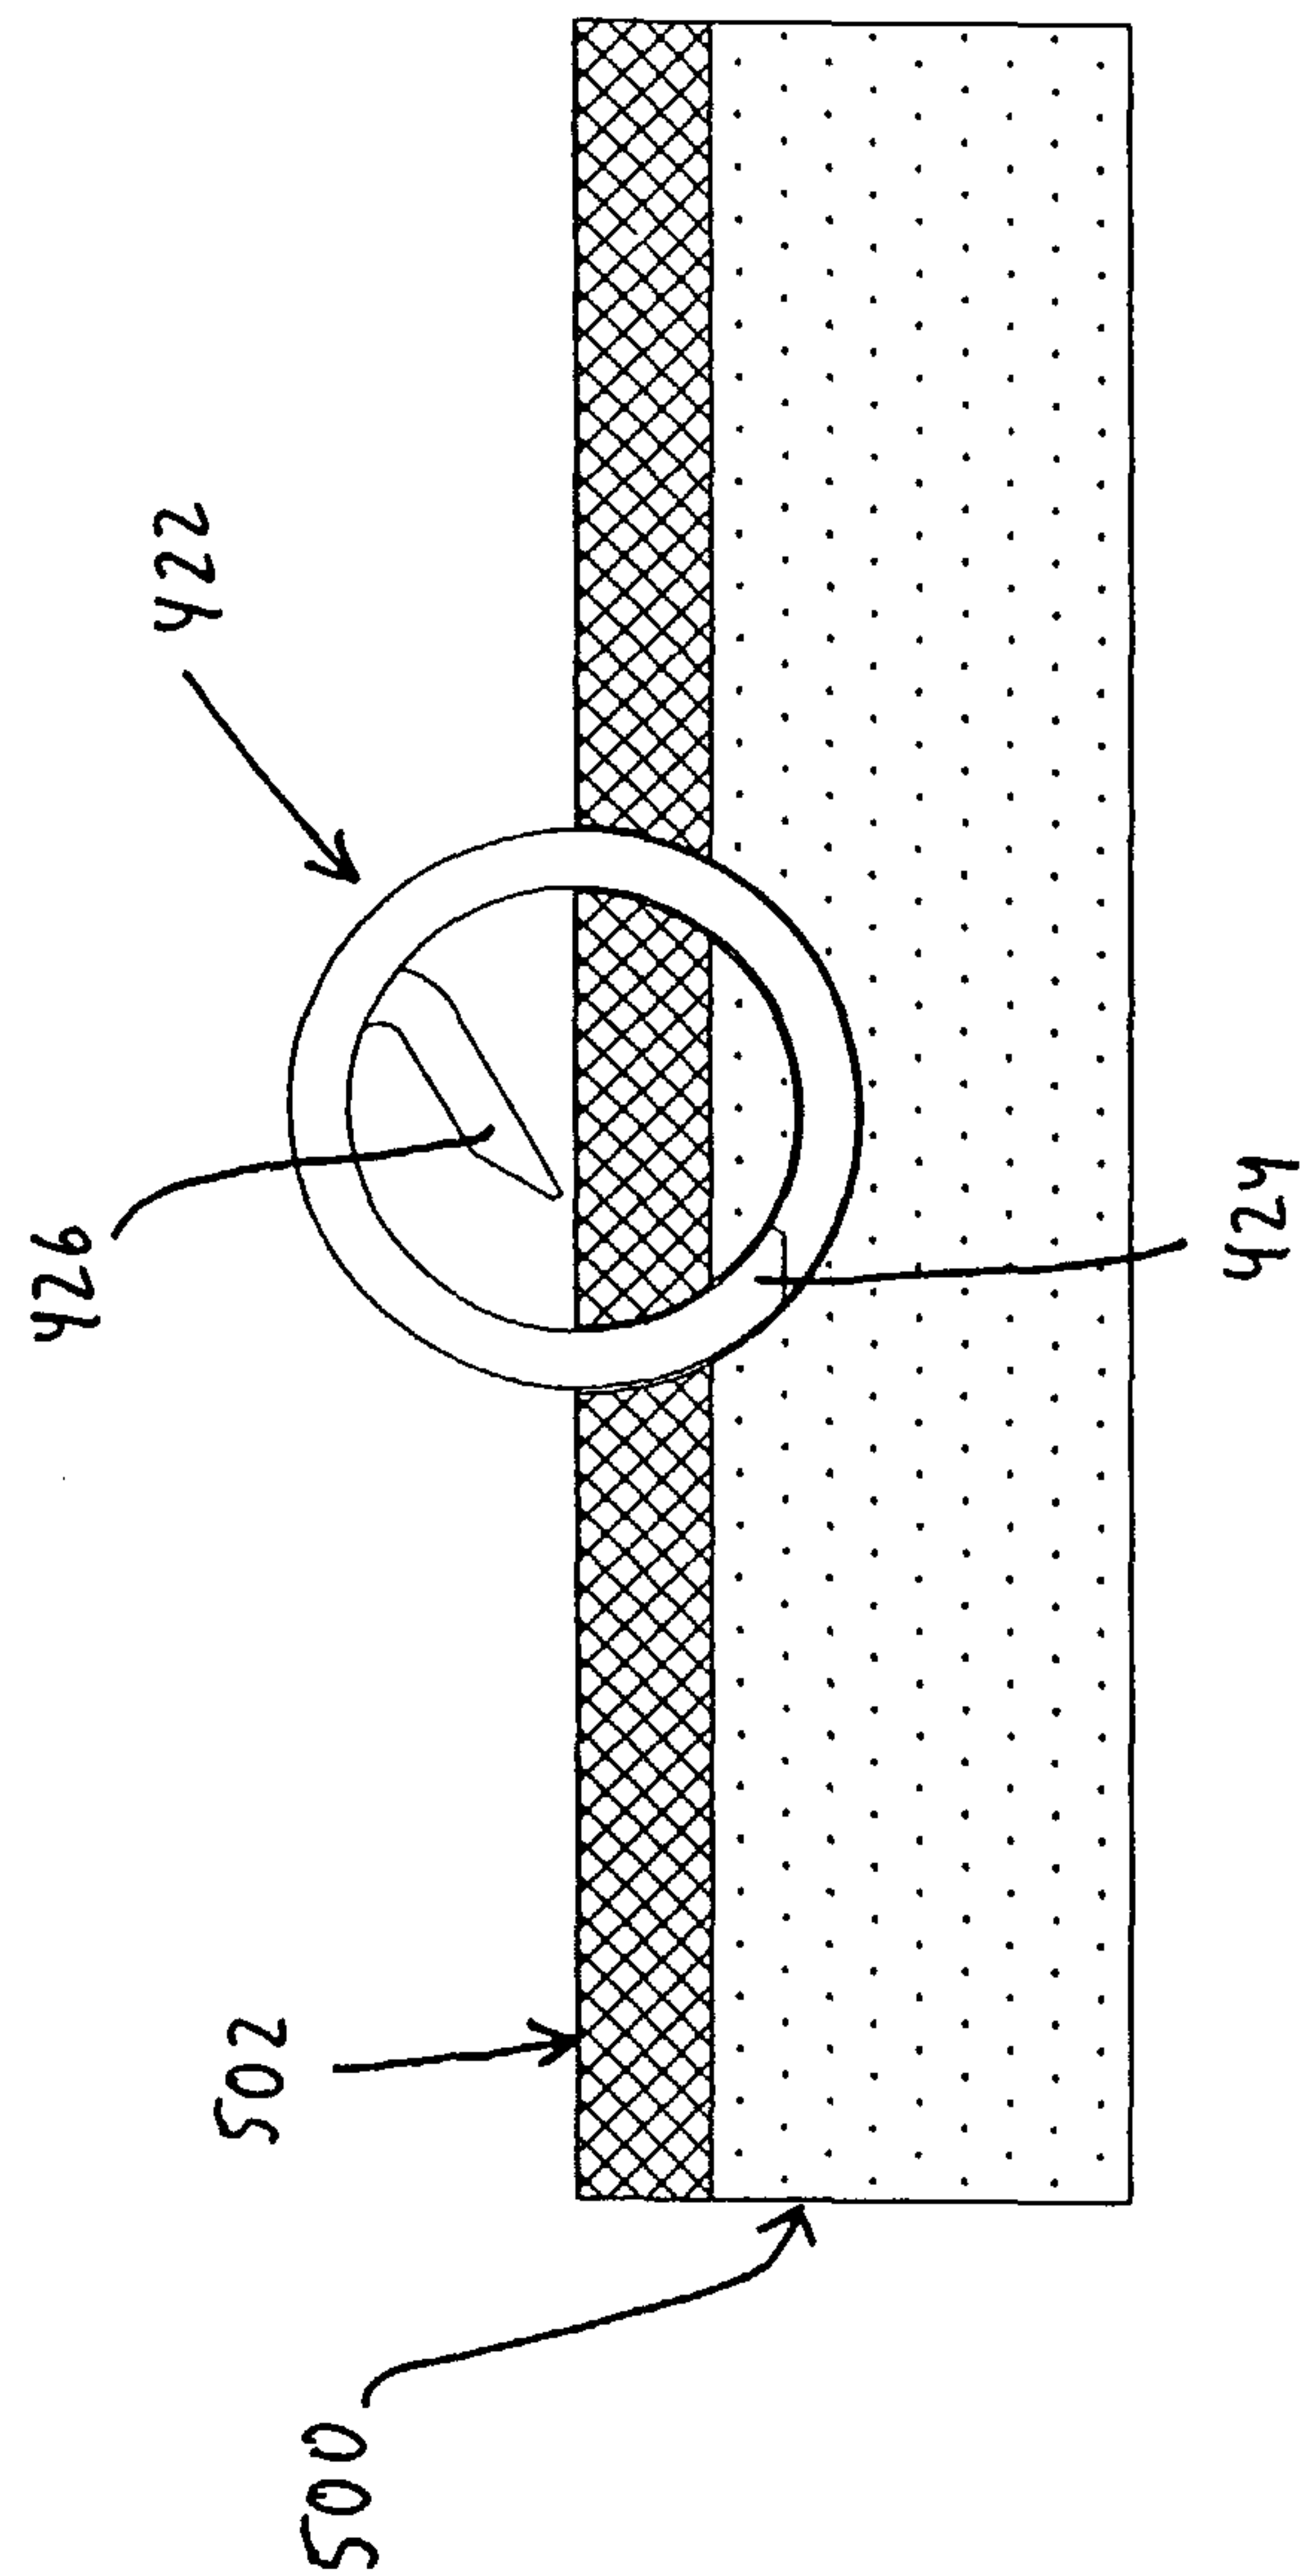


FIG. 33

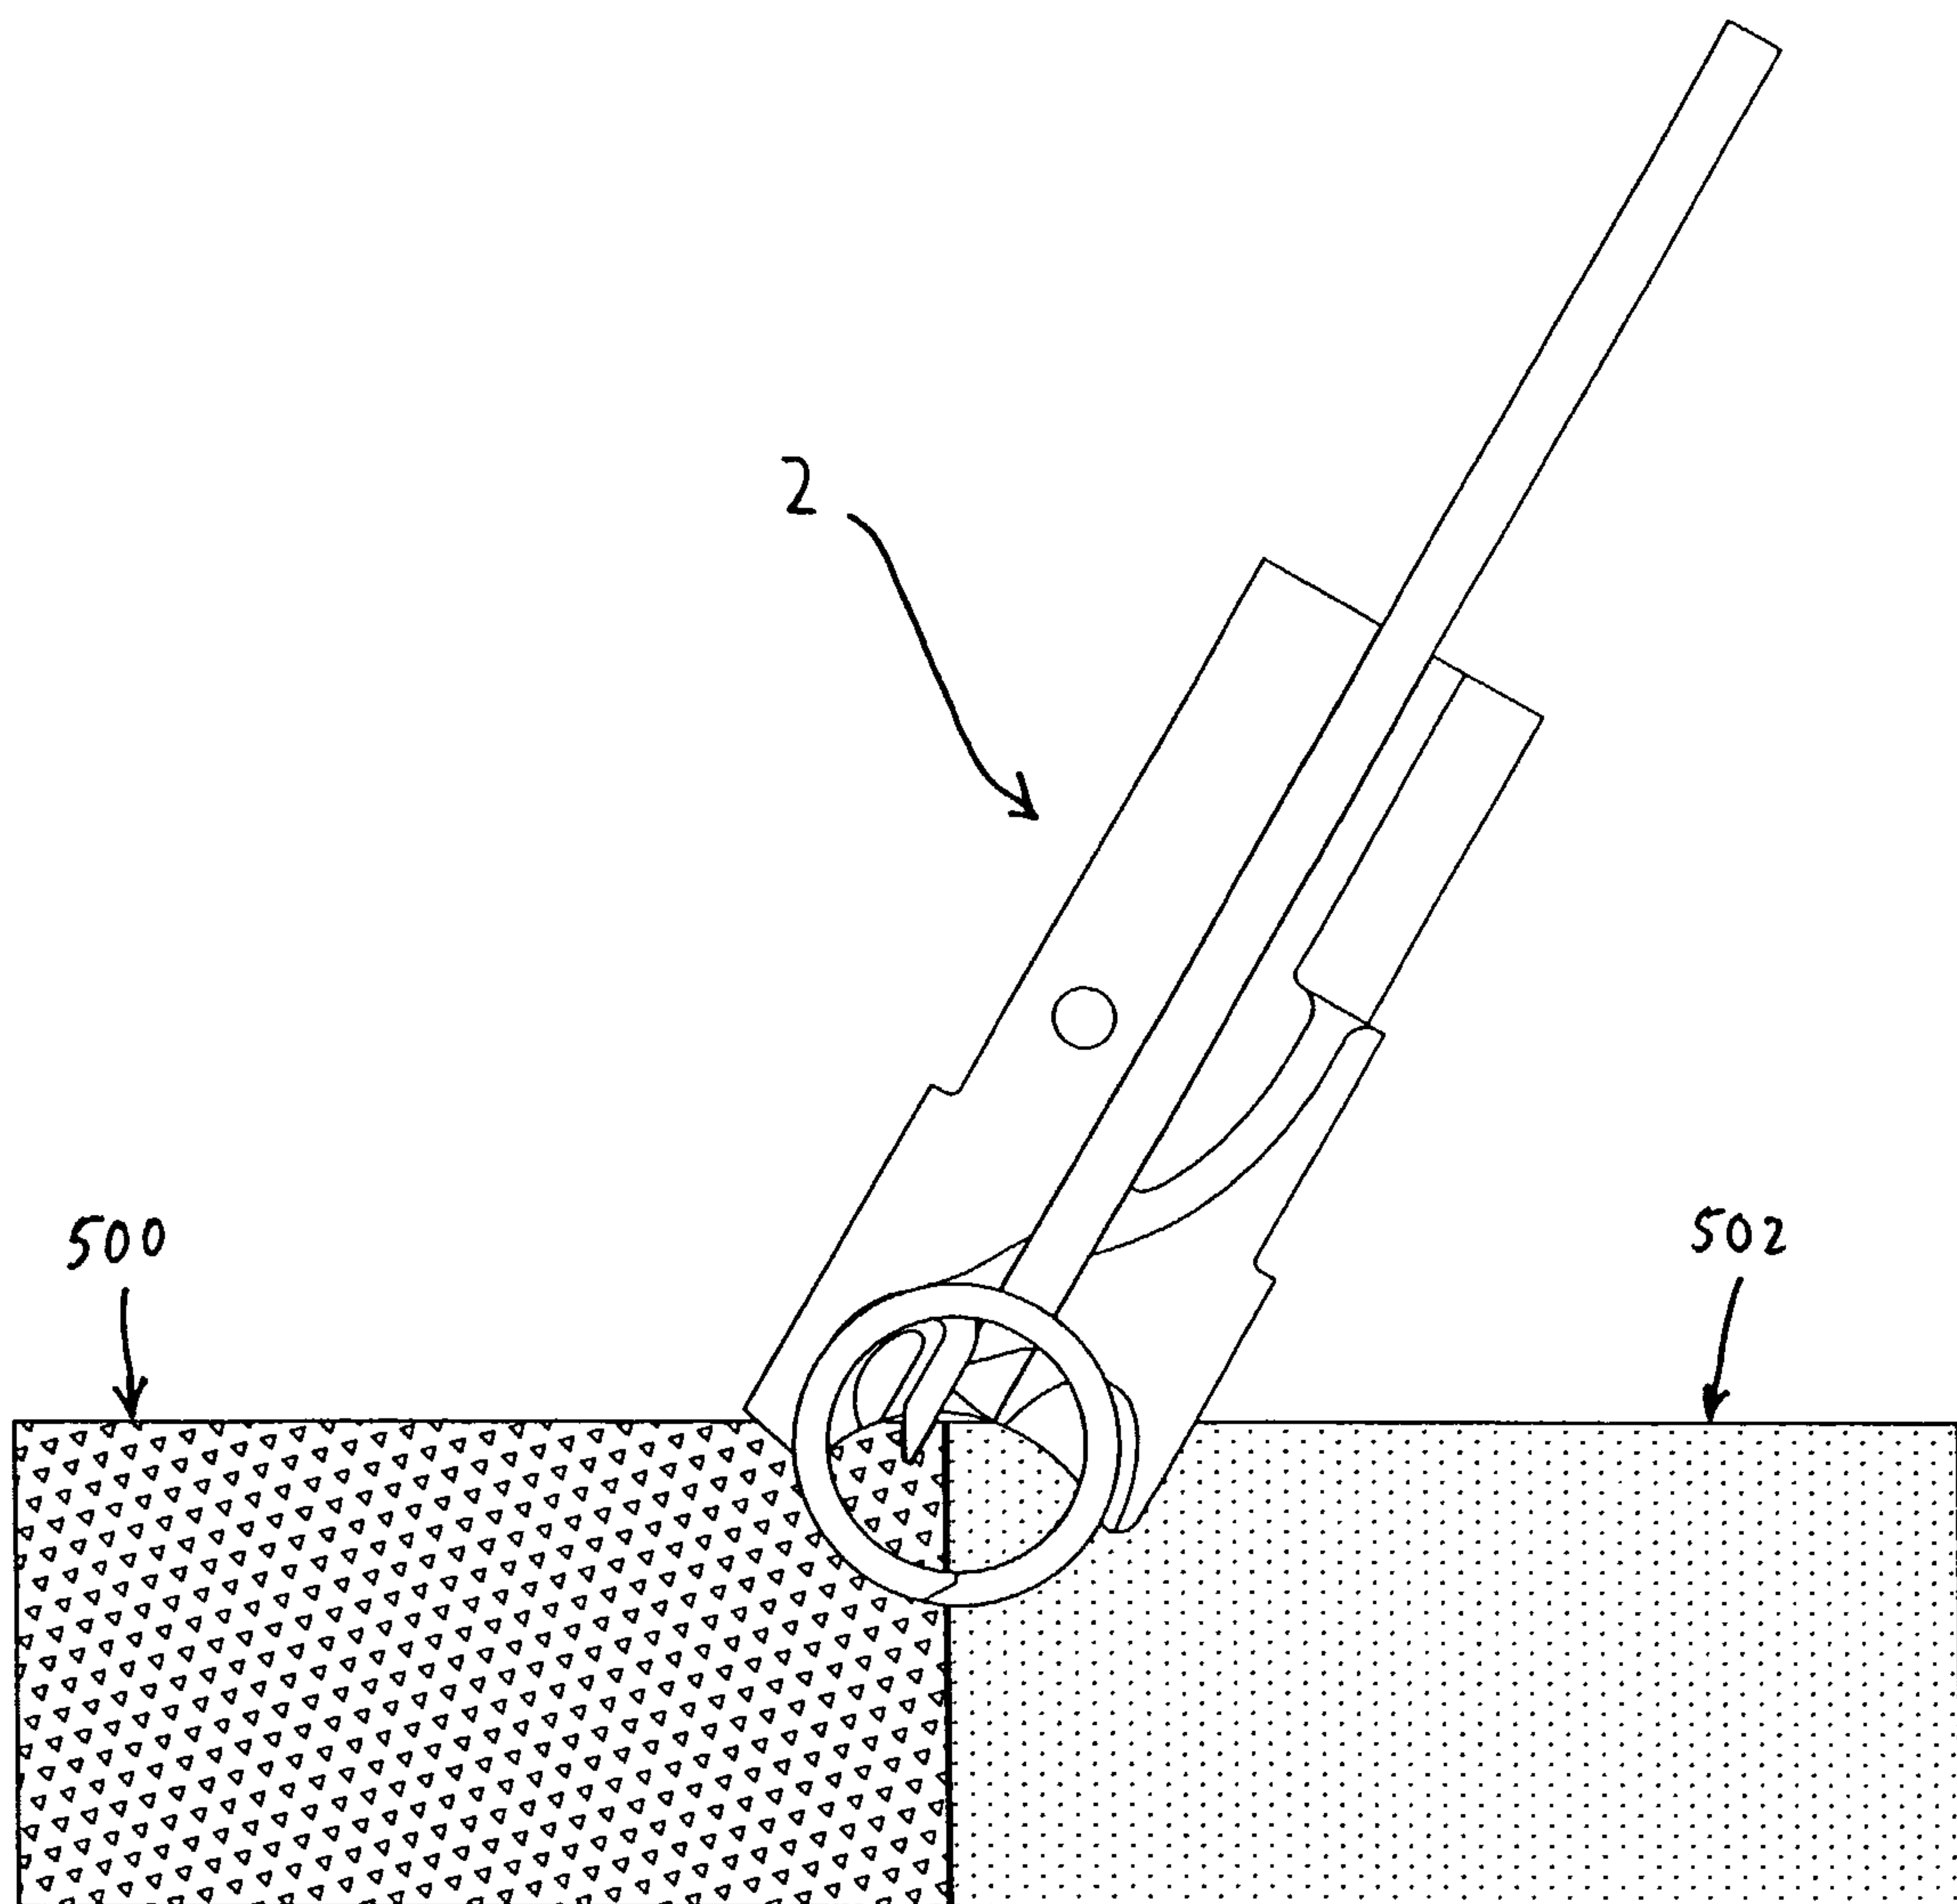


FIG. 34

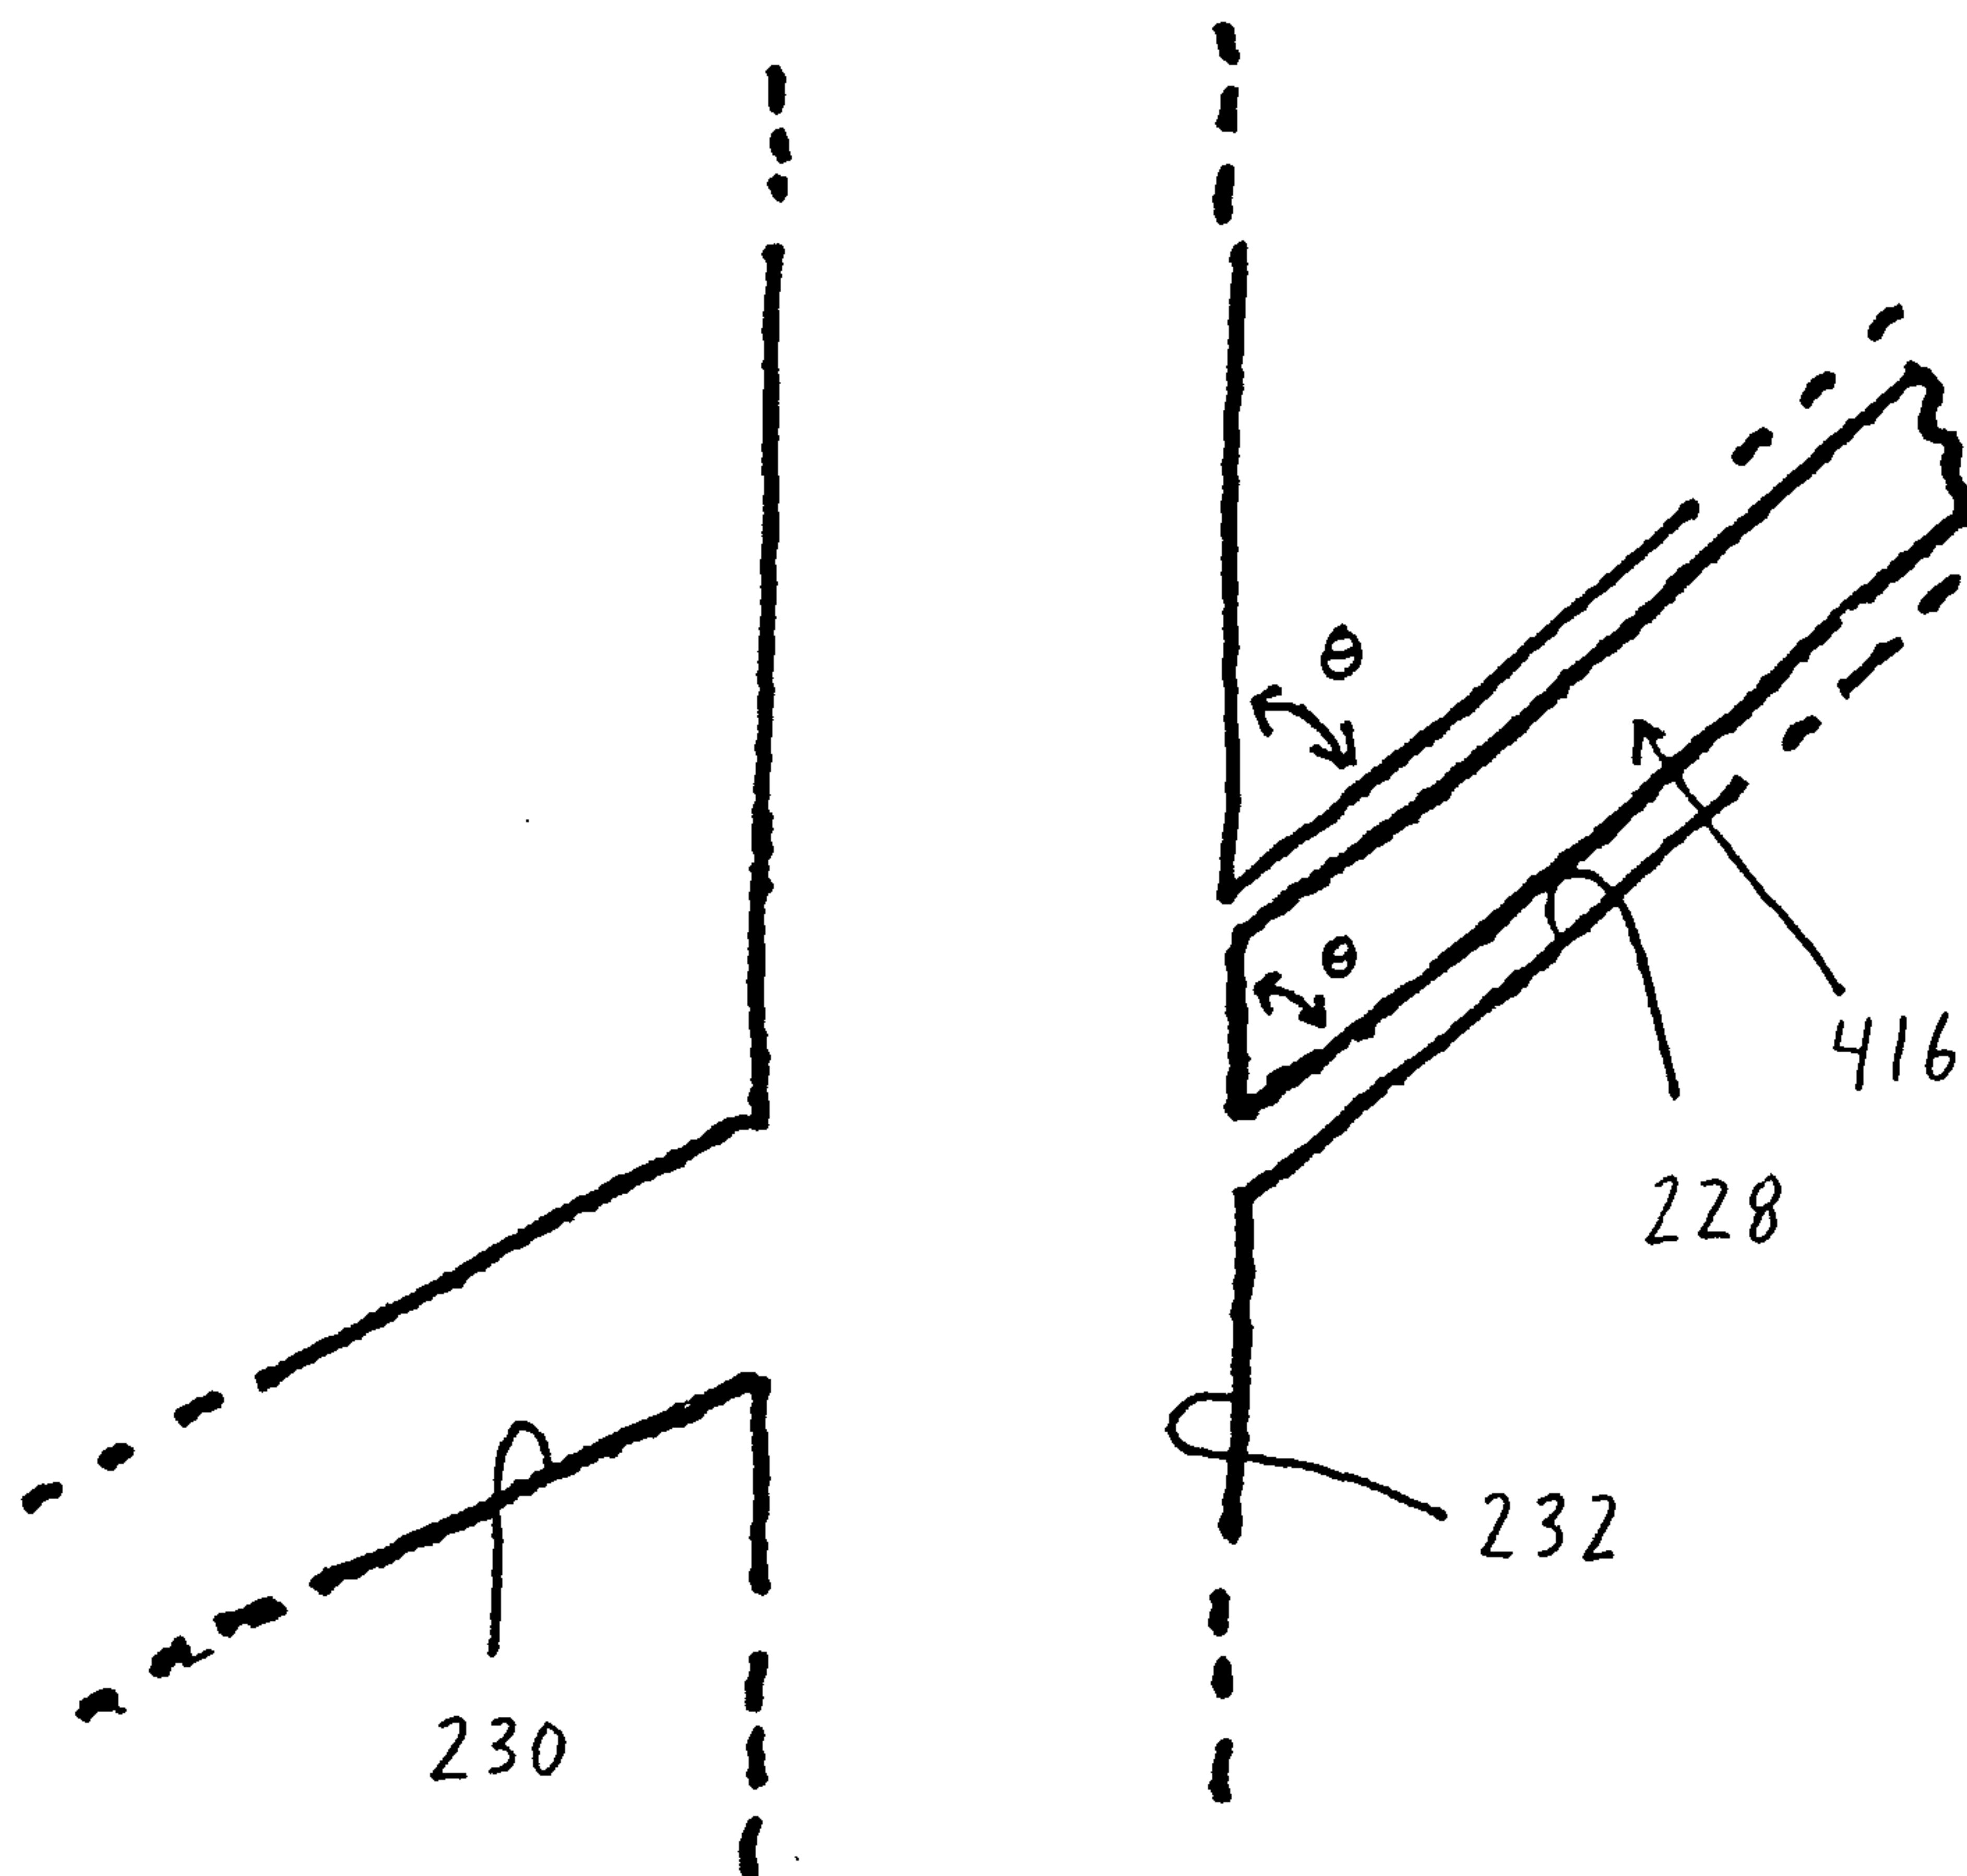


FIG. 35

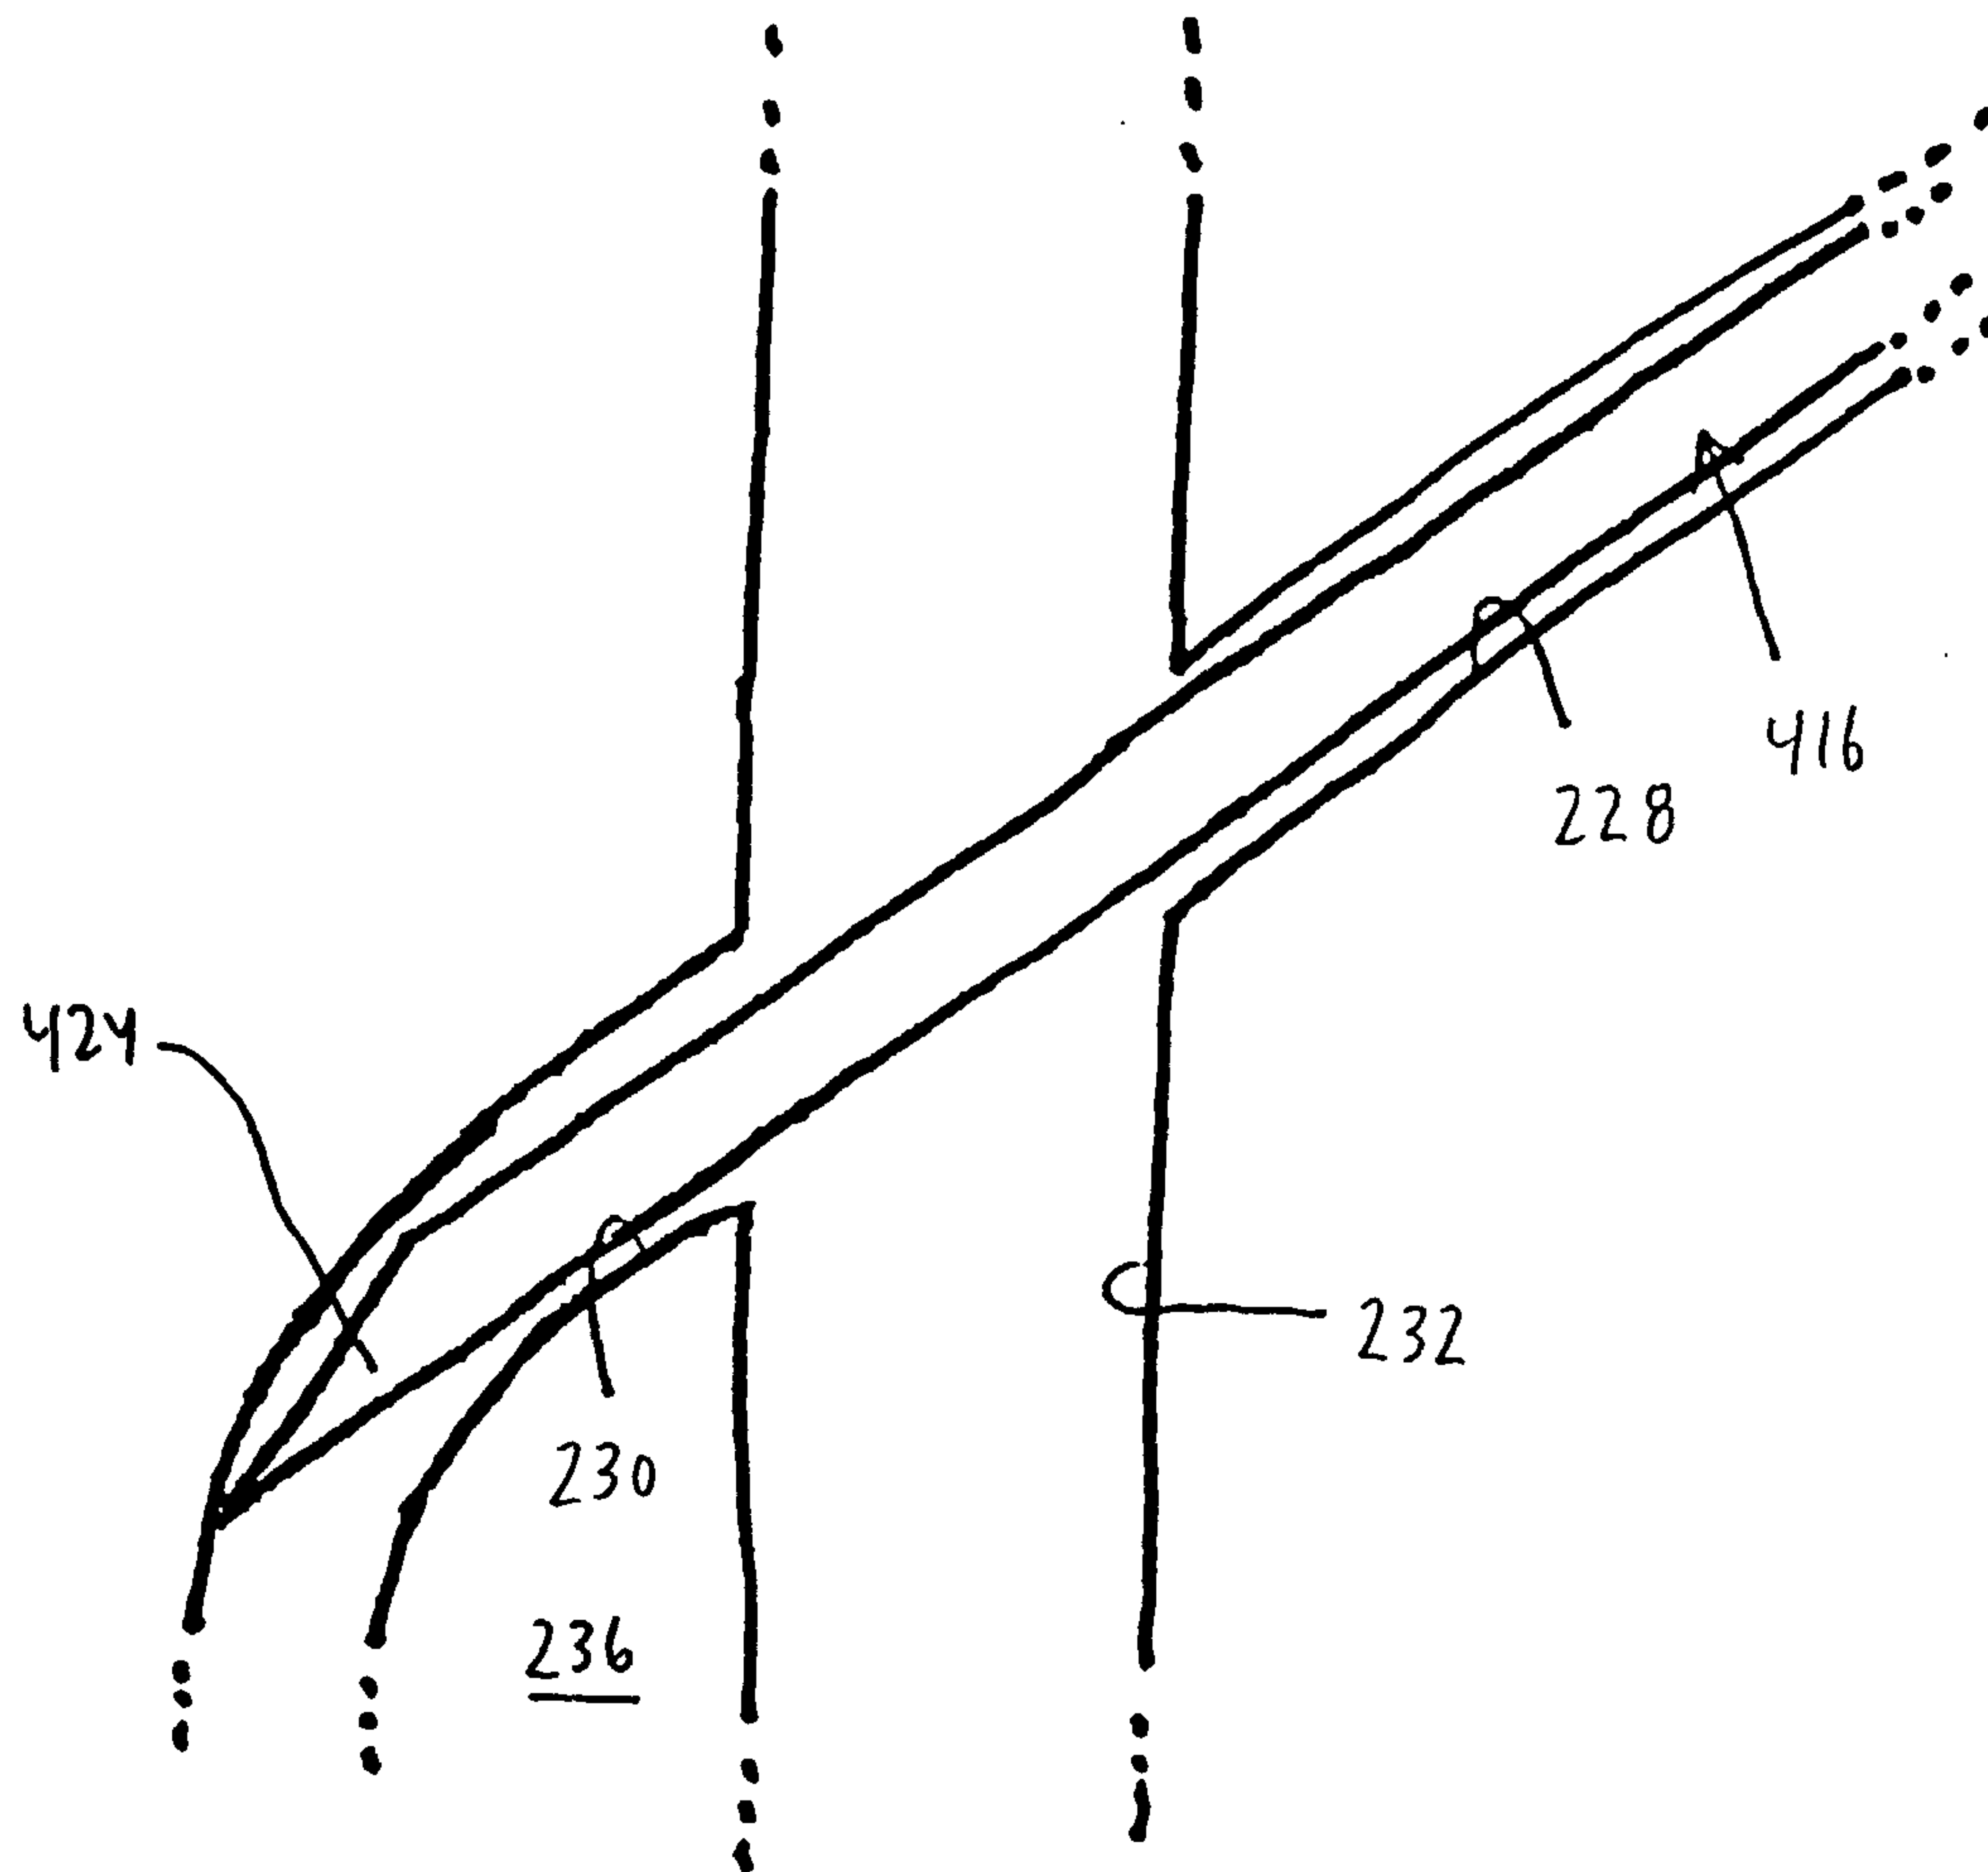


FIG. 36

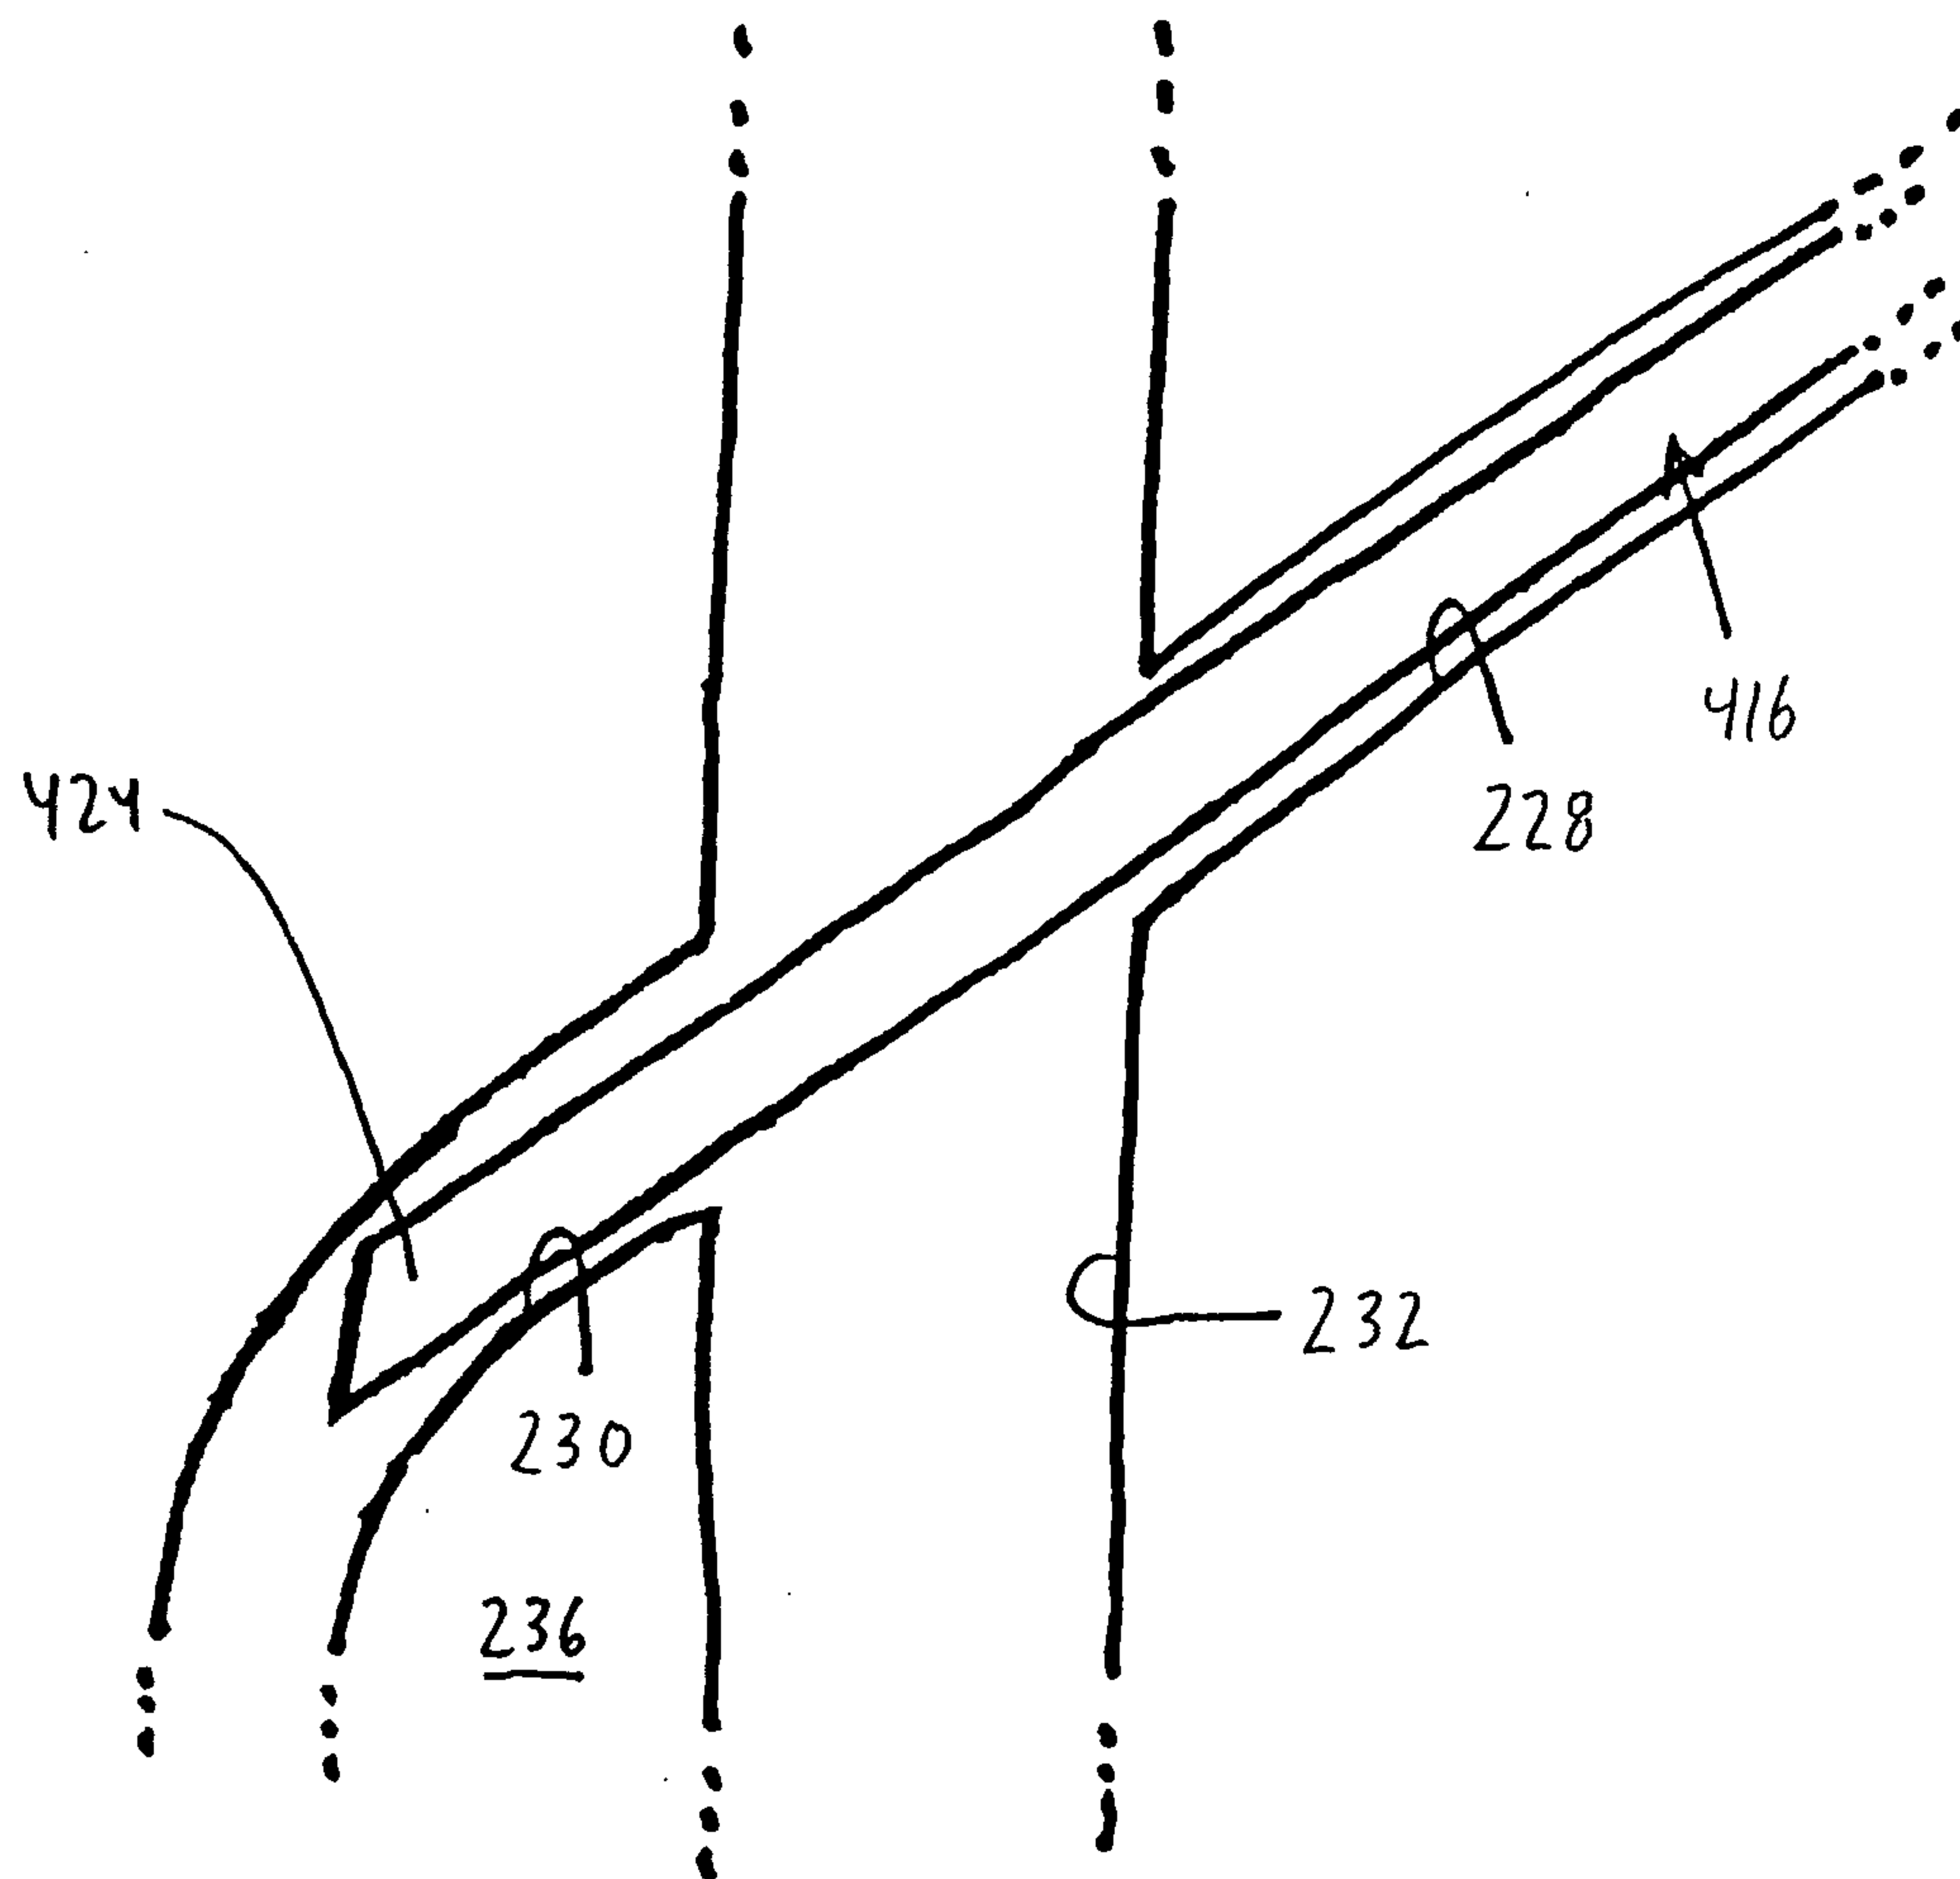


FIG. 37

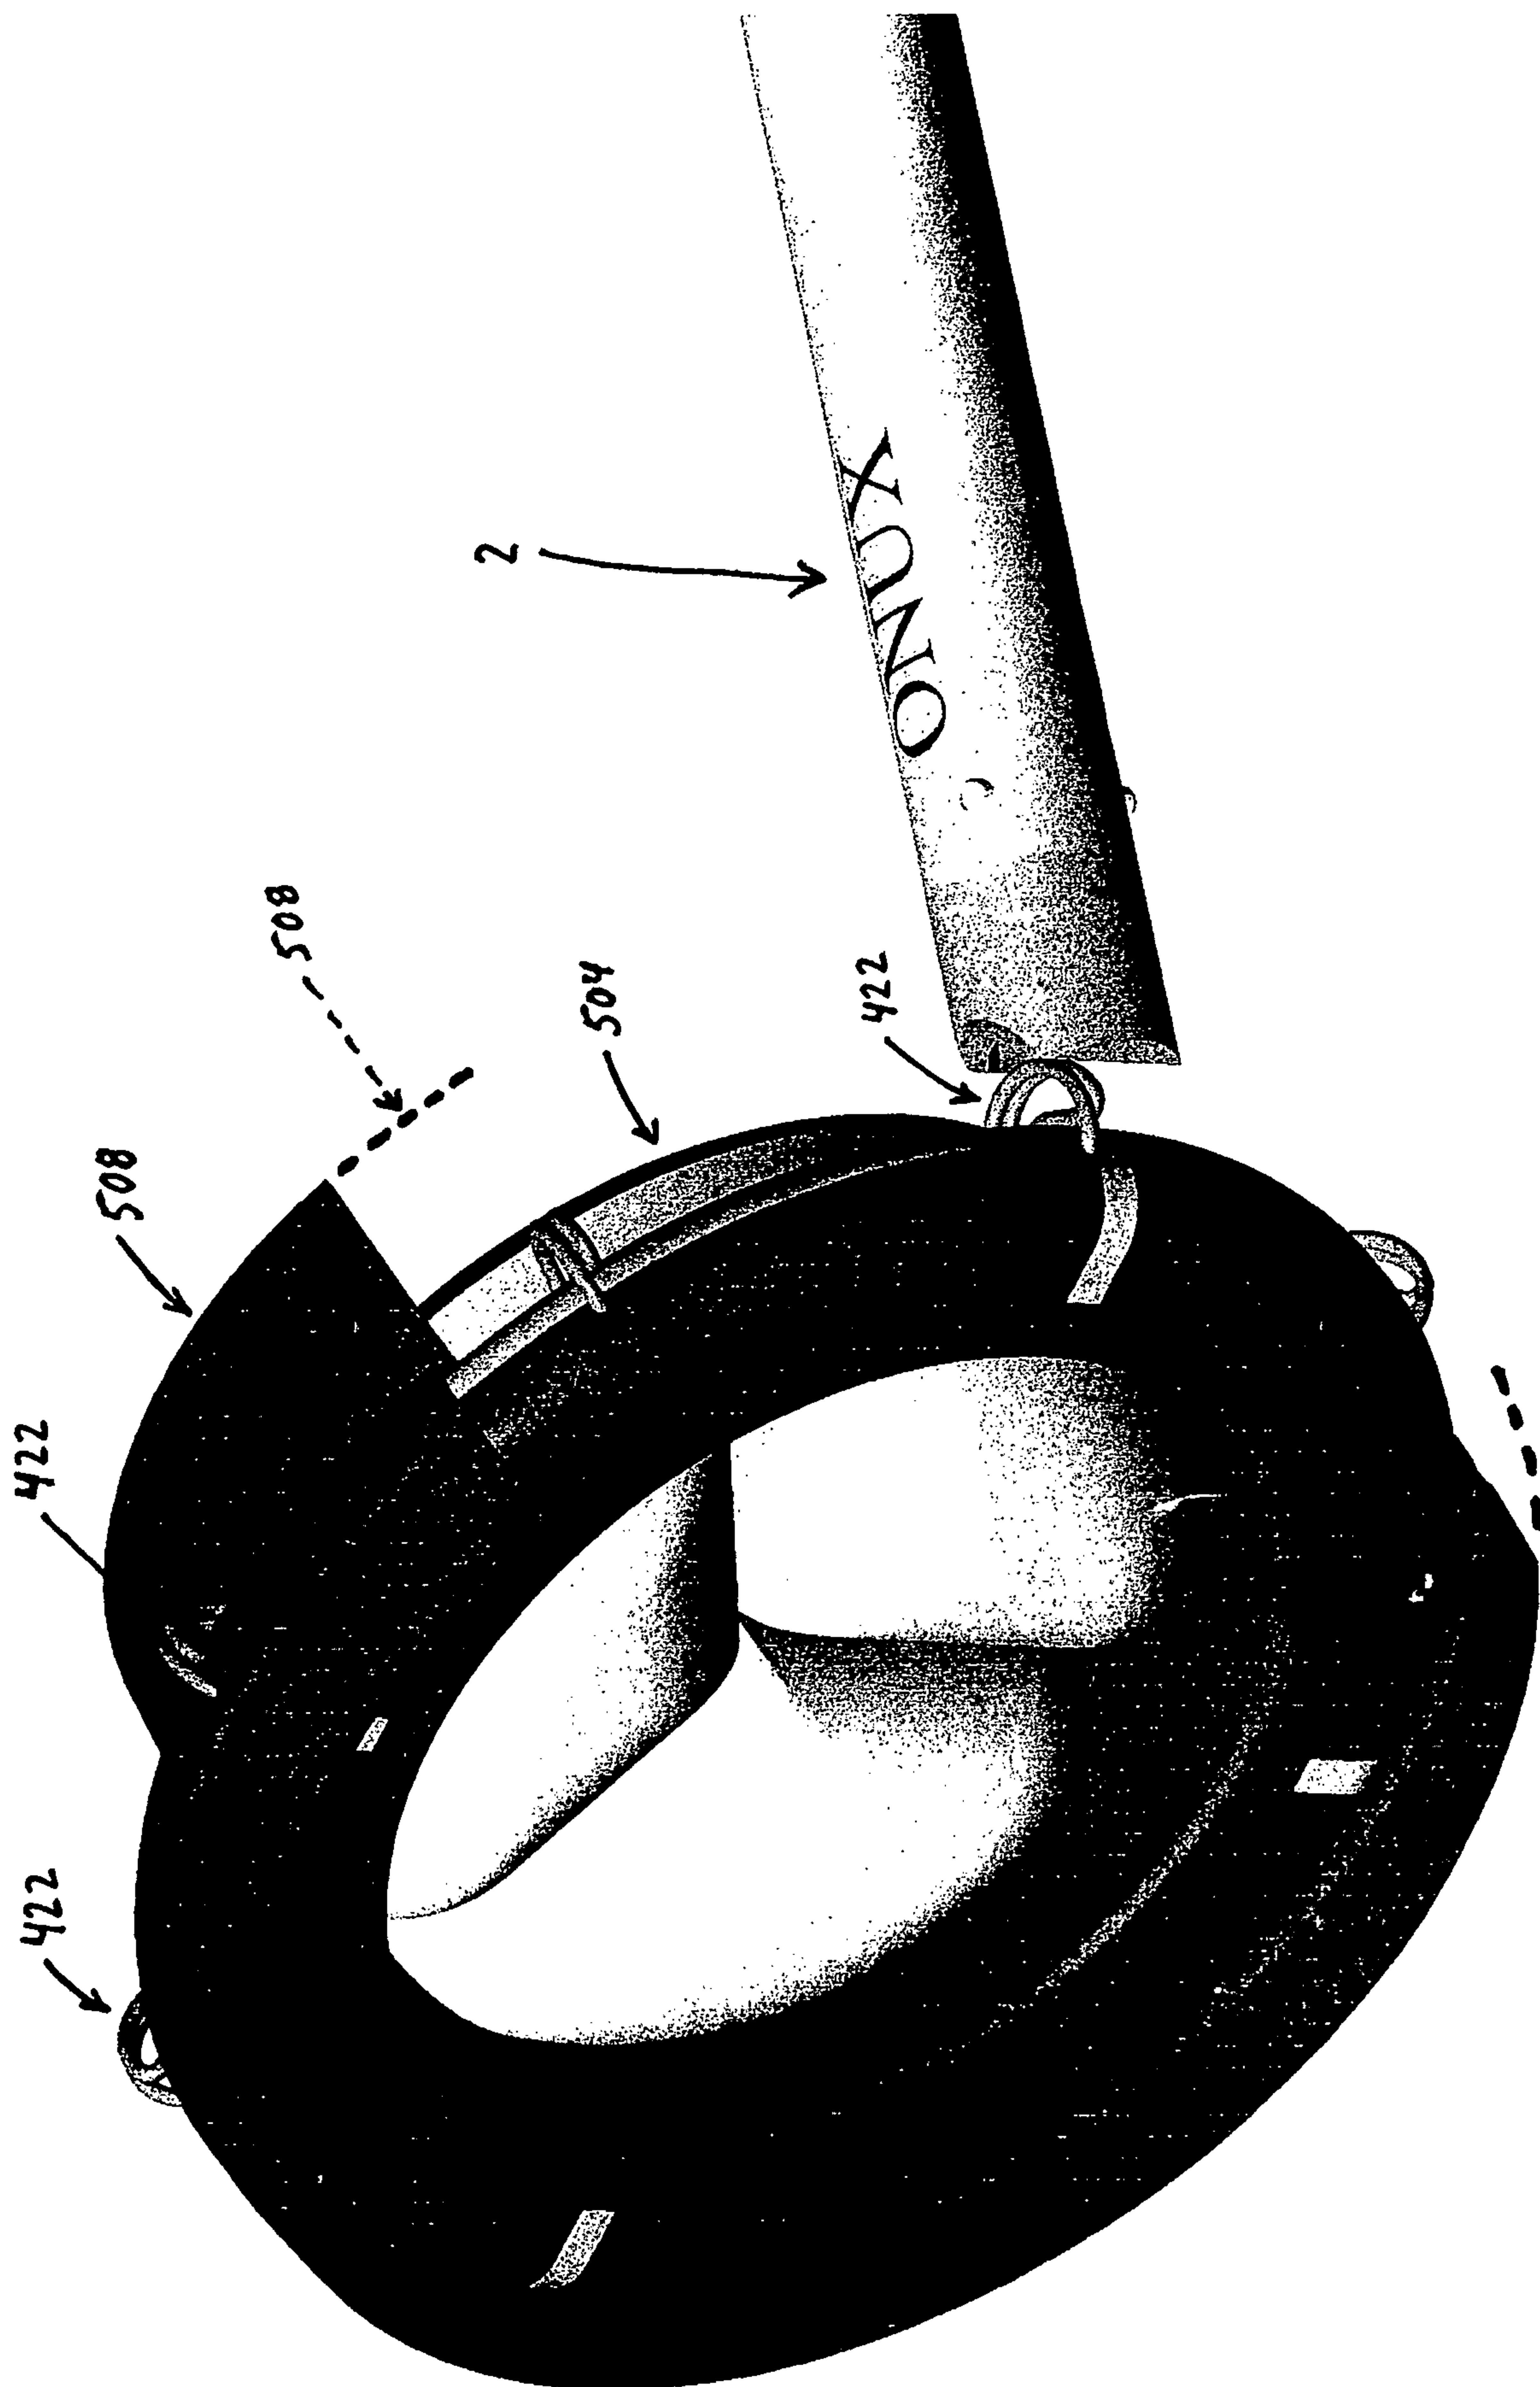


FIG. 38

36/50



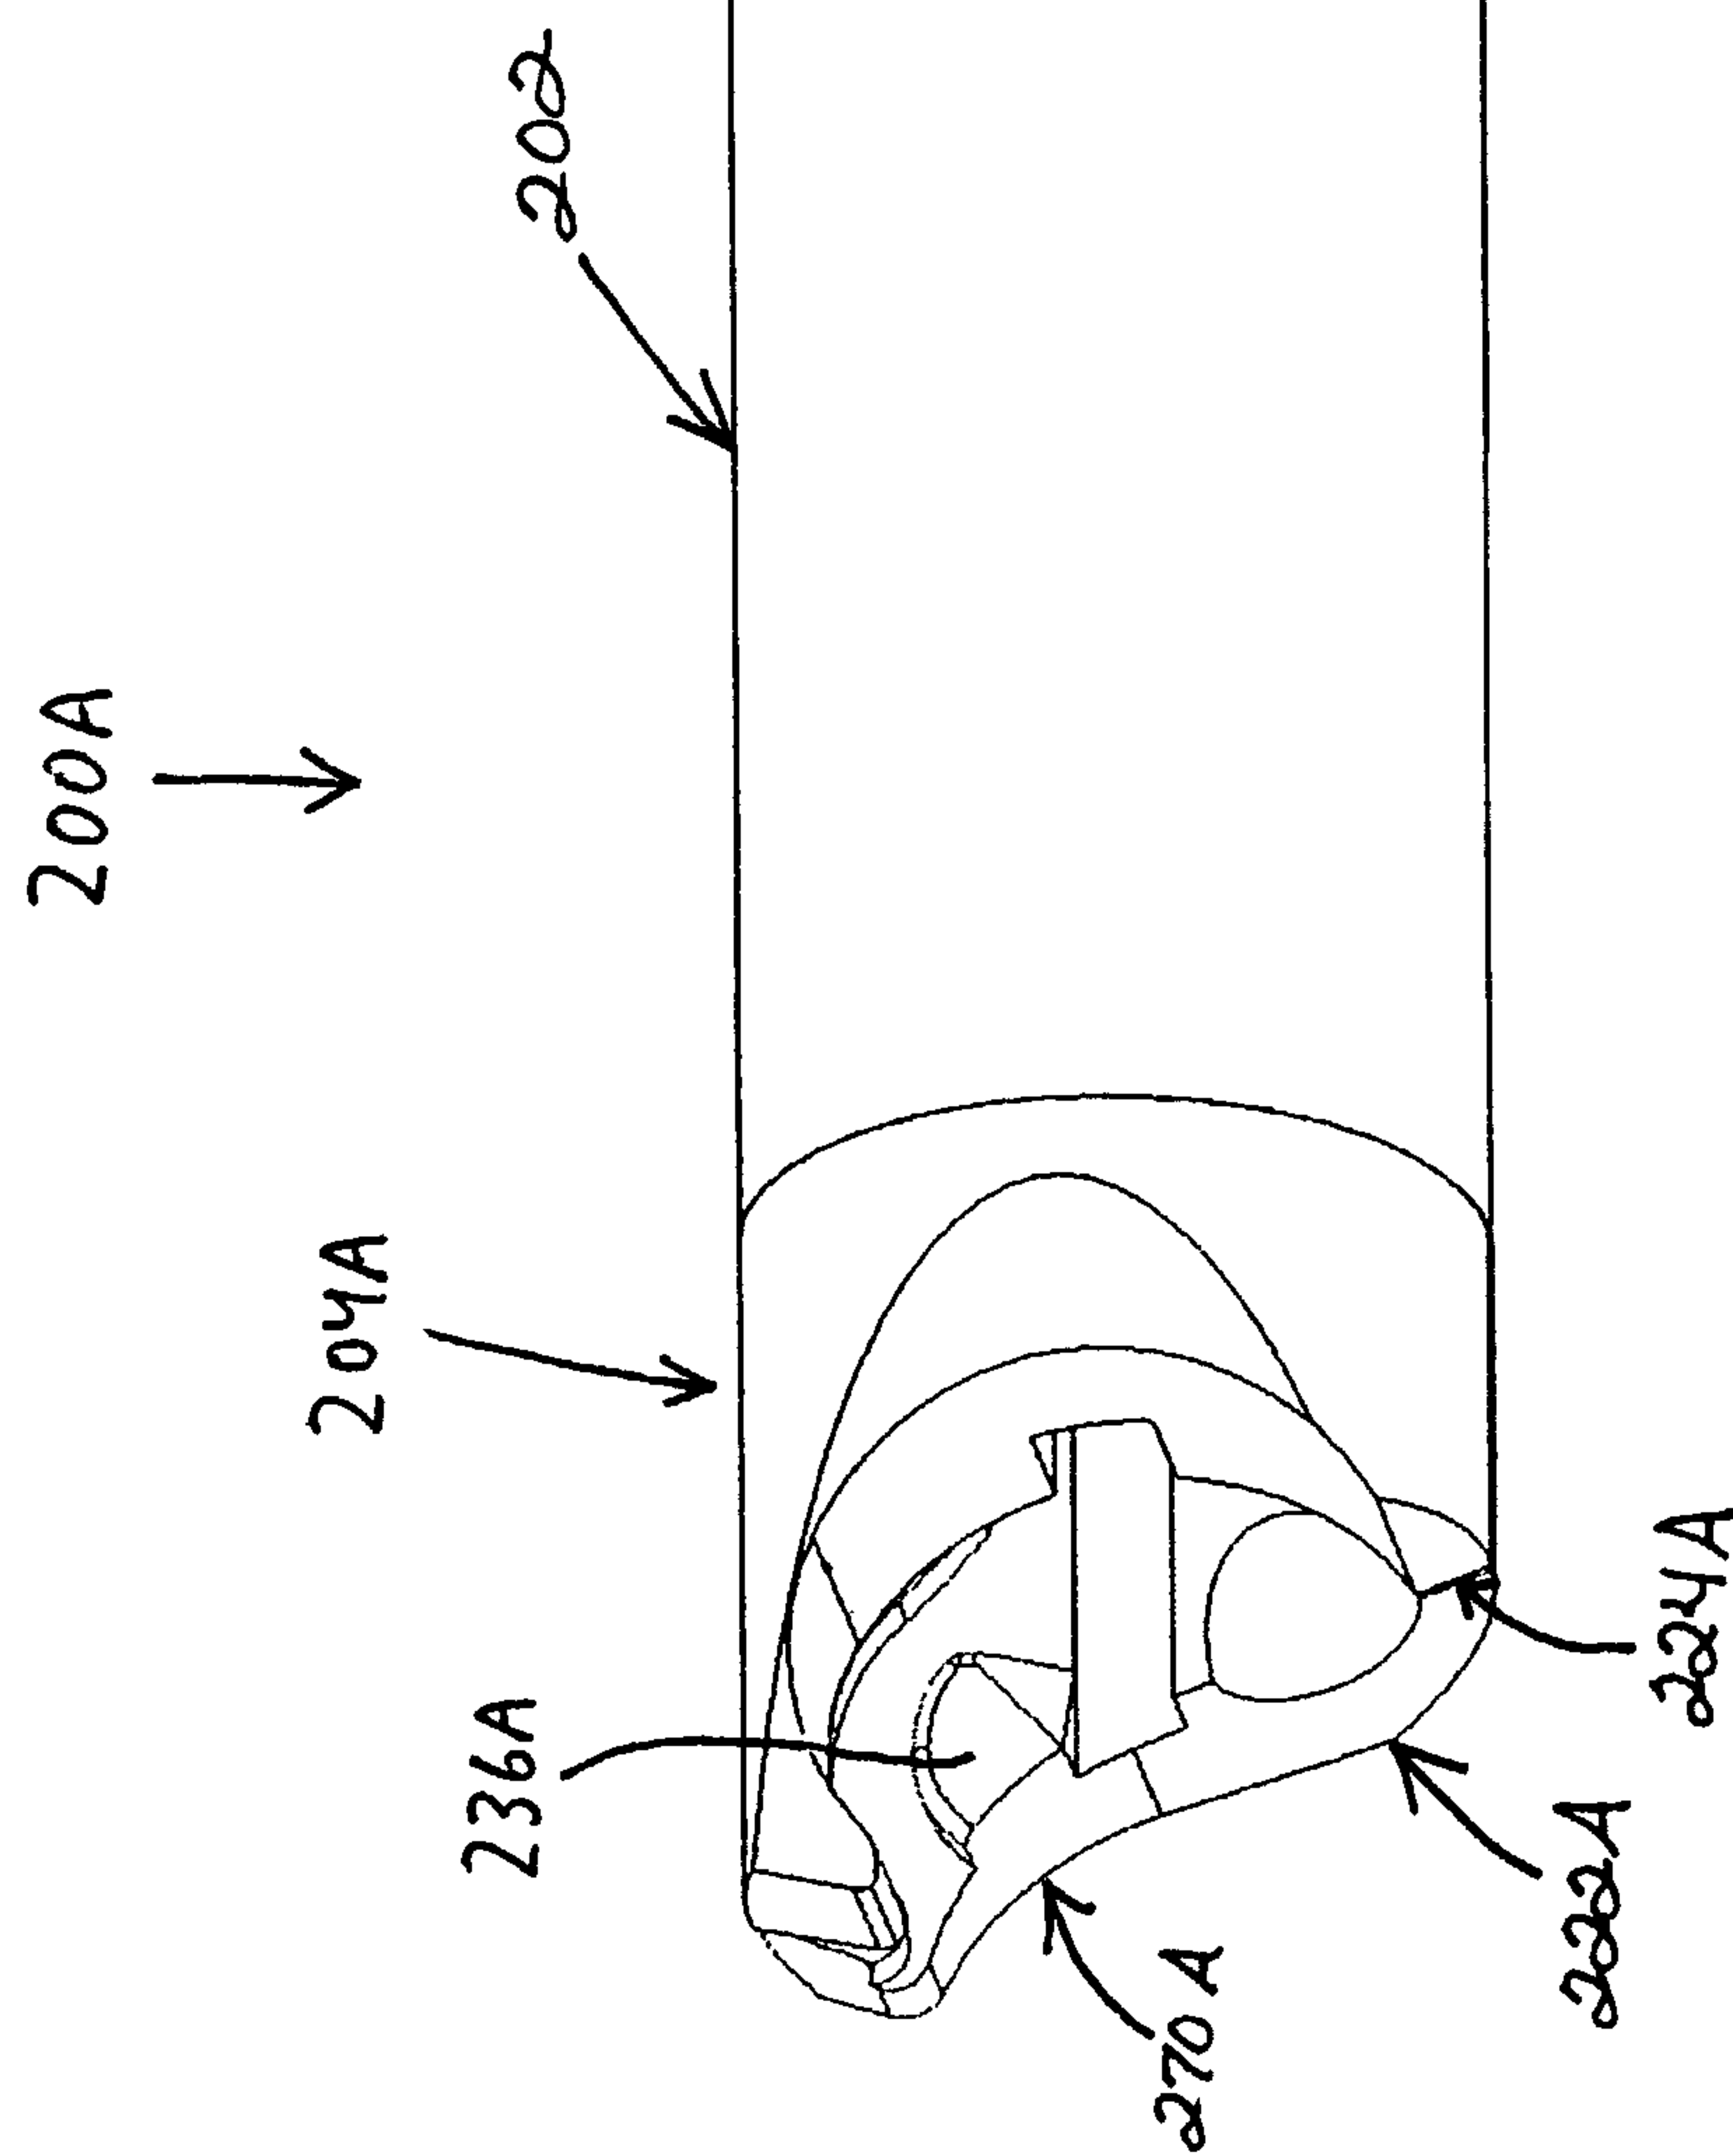



FIG. 39

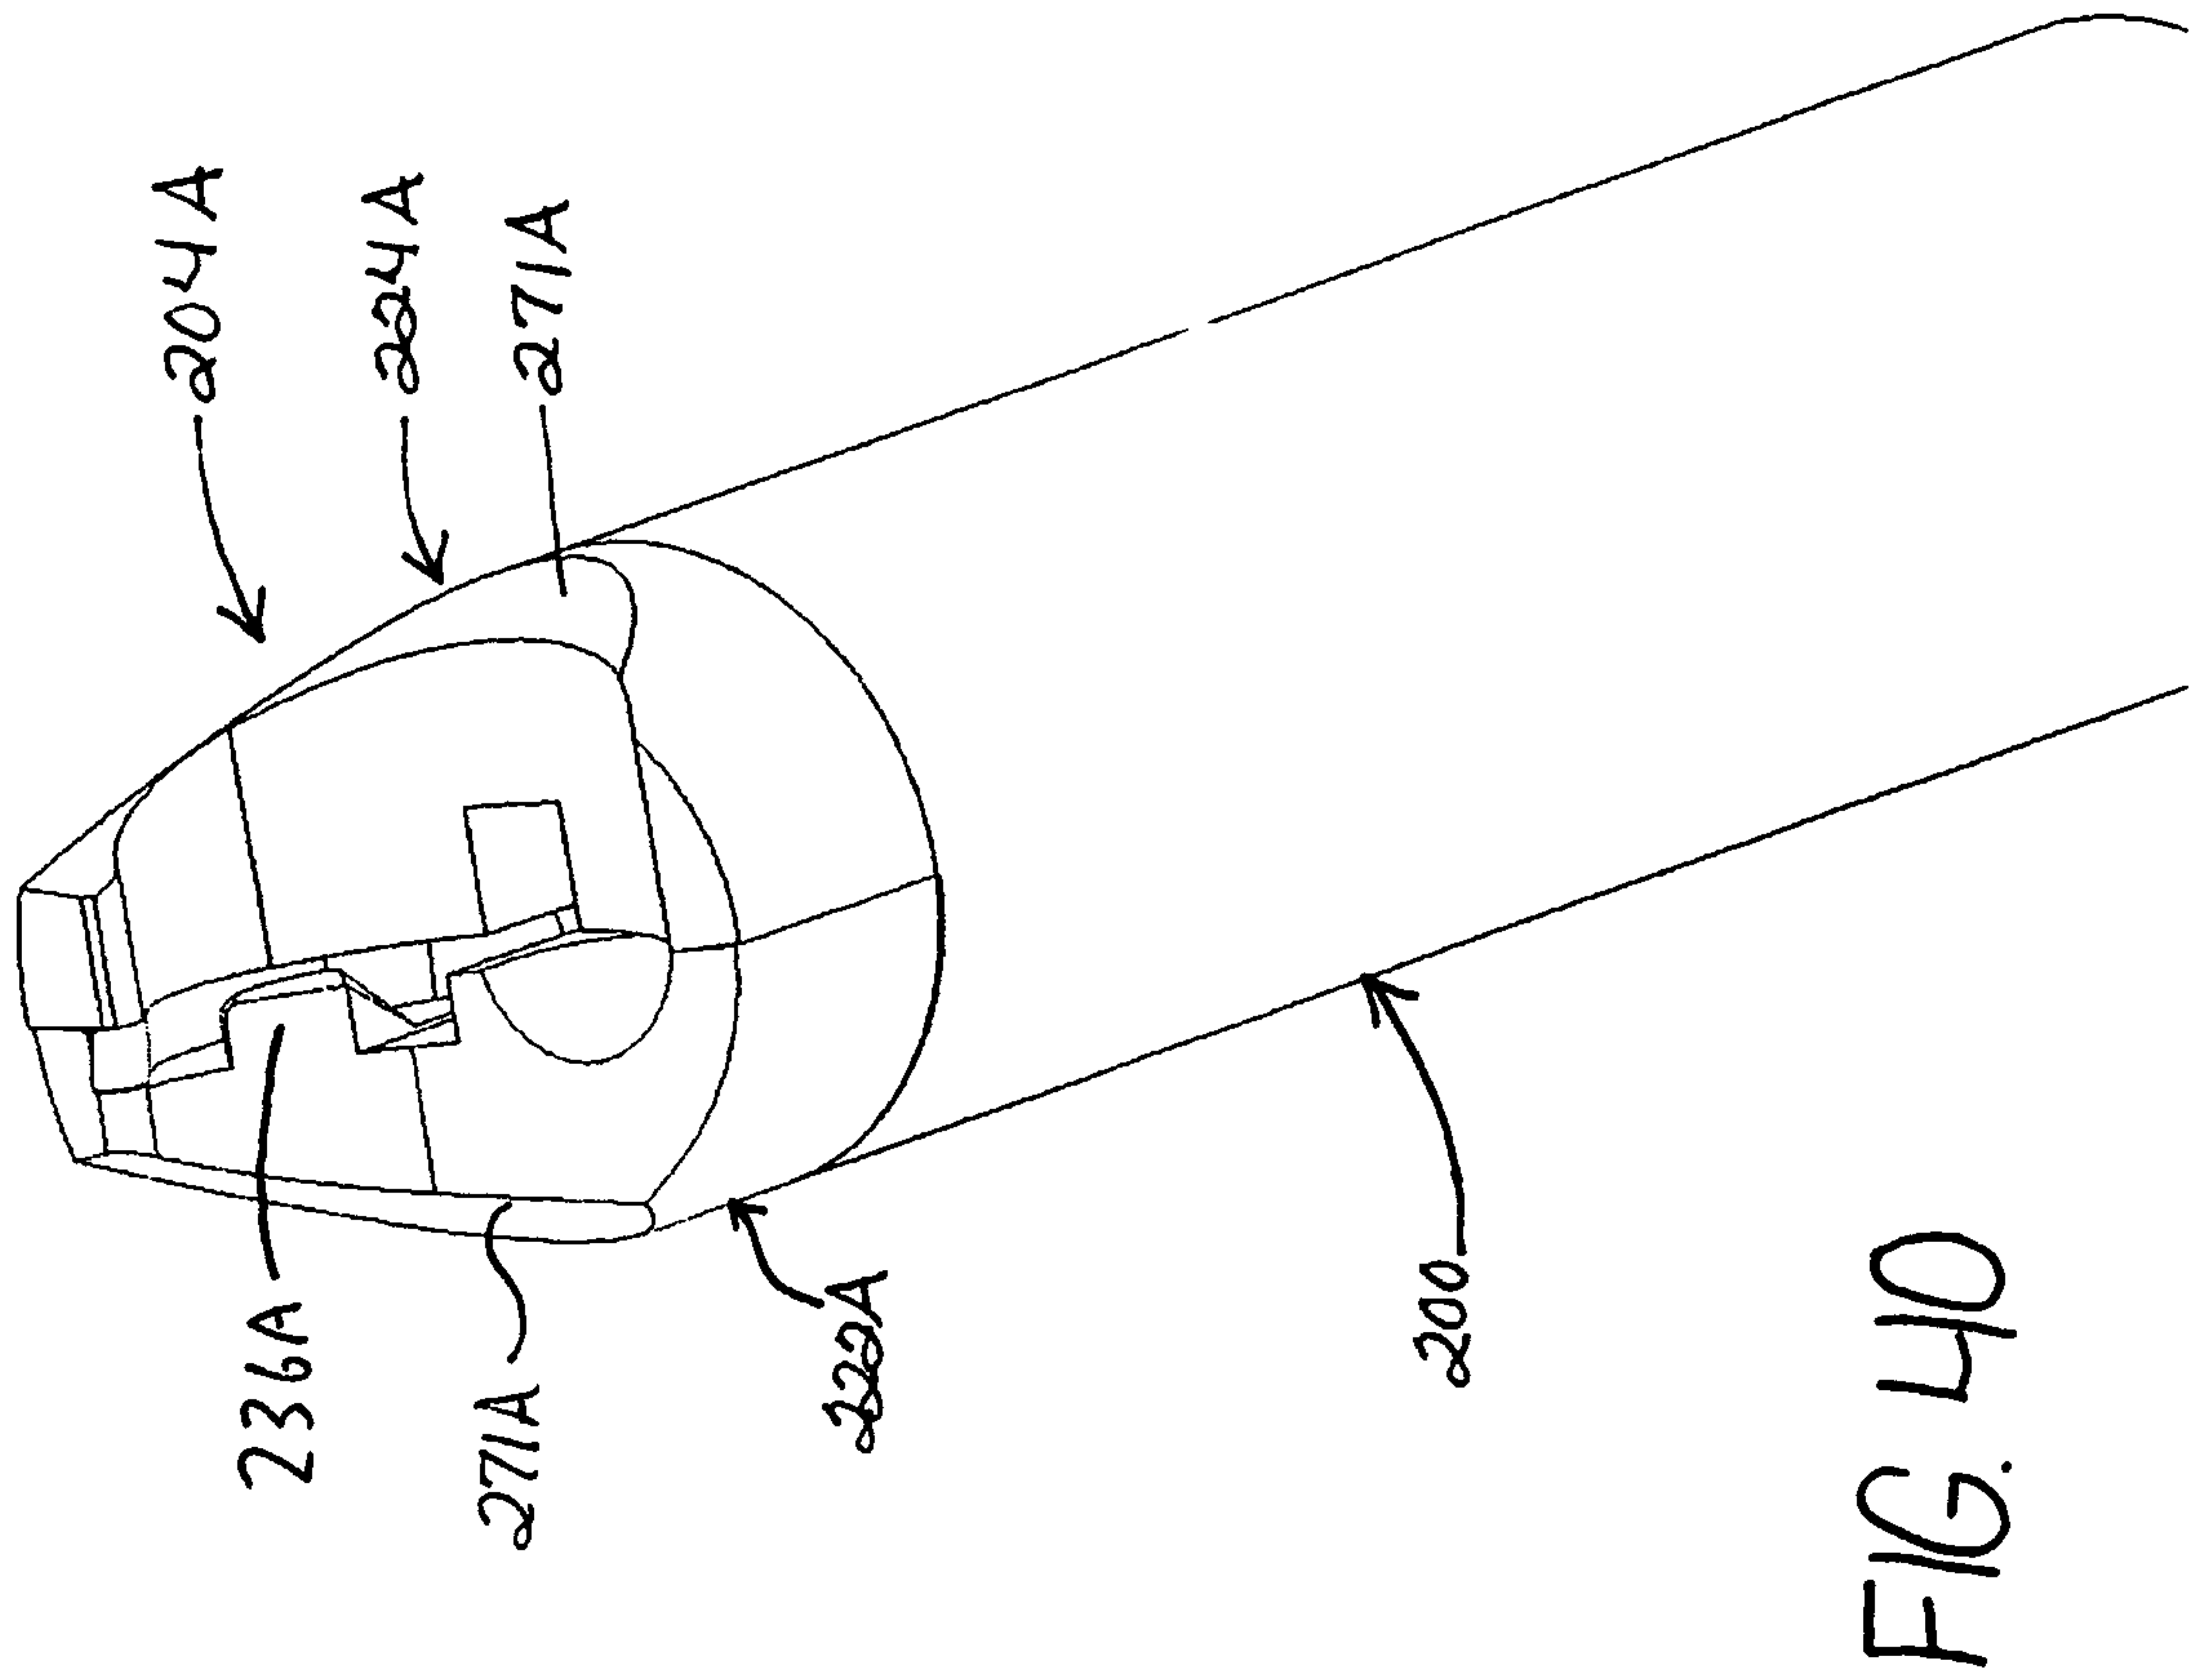

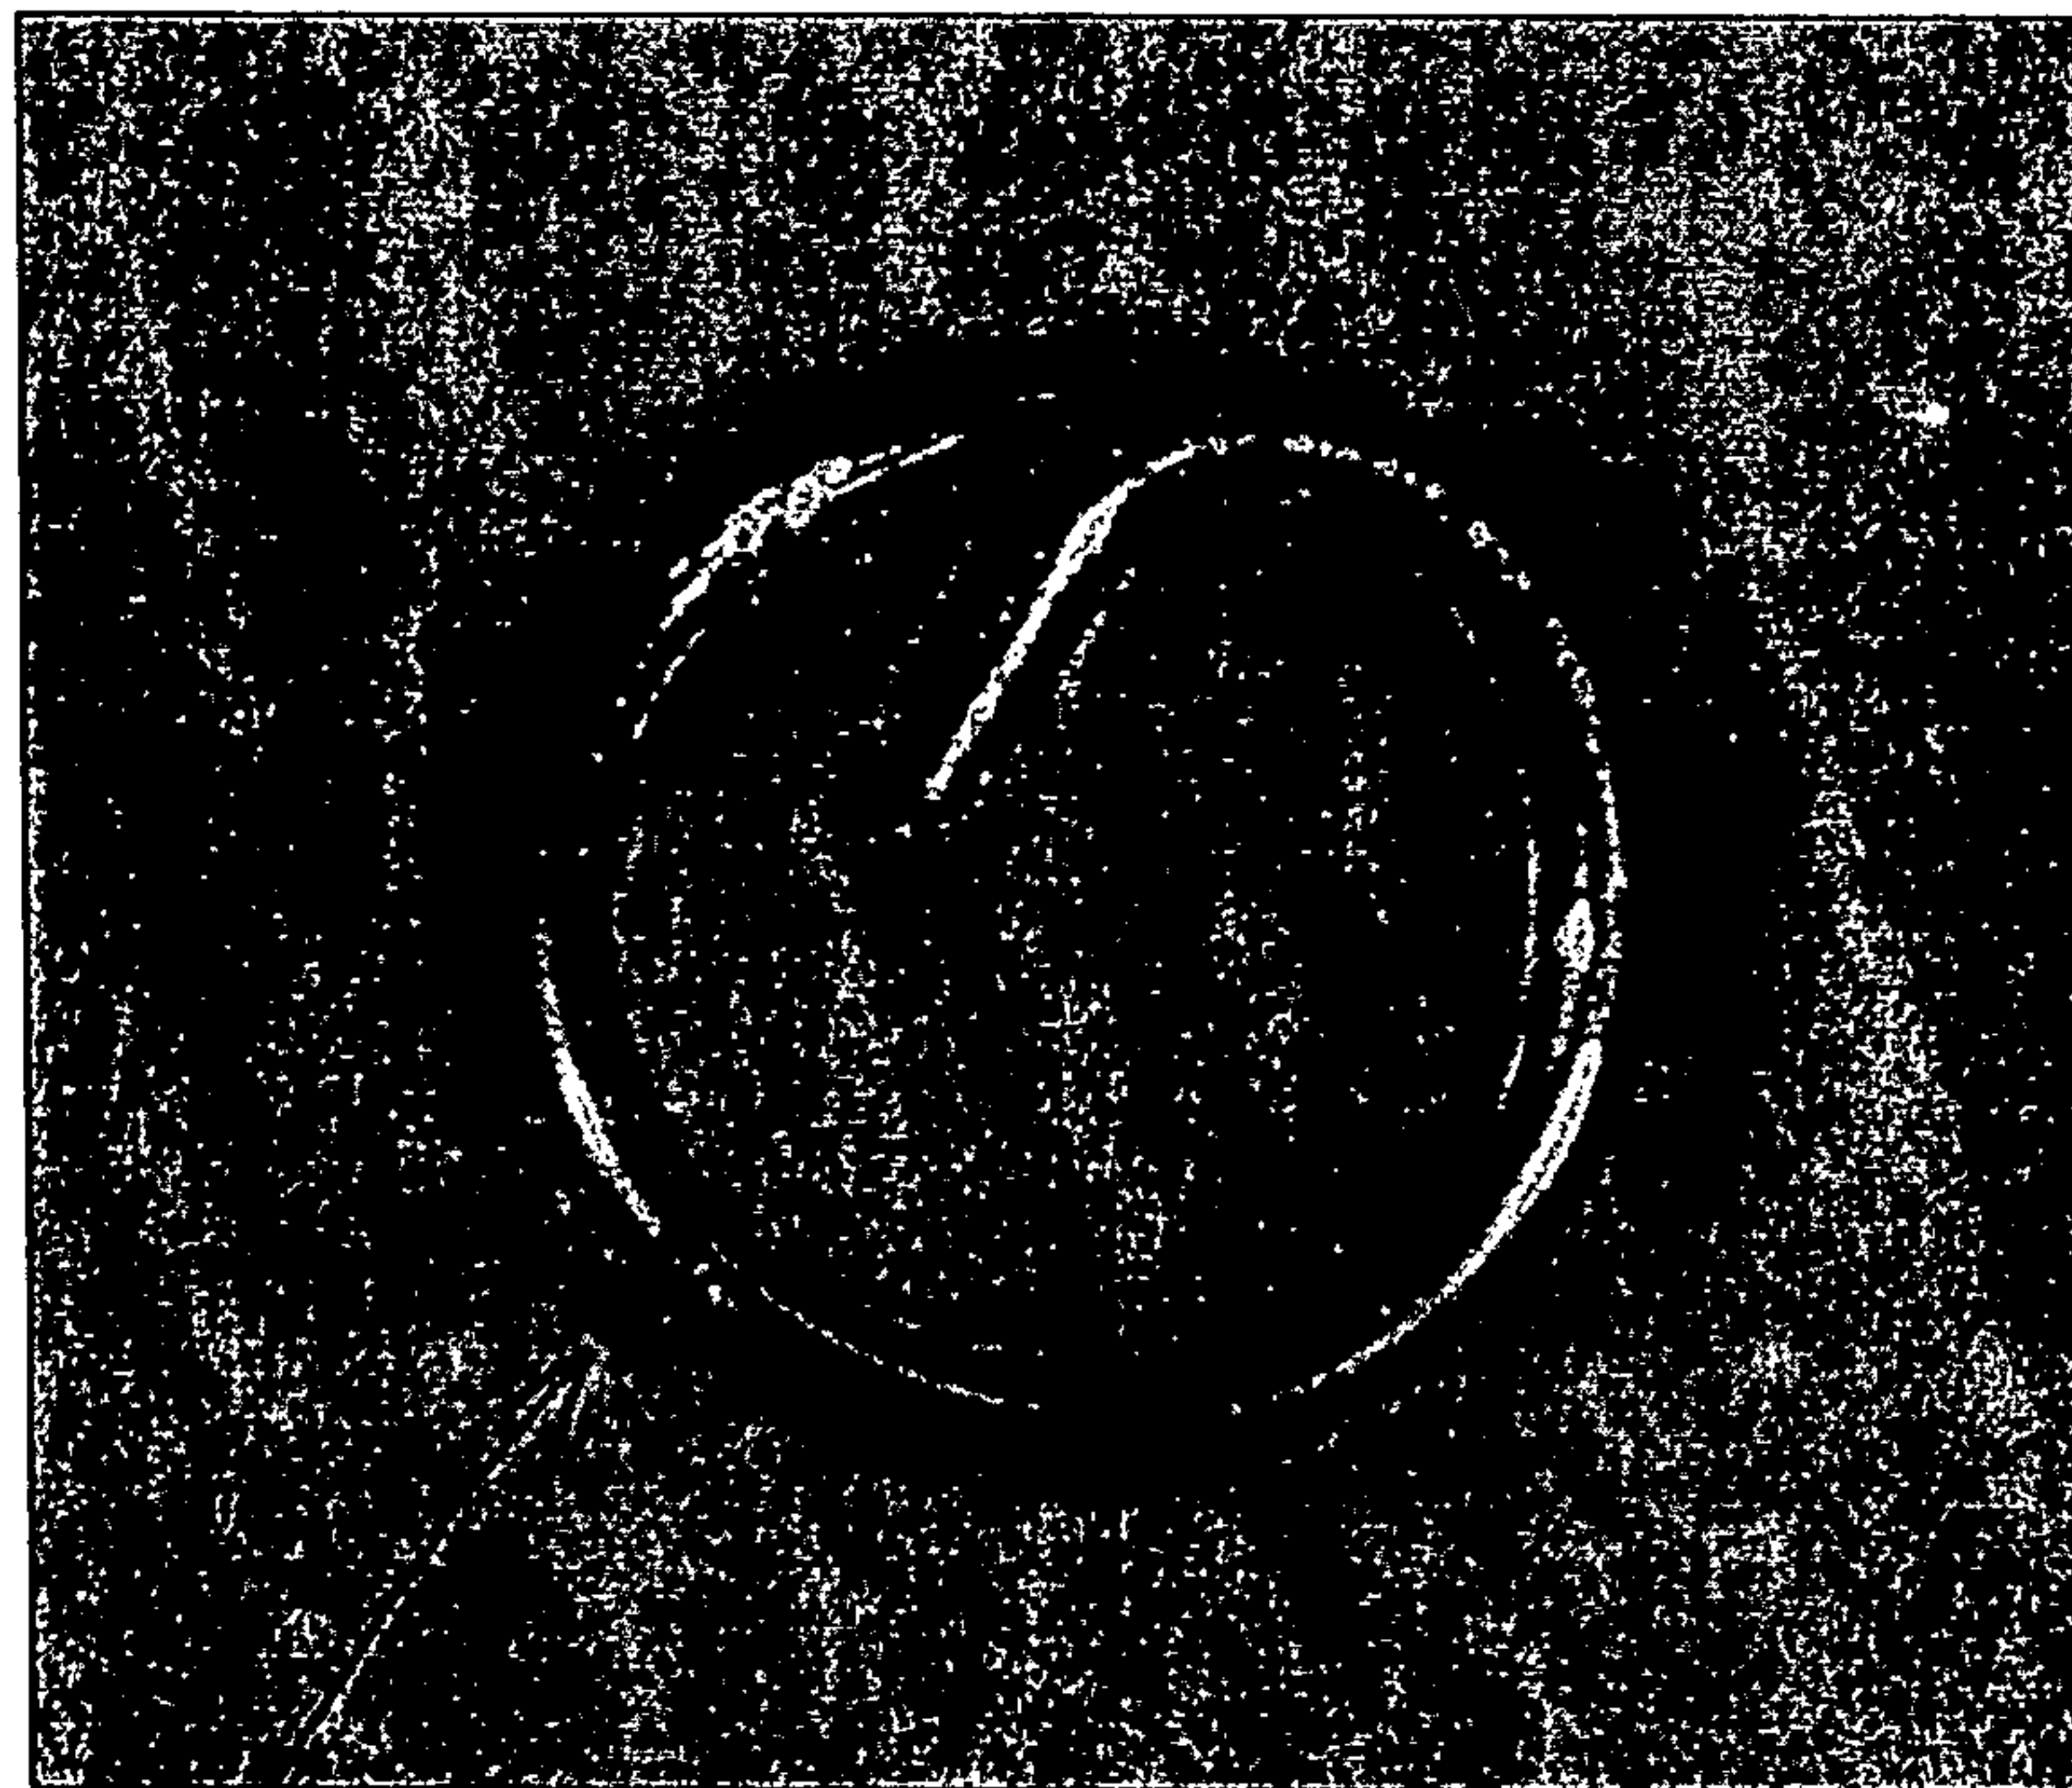

422A

FIG. 41

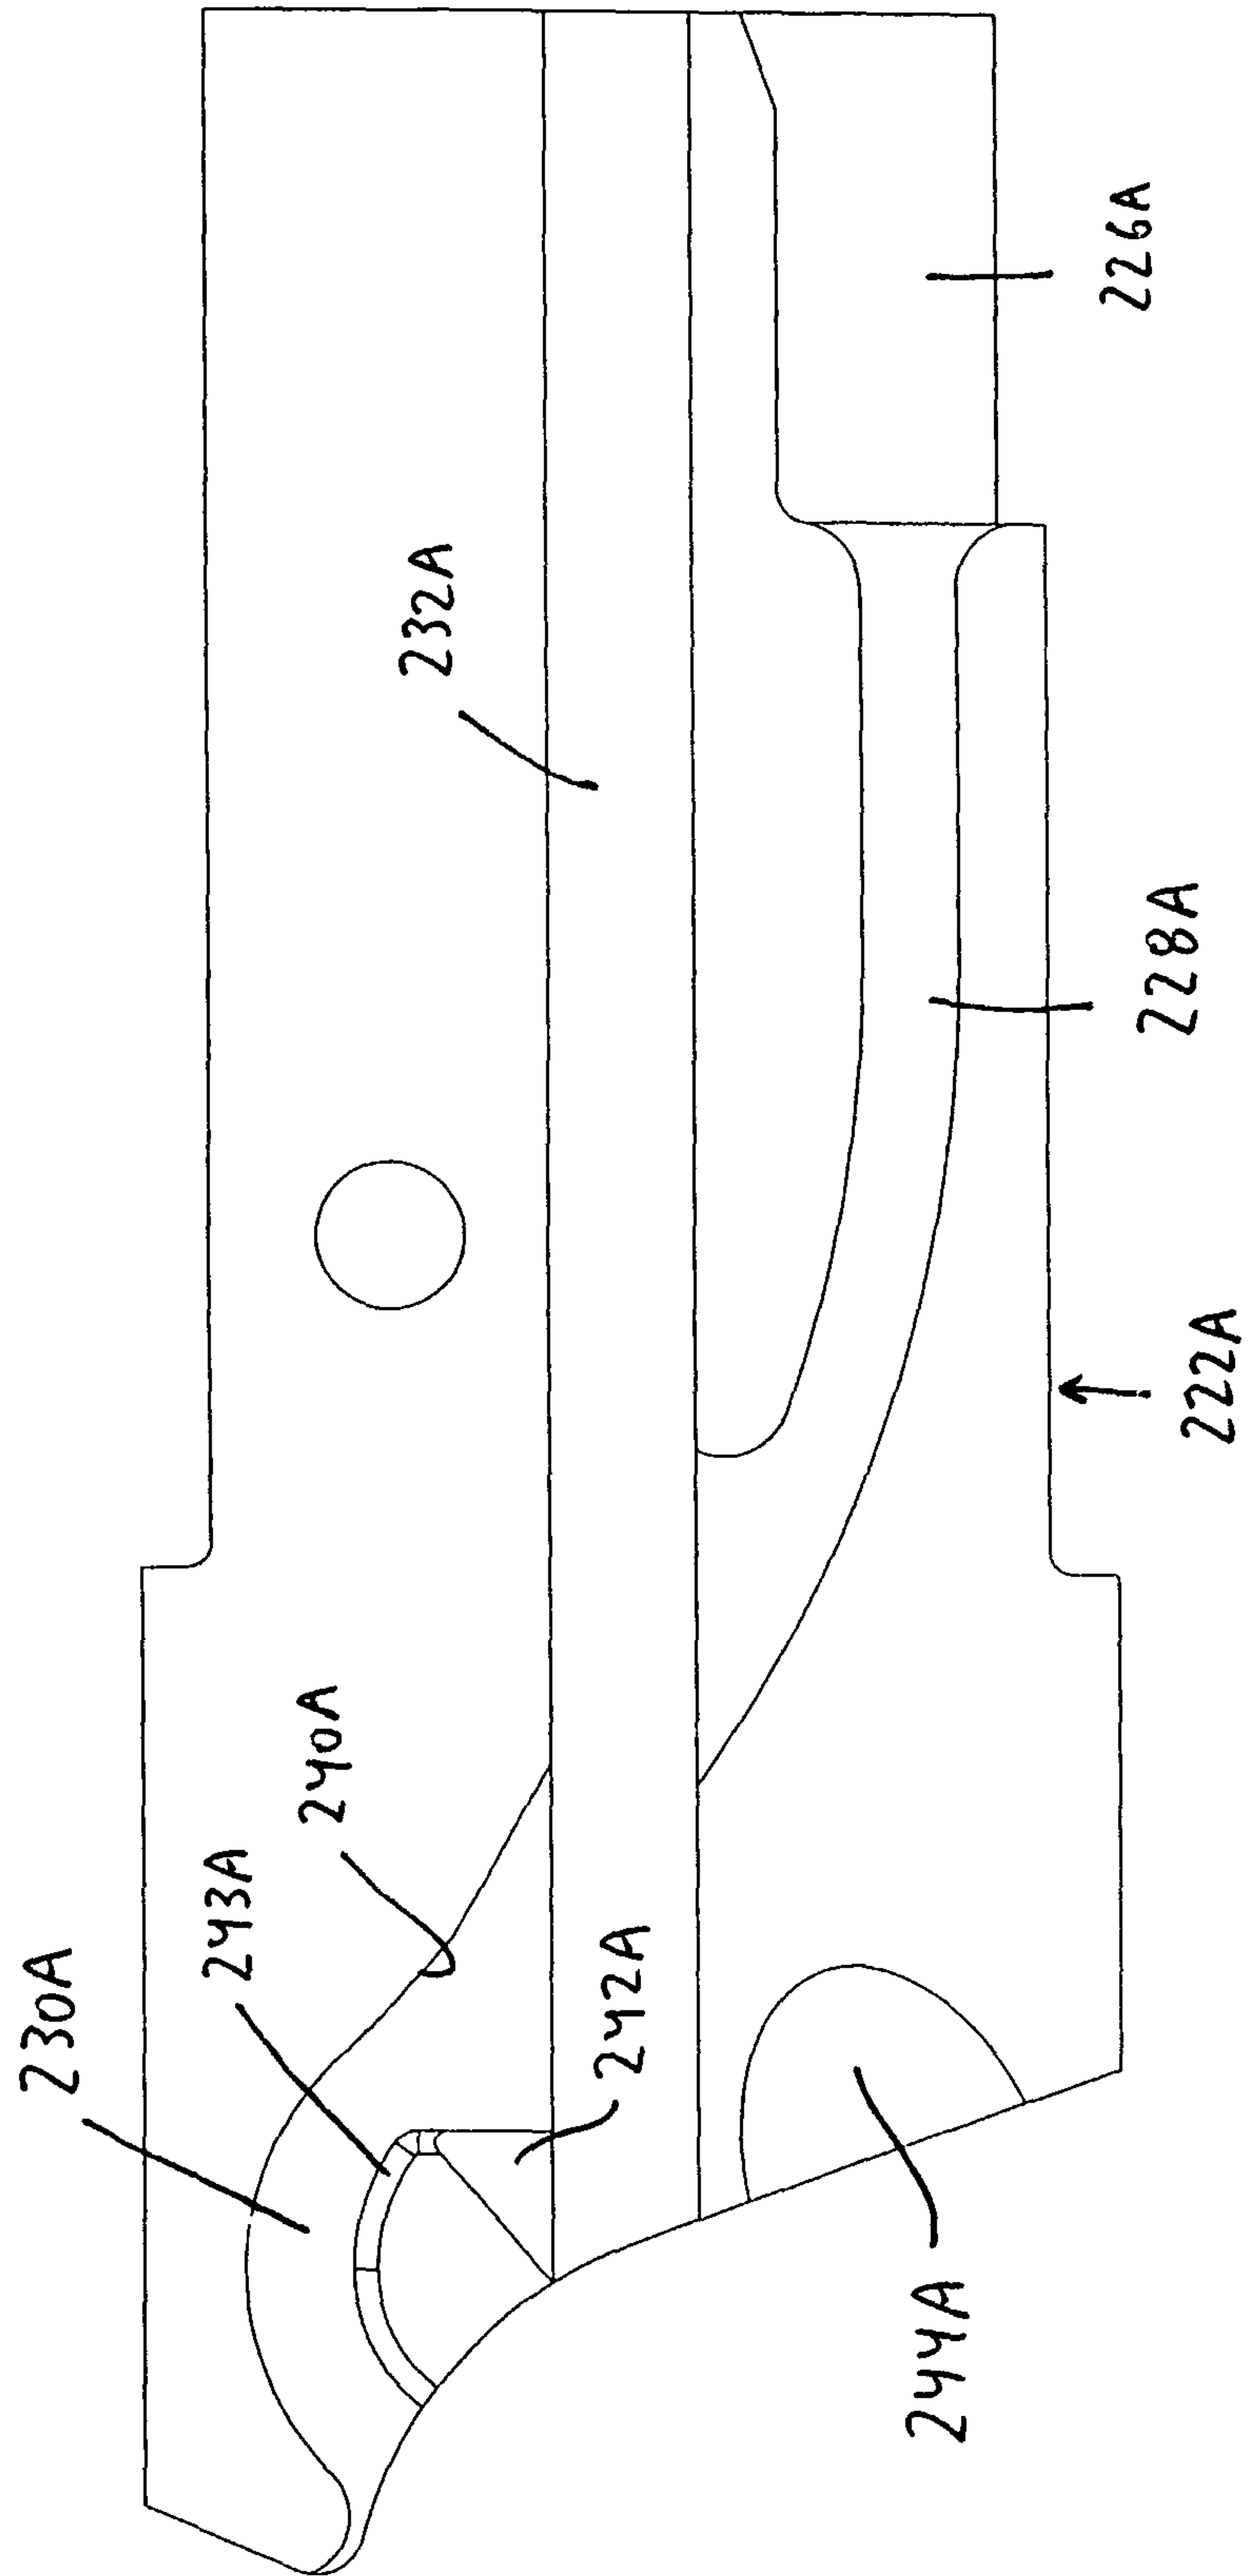**FIG. 42**

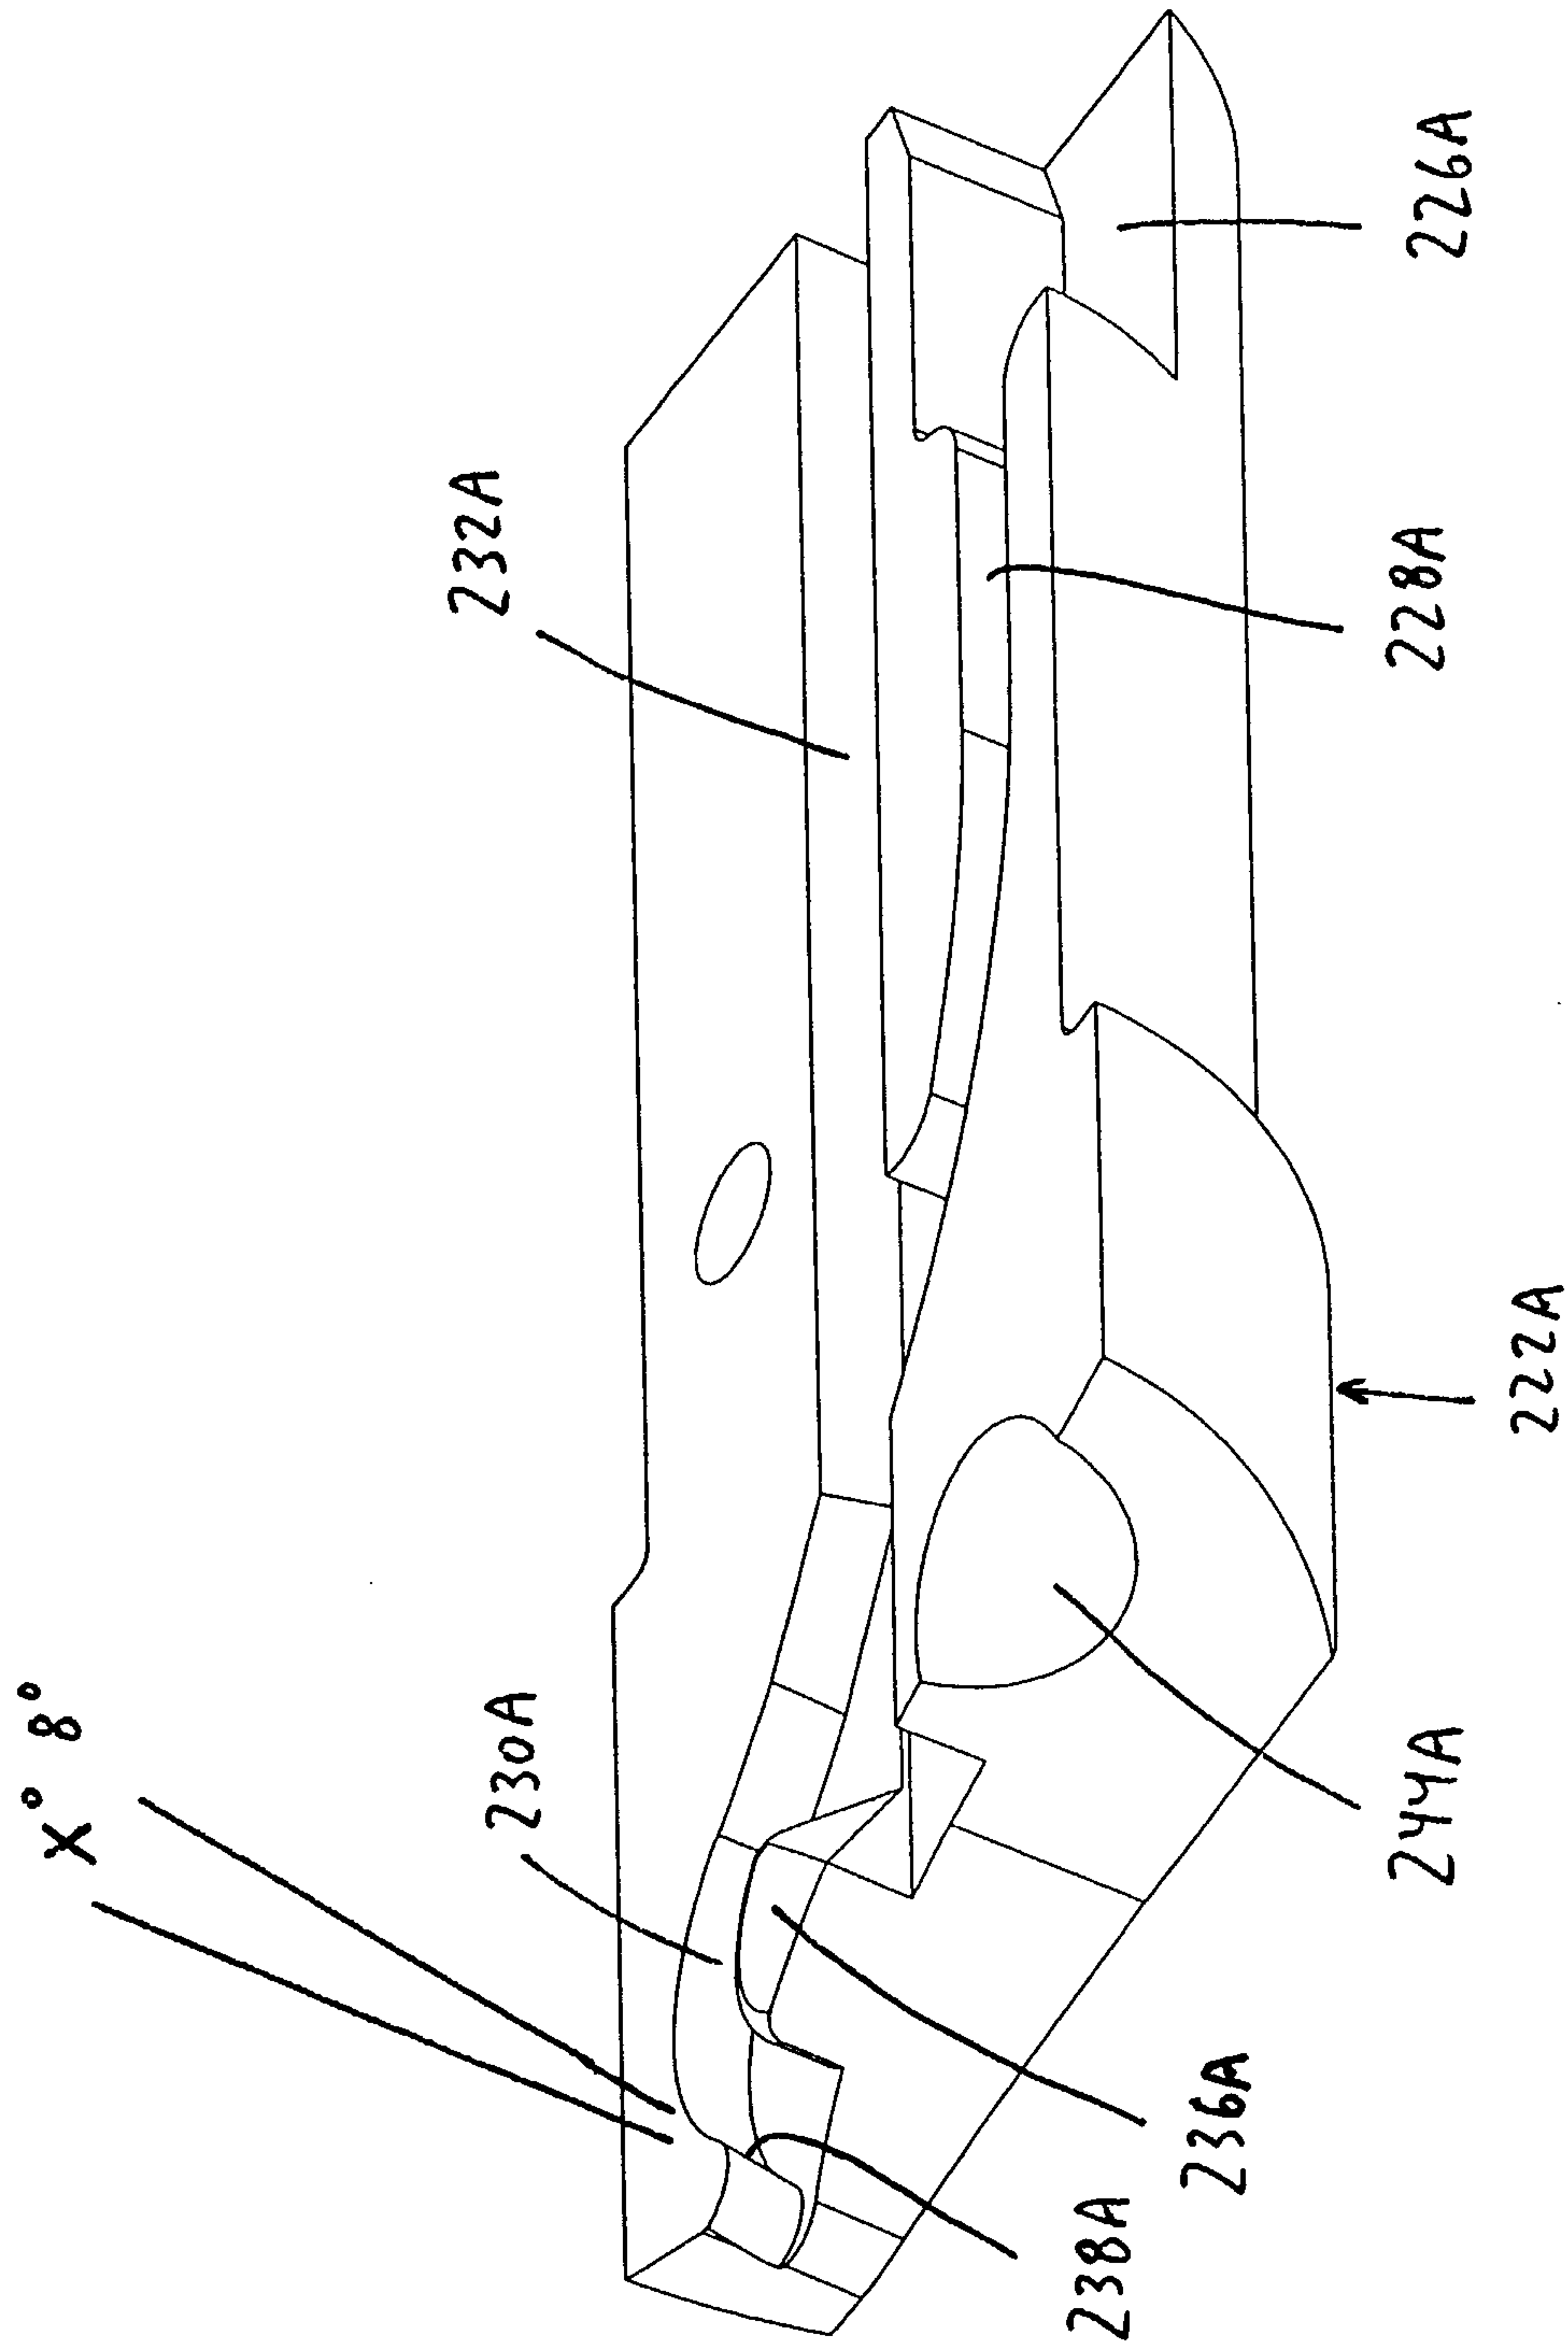


FIG. 43

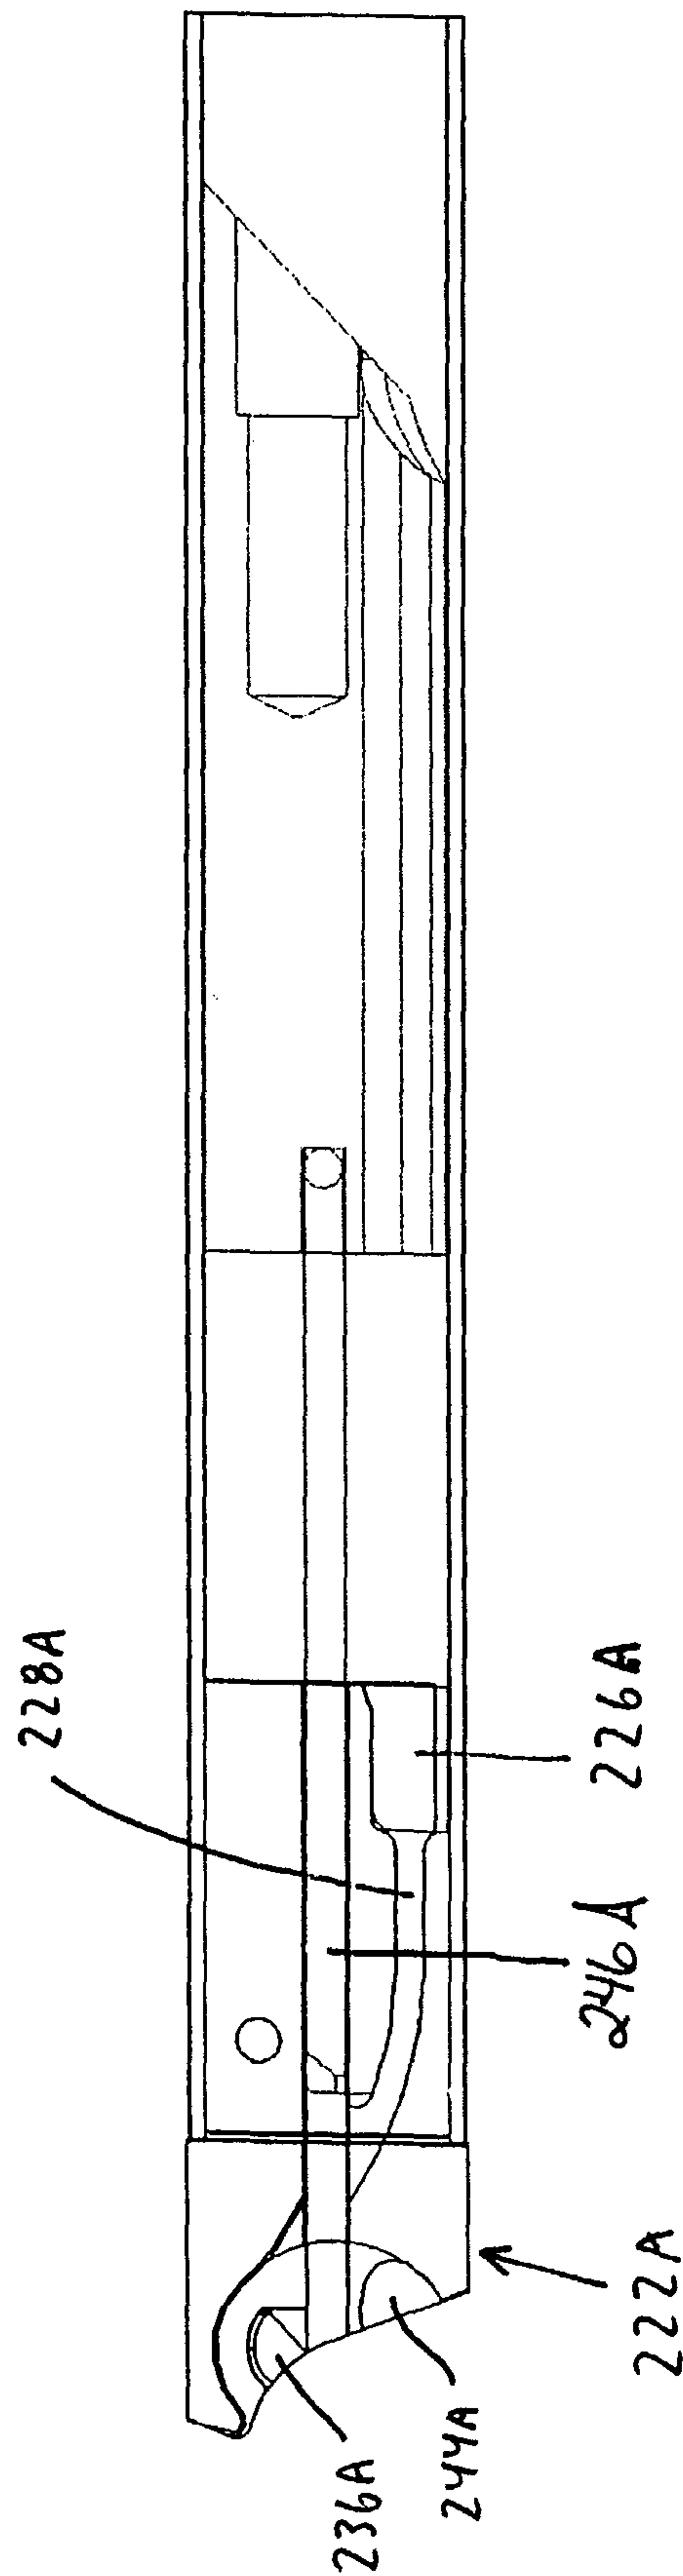
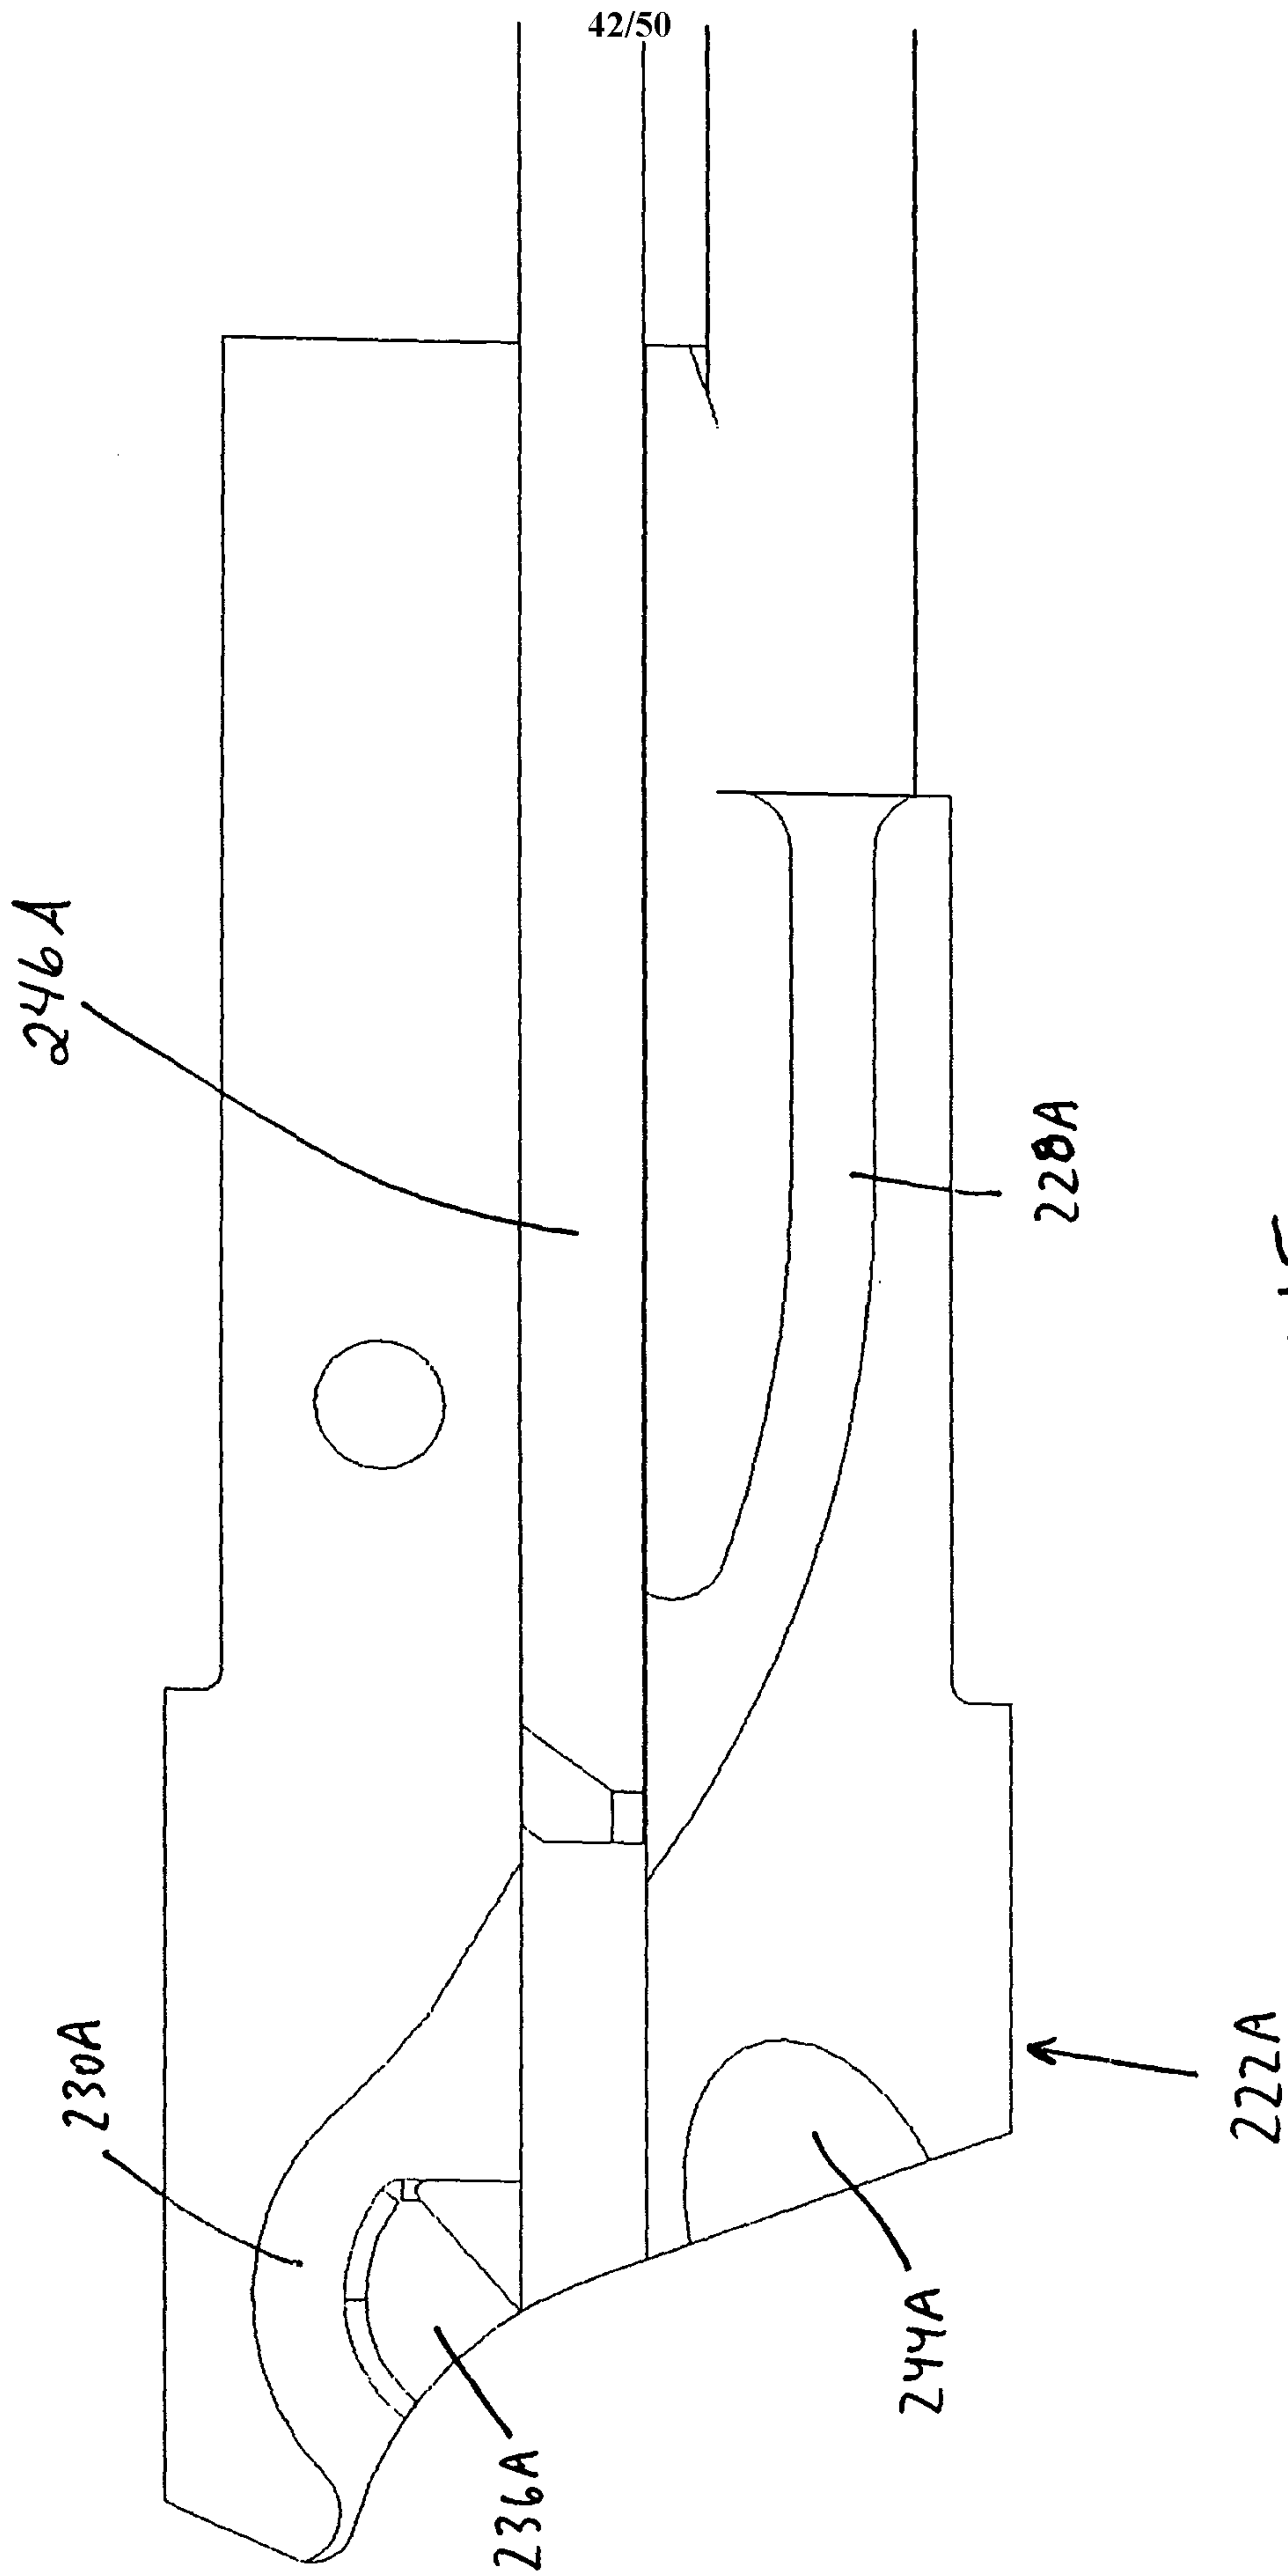


FIG. 44



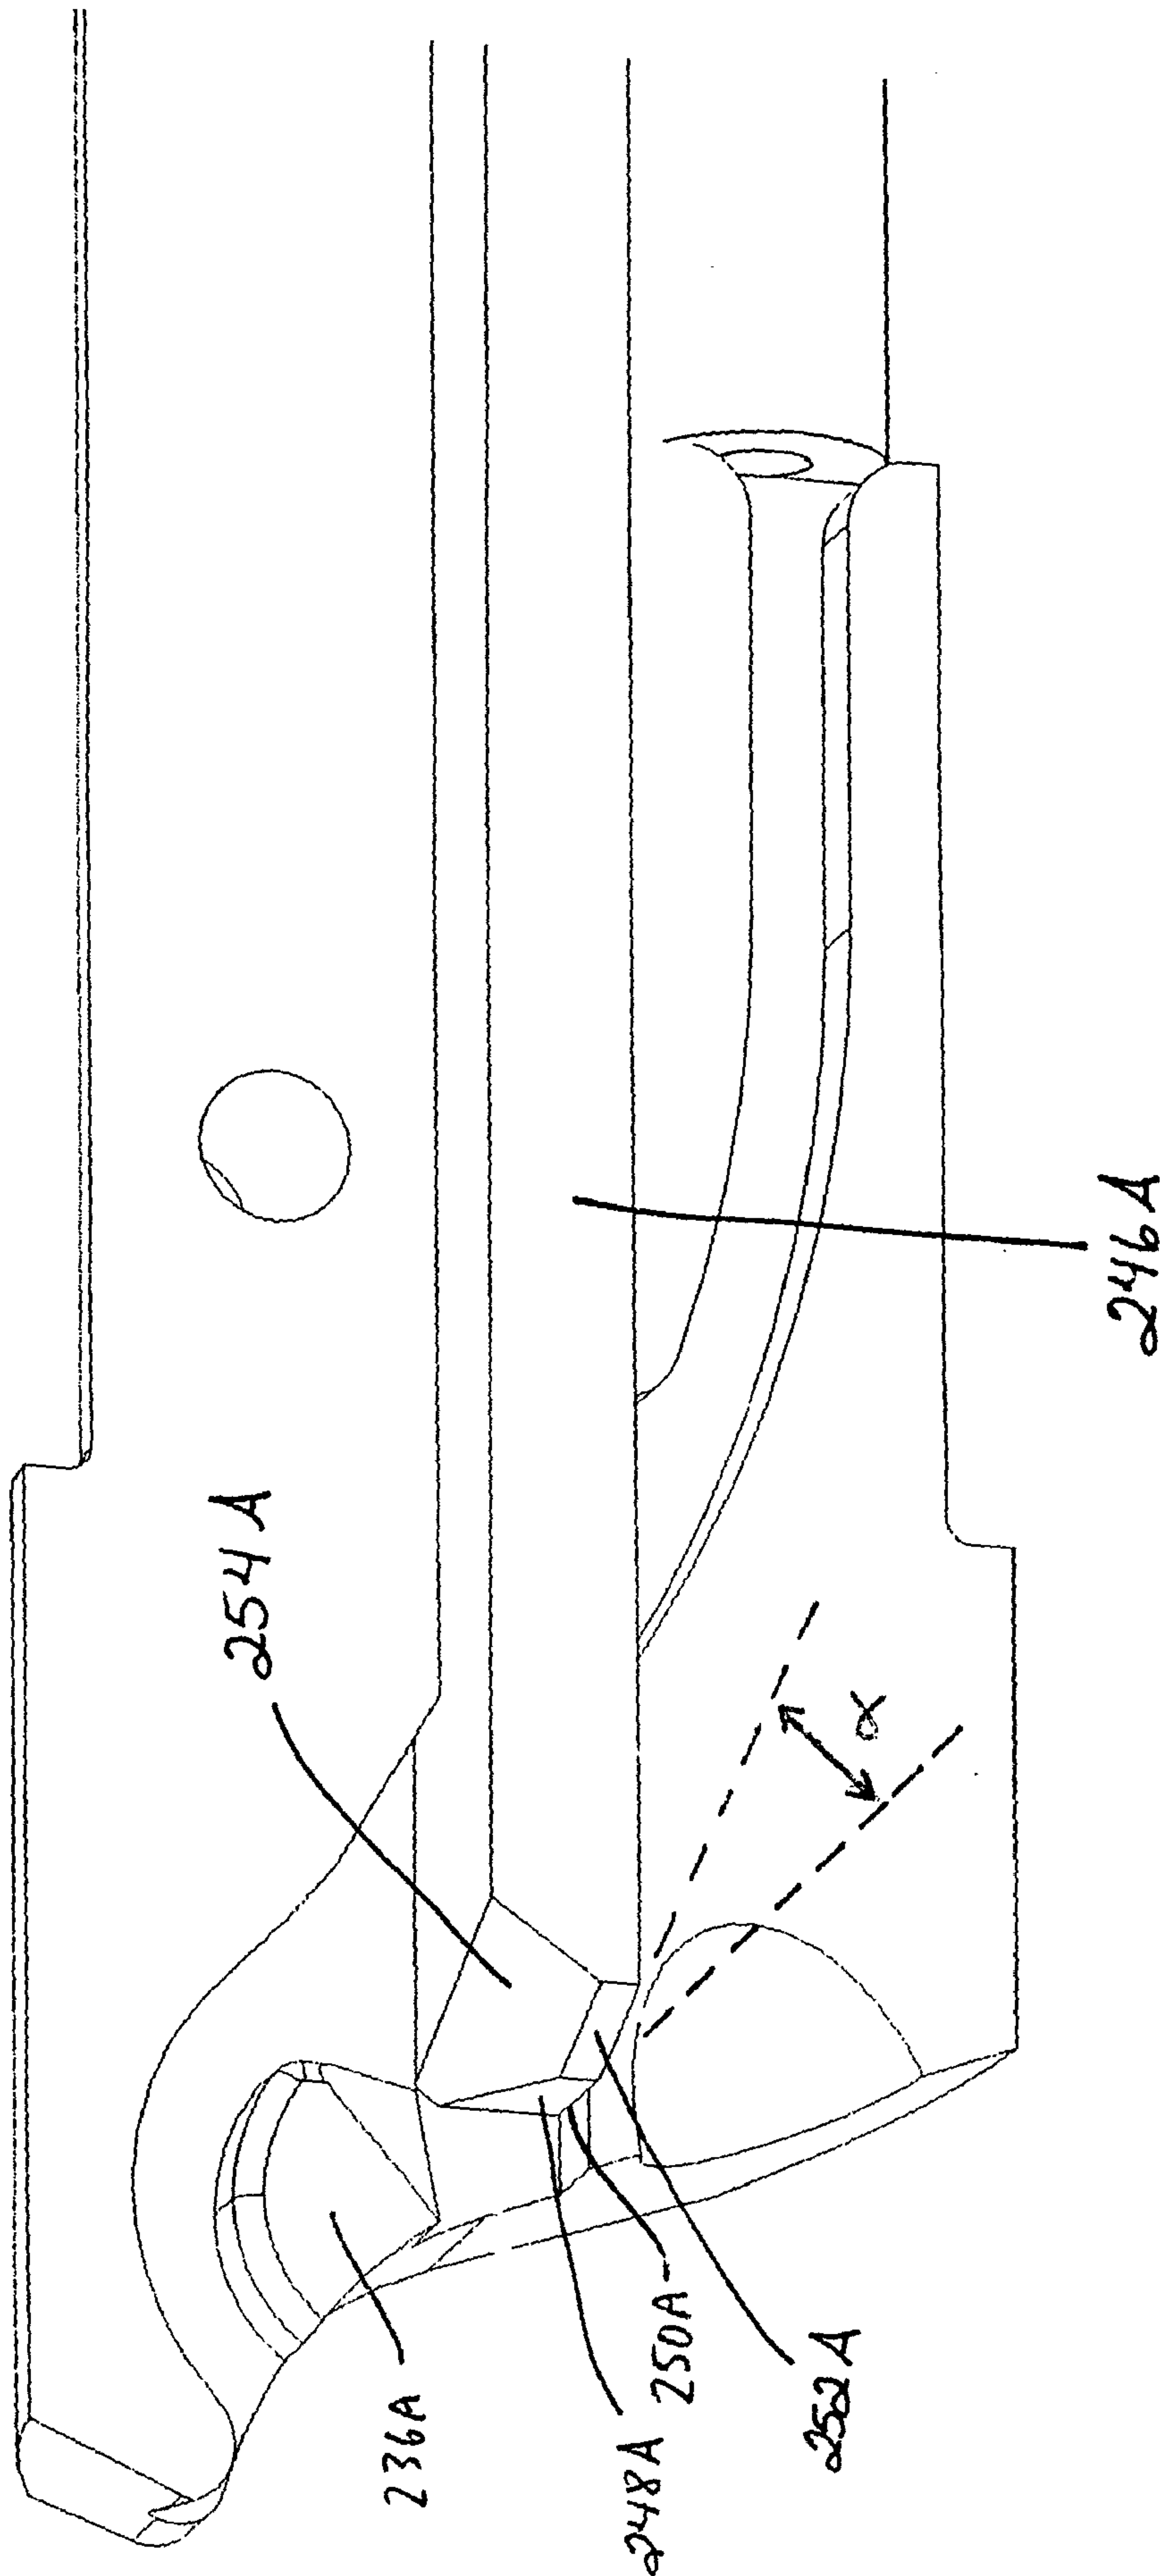


FIG. 46

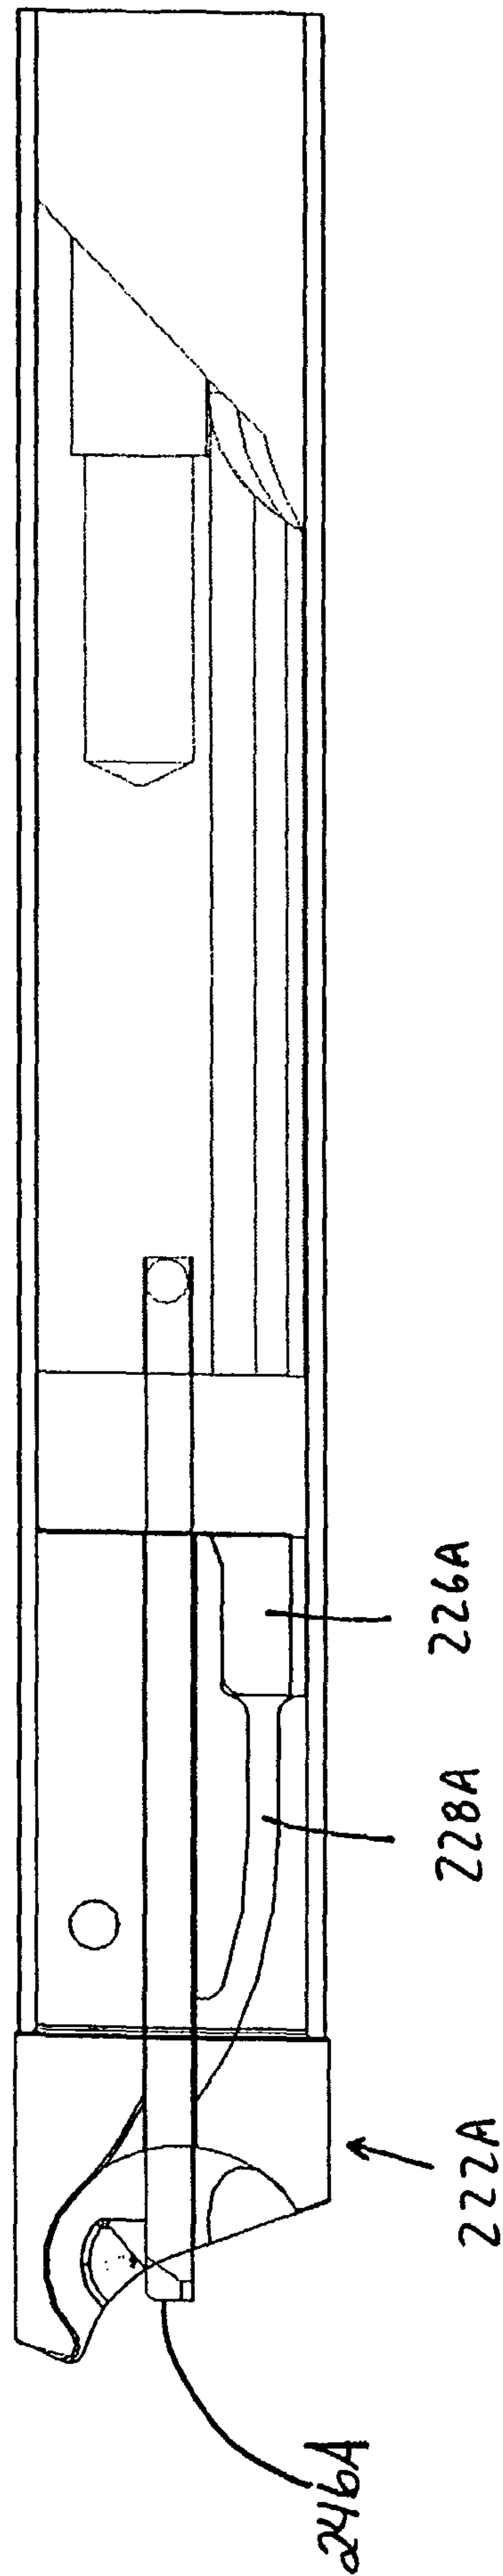


FIG. 47

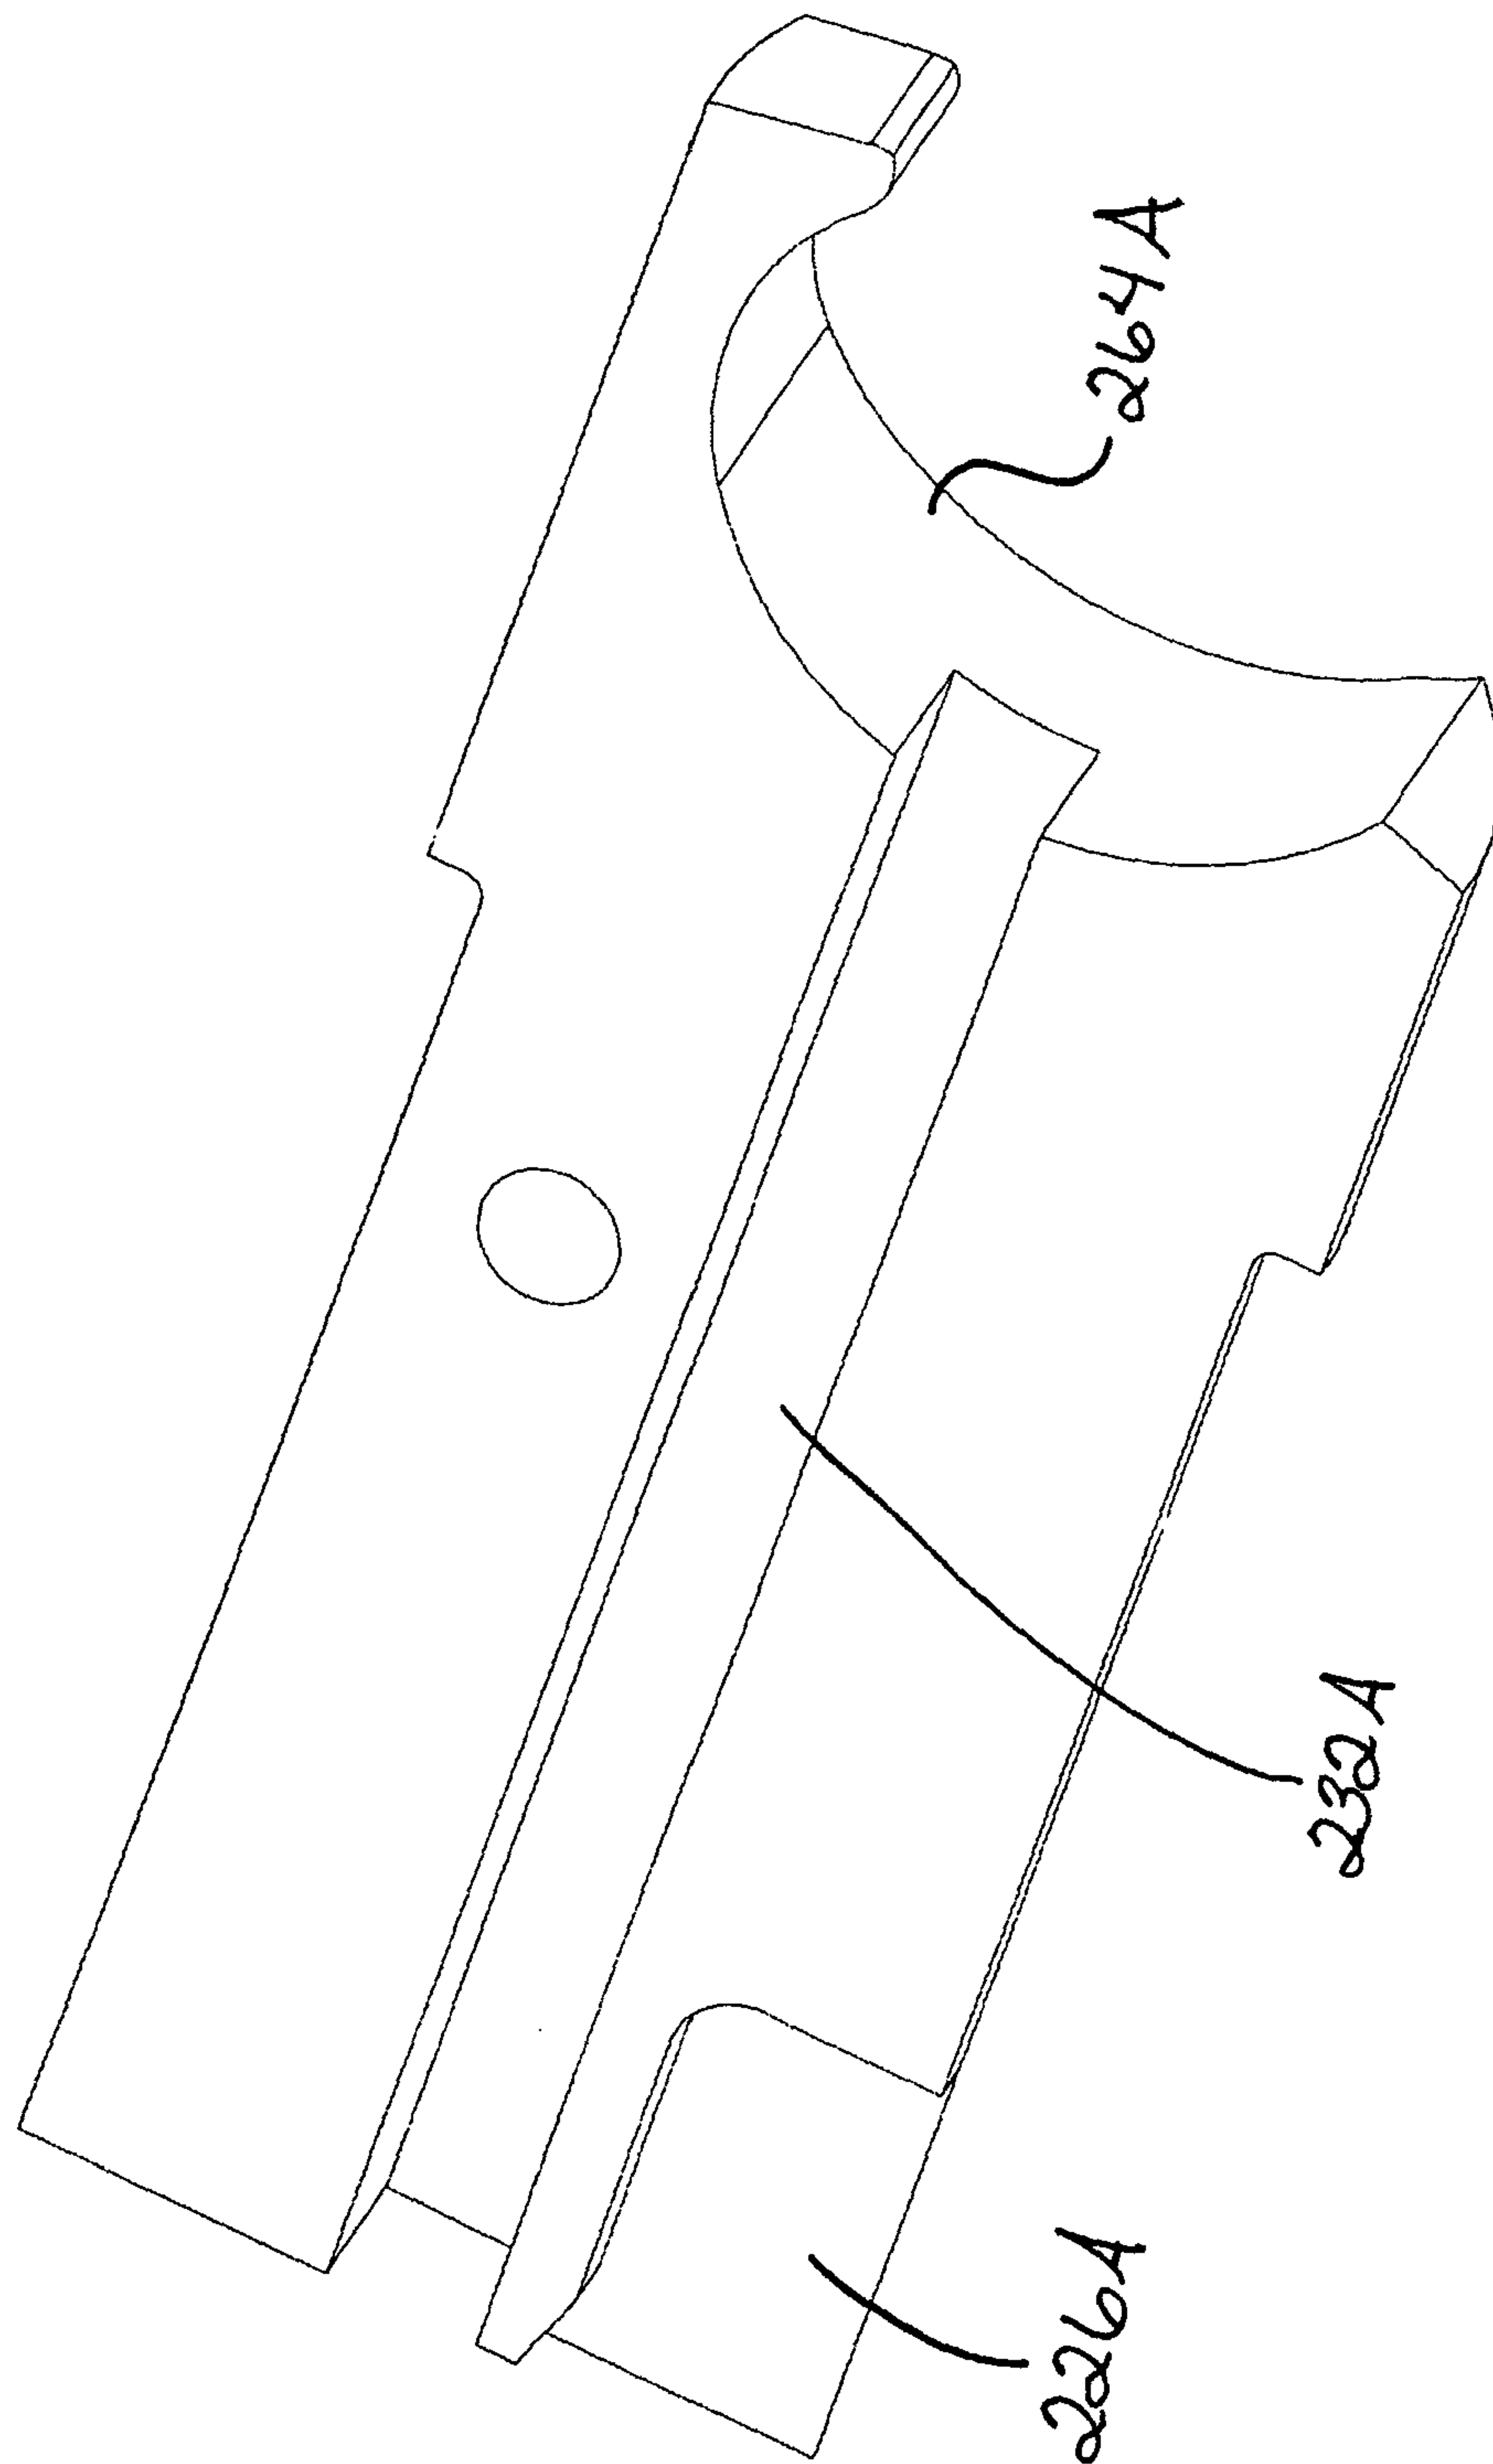


FIG. 48

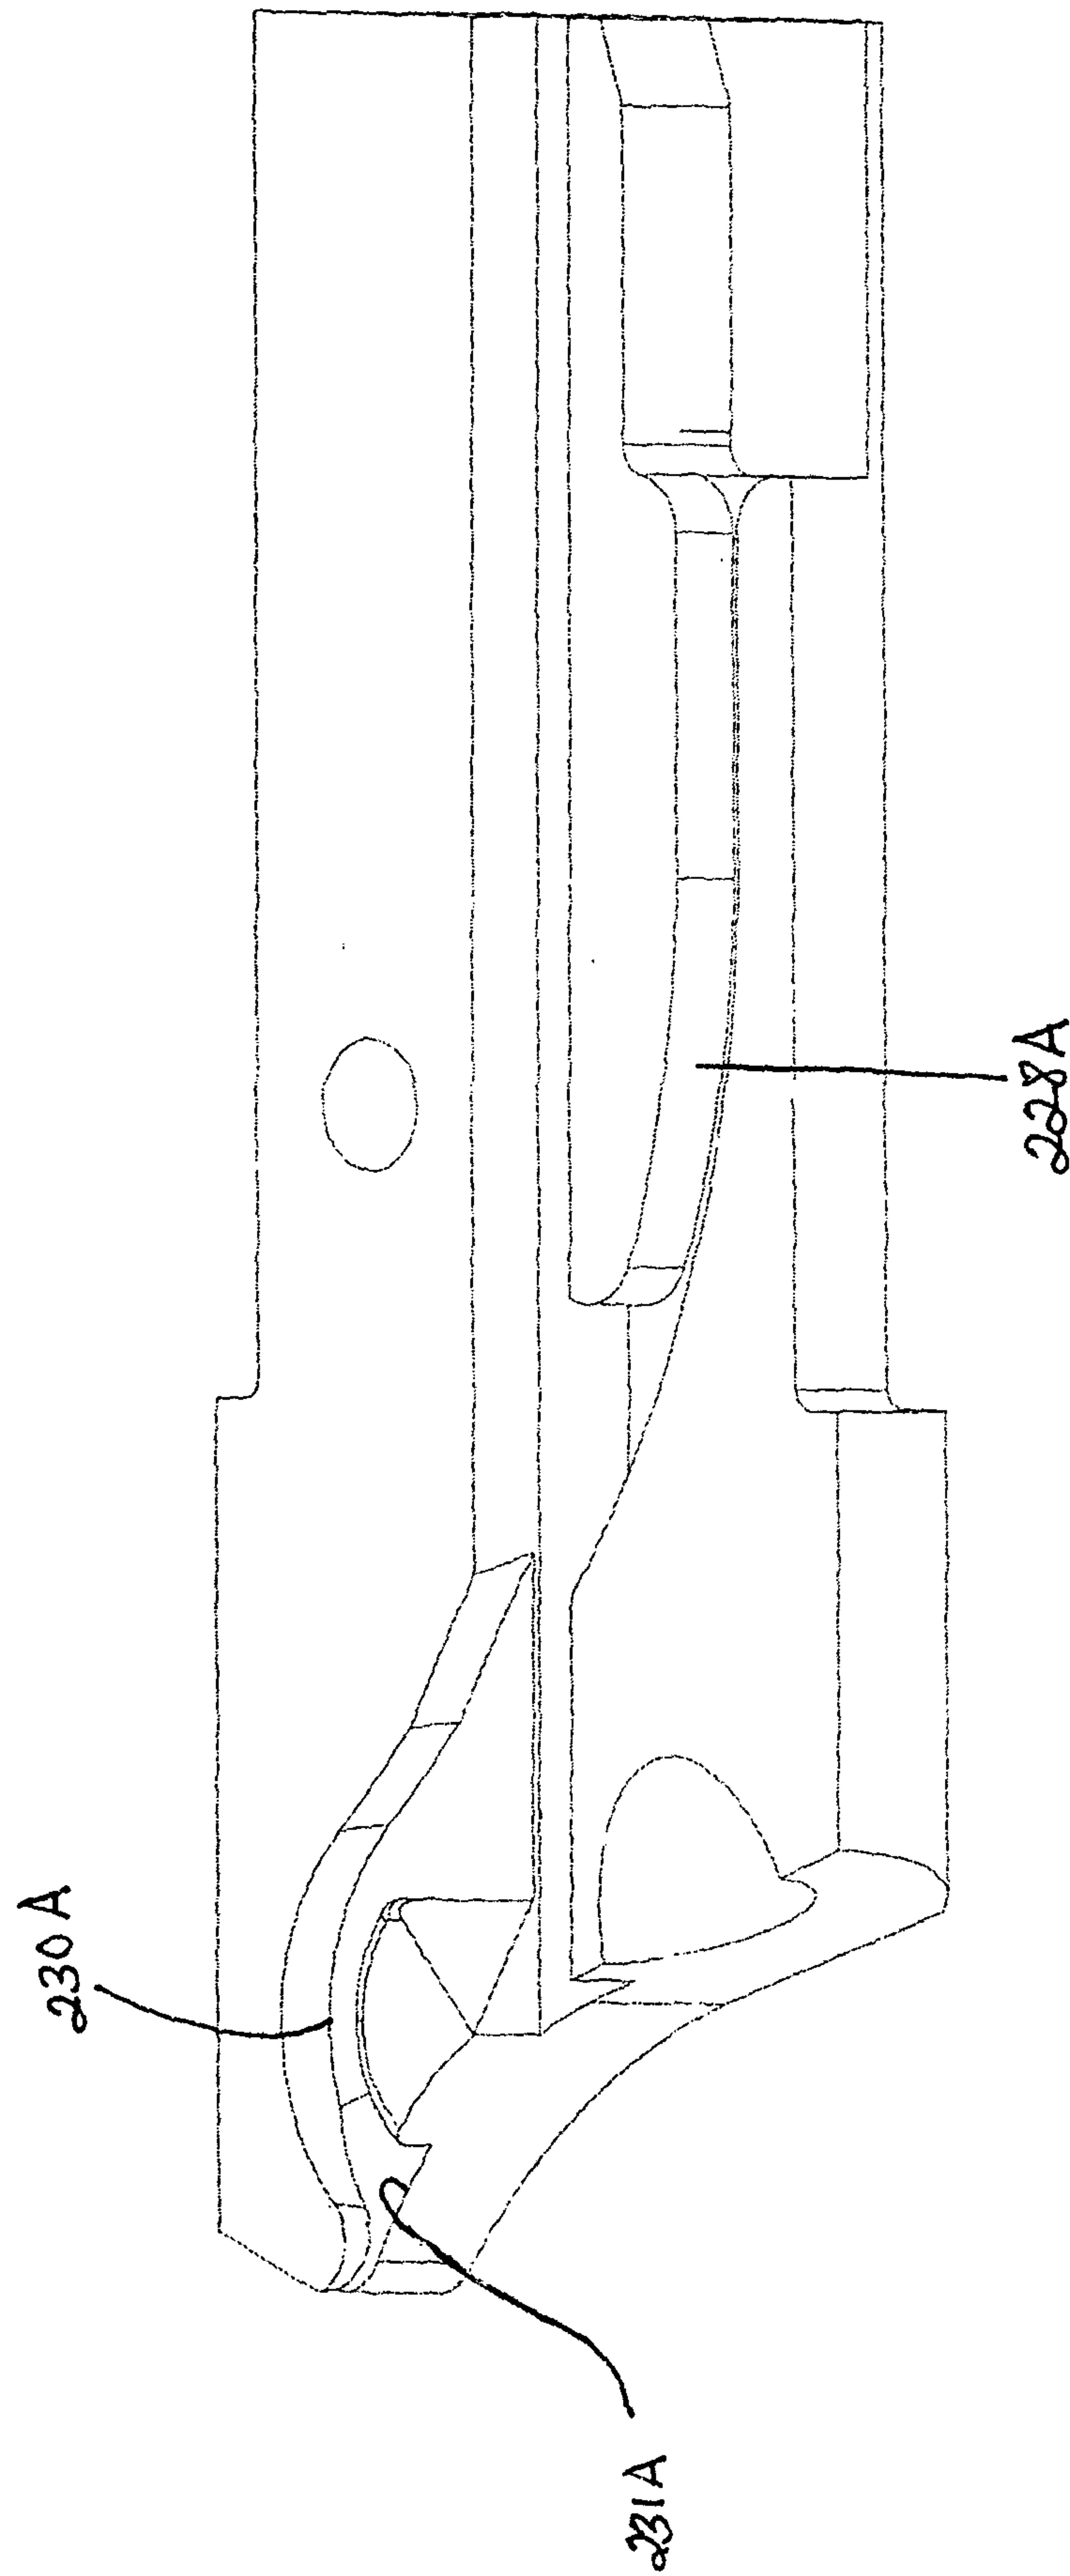


FIG. 49


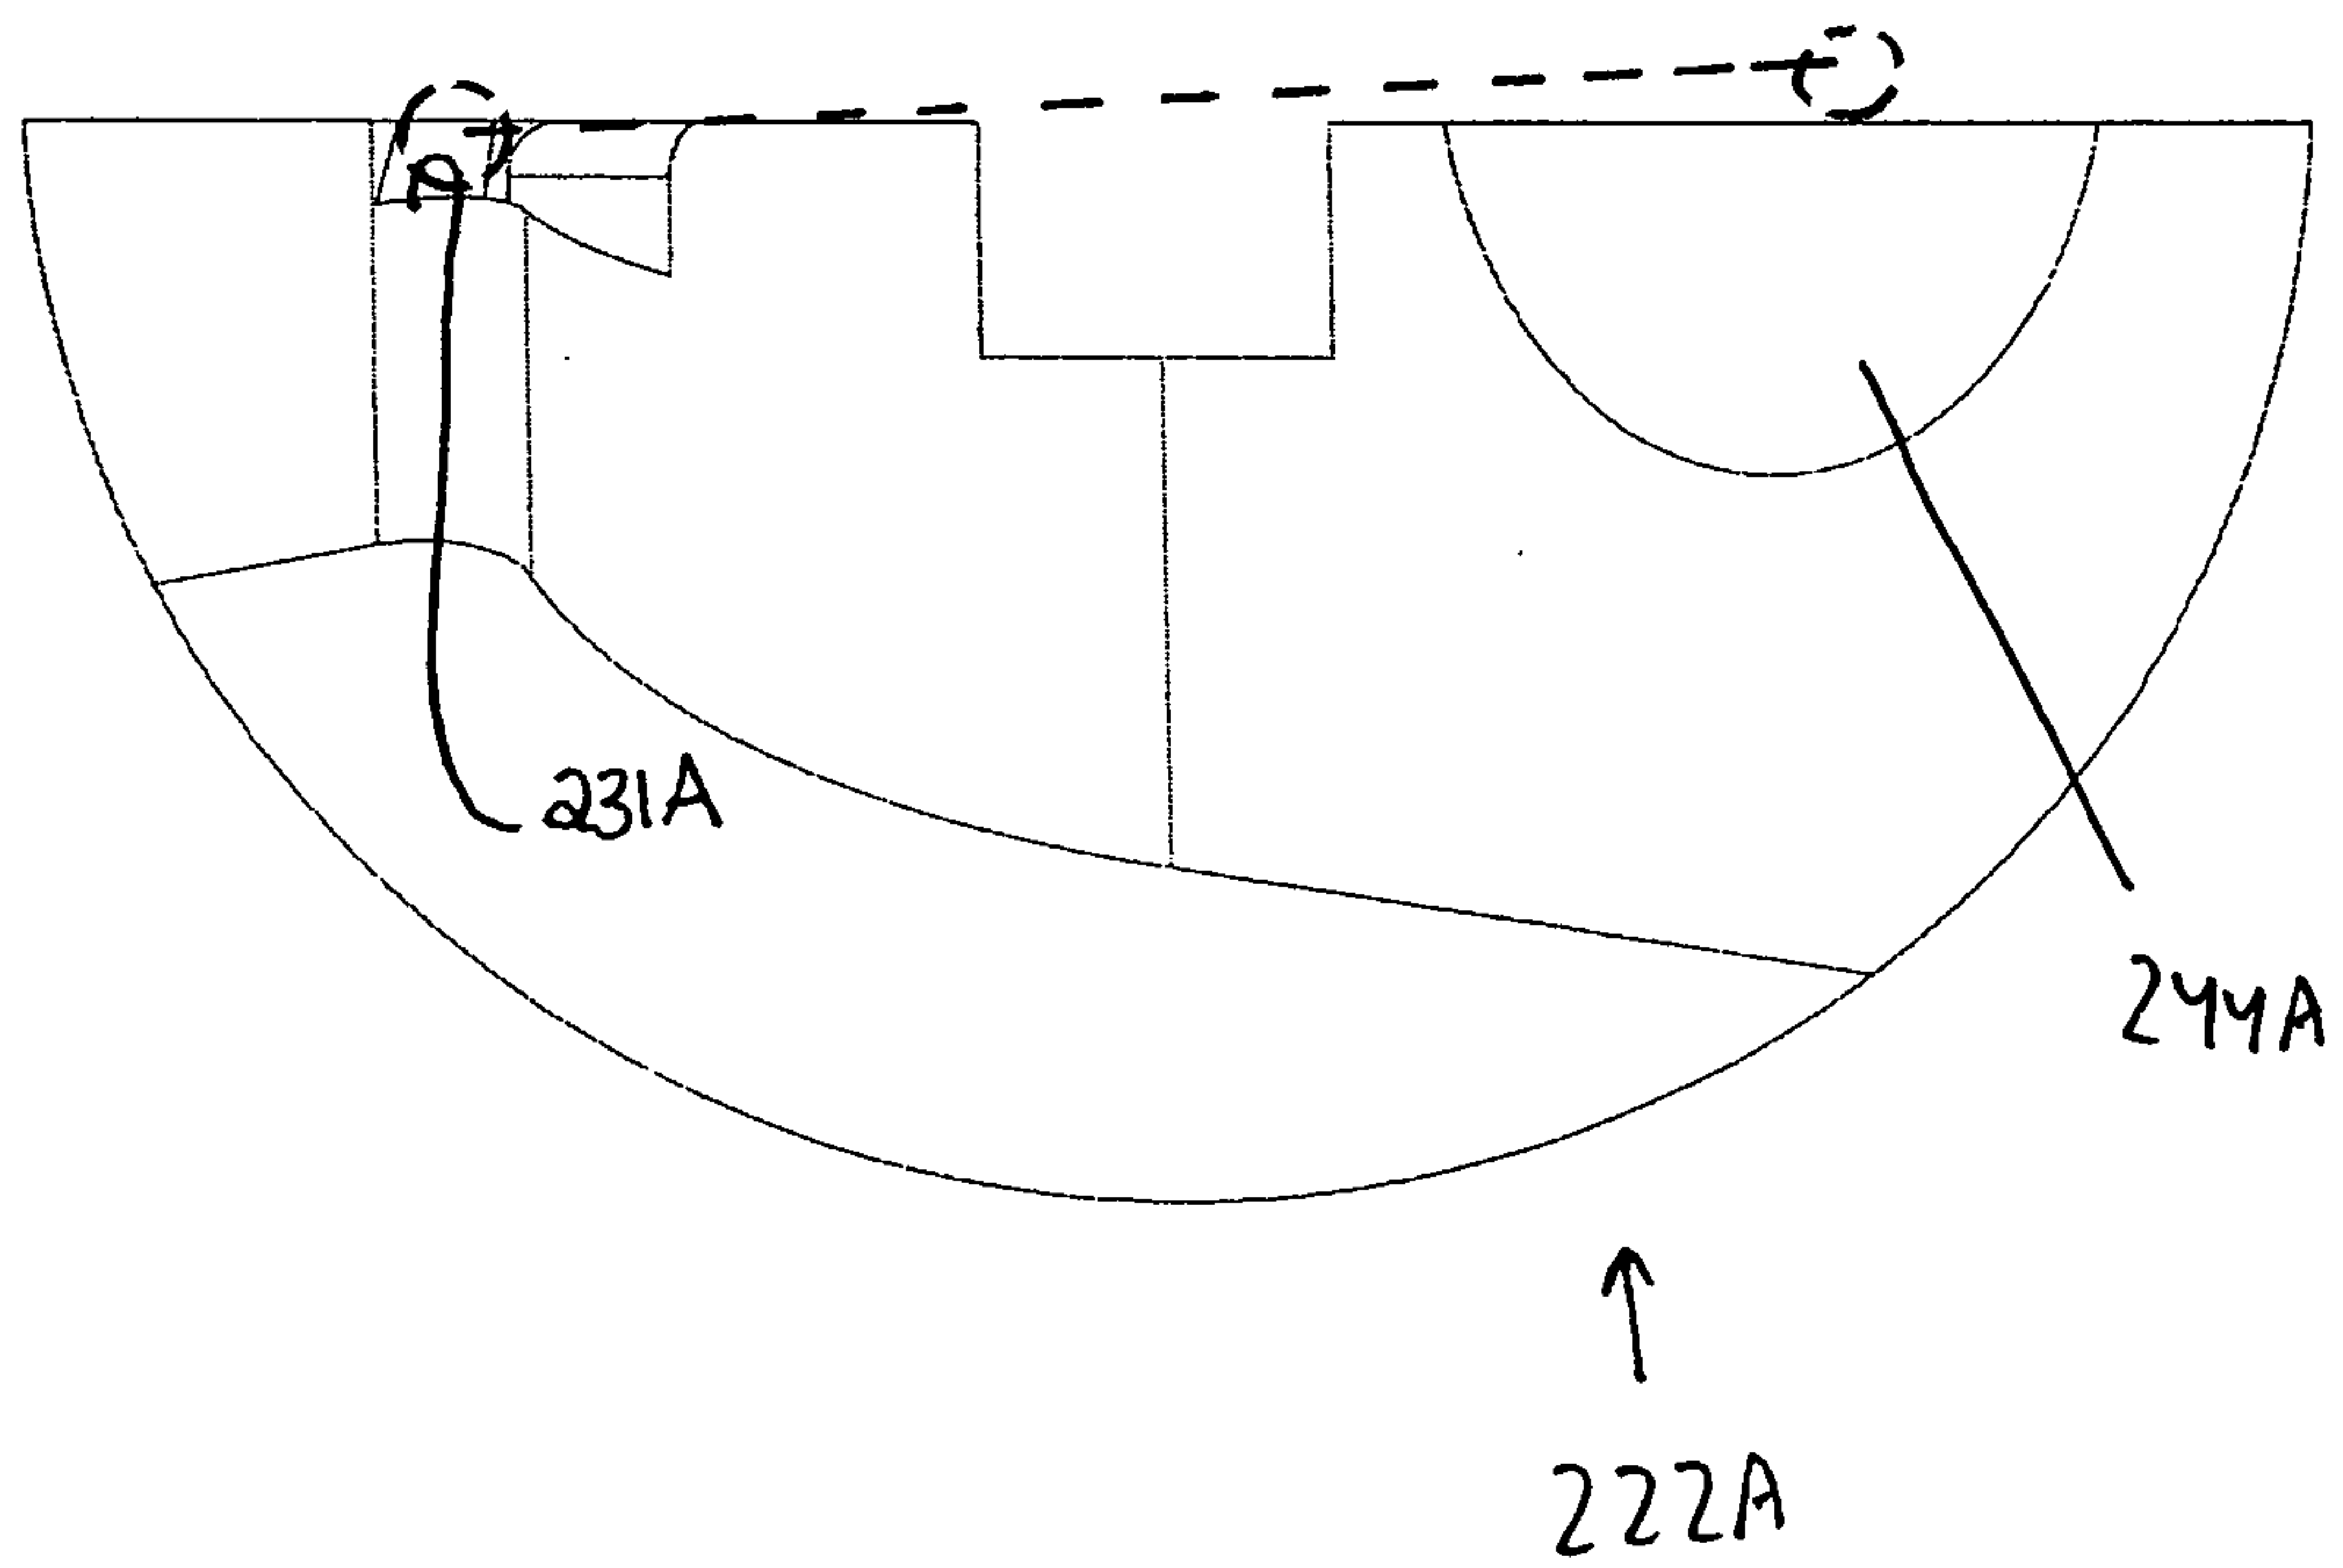


FIG. 50

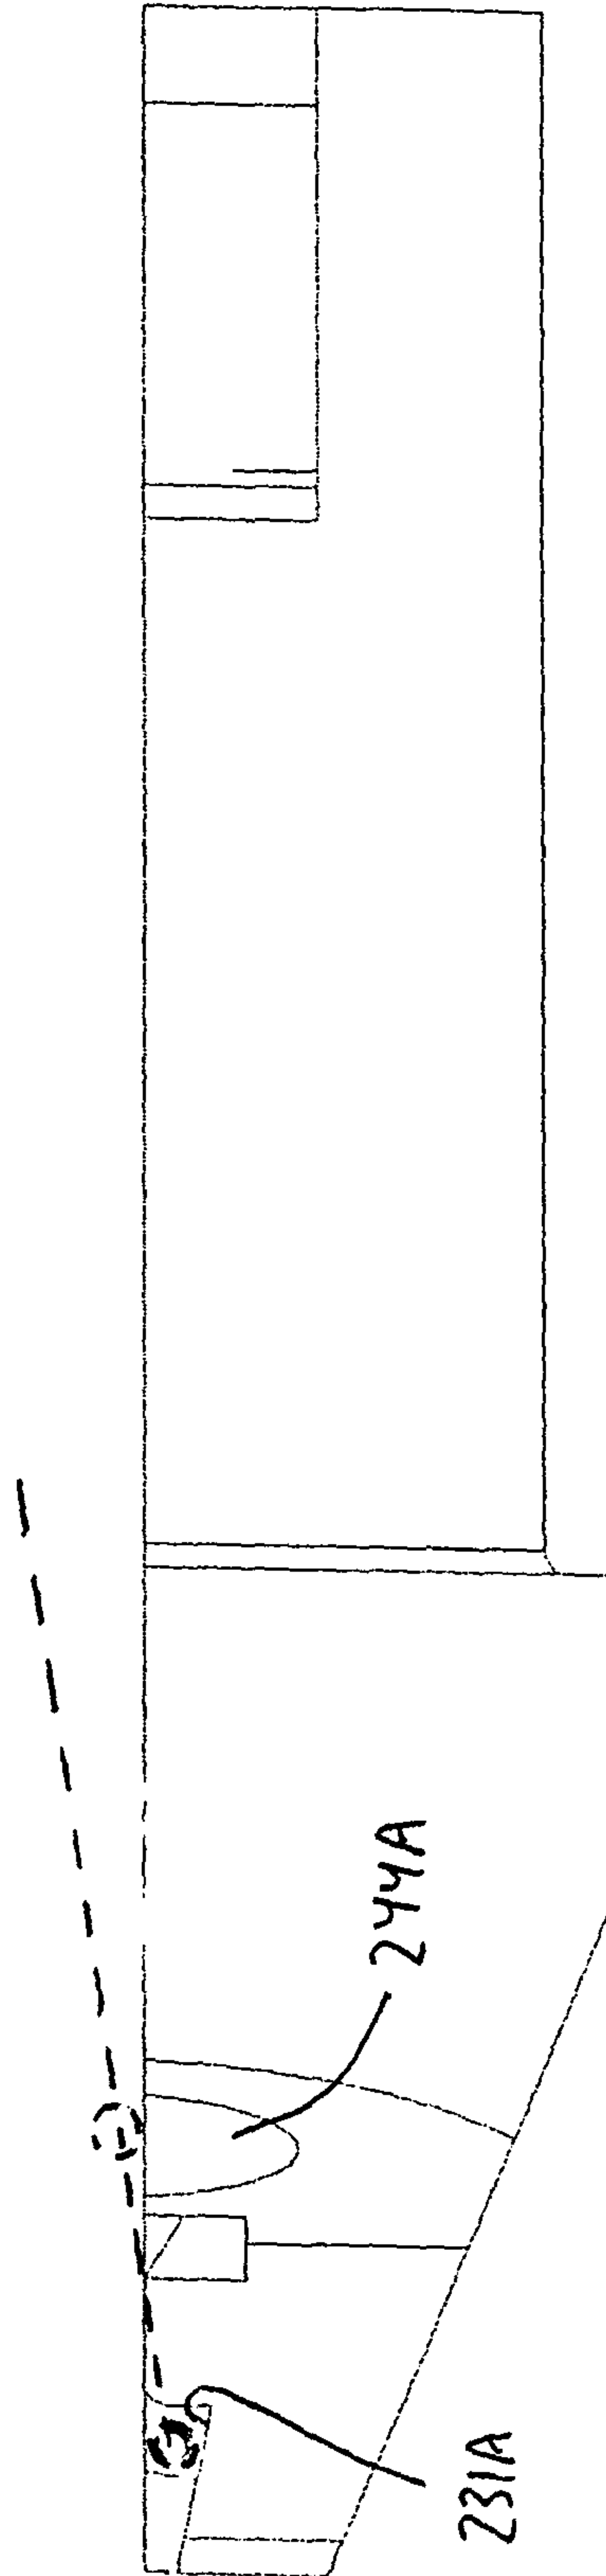

222A

FIG. 51

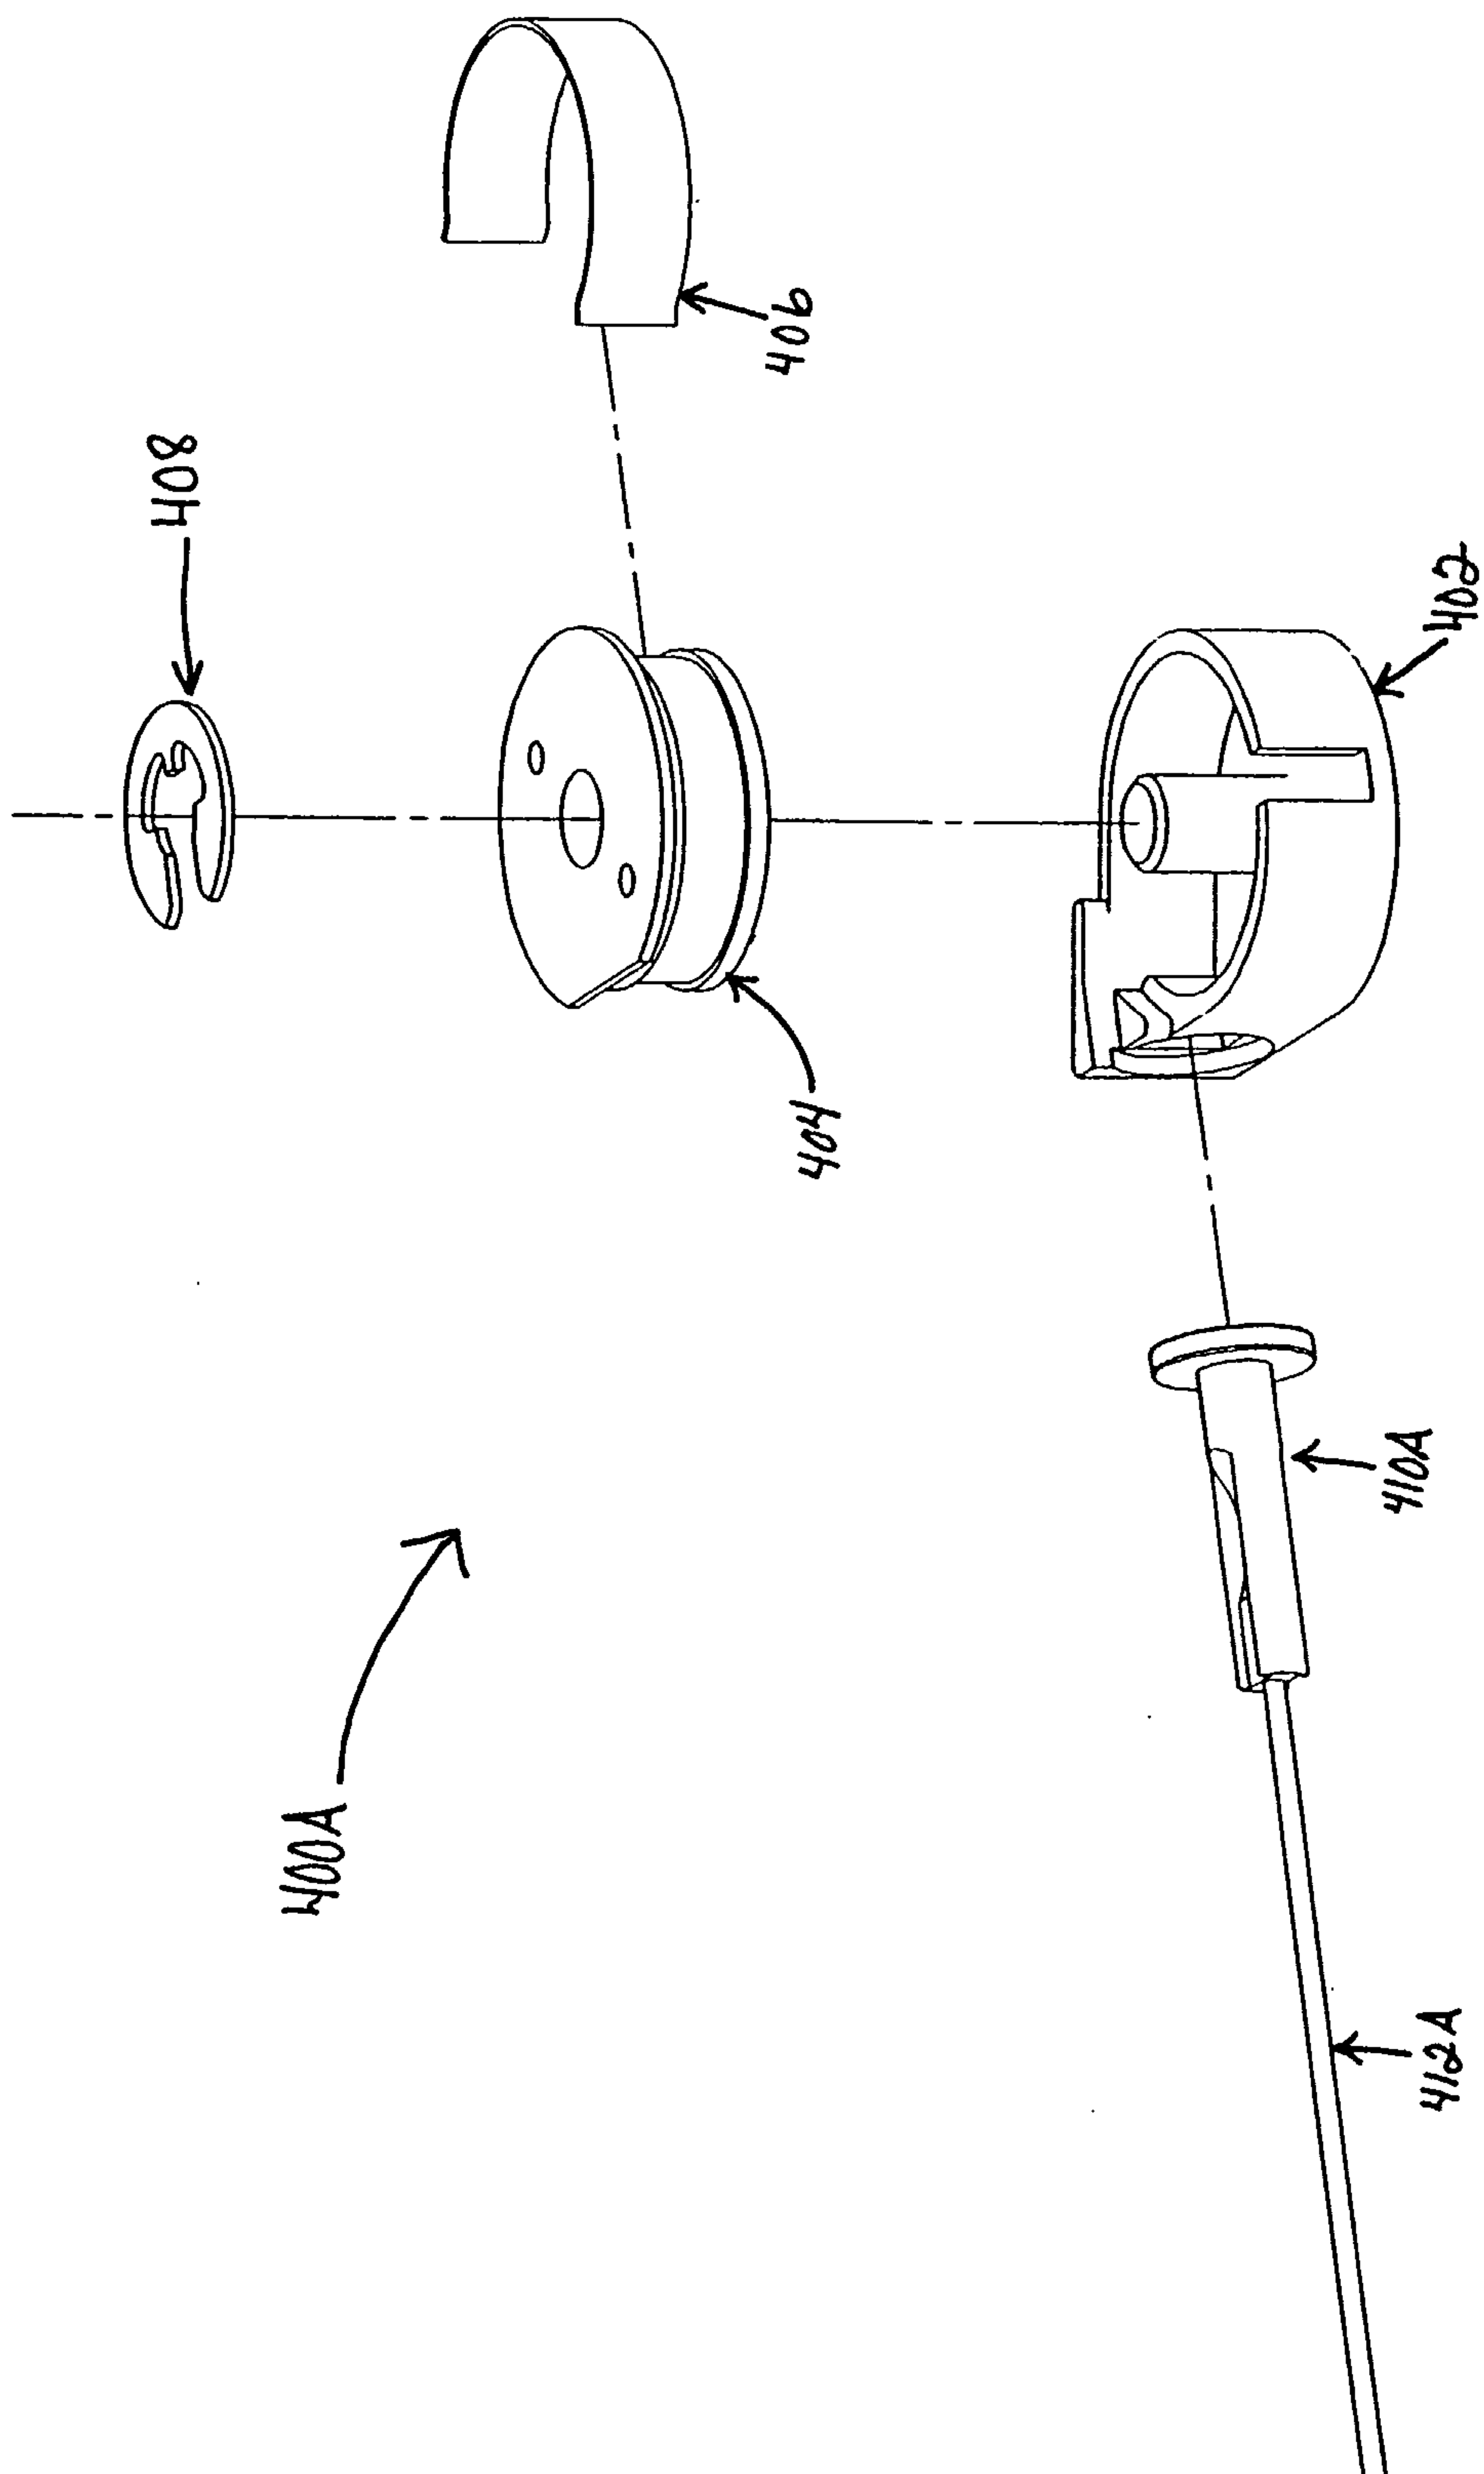


FIG. 52

