

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 June 2006 (15.06.2006)

PCT

(10) International Publication Number
WO 2006/061746 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/IB2005/054001

(22) International Filing Date:
1 December 2005 (01.12.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04106333.0 6 December 2004 (06.12.2004) EP

(71) Applicant (for DE only): PHILIPS INTELLECTUAL
PROPERTY & STANDARDS GMBH [DE/DE]; Stein-
damm 94, 20099 Hamburg (DE).

(71) Applicant (for AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE,
BF, BG, BJ, BR, BW, BY, BZ, CA, CF, CG, CH, CI, CM, CN,
CO, CR, CU, CY, CZ, DK, DM, DZ, EC, EE, EG, ES, FI,
FR, GA, GB, GD, GE, GH, GM, GN, GQ, GR, GW, HR, HU,
ID, IE, IL, IN, IS, IT, JP, KE, KG, KM, KN, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, LY, MA, MC, MD, MG, MK, ML,
MN, MR, MW, MX, MZ, NA, NE, NG, NI, NL, NO, NZ, OM,
PG, PH, PL, PT, RO, RU, SC, SD only): KONINKLIJKE

PHILIPS ELECTRONICS N. V. [NL/NL]; Groenewoud-
seweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and
(75) Inventor/Applicant (for US only): HOFMANN, Bernd
[DE/DE]; c/o Philips Intellectual Property & Standards
GmbH, Weisshausstr. 2, 52066 Aachen (DE).


(74) Agent: VOLMER, Georg; Philips Intellectual Property &
Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,
LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI,
NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG,
SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: DANCING GUIDE FLOOR USING LED MATRIX DISPLAYS

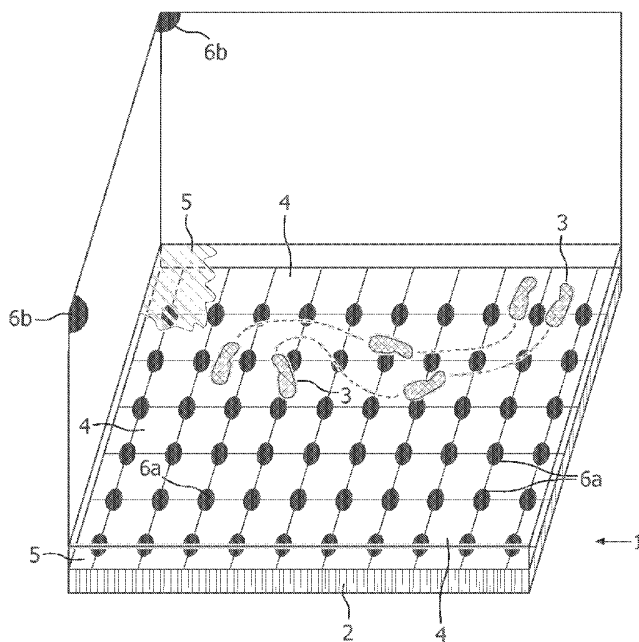

(57) Abstract: The present inventions concerns a display system for displaying multiplex information, whereby an individual selection of information is individually addressed to a different user or user groups, whereby the display system for displaying multiplex information comprises at least one display panel of a plurality of light emitting dot-like means and a plurality of sensors, whereby a user or user groups are located by sensor so that individual information can be individually addressed depending on the position of each sensor-located user or user groups.

WO 2006/061746 A2



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

Dancing Guide Floor using LED Matrix Displays

5

The present invention is generally directed at a display system for displaying multiplex information, whereby an individual selection of information is individually addressed to a different user or user groups. Further, the present invention is directed at the use of said display system and at a process to simultaneously and
10 individually address individual information with a display system. In particular, the present invention is directed at a dancing guide floor using LED matrix displays (LED: light emitting diode).

LED matrix displays are widely known in prior art. For example LED dot matrix displays are used in sport stadiums to display information about the game to
15 the spectators.

US 5,130,909 discloses an emergency aid, in the form of a lighting strip arranged along the floor of a predetermined escape route, which is provided for guiding the escape of occupants from a confined area during conditions of severely reduced visibility. The strip comprises a plurality of spaced light-emitting elements, each being
20 an LED emitting a beam having an axial intensity of at least 0.12 candela and a full cone angle of no greater than 24 degrees. Each element includes an external reflector, in the form of a spaced prism or a metal reflector mounted on the element, located along its beam axis and angled with respect thereto for deflecting the emitted light at a predetermined angle. In one embodiment the elements are arranged in pairs facing each
25 other with their beam axes parallel to the axis of the strip and their reflectors between them. The reflectors are arranged to emit light in two predetermined directions relative to the axis, preferably along the floor to illuminate it, and vertically to mark the path to escaping occupants. In another embodiment the elements are arranged in a single direction and can have metal reflectors mounted on the elements. If the strip is mounted
30 at the juncture of a wall and the floor, the reflectors angle alternate beams horizontally and outward at a 45° angle.

However, LED matrix displays as used in prior art do not address individual information to a user or user groups depending on their positions. Furthermore, LED matrix displays systems are not known which can simultaneously address individual information to a user or user groups depending on their position, 5 whereby the information tracks the addressed user or user group if moved.

Therefore, there is a need in prior art to provide a more advanced display system for displaying multiplex information to a user or user groups.

According to the present invention a display system for displaying multiplex information is provided, whereby an individual selection of information is 10 individually addressed to a different user or user groups, whereby the display system for displaying multiplex information comprises at least one display panel of a plurality of light emitting dot-like means and a plurality of sensors, whereby a user or user groups are located by sensors so that individual information can be individually addressed depending on the position of each sensor-located user or user groups.

15 A display that can be used in a display system according to the present invention can be an LED display, preferably a matrix of LED dots such as a LED dot matrix display.

According to the present invention, the display system can comprise a plurality of display panels of a plurality of light emitting dot like means. The light- 20 emitting dot-like means can preferably be LEDs and/or OLEDs.

The display panels can be connected to form one large display and/or a plurality of large displays.

A preferred embodiment of the present invention is a display system for displaying multiplex information, whereby an individual selection of information is 25 individually and simultaneously addressed to a different user or user groups, whereby the display system for displaying multiplex information comprises at least one display panel of a plurality of light emitting dot-like means and at least one sensor, preferably a plurality of sensors, whereby a user or user groups are located simultaneously by sensor/s so that individual information can be individually addressed depending on the 30 position of each sensor/s-located user or user groups.

In order to individually address information to a user or user group the position of said user or user group has to be located. According to the present invention

at least one sensor can be used to locate a user or user groups. A sensor can be selected from the group of radiation sensor, light sensor, photo sensor, infrared sensor, movement sensor, inductive sensor, interferometrical sensor, humidity sensor, image sensor, force sensor, optical sensor, position sensor, proximity sensor, heat flow sensor, radio frequency sensor and/or temperature sensor.

The type of sensor can be selected with respect to the intended use of the display system according to the present invention. In case of a dancing floor with an integrated display system according to the present invention sensors can be preferably selected from the group comprising radiation sensor, light sensor, photo sensor, infrared sensor, movement sensor, inductive sensor, interferometrical sensor, force sensor, optical sensor, proximity sensor, and/or temperature position sensor.

At least one sensor can be used to locate the position of a user or a user group. However, it is preferred to use a plurality of sensors. One advantage is that a position of a user can be located more accurately. Furthermore, the position of a user or user group can be tracked more easily if a plurality of sensors is used.

At least one sensor can be integrated in and/or on the display system according to the present invention. Furthermore, at least one sensor can be arranged outside of the display system. However, it is preferred that the display system comprises a plurality of sensors, whereby sensors are arranged so that they allow to track the movement of the position of at least one user or user groups over a distance, whereby information can be individually addressed to at least one user, preferably at least two user, or user groups and the individual information tracks the individually addressed user or user groups if moved.

A preferred display system according to the present invention allows that information to be individually addressed to a user. In addition, said preferred display system can address information in such a manner that the individually addressed information tracks the addressed user or user group when moved. Thus, a display system according to the present invention can, for example, function as a dancing guide, whereby the display system displays the next steps to take to a dancer or to a group of dancers, whereby the information is individually addressed. Furthermore, the information of the next dance steps follows the user, whereby the next steps to be danced is displayed to the user or group of users. The information addressed to at least

one user is depending on the position detected by a sensor. The individual information addressed to the user can be easily defined by a data processing system calculated with respect to the position located by at least one sensor.

The display system according to the present invention may be improved
5 further insofar as that information addressed to at least one user can be authorised by a specific user code. In order to obtain authorised information the user can, for example, communicate a specific user code to a display system provided with a user code-receiving unit. This allows that a user can be individually addressed by authorised
10 information only. Most preferred is the so-called RFID technique (Radio Frequency Identification) for transmission of said specific user code from a user to the user code-receiving unit of said display system. However, the RFID technique can be used for data communication between a user and a user code-receiving unit either in one or in both directions.

A preferred embodiment of a display system according to the present
15 invention is a person and/or traffic management system, whereby a plurality of light emitting dot-like means are arranged to individually address, depending on position of the user or user groups, individual information to each sensor-detected user or user groups, whereby the actual position of a user or user groups are calculated by means of at least one sensor, whereby said at least one sensor is integrated into the display system
20 and/or external, whereby the individual information tracks the individually addressed user or user groups when moved. It is preferred that individual information to each sensor-detected user or user groups is simultaneously addressed.

The person and/or traffic management display system provides
individual information to a user. For example, a user at an airport can be individually
25 addressed and guided by said display system according to the present invention to the desired gate. This can be further improved by a display system with a data-receiving unit, which can individually address a user or user groups with selected information. In order to receive said information from said display system the user needs to be authorized and/or logged in. A user can be authorized and/or logged in with the display
30 system wirelessly as described above and/or by means of an input device.

A further object of the present invention is directed at a dancing guide floor with an integrated display system to address to at least one dancer information,

such as the next position to move, title of the dance and/or rhythm, whereby the display system comprises light emitting dot-like means and the display system is protected against damage which may be inflicted by a dancer by a transparent layer.

In its simplest form the dancing guide floor with an integrated display system displays information to at least one dancer, preferably a couple, a group of dancers and/or a group of couples, whereby the display system provides information on the next step to take, steps of the dance, rhythm, title and/or background information. This display system does not necessarily need a sensor or sensors to locate the user, i.e. dancer. However, it can be beneficial to locate the actual position of a dancer (user) by means of at least one sensor in order to individually address information to a dancer or a couple.

The display is preferably a matrix of a plurality of light emitting dots, such as LEDs or OLEDs. It can be preferred that the display comprises reflectors for deflecting the light at a predetermined angle. The reflectors can be arranged to emit light in at least two predetermined directions relative to the vertical light beam axis.

A display system according to the present invention can comprise a plurality of display panels, whereby the display panels comprises a plurality of light emitting dots, such as LEDs, OLEDs and/or OLEDs. A display panel that can be used according to the present invention comprises a matrix of LED dots.

According to a preferred embodiment, the reflectors of a display system according to the present invention can be arranged so that groups of light emitting dots emit light in a predetermined angle different to other groups of light emitting dots, so that individual information reaches a user at different perspective view angles. This allows that a variety of different information can be addressed to user at the same position in that the user has to vary his perspective view angle with respect to said display. Further, it is possible that a variety of different individual information can be addressed for a prolonged distance separated from each other by a predetermined perspective view angle to at least one user or user groups, whereby a user can select his desired information by adjusting his perspective view angle, so that a user can track his desired information when moved.

It is further preferred that reflectors are arranged to emit light beams of groups of light emitting dots, such as LEDs or OLEDs in predetermined directions

relative to the vertical axis of the light beam, whereby the reflectors angle can alternate between individual display panel with a group of light emitting dots of at least 10° angle, preferably of at least 15° angle, further preferred of at least 20° angle and more preferred of at least 30° angle, so that individual information can be addressed
5 separated from each other at a different perspective view angle to a user.

According to a more preferred embodiment of the present invention, a dancing floor is provided based on a display system, whereby a plurality of light emitting dot-like means is arranged to individually address, depending on the position of at least one dancer, individual information, such as the next position to move, title of
10 the dance and/or rhythm, whereby the light emitting dot-like means are protected with a transparent layer against damage inflicted by a dancer and the actual position of at least one dancer can be calculated by means of at least one sensor, whereby said at least one sensor is integrated into the dancing floor and/or external.

The display system according to the present invention can be used for
15 practically all purposes where information should be individually addressed to at least one user.

A display system according to the present invention can in particular be used to individually address information to at least one user or user groups depending on the position of each detected user or user groups.

20 Furthermore, a display system according to the present invention can be used to simultaneously and individually address information to a user or user groups depending on the position of each sensor-detected user or user groups, whereby the actual position of a user or user groups is calculated by means of at least one sensor, whereby said at least one sensor is integrated into the display system and/or external,
25 whereby the individual information tracks the individually addressed user or user groups if moved.

A further object of the present invention is directed at a process to simultaneously and individually address individual information by means of a display system according to the present invention to a plurality of users or user groups,
30 whereby

- at least one user or user group is detected and located by means of at least one sensor;

- information is individually addressed to a sensor-located user or user groups;

- individually addressed information tracks the individually addressed user or user groups if moved; and

5 - optionally a user or user groups are identified and/or authorized by a user code so that depending on the user code the information is selected to be individually addressed to said user.

The present invention is further illustrated by the figures 1 to 2.

Fig. 1 shows a dancing guide floor 1 with an integrated display system 2
10 to address to at least one dancer information on the next steps to move 3, whereby the display system comprises an LED matrix display 4 and the display system 2 is at least partially protected with a transparent layer 5 against damage which may caused by a dancer.

Fig. 2 shows a dancing guide floor 1 based on a display system 2,
15 whereby an LED matrix display 4 is arranged to individually address, depending on the position of at least one dancer, individual information, such as the next step to move, whereby the LED matrix display 4 is protected with a transparent layer 5 against damage inflicted by a dancer and the actual position of at least one dancer is calculated by means of at least one sensor 6a/6b, whereby said at least one sensor 6a is integrated
20 into the dancing floor and external 6b.

To provide a comprehensive disclosure without unduly lengthening the specification, the applicant hereby incorporates by reference each of the patents and patent applications referenced above.

The particular combinations of elements and features in the above
25 detailed embodiments are exemplary only; the interchanging and substitution of these teachings with other teachings in this and the patents/applications incorporated by reference are also expressly contemplated. As those skilled in the art will recognize, variations, modifications, and other implementations of what is described herein can occur to those of ordinary skill in the art without departing from the spirit and the scope
30 of the invention as claimed. Accordingly, the foregoing description is by way of example only and is not intended as limiting. The invention's scope is defined in the following claims and the equivalents thereto. Furthermore, reference signs used in the

description and claims do not limit the scope of the invention as claimed.

Fig.1 shows a dancing guide floor with an integrated display system;

Fig. 2 shows a dancing guide floor based on a display system with

5 sensor.

CLAIMS:

1. A display system for displaying multiplex information, whereby an individual selection of information is individually addressed to a different user or user groups, characterized in that the display system for displaying multiplex information comprises at least one display panel of a plurality of light emitting dot-like means and
5 at least one sensor, whereby a user or user groups are located by sensor so that individual information can be individually addressed depending on the position of each sensor-located user or user groups.
2. The display system according to claim 1, whereby at least one sensor to
10 locate a user or user groups is selected from the group comprising radiation sensor, light sensor, photo sensor, infrared sensor, movement sensor, inductive sensor, interferometrical sensor, humidity sensor, image sensor, force sensor, optical sensor, position sensor, proximity sensor, heat flow sensor, radio frequency sensor and/or temperature sensor.
- 15 3. The display system according to claim 1 or claim 2, whereby the display system comprises a plurality of sensors, whereby sensors are arranged so that they allow to track the movement of the position of at least one user or user groups over a distance, whereby information can be individually addressed to each of said user or user
20 groups and the individually information tracks the individually addressed user or user groups if moved.
4. The display system according to claims 1 to 3, whereby the light emitting dot-like means are LEDs and/or OLEDs.

5. Person and/or traffic management system according to claims 1 to 4, whereby a plurality of light emitting dot-like means is arranged to individually address, depending on position of user or user groups, simultaneously individual information to
5 each sensor-detected user or user groups, whereby the actual position of user or user groups is calculated by means of at least one sensor, whereby said at least one sensor is integrated into the display system and/or external, whereby the individual information tracks the individually addressed user or user groups if moved.
- 10 6. A dancing guide floor based on a display system according to claims 1 to 4, whereby a plurality of light emitting dot-like means is arranged to individually address, depending on the position of at least one dancer, individual information, such as the next position to take, title of the dance and/or rhythm, whereby the light emitting dot-like means are protected by a transparent layer against damage inflicted by a dancer
15 and the actual position of at least one dancer is calculated by means of at least one sensor, whereby said at least one sensor is integrated in the dancing floor and/or external.
7. A dancing guide floor with an integrated display system to address to at
20 least one dancer information, such as the next position to move, title of the dance and/or rhythm, whereby the display system comprises an LED matrix display and the display system is at least partially protected with a transparent layer against damage which may be inflicted by a dancer.
- 25 8. Use of a display system according to claims 1 to 4 to individually address information to at least one user or user groups depending on the position of each detected user or user groups.
9. Use of a display system according to claim 8, to simultaneously and
30 individually address information to a user or user groups depending on the position of each sensor detected user or user groups, whereby the actual position of a user or user

groups are calculated by means of at least one sensor, whereby said at least one sensor is integrated into the display system and/or external, whereby the individual information tracks the individually addressed user or user groups if moved.

- 5 10. Process to simultaneously and individually address individual information with a display system according to claims 1 to 7 to a plurality of users or user groups, whereby
- at least one user or user group is detected and located by means of at least one sensor;
- 10 - information is individually addressed to a sensor-located user or user groups;
- individually addressed information tracks the individually addressed user or user groups if moved; and
 - optionally a user or user groups are identified and/or authorized by a
- 15 user code so that depending on the user code information is selected to be individually addressed to said user.

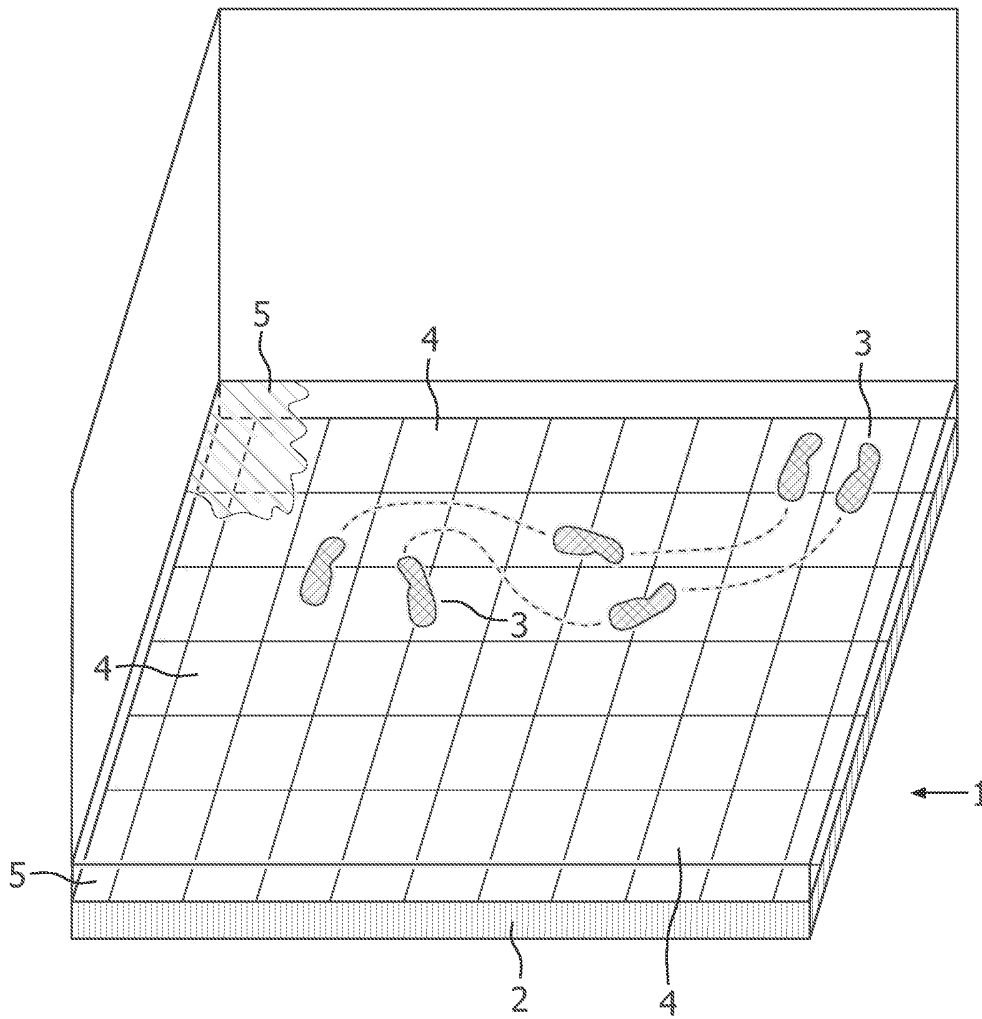


FIG. 1

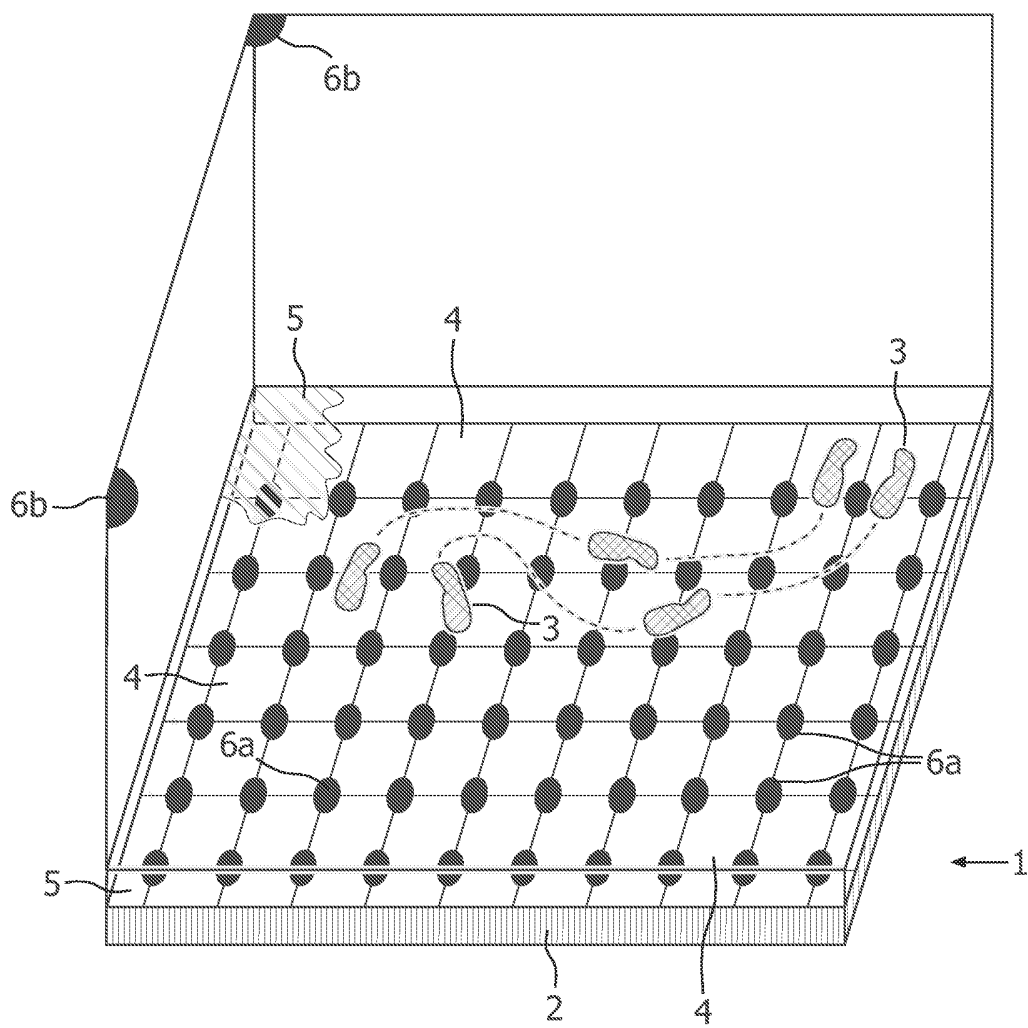


FIG. 2