

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 September 2003 (12.09.2003)


PCT

(10) International Publication Number
WO 03/073924 A1

- (51) International Patent Classification⁷: **A61B 5/00**
- (21) International Application Number: PCT/GB03/00897
- (22) International Filing Date: 3 March 2003 (03.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0204887.4 1 March 2002 (01.03.2002) GB
0229073.2 13 December 2002 (13.12.2002) GB
- (71) Applicant and
(72) Inventor: **BEAUMONT, Terry** [GB/GB]; Far Mount Farm, Cumberworth HD8 8YE (GB).
- (74) Agent: **HARRISON, Michael, R.**; Harrison Goddard Foote, Quality House, Quality Court, Chancery Lane, London WC2A 1HT (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: EAR CANAL SENSING DEVICE

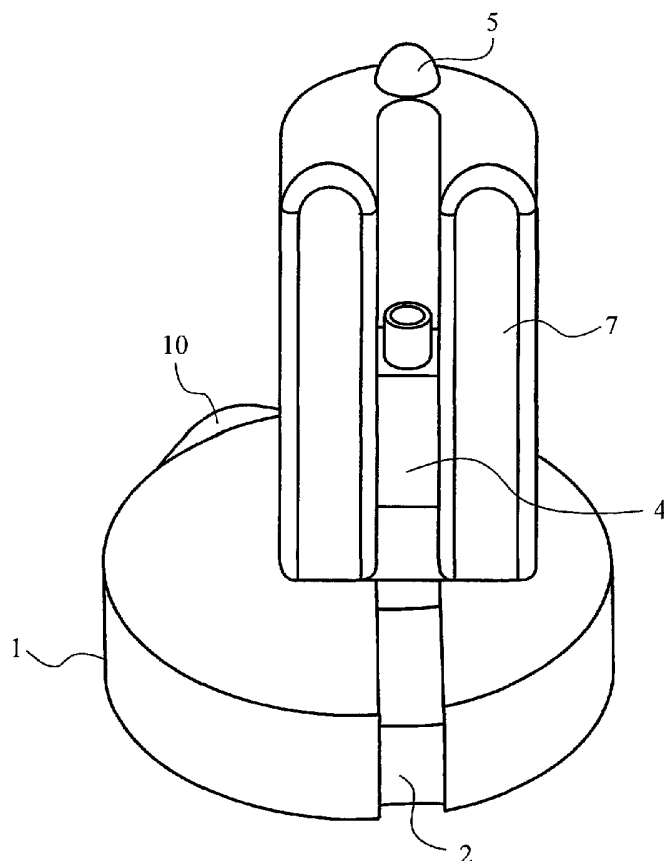

(57) Abstract: The present invention relates to a sensing device suitable for the non-invasive monitoring of physiological factors, the device being particularly suitable for location within the ear canal. The invention also relates to provision for duplex audio communication for use with said sensing device.

WO 03/073924 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

EAR CANAL SENSING DEVICE

The present invention relates to a sensing device suitable for the non-invasive monitoring of physiological factors, the device being particularly suitable for location
5 within the ear canal. The invention also relates to provision for duplex audio communication for use with said sensing device.

Systems for the monitoring of critical physiological factors are known. US
07/272,146 discloses the use of a nasal septum probe or oximeter. The application
10 discloses the modified use of a nasal septum probe or oxisensor used with a conventional medical pulse oximeter. The nasal septum probe fits over a patient's nose bridge, or septum. The nasal septum oxisensor is modified to mount within the nose bridge portion of a conventional aircrew member face mask so that the blood oxygen saturation and pulse rate of the aircrew member can be monitored without
15 any noticeable interference with, or extra effort by, the aircrew member.

A pulse oximeter calculates blood oxygen saturation from the different rates at which oxygenated haemoglobin and reduced haemoglobin absorb light of different wavelengths or frequencies. Typically, two wavelengths of light are used, one in the
20 red portion of the spectrum and the other in the infra-red. Also typically, absorption of the infra-red wavelengths is much less sensitive to blood oxygen saturation levels than is absorption of the red wavelengths. The intensity of a particular infra-red wavelength remaining after passing through vascular tissue can serve as a constant against which to measure the intensity of a particular red wavelength remaining after
25 passing through the same vascular tissue. Pulse rate is calculated from the timing of the relative rise and fall of the amount of light absorbed at each wavelength.

The pulse oximeter probe prior art has placed light emitting diodes (LEDs), and corresponding light sensors, over a variety of body appendages having sufficient
30 vascular tissue. Such appendages include a finger, an ear pina, or ear lobe, the nasal septum as previously mentioned, and the scalp. The prior art refers to ear oximeters,

but in most cases it refers to oximeters using probes, or oxisensors, that mount across the ear lobe.

5 US 5,213,099 describes a sensing device comprising physiological sensing means in the form of a probe for measuring blood oxygen saturation level and a pulse monitor. The device comprises a means to locate the sensing means inside the ear canal. The device is specifically designed as a non-invasive, unobtrusive physiological monitor for a pilot or an aircrew member of high performance aircraft. Placement of the probe inside the relatively dark ear canal is greatly advantageous as it reduces
10 sensitivity to error from external light sources and allows measurement of blood oxygen saturation at a location as near as possible to the blood supply to the brain of an air-crew member. This is due to the fact that the main artery that supplies the brain also supplies the timpanic membrane. The device is incorporated as part of a protective ear plug already issued to aircrew members.

15 Since the device of US 5,213,099 effectively seals off the auditory meatus into which it is plugged, the user of the device suffers from various problems. These include an uncomfortable feeling of pressure in the ear canal, sweat in the ear, pollution by cerumen and loss of sound location when the auditory meatus is blocked off.

20 According to a first aspect of the present invention there is provided a sensing device comprising:

- a) physiological sensing means; and
 - b) locating means to locate the sensing means inside an ear canal;
- 25 characterised in that the locating means is provided with an aperture which, when the sensing device is fitted in the ear canal, allows motion of the air in and out of the ear canal.

30 Placement of the device of the present invention inside the ear canal or auditory meatus has the important advantages of reduced sensitivity to error from external light sources and measurement of important parameters such as blood oxygen

saturation, heart rate, and body core temperature as near as possible to the blood supply to the brain of the wearer.

5 Preferably the locating means is substantially U-shaped and the aperture is defined by the trough between each arm of the U.

Preferably the locating means is made of pliable material and can be adapted to fit comfortably within the ear canal.

10 Preferably the locating means is provided with an adjusting means such that one device can be comfortably accommodated by a multiplicity of different users.

Most preferably the locating means is made of silicone or any other like material.

15 Preferably the locating means has a thermal conducting heat transfer tip.

Preferably the physiological sensing means comprises pulse oximetry optical transmitters and receiver.

20 Preferably the physiological sensing means also comprises a temperature sensor in contact with said heat transfer tip on the locating means.

25 Preferably the sensing device is provided with a securing means to secure the device to the ear of the user.

Preferably the securing means comprises an ear clip which partially or completely surrounds the ear.

30 The securing means may be designed to go around the top or bottom of the ear.

An alternative embodiment of the securing means is a custom made unit specifically to fit one ear of a particular user.

5 It will be appreciated that a means of audio communications between the user of the device and a person monitoring the physiological parameters will be desirable along with communication of physiological information and alarms for the wearer of the device.

10 Communication earpieces are known. US 5,659,620 (Kuhlman) describes an ear microphone which is adapted to be disposed and retained in the outer ear region, i.e., outside the auditory meatus. The device is suitable for use with portable telephones or radios.

15 The disclosure of US5,659,620 teaches away from the use a device which is designed for arrangement within the auditory meatus.

Embodiments of the present invention seek to provide a physiological monitor.

20 Accordingly the sensing device of the present invention may further comprise an audio communications means comprising a speaker and a microphone.

Preferably a multi-core cable connects the sensing device to an interface unit for transmission by radio or cable to an external recording and monitoring means.

25 Preferably the speaker is located within the aperture of the U-shaped locating means.

Preferably the microphone contacts the front part of the outer ear. Preferably the microphone is a bone microphone and collects vibrations transmitted by the jawbone which passes near the front part of the outer ear. These vibrations are generated in
30 the throat and vocal cords of the user upon talking.

Preferably the microphone aperture is pneumatically connected to a bubble of air. When the device is in use, the air bubble makes contact with the tragus against which it is placed and transmits vibrations in the air within the bubble to a microphone.

- 5 Preferably the communications means and the locating means are formed as separate components, each component suitably adapted for reversible attachment with said other component. Reversible attachment facilitates general maintenance and cleaning of the sensing device. In an alternative embodiment the communication means is integral with the locating means.

10

Applications of a present device of the present invention include but are not restricted to use within the emergency, medical and military services. The device also has applications within the industrial sector for the monitoring of workers in hazardous areas.

15

- Due to the nature of potential applications of the present device mentioned above, it will be apparent to one of skill in the art that full duplex communication, as opposed to merely simplex communication, is clearly desirable. It is known that for an ear microphone and speaker to be used for full duplex, sufficient separation between input and output must be present in order to avoid self-resonance. Although US5,659,620 makes reference to the advantage of a full duplex communication the described embodiment does not enable such levels of communication.

20

- According to a second aspect of the present invention there is provided a communications means comprising;

25

a) a speaker

b) a microphone

characterised in that the speaker is located within a vibration absorbent material.

- 30 Preferably the speaker and/or the microphone are located within two layers of vibration absorbent material.

Preferably the surrounding enclosure for the speaker and microphone is a soft silicone sealant type material.

Preferably the location means is thermoplastic elastomer or thermoset silicone.

5

Preferably the location means vibration absorbing material has a shore hardness of 30 to 60 %

The absorbent materials serve to absorb vibrations emitted by the speaker and thus prevent transmittal of these vibrations to the microphone. Preferably the speaker is located partially within the inner auditory meatus thus increasing the distance between the speaker and the microphone. Accordingly the communication means of the present invention allows for full duplex communication.

The present invention is illustrated by the accompanying drawings wherein reference numerals 1 to 12 refer to the following earpiece parts:

1. earpiece body (lower)
2. venting aperture
3. infra-red & red transmitter
4. speaker
5. temperature sensor
6. microphone
7. U shaped locating means
8. optical sensors
9. microphone sound tube
10. microphone air bubble
11. ear piece body (upper)
12. multi-core cable

30

Figure 1 illustrates in plan view, the detail of the lower earpiece body (1) and U shaped locating means (7).

Figures 2 and 3 are perspective views and illustrate the aperture or groove provided
5 by the U shaped locating means (7) and the location of the speaker (4) therewithin.

Figure 4 shows the assembled sensing device located in the inner ear of a user.

10

15

20

25

30

CLAIMS

1. A sensing device comprising:
 - a) physiological sensing means; and
 - 5 b) locating means to locate the sensing means inside an ear canal ;
characterised in that the locating means is provided with an aperture which, when the sensing device is fitted in the ear canal, allows motion of the air in and out of the ear canal.
- 10 2. A sensing device according to claim 1 wherein the locating means is substantially U-shaped and the aperture is defined by the trough between each arm of the U.
3. A sensing device according to claim 1 or claim 2 wherein the locating means
15 is made of pliable material and can be adapted to fit comfortably within the ear canal.
4. A sensing device according to claim 3 wherein the locating means is made of silicone or any other like material.
- 20 5. A sensing device according to any of the preceding claims wherein the locating means is provided with adjusting means such that one device can be comfortably accommodated by a multiplicity of different users.
6. A sensing device according to any of the preceding claims wherein the
25 physiological sensing means comprises pulse oximetry optical transmitters and receiver.
7. A sensing device according to any of the preceding claims wherein the locating means has a thermal conducting heat transfer tip.

30

8. A sensing device according to claim 7 wherein the physiological sensing means also comprises a temperature sensor in contact with said heat transfer tip on the locating means.

5 9. A sensing device according to any of the preceding claims wherein the sensing device is provided with securing means to secure the device to the ear of a user.

10 10. A sensing device according to claim 9 wherein the securing means comprises an ear clip which partially or completely surrounds the ear.

11. A sensing device according to claim 9 or claim 10 wherein the securing means are designed to go around the top or bottom of the ear.

15 12. A sensing device according to any of the preceding claims and further comprising audio communication means wherein the audio communication means comprise a speaker and a microphone and the speaker and/or microphone is located within a vibration absorbent material.


20 13. A sensing device according to claim 12 wherein the absorbent material is a soft silicone sealant type material.

14. A sensing device according to claim 13 wherein the absorbent material is a thermoplastic elastomer or thermoset silicone.

25

15. A sensing device according to any of claims 12 to 14 wherein the absorbent material has a shore hardness of 30 to 60 %.

30

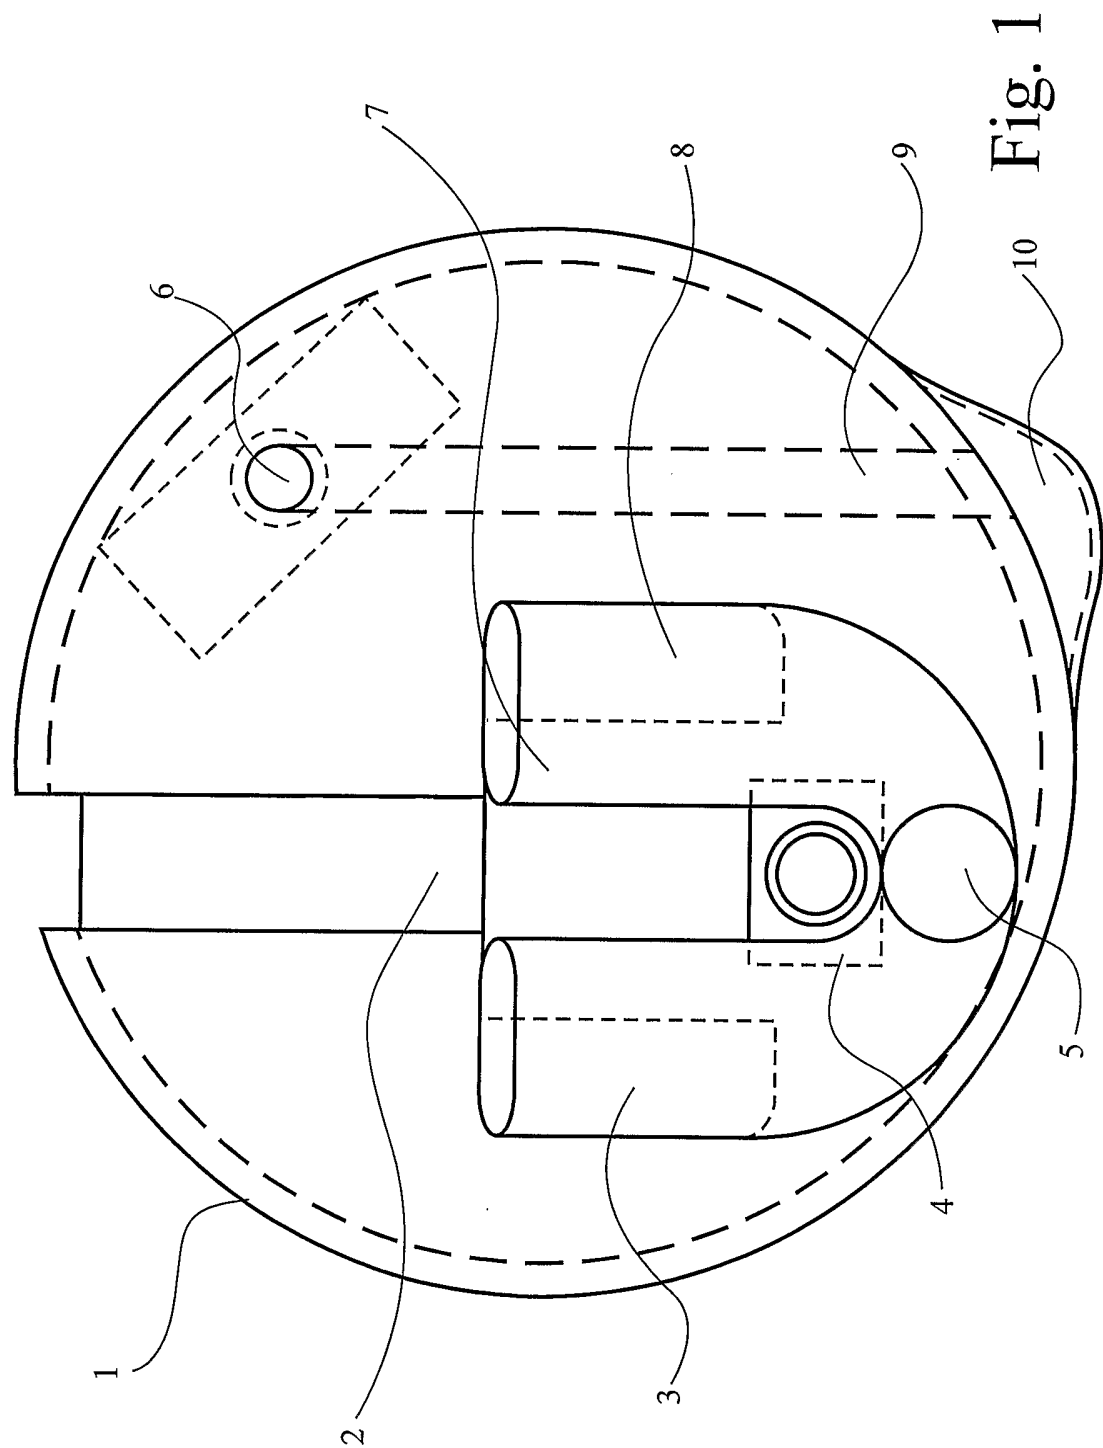

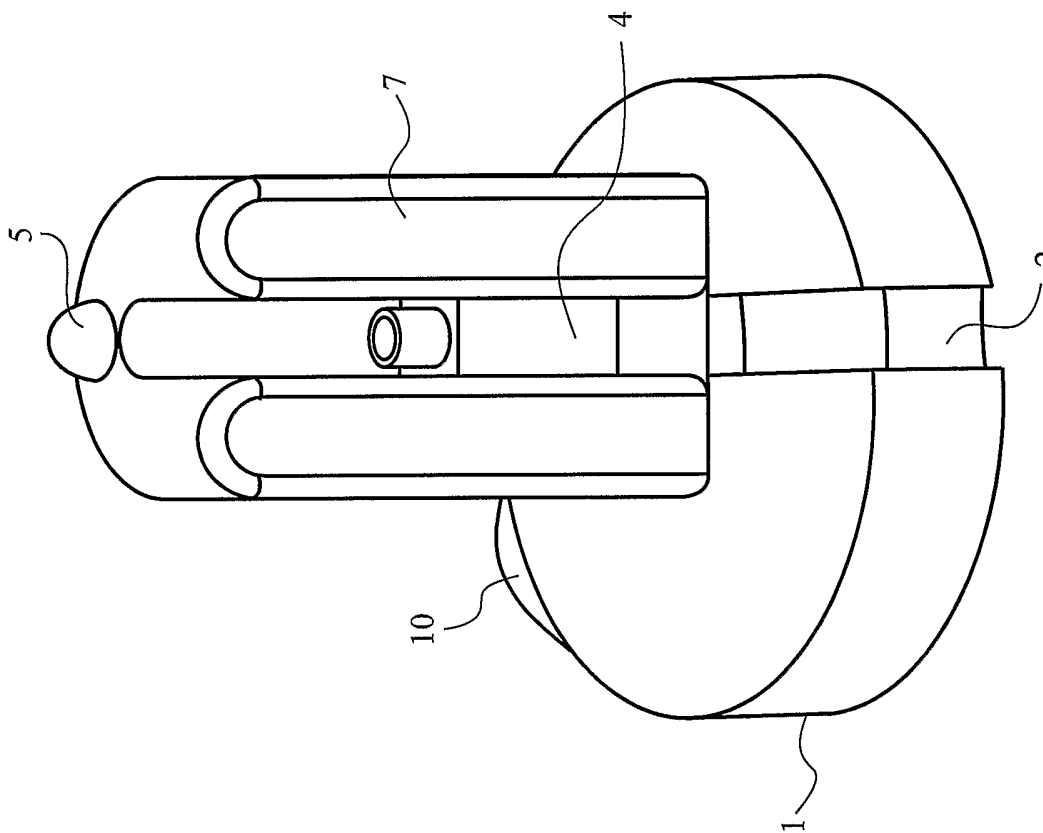


Fig. 2

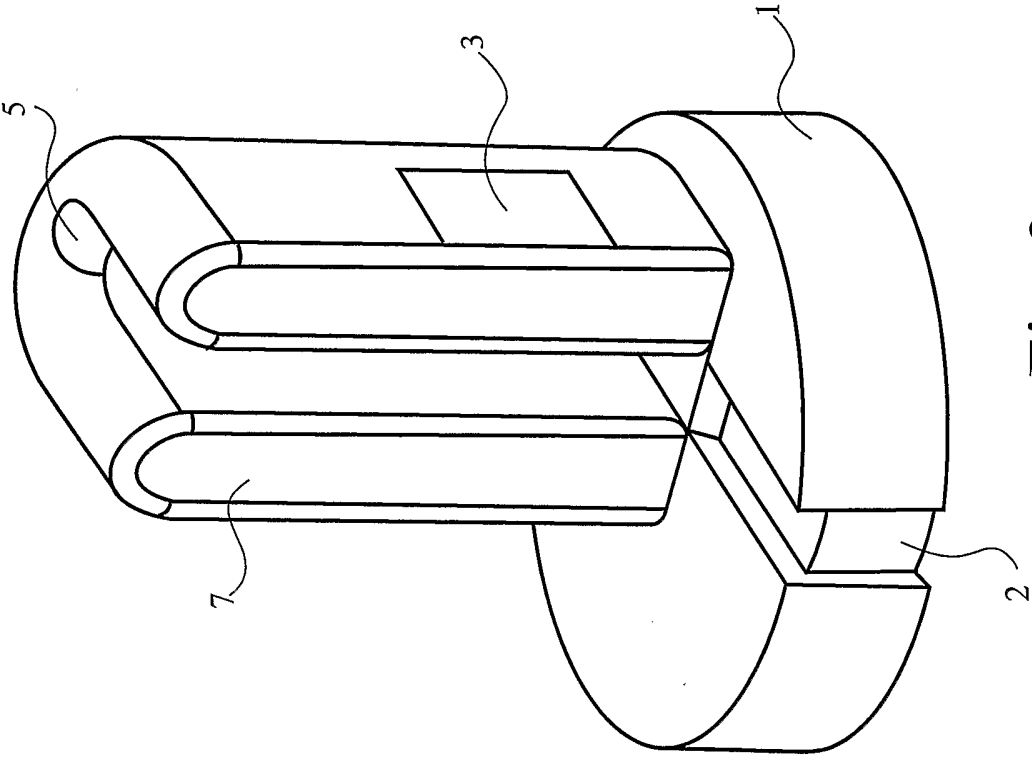


Fig. 3

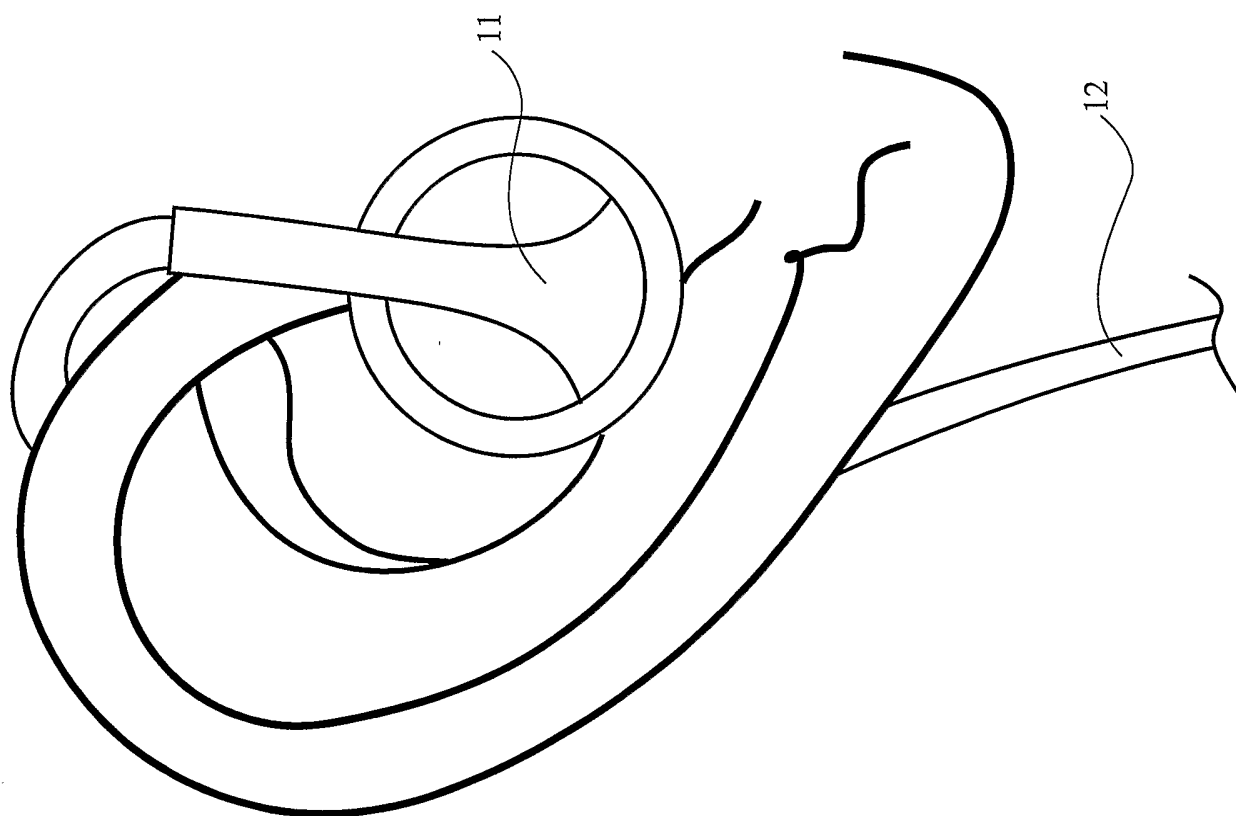


Fig. 4

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 03/00897

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61B5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A61B H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 673 692 A (COOPER TOMMY G ET AL) 7 October 1997 (1997-10-07) column 5, line 49 -column 5, line 57 column 6, line 65 -column 7, line 35 column 7, line 61 -column 8, line 20 column 9, line 13 -column 9, line 23 figures 6-10 ---	1-11
X	WO 00 53094 A (SARNOFF CORP) 14 September 2000 (2000-09-14) page 4, line 23 -page 4, line 28 page 5, line 23 -page 6, line 9 page 7, line 1 -page 7, line 14 page 10, line 1 -page 10, line 19 figures 1-3 --- -/--	1-11



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

23 May 2003

Date of mailing of the international search report

03/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lommel, A

INTERNATIONAL SEARCH REPORT

In International Application No
PCT/GB 03/00897

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 971 931 A (RAFF GILBERT LEWIS) 26 October 1999 (1999-10-26) column 2, line 32 -column 2, line 46 claims 1,3,21 -----	1-15
A	DE 37 23 275 A (TEMCO JAPAN) 31 March 1988 (1988-03-31) column 3, line 57 -column 4, line 6 figures 1-3 -----	12-15

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/GB 03/00897

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5673692	A	07-10-1997	NONE		
WO 0053094	A	14-09-2000	US	6253871 B1	03-07-2001
			AU	3731000 A	28-09-2000
			WO	0053094 A1	14-09-2000
US 5971931	A	26-10-1999	NONE		
DE 3723275	A	31-03-1988	JP	63080698 A	11-04-1988
			AU	609413 B2	02-05-1991
			AU	7799487 A	31-03-1988
			CA	1287914 A1	20-08-1991
			DE	3723275 A1	31-03-1988
			FR	2604589 A1	01-04-1988
			GB	2197158 A , B	11-05-1988
			KR	9010854 Y1	30-11-1990