

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 June 2002 (27.06.2002)

PCT

(10) International Publication Number
WO 02/50354 A1

(51) International Patent Classification⁷: D04H 1/46, 1/70

(21) International Application Number: PCT/DK00/00710

(22) International Filing Date:
19 December 2000 (19.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): M & J FLBRETECH A/S [DK/DK]; Vejlevej 3, DK-8700 Horsens (DK).

(72) Inventor; and
(75) Inventor/Applicant (for US only): BRÖCHNER, Jens, Ole [DK/DK]; Bytoften 17, DK-8600 Skanderborg (DK).

(74) Agent: HOLME PATENT A/S; Vesterbrogade 20, DK-1620 Copenhagen V (DK).

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,


CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND PLANT FOR WITHOUT A BASE WEB PRODUCING AN AIR-LAID HYDROENTANGLED FIBRE WEB

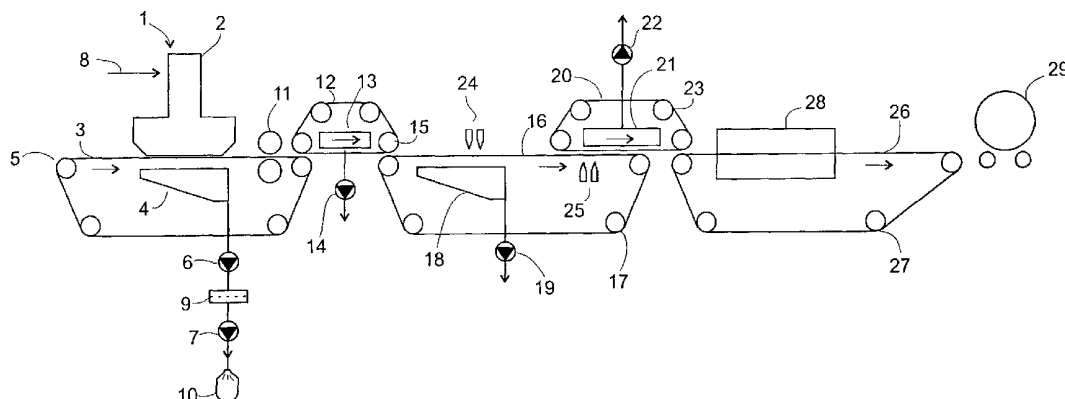

(57) Abstract: Method and plant for without a base web producing an air-laid hydroentangled fibre web ABSTRACTA plant for producing an air-laid non-woven web of cellulose fibres or of cellulose fibres mixed with synthetic fibres is comprising at least one air-laying section (1) for depositing fibre fluff into a layer upon a forming wire (3), an overlying second wire (12) for transferring the layer of fluff to a third wire (16; 30) having mesh count small enough for preventing the fibres from penetrating into the wire, and at least one nozzle (24; 25) for ejecting a water jet towards the fluff on the third wire (16), thereby hydroentangling the fluff into a coherent web. By means of the method and plant according to the invention it is possible to produce hydroentangled fibre webs which is less expensive and has better absorption properties than hitherto known. The webs can be produced with weights between about 20 - 2000 g/m².



WO 02/50354 A1

Method and plant for without a base web producing an air-laid hydroentangled fibre web

The invention relates to an air-laid non-woven web of cellulose fibres or of cellulose fibres mixed with synthetic fibres having a structure obtained by hydroentangling the fibres to a coherent web, and also a method and a plant for producing such web.

Hydroentangled webs of this kind are to a great extent used for the manufacturing of disposable non-woven products of which can be mentioned,

- absorbent core material for feminine hygiene articles,
- incontinence articles,
- diapers,
- table top napkins,
- hospital products such as bed protection sheets,
- wipes, and
- towels.

During the hydroentangling process jets of water are, under the influence of a pressure as high as e.g. 100 bar, ejected through a number of nozzles towards a layer of fibre fluff which is air-laid by means of a forming head per se. During the hydroentangling process the fluff is conventionally supported by a base web, which in its turn is supported by a wire.

The base web has to be strong enough to withstand the heavy load from the water jets and is therefore normally produced of synthetic fibres.

In some cases the base web can be supplied to the forming head in form of a spunbonded/meltblown (SMMS) web, but usually it is formed of carded fibres which are hydroentangled and dried

before being used as base for the air-laid fibre fluff during the hydroentangling of this.

The carding of the synthetic fibre material is a relatively slow process causing therefore a limitation to the production rate of the total plant.

Besides, the price of synthetic fibres can e.g. be about three times the price of cellulose fibres. The base web therefore is rather costly.

A finished web of 60 g/m^2 will typically consist of a base web of 30 g/m^2 supplied with a layer of cellulose fibres of 30 g/m^2 . Such a web has, in relation to its high price, poor absorption properties as the costly synthetic fibres do not or only negligibly participate in the absorption process.

The total weight of a conventional web is typically between $20\text{-}60 \text{ g/m}^2$ with a base web of between $10\text{-}30 \text{ g/m}^2$ and air-laid cellulose fibre and/or cellulose fibres and synthetic fibres of between $10\text{-}30 \text{ g/m}^2$. The webs are relatively thin, for example about $0.5 - 0.6 \text{ mm}$.

It is an object of the invention to provide a hydroentangled fibre web of the kind mentioned in the opening paragraph, which is less expensive and has better absorption properties than hitherto known.

Another object of the invention is to provide a hydroentangled fibre web of the kind mentioned in the opening paragraph having a weight of between $20 - 2000 \text{ g/m}^2$.

A further object of the invention is to provide a method and a plant of the kind mentioned in the opening paragraph for producing a web, which is less expensive and has better absorption properties than hitherto known.

Still a further object of the invention is to provide a method and a plant of the kind mentioned in the opening paragraph for producing a web having a weight of between 20 - 2000 g/m².

An inexpensive and good absorbing web according to the invention is obtained when it is produced without base web and therefore only consists of cellulose fibres, which if necessary can be mixed with synthetic fibres for strengthening the web.

Such a web could be produced by means of a method and a plant according to the invention by air-laying fibre fluff into a layer upon a forming wire, transferring the layer of fluff by means of an overlying second wire to a third wire having mesh count small enough for preventing the fibres from penetrating into the wire, and ejecting water jets towards the fluff on the third wire, thereby hydroentangling the fluff into a coherent web.

Preferably the mesh count of the third wire, on which the fluff is entangled, could be between 38 and 58 meshes at least at the top of said wire.

A web produced in this way could, according to the invention, in subsequent process steps be imparted further advantageous properties and obtain weights up to e.g. 2000 g/m².

The invention will be explained in greater details below where further advantageous properties and only exemplary embodiments are described with reference to the drawing, in which

Fig. 1 is a diagrammatic view of a first embodiment of a plant according to the invention,

Fig. 2 is a diagrammatic view of a second embodiment of a plant according to the invention,

Fig. 3 is a diagrammatic view of a third embodiment of a plant according to the invention,

Fig. 4 is a diagrammatic view of a fourth embodiment of a plant according to the invention,

Fig. 5 is a diagrammatic view of a fifth embodiment of a plant according to the invention,

Fig. 6 is a diagrammatic view of a sixth embodiment of a plant according to the invention,

Fig. 7 is a diagrammatic view of a seventh embodiment of a plant according to the invention, and

Fig. 8 is a diagrammatic view of an eighth embodiment of a plant according to the invention.

The embodiments shown in the figures all comprise a forming station 1, which mainly consists of a forming head 2 placed above a forming wire 3 and a suction box 4 placed below the forming wire.

The forming wire runs, during operation, around four rolls 5 in the direction indicated by the arrow. A differential pressure is generated over the forming wire by means of a first - and second vacuum fan 6 and 7, which are connected to the suction box 4.

Fibres from a supply of fibres (not shown) are via a channel 8 carried into the forming head in a flow of air. The fibres are by means of said differential pressure deposited in a layer of fluff onto the forming wire.

The fluff normally contains fines, which are small fibre particles in order of 10 - 50 μ . These fines make the

subsequent hydroentangling process troublesome and costly and moreover tend to reduce the quality of the finished web.

The forming station according to the invention is therefore arranged in such a way that at least most of the fines are removed from the fluff during the air-laying process in the forming station.

This advantageous effect is obtained by choosing the mesh count of the forming wire and the differential pressure between the forming head and the suction box such that mainly only fines contained in the fluff will pass through the forming wire.

The mesh count of the forming wire is, more definite, about 14 - 30 meshes while the mesh count of a conventional forming wire normally is about 31 - 38 mesh.

The coarser forming wire according to the invention results in a reduction of the differential pressure from the conventional about 180 - 270 mm water head to about 80 - 150 mm water head.

The fluff on the forming wire is thereby deposited in a light and airy layer which easily is blown through by the flow of air with velocity so low that the fines but not the fibres are conveyed by the air which is flowing through the fluff and the forming wire.

A filter 9 is arranged between the first - and second vacuum fan 6 and 7 for removing fines from the flow of air. The removed fines are collected in a sack 10 or a similar device.

The cleaned fluff is, in this case, compacted between two compacting rolls 11 and sucked up upon an overlaying second wire 12 by means of a suction box 13 which is connected to a

vacuum fan 14. The second wire 12 runs, during operation, around four rolls 15 in the direction indicated by the arrow.

The cleaned and compacted fluff is by means of the second wire transferred to a third wire 16 running, during operation, around four rolls 17 in the direction indicated by the arrow. A suction box 18, which is arranged below the third wire 16, is connected to a vacuum fan 19.

An overlying fourth wire 20 is extending from the third wire 16. A suction box 21, which is arranged above the fourth wire, is connected to a vacuum fan 22. The fourth wire 20 runs, during operation, around four rolls 23 in the direction indicated by the arrow.

Above the third wire 16 is, in the area of the suction box 18, placed a first set of hydroentangling nozzles 24. Another set of hydroentangling nozzles 25 is, in the area of the suction box 21, placed underneath the fourth wire 20.

During operation jets of water are, under influence of a pressure of e.g. 100 bar, ejected through the two sets of nozzles 24 and 25 towards the cleaned and compacted fluff on the third and fourth wire, respectively. The fluff is thereby entangled into a coherent web.

The second set of water nozzle is loosening the web from the third wire by ejecting water jet towards the lower side of the web on the third wire. That means that the hydroentangling performed by the second set of water nozzles at the same time also is loosening the web from the wire.

Jets of air from air nozzles can alternatively be used for loosening the web from the wire.

The fluff is, in this case, hydroentangled from both sides. Alternatively, the fluff could be hydroentangled from only one side, for example the topside.

A hydroentangling process is known per se. But conventionally the hydroentangling is carried out from the top side with the fluff supported by a base web which usually is formed of carded synthetic fibres which are hydroentangled and dried before being used in the hydroentangling process.

The carding process reduces the possible production rate of the total plant, and the price of synthetic fibres is rather high. The base web is therefore costly and also has poor absorption properties as the synthetic fibres do not or only negligibly participate in the absorption process.

For remedying these drawbacks the third and fourth wire 16, 20 are formed with mesh count small enough for preventing the fibres from penetrating into the wire. More specific, the mesh count is between 38 - 58 meshes while the mesh count of a conventional hydroentangling wire is between 25 - 35 meshes.

The hydroentangling process can, by using such a fine wire, now be carried out without using the conventional base web. Thereby it surprisingly is obtained that a hydroentangled web with superior absorbing properties advantageously can be produced at a very low price.

The rate of water flowing through the nozzles 24 and 25 during hydroentangling the web is very high. In order to avoid that the water runs to waste it is recirculated (not shown) back to the nozzles for being reused.

Conventionally, the fluff will contain fines, which will be dispersed in the water flowing through the fluff being hydroentangled. The dispersed fines in the reused water tend

to get stuck in the fine nozzles, which then stop to function thereby causing a costly stop-down for the total plant.

The fines are therefore by means of a filter removed from the used water before this water is recirculated back to the nozzles. Filtering particles as small as fines require a costly and complex filter having a number of filtering steps. The servicing of such filter also is very costly.

The above named drawbacks of the conventional hydroentangling technique is according to the invention remedied by removing the fines from the fluff already in the forming station in the way previously described.

For some applications it is, however, preferred to let the fines in the fluff remain in the web. In this case the process in the forming station is carried out in the conventional way, that means without separating the fines from the fluff.

The wet hydroentangled web is by means of the fourth wire 20 transferred to a fifth wire 26 running, during operation, around four rolls 27 in the direction indicated by the arrow. On the fifth wire the web is dried by passing e.g. an oven 28 or similar heat source.

Finally, the finished web is wound up on a reel 29.

Fig. 2 shows a variant of the embodiment of the plant shown in fig. 1 and identical components are designated by the same reference numerals.

The fluff is, in this case, hydroentangled only from the topside on the wire 16 by means of the first set of nozzles 24.

The web is then transferred to a fourth wire 30 running over four rolls 31 in the direction indicated by the arrow. On the fourth wire 30 the second side of the web will be turned upwards and hydroentangled by means of the second set of nozzles 25.

Underneath the fourth wire 30 is placed a suction box 32, which is connected to a vacuum fan 33.

The wet hydroentangled web is transferred to a fifth wire 34 running, during operation, around four rolls 35 in the direction indicated by the arrow. On the fifth wire the web is dried by passing e.g. an oven 36 or a similar heat source.

The dried web is on a sixth wire 37 running over four rolls 38 in the direction indicated by the arrow finally transferred to the reel 29 and wound up on this reel.

Fig. 3 shows another variant of the embodiment of the plant shown in fig. 1 and identical components are designated by the same reference numerals.

The hydroentangled and dried web is in this case transferred to a sixth wire 39 running, during operation, around four rolls 40 in the direction indicated by the arrow. A steam ejector 41 is arranged over the web and underneath the wire 39 is placed a suction box 42 connected to a vacuum fan 43.

On the sixth wire 39 the web is treated with steam from the steam ejector 41 for thereby binding dust on the web. The vacuum from the suction box ensures that the steam is directed against the surface of the web.

Before being wound up on the reel 29 the web is passing through a calender 44 where the web is compacted and possibly embossed with a wanted pattern.

Fig. 4 shows another variant of the embodiment of the plant shown in fig. 1 and identical components are designated by the same reference numerals.

The hydroentangled and dried web is in this case transferred to a sixth wire 45 running, during operation, around four rolls 46 in the direction indicated by the arrow. A hot-melt applicator 47 is arranged over the web and underneath the wire 45 is placed a suction box 48 connected to a vacuum fan 49.

By means of the hot-melt applicator 47 a layer of hot-melted plastic is applied on the web on the sixth wire. A non-woven web 50 of e.g. cellulose fibres or cellulose fibres mixed with synthetic fibres is unwound from a reel 51 and applied upon the melted plastic on the web on the sixth wire, thereby forming a laminate of the originally hydroentangled web and said non-woven web.

Before being wound up on the reel 29 the laminate is passing through the calender 44 where the web is compacted and possibly embossed with a wanted pattern.

Fig. 5 shows still another variant of the embodiment of the plant shown in fig. 1 and identical components are designated by the same reference numerals.

The hydroentangled and dried web is in this case transferred to a sixth wire 52 running, during operation, around four rolls 53 in the direction indicated by the arrow. Underneath the wire 52 is placed a suction box 54 connected to a vacuum fan 55 and above the wire is arranged a device 56 for applying a layer of spunbonded/meltblown fibres (SMMS), bicomponent fibres and/or a combination of these fibres upon the web on the sixth wire thereby producing a laminate of the originally hydroentangled web and said fibres.

Before being wound up on the reel 29 the laminate is passing through the calender 44 where the web is compacted and possibly embossed with a wanted pattern.

Fig. 6 shows a further variant of the embodiment of the plant shown in fig. 1 and identical components are designated by the same reference numerals.

The hydroentangled and dried web is in this case transferred to a sixth wire 57 running, during operation, around four rolls 58 in the direction indicated by the arrow. Underneath the wire 57 is placed a suction box 59 connected to a vacuum fan 60 and above the wire is arranged a device 61 for producing a carded web 62 which is bonded by e.g. a hot-melt application to the hydroentangled web thereby forming a laminate of said two webs.

Before being wound up on the reel 29 the laminate is passing through the calender 44 where the web is compacted and possibly embossed with a wanted pattern.

Fig. 7 shows a variant of the embodiment of the plant shown in fig. 6 and identical components are designated by the same reference numerals.

In this case the plant of fig. 6 is supplied with a device 63 for further applying a non-woven web 64, which is bonded by e.g. a hot-melt application onto the lower side of the hydroentangled web.

By means of the plant shown in fig. 7 a laminate consisting of the originally hydroentangled web, a carded web on the upper side and a non-woven web on the lower side of the hydroentangled web can be produced.

In stead of the non-woven web 64 a film of e.g. a plastic can be applied to the lower side of the hydroentangled web or both a non-woven web and a film can be applied to the lower side of the hydroentangled web.

Fig. 8 shows a further variant of the embodiment of the plant shown in fig. 1 and identical components are designated by the same reference numerals.

The hydroentangled web is in this case transferred to a fifth wire 65 running, during operation, around four rolls 66 in the direction indicated by the arrow.

Above the fifth wire is arranged an applicator 67 for applying a first layer of binder to the upper side of the fibre web on the fifth wire.

The web is then transferred to a sixth wire 68 running, during operation, around four rolls 69 in the direction indicated by the arrow. On the fifth wire the web is dried by passing e.g. an oven 70 or a similar heat source.

A seventh wire 71 is placed downstream of the sixth wire 65 for turning the lower second side of the web upwards. The wire runs during operation, around four rolls 72 in the direction indicated by the arrow.

Above the seventh wire 71 is arranged another applicator 73 for applying a second layer of binder to the second side of the fibre web on the seventh wire.

The web is then transferred to an eight wire 74 running, during operation, around four rolls 75 in the direction indicated by the arrow. On the eight wire the web is dried by passing e.g. an oven 76 or a similar heat source.

The binder on the web is on a ninth wire 77 running over four rolls 78 in the direction indicated by the arrow cured by passing e.g. an oven 79 or a similar heat source whereafter the web is transferred to the reel 29 for being wound up on this reel.

The invention is described above by way of example and by means of eight different embodiments, which of course can be combined in many ways for thereby producing webs having a wanted structure and properties.

In one embodiment according to the invention the web only consist of hydroentangled cellulose fibres. This web has excellent absorption properties and also can be produced at a very low price owing to the low price of the cellulose fibres.

In another embodiment of the invention the cellulose fibres are mixed with synthetic fibres for strengthening the web by for example heat treating the web in such a way that the synthetic fibres are bonded to the cellulose fibres and to each other.

In a further embodiment of the invention at least one side of the web is applied a binder for making this side dust free. Alternatively the web is treated by steam for binding the dust.

An expedient web according to the invention has a structure with little or no fines.

As examples of products manufactured of such webs can be mentioned disposable non-woven products as e.g. feminine hygiene articles, incontinence articles, diapers, napkins, wipes and towels which all need to have good absorption properties and preferably also should have a low price.

The webs used for such products usually have a weight of about 20 - 80 g/m² and are usually calendered.

By using the plant and method according to the invention it is, however, possible to produce webs having a weight of up to e.g. 2000 g/m².

In one embodiment of the invention such heavy-duty webs only consist of hydroentangled cellulose fibre or cellulose fibres mixed with synthetic fibres.

In other embodiments said hydroentangled web is laminated with other layers of different kinds.

As an example of such other layers can be mentioned a hot melted layer of a plastic on at least one side of the hydroentangled web, and at least one non-woven web on the melted plastic.

In another example the other layers are comprising at least one layer of melt blown fibres (SMMS) or bicomponent fibres and/or a combination of these on at least one side of the web.

In a third example the other layers are comprising at least one carded web on at least one side of the web.

In a fourth example the other layers are comprising at least one carded web on at least one side of the web, and a film of e.g. a plastic on at least one side of the web.

Heavy duty webs of the kind named above are usually calendered and can advantageously be used for producing e.g. corrugated board and heat - and/or sound insulating materials.

Claims

1. A method for producing an air-laid non-woven web of cellulose fibres or of cellulose fibres mixed with synthetic fibres comprising the steps of,
 - air-laying fibre fluff into a layer upon a forming wire (3),
 - transferring, preferably by means of an overlying second wire (12), the layer of fluff to a third wire (16;30) having mesh count small enough for preventing the fibres from penetrating into the wire, and
 - ejecting at least one water jet towards the fluff on the third wire, thereby hydroentangling the fluff into a coherent web.
2. A method according to claim 1, characterized in that the mesh count of the third wire (16;30), on which the fluff is hydroentangled, is between 38 and 58 meshes at least at the top of said wire.
3. A method according to claim 1 or 2 comprising the step of ejecting at least one first water jet towards the upwards facing first side of the fluff on the third wire (16).
4. A method according to claim 1 or 2 comprising the steps of,
 - ejecting at least one first water jet towards the upwards facing first side of the fluff on the third wire (16), and
 - via the third wire ejecting at least one second water jet against the downward facing second side of the fluff.
5. A method according to claim 1 or 2 comprising the steps of,
 - ejecting at least one first water jet towards the upwards facing first side of the fluff on the third wire (16), and

- ejecting at least one second water jet towards the downward facing second side of the fluff sucked upon the lower side of an overlying fourth wire (20).
6. A method according to claim 1 or 2 comprising the steps of,
- ejecting at least one first water jet towards the upwards facing first side of the fluff on the third wire (16),
 - turning the second side of the web upwards by means of a fourth wire (30), and
 - ejecting at least one second water jet towards the upward facing second side of the fluff on the fourth wire.
7. A method according to any of the claims 1 - 6 comprising the step of drying the web on a fifth wire (26).
8. A method according to any of the claims 1 - 7 comprising the step of,
- ejecting, on a sixth wire (39), steam towards at least one side of the web for bonding dust on the web.
9. A method according to any of the claims 1 - 8 comprising the steps of,
- forming a laminate by, on a sixth wire (45), hot melting a layer of plastic to at least one side of the web, and
 - applying a non-woven web to the web on the sixth wire.
10. A method according to any of the claims 1 - 8 comprising the step of forming a laminate by on a sixth wire (52) applying at least one layer of melt blown fibres (SMMS) or bicomponent fibres and/or a combination of these to at least one side of the web.
11. A method according to any of the claims 1 - 8 comprising the step of forming a laminate by, on a sixth wire (57), applying at least one carded web (62) to at least one side of the web.

12. A method according to any of the claims 1 - 8 comprising the steps of,
- forming a laminate by, on a sixth wire (57), applying at least one carded web (62) upon at least one side of the web, and
 - applying a layer (64) in form of a film of e.g. a plastic and/or a non-woven web to at least one side of the web on the sixth wire.
13. A method according to any of the claims 1 - 6 comprising the steps of,
- applying a layer of binder to one side of the fibre web on a fifth wire (65), and
 - drying the web on a sixth wire (68).
14. A method according to any of the claims 1 - 6 comprising the steps of,
- applying a first layer of binder to the upper side of the fibre web on a fifth wire (65),
 - drying the web on a sixth wire (68) ,
 - turning the lower side of the web upwards by means of a seventh wire (71) and applying a second layer of binder to the second side of the web,
 - drying the web on an eight wire (74),
 - curing the binder on a ninth wire (77).
 -
15. A method according to any of the claims 1 - 14, where the non-woven web consists of cellulose fibres mixed with synthetic fibres comprising the step of heat treating the fibre fluff entangled to a coherent fibre web, in such a way that the synthetic fibres are bonded to the cellulose fibres and to each other.
16. A method according to any of the claims 1 - 15 comprising the step of loosening the web from the wire (16;20;30) upon which the web is hydroentangled by means of the nozzles

(24;25) ejecting water jets towards the fluff for hydroentangling the web.

17. A method according to any of the claims 1 - 15 comprising the step of loosening the web from the wire (16;20;30) upon which the web is hydroentangled by ejecting a flow of air towards the fluff on said wire.

18. A method according to any of the claims 1 - 17 comprising the step of calendering the web.

19. A method according to any of the claims 1 - 18 comprising the step of winding the web up upon a reel (29).

20. A method according to any of the claims 1 - 19 comprising the step of removing at least a major part of fines contained in the fibre fluff from the fluff on the forming wire (3).

21. A method according to claim 1 - 20, characterized in that the mesh count of the forming wire are between 14 and 30 meshes.

22. A method according to claim 1 - 21, characterized in that the differential pressure between the forming head and the suction box is between 80 - 150 mm water head.

23. A plant for producing an air-laid non-woven web of cellulose fibres or of cellulose fibres mixed with synthetic fibres comprising,

- at least one air-laying section (1) for depositing fibre fluff into a layer upon a forming wire (3),
- an overlying second wire (12) for transferring the layer of fluff to a third wire (16;30) having mesh count small enough for preventing the fibres from penetrating into the wire, and

- at least one nozzle (24;25) for ejecting a water jet towards the fluff on the third wire (16), thereby hydroentangling the fluff into a coherent web.
- 24.A plant according to claim 23, characterized in that the mesh count of the third wire (16), on which the fluff is entangled, is between 38 and 58 meshes.
- 25.A plant according to claim 23 or 24 comprising at least one nozzle (24) for ejecting a water jet towards the upwards facing first side of the fluff on the third wire (16).
- 26.A plant according to claim 23 or 24 comprising,
- at least one nozzle (24) for ejecting a water jet towards the upwards facing first side of the fluff on the third wire (16), and
 - at least one other nozzle (25) for through the third wire (16) ejecting a water jet towards the downward facing second side of the fluff.
- 27.A plant according to claim 23 or 24 comprising,
- at least one nozzle (16) for ejecting a water jet towards the upwards facing first side of the fluff on the third wire (16),
 - an overlying fourth wire (20) with a suction box (21) for suctioning the web from the third wire (16) up upon the lower side of the fourth wire (20), and
 - at least one other nozzle (25) for ejecting a water jet towards the downwards facing second side of the fluff hanging on the lower side of the fourth wire (20).
- 28.A plant according to claim 23 or 24 comprising,
- at least one nozzle (24) for ejecting a water jet towards the upwards facing first side of the fluff on the third wire (16),

- a fourth wire (30) for turning the second side of the web upwards, and
 - at least one other nozzle (25) for ejecting a water jet towards the upwards facing second side of the fluff on the fourth wire (30).
29. A plant according to any of the claims 23 - 28 comprising,
- a fifth wire (34) placed downstream of the fourth wire (30) for supporting the web while this web is leaving the fourth wire (30), and
 - drying means (36) for drying the web on the fifth wire (34).
30. A plant according to any of the claims 23 - 29 comprising,
- a sixth wire (39) placed downstream of the fifth wire for supporting the web while this web is leaving the fifth wire (39), and
 - means (41) for ejecting steam towards at least one side of the web on the fifth wire for bonding dust on the web.
31. A plant according to any of the claims 23 - 29 comprising,
- a sixth wire (45) placed downstream of the fifth wire (26) for supporting the web while this web is leaving the fifth wire (26),
 - means (47) for hot melting a layer of plastic upon at least one side of the web on the sixth wire, and
 - means (51) for applying a non-woven web (50) upon the melted plastic on the web on the sixth wire (45).
32. A plant according to any of the claims 23 - 29 comprising,
- a sixth wire (52) placed downstream of the fifth wire (26) for supporting the web while this web is leaving the fifth wire (26), and
 - means (56) for applying at least one layer of spunbonded/melt blown fibres (SMMS), bicomponent fibres

and/or a combination of these fibres upon at least one side of the web on the sixth wire (52).

33. A plant according to any of the claims 23 - 29 comprising,
- a sixth wire (57) placed downstream of the fifth wire (26) for supporting the web while this web is leaving the fifth wire (26), and
 - means (61) for applying at least one carded web (62) upon at least one side of the web on the sixth wire (57).
34. A plant according to any of the claims 23 - 29 comprising,
- a sixth wire (57) placed downstream of the fifth wire (26) for supporting the web leaving the fifth wire,
 - means (61) for applying at least one carded web (62) to at least one side of the web on the sixth wire (57), and
 - means (63) for applying a layer (64) in form of a film of e.g. a plastic and/or a non-woven web to at least one side of the web on the sixth wire (57).
35. A plant according to any of the claims 23 - 29 comprising,
- means (67) for applying a layer of binder to the upwards facing side of the fibre web on a fifth wire (65), and
 - means (70) for drying the web on a sixth wire (68).
36. A plant according to any of the claims 23 - 29 comprising,
- a fifth wire (65) placed downstream of the fourth wire (20) for supporting the web while this web is leaving the fourth wire (20),
 - means (67) for applying a first layer of binder to the upper side of the fibre web on the fifth wire (65),
 - a sixth wire (74) placed downstream of the fifth wire (65) for supporting the web while this web is leaving the fifth wire (65),
 - means (70) for drying the web on the sixth wire (68),

- a seventh wire (71) placed downstream of the sixth wire (68) for turning the lower second side of the web leaving the sixth wire (68) upwards,
- means (73) for applying a second layer of binder to the second side of the web on the seventh wire (71),
- an eighth wire (74) placed downstream of the seventh wire (71) for supporting the web while this web is leaving the seventh wire (71),
- means (76) for drying the web on the eighth wire (74),
- a ninth wire (77) placed downstream of the eighth wire (74) for supporting the web while this web is leaving the eighth wire (74),
- means (79) for curing the binder on the ninth wire (77).

37. A plant according to any of the claims 23 - 36, where the non-woven web consists of cellulose fibres mixed with synthetic fibres, comprising means for heat treating the fibre fluff entangled to a coherent fibre web, in such a way that the synthetic fibres are bonded to the cellulose fibres and to each other.

38. A plant according to any of the claims 23 - 37 comprising at least one second water nozzle for loosening the web from the third wire by ejecting at least one second water jet towards the lower side of the fluff on the third wire.

39. A plant according to any of the claims 23 - 38 comprising nozzles (24;25) for loosening the web from the wire (16;20;30) upon which the web is hydroentangled by ejecting water jets towards the fluff during the hydroentangling process.

40. A plant according to any of the claims 23 - 39 comprising means for removing at least a major part of fines contained in the fibre fluff on the forming wire (3).

41. A plant according to claim 23 - 40 comprising,
- a forming head (2), which is placed above the forming wire (3) and arranged for air-laying fibre fluff into a layer upon the forming wire (3),
 - at least one channel (8) for carrying, in a flow of air, fibres from a supply of fibres into the forming head (2),
 - a suction box (4) placed at the lower side of the forming wire (3),
 - at least one vacuum fan (6;7) connected to the suction box (4) for generating an air flow from the forming head (1), through the fluff, the forming wire (3), and the suction box (4) to the vacuum fan (6;7), characterized in
 - that the mesh count of the forming wire (3) mainly allows only fines contained in the fluff to pass the forming wire (4).
42. A plant according to claim 41, characterized in that the mesh count of the forming wire (3) are between 14 and 30 meshes.
43. A plant according to claim 41 or 42 comprising means for adjusting the differential pressure between the forming head (1) and the suction box (4) to between 80 - 150 mm water head.
44. A plant according to claim 41, 42, or 43 comprising,
- a first vacuum fan (6) connected to the suction box (4) for generating an air flow from the forming head (2), through the fluff, the forming wire (3), and the suction box (4) to said first vacuum fan (6),
 - a filter (9) connected to the first vacuum fan (6) for removing fines from the air supplied to the filter (9) by the first vacuum fan (6), and
 - a second vacuum fan (7) connected to the filter (9) for removing the filtered air from the filter (9).

45. A plant according to claim 44 comprising a collector device (10) for collecting fines which by means of the filter (9) are removed from the air flow.
46. A plant according to any of the claims 23 - 45 comprising a calender (44) for calendering the web.
47. A plant according to any of the claims 23 - 46 comprising a reel (29) for winding up the web.
48. A web comprising,
- air laid cellulose fibres or cellulose fibres mixed with synthetic fibres, and
 - a structure obtained by hydroentangling the fibres to a coherent web.
49. A web according to claim 48 comprising that the weight of the web is between 20 - and 80 g/m².
50. A web according to claim 48 comprising that the weight of the web is between 80 and 2000 g/m².
51. A web according to claim 48, 49 or 50, where the non-woven web consists of cellulose fibres mixed with synthetic fibres, characterized in that the synthetic fibres by heat treatment are bonded to the cellulose fibres and to each other.
52. A web according to any of the claims 48 - 51, characterized in that the web has a structure with little or none fines.
53. A web according to any of the claims 48 - 52, characterized in that the web has a structure obtained by ejecting steam upon the web for binding dust on this.
54. A web according to any of the claims 48 - 52 comprising,

- a hot melted layer of a plastic on at least one side of the web, and
- at least one non-woven web applied on the melted plastic.

55.A web according to any of the claims 48 - 52 comprising at least one layer of melt blown fibres (SMMS) or bicomponent fibres and/or a combination of these on at least one side of the web.

56.A web according to any of the claims 48 - 52 comprising at least one carded web on at least one side of the web.

- 57.A web according to any of the claims 48 - 52 comprising,
- at least one carded web on at least one side of the web, and
 - a film of e.g. a plastic on at least one side of the web.

58.A web according to any of the claims 48 - 52 comprising a binder on at least one side of the air laid web.

59.A web according to any of the claims 48 - 58, characterized in that the web is calendered.

1/8

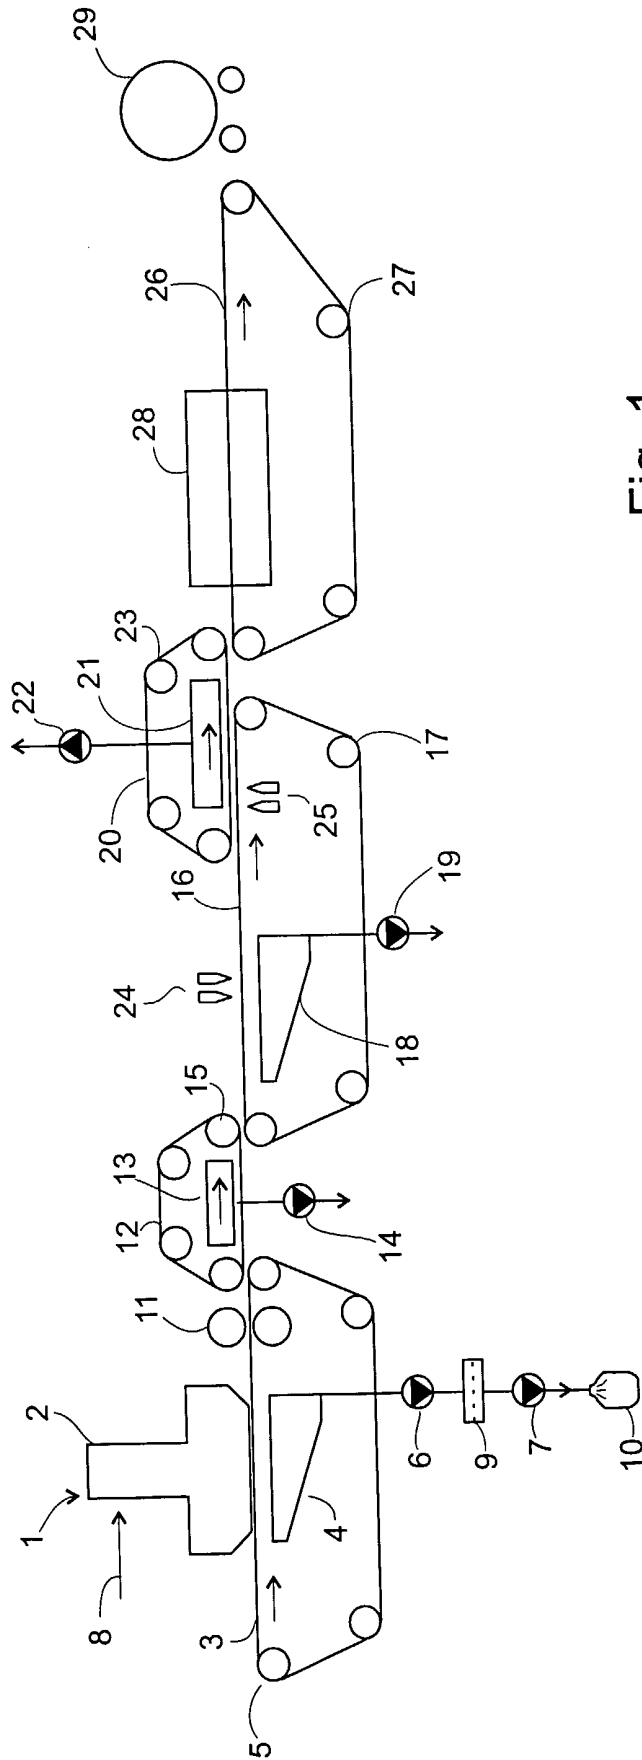


Fig. 1

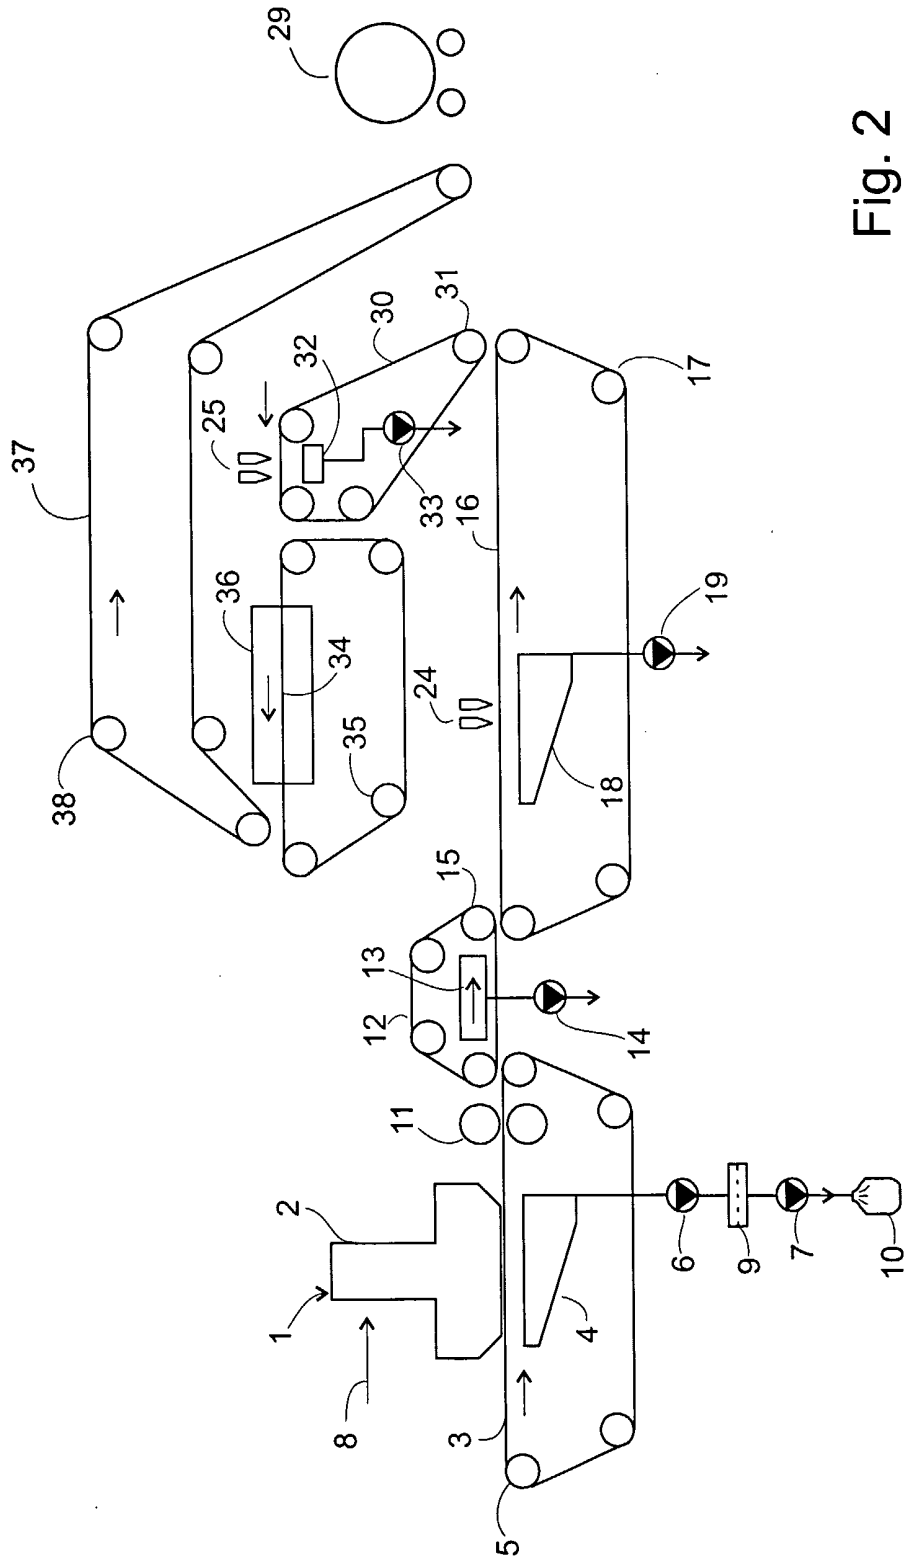


Fig. 2

3/8

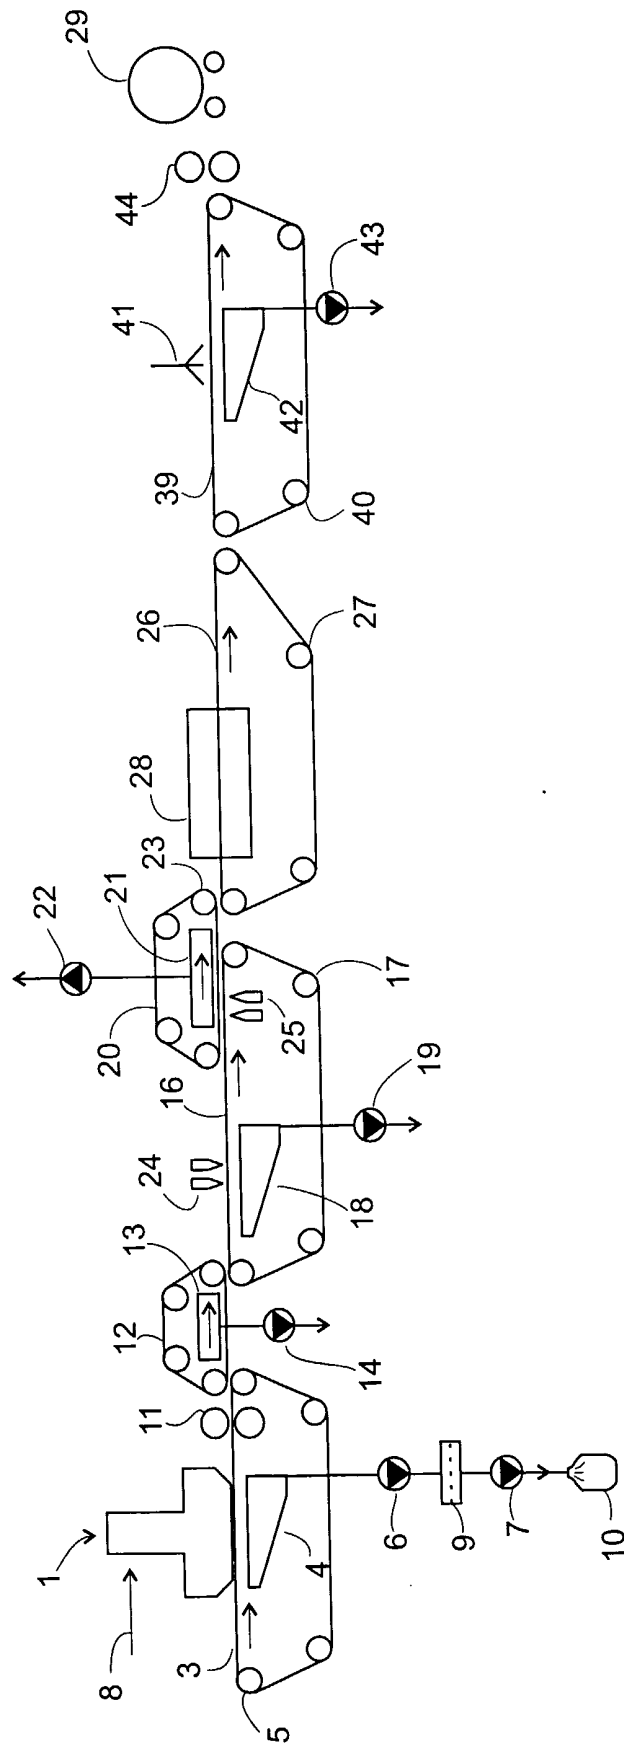


Fig. 3

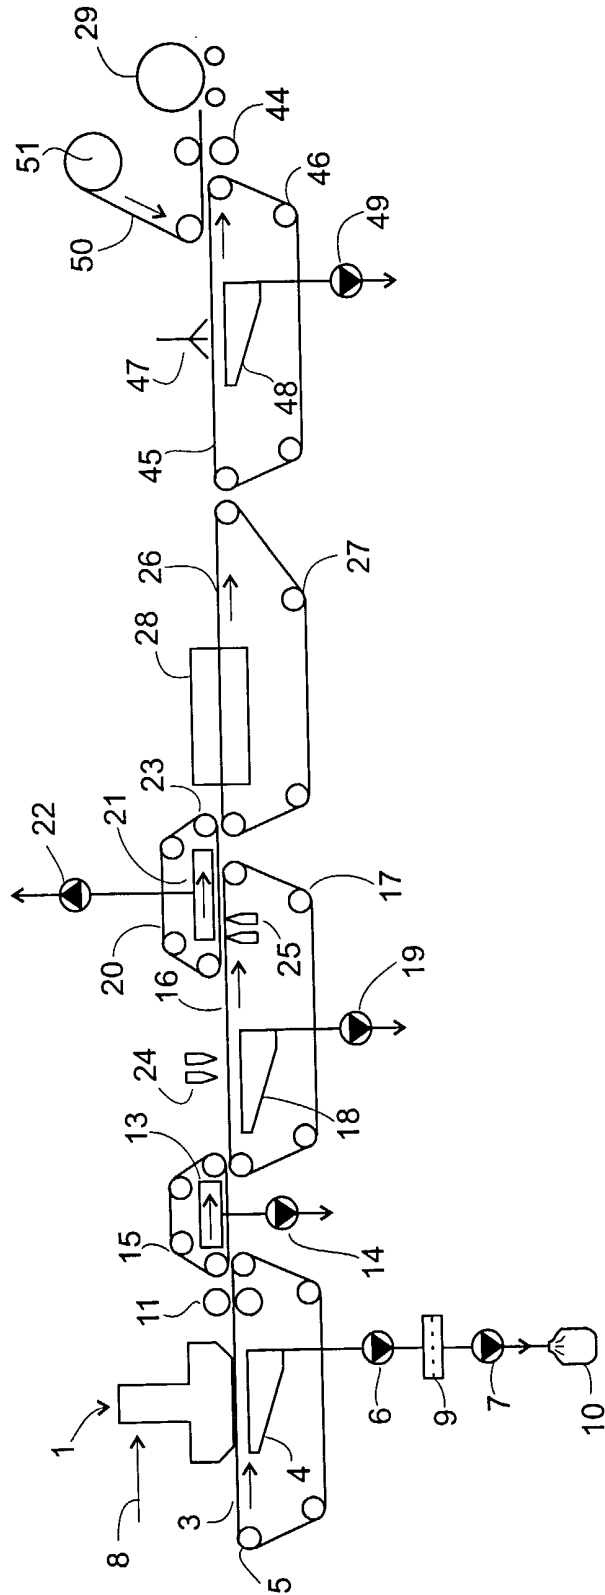


Fig. 4

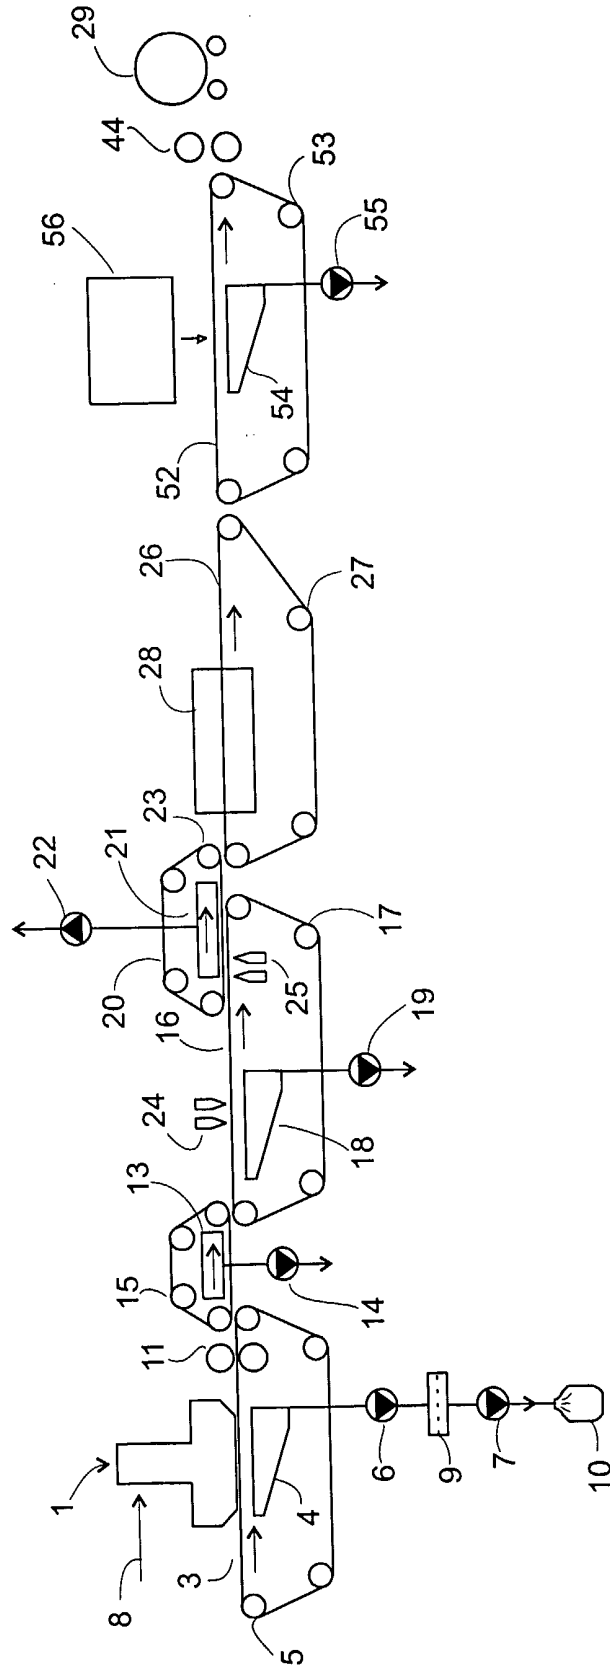


Fig. 5

6/8

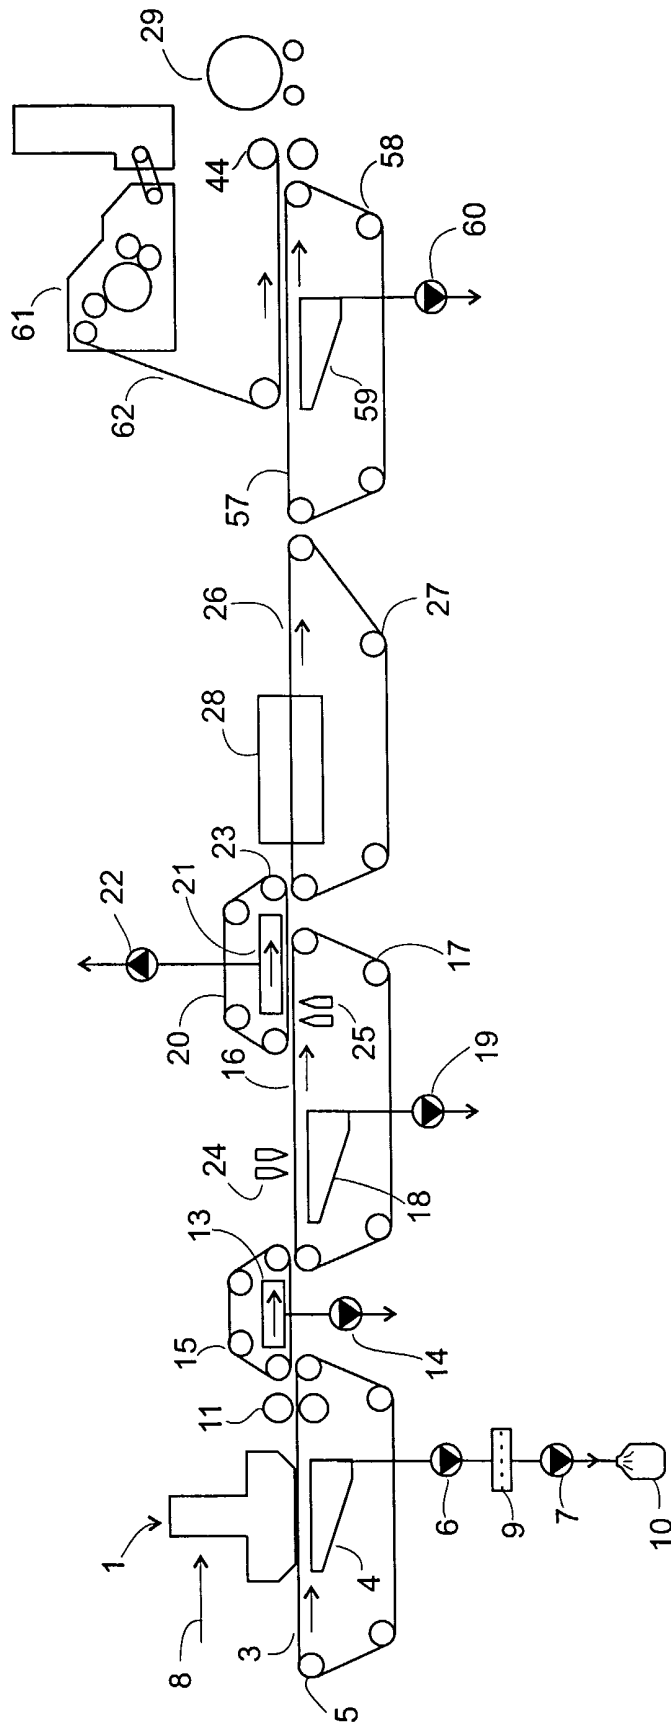


Fig. 6

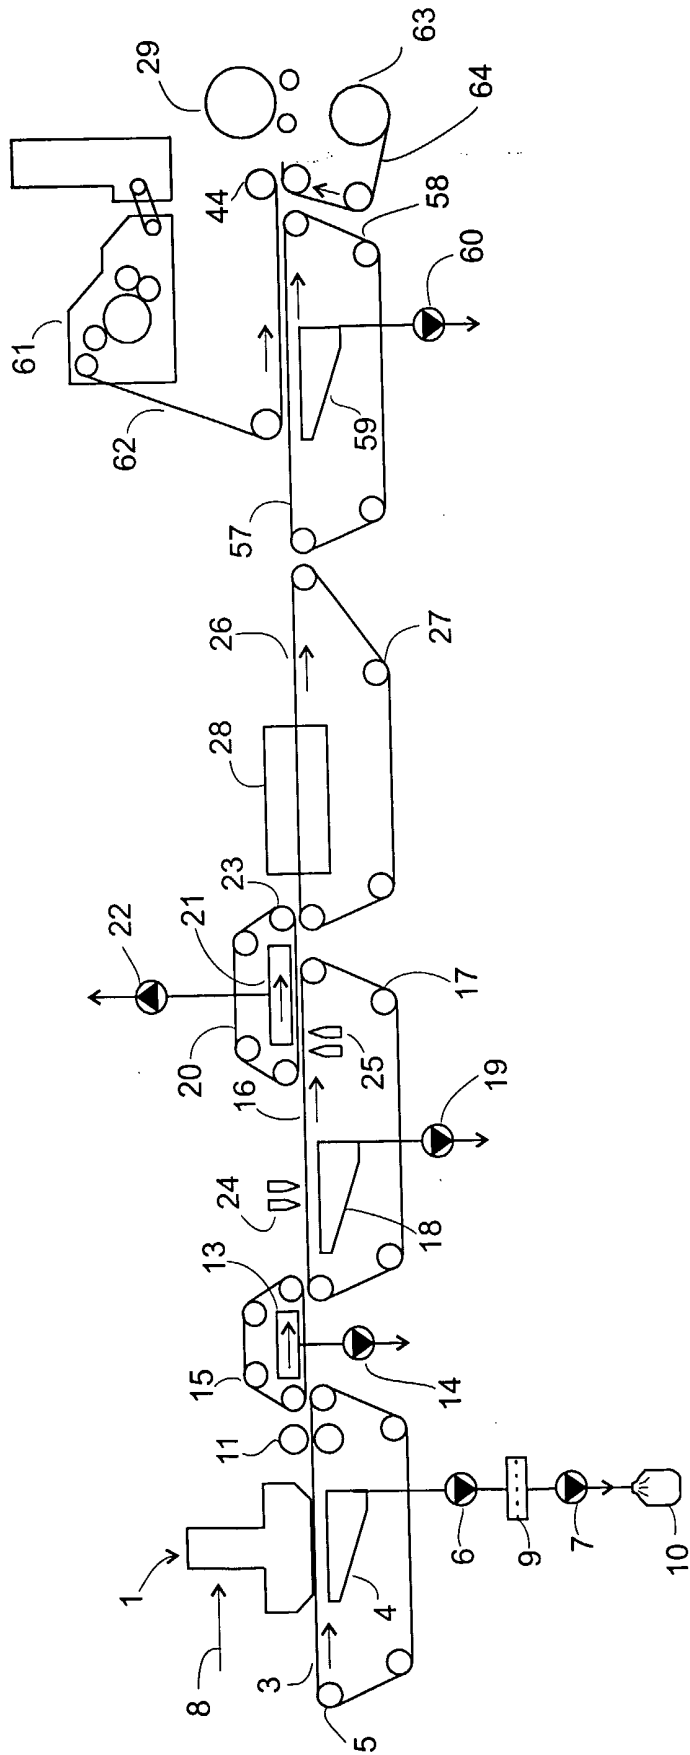


Fig. 7

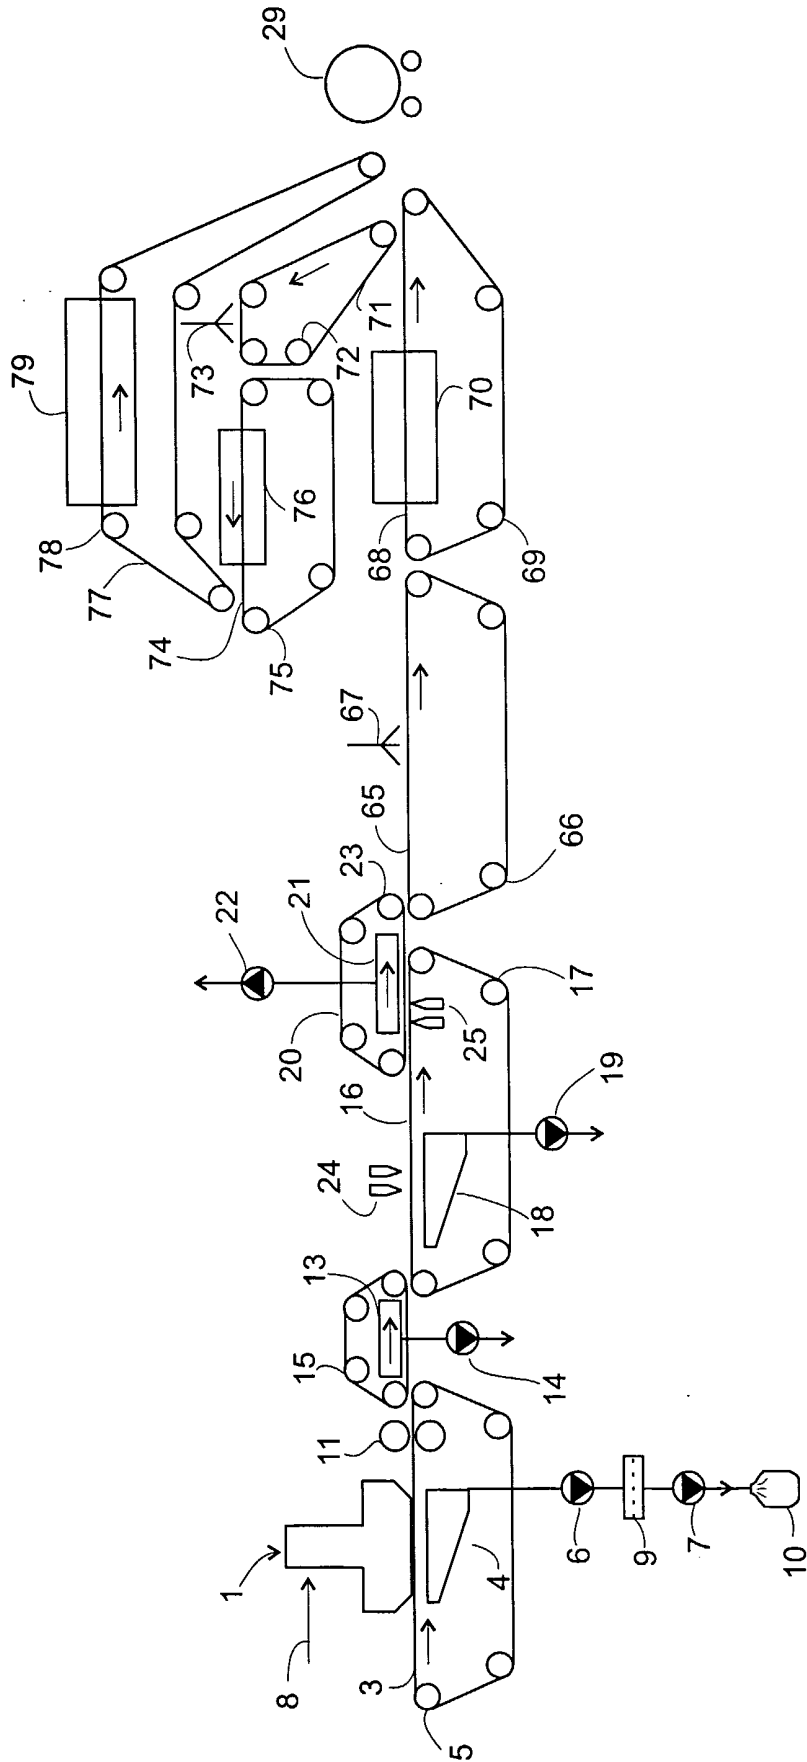


Fig. 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 00/00710

A. CLASSIFICATION OF SUBJECT MATTER		
IPC7: D04H 1/46, D04H 1/70 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC7: D04H		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9919551 A1 (M & J FIBRETECH A/S), 22 April 1999 (22.04.99), page 4, line 35 - page 5, line 5 --	1-59
X	WO 9208832 A1 (MÖLNLYCKE AB), 29 May 1992 (29.05.92), abstract, claims; figures --	1-59
X	WO 9208833 A1 (MÖLNLYCKE AB), 29 May 1992 (29.05.92), page 8, line 31 - page 9, line 8, abstract, claims; figures --	1-59
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>		
Date of the actual completion of the international search		Date of mailing of the international search report
21 August 2001		24-08-2001
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Monika Bohlin/Els Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 00/00710

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9208834 A1 (MÖLNLYCKE AB), 29 May 1992 (29.05.92), page 3, line 3 - line 23; page 8, line 29 - page 9, line 24, figure 1, abstract, claims --	1-59
X	US 5375306 A (YVES ROUSSIN-MOYNIER), 27 December 1994 (27.12.94), column 2, line 17 - line 38; column 3, line 34 - line 68, figure 1, abstract --	1-59
X	EP 0884413 A1 (BONDED FIBRE FABRIC LIMITED), 16 December 1998 (16.12.98), column 2, line 11 - line 19; column 3, line 37 - line 43; column 4, line 43 - line 46, column 4, line 50 - column 5, line 9; figure 1; abstract -- -----	1-59

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/08/01

International application No.

PCT/DK 00/00710

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9919551 A1	22/04/99	AU 9434298 A CN 1276028 T EP 1023478 A	03/05/99 06/12/00 02/08/00
WO 9208832 A1	29/05/92	AT 146830 T AU 655952 B AU 8939091 A CA 2096410 A CZ 280871 B CZ 9203921 A DE 69123853 D,T DK 593484 T EP 0593484 A,B SE 0593484 T3 ES 2098380 T FI 932252 A GR 3022173 T HU 67271 A HU 215013 B HU 9301444 D JP 6502457 T MX 9102111 A NO 300927 B NO 931794 D NZ 240536 A SE 469896 B,C SE 9003676 A SK 392192 A US 5353485 A ZA 9108970 A	15/01/97 19/01/95 11/06/92 20/05/92 17/04/96 16/02/94 10/04/97 20/01/97 27/04/94 01/05/97 18/05/93 31/03/97 28/03/95 28/08/98 00/00/00 17/03/94 05/06/92 18/08/97 00/00/00 27/06/94 04/10/93 20/05/92 09/09/93 11/10/94 26/08/92
WO 9208833 A1	29/05/92	AU 8927791 A CZ 9204018 A MX 9102112 A SE 9003679 A ZA 9108971 A	11/06/92 16/06/93 08/07/92 20/05/92 26/08/92
WO 9208834 A1	29/05/92	AU 9028091 A CZ 9204021 A SE 467499 B,C SE 9003678 A	11/06/92 11/08/93 27/07/92 20/05/92
US 5375306 A	27/12/94	AT 141964 T CA 2070773 A DE 69121694 D,T EP 0504368 A,B FR 2667622 A,B WO 9206237 A FR 2671772 A	15/09/96 09/04/92 23/01/97 23/09/92 10/04/92 16/04/92 24/07/92
EP 0884413 A1	16/12/98	AU 7925898 A GB 9712255 D GB 9807003 D WO 9856968 A	30/12/98 00/00/00 00/00/00 17/12/98