

(19)



(11)

EP 2 071 972 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
01.12.2010 Bulletin 2010/48

(51) Int Cl.:
A44B 19/32 (2006.01) A44B 19/34 (2006.01)

(21) Application number: **07024770.5**

(22) Date of filing: **20.12.2007**

(54) **A fluid-tight slide fastener**

Flüssigkeitsdichter Reißverschluss

Fermeture à glissière étanche aux fluides

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**

(74) Representative: **Zardi, Marco et al**
M. Zardi & Co. S.A.
Via Pioda 6
6900 Lugano (CH)

(43) Date of publication of application:
24.06.2009 Bulletin 2009/26

(56) References cited:
EP-A- 0 108 214 WO-A-02/03825
WO-A-02/058500 US-A- 3 820 202
US-A- 4 123 830 US-A- 4 426 066
US-A1- 2006 101 632

(73) Proprietor: **RIRI SA**
6850 Mendrisio (CH)

(72) Inventor: **Peano, Roberto**
Malnate (VA) (IT)

EP 2 071 972 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of application

[0001] The present invention refers to a fluid-tight slide fastener and to a process for manufacturing a fluid-tight slide fastener.

Prior Art

[0002] A slide fastener, in essential terms, comprises a pair of tapes bearing respective rows of teeth, top and bottom stops, and a slider for opening and closing the fastener by engaging and disengaging the teeth.

[0003] Fluid-tight slide fasteners are needed for a number of applications, such as provision of sports and outdoor activity items, diving or sailing suits, camping tents and the like. Said fasteners are required to be resistant to passage of a liquid and/or gas, e.g. water and/or air even under a significant pressure difference between the interior and the exterior, for example up to about 2 bars; at the same time, they must be tenacious and pliable.

[0004] According to known art, fluid-tight slide fasteners are realized with layered tapes made of a textile core layer coated with a suitable fluid-barrier layer, and teeth which are applied to the layered tapes or injection-molded. With regard to materials, it is known to realize fluid-tight slide fasteners with textile tapes coated with a thermoplastic elastomer material (TPE) and teeth made of a thermoplastic material.

[0005] US 2006/101632 discloses a pattern imprinted on a finished zipper by means of a patterning roller. EP 0 108 214 discloses stringer tapes with a thickened or enlarged resilient sealing member extending along the edge portion. US 4 123 830 discloses stringer tapes with a reinforcing cord along one edge. WO 02/03825 discloses a slide fastener with teeth welded onto the tapes.

[0006] The region of the slide fastener wherein teeth are fixed to the coated tapes is known to be a critical point of a fluid-tight slide fastener. The coupling between each tooth and the tapes, in fact, must be fluid-tight and must also withstand the mechanical stress due to opening and closing action of the slider, bending of the tapes, handling and direct exposure to environment.

[0007] Furthermore, the layered tapes may suffer a separation of the layers due to intensive use and/or lack of adhesion between the layers. Due to said separation, also known as delamination, the textile core may be exposed and in such a case the fluid-tight performance is generally compromised.

Summary of the invention

[0008] The technical problem underlying the invention is to improve the fluid-tight performance and reliability of a fluid-tight slide fastener as defined above, with particular regard to the coupling between the teeth and the

coated tapes.

[0009] This problem is solved by providing a knurled or embossed region on at least one side of the tapes of the slide fastener. More in detail, the problem is solved by a fluid-tight slide fastener comprising a pair of tapes, each of said tape comprising a textile core layer and a fluid barrier layer coating said textile layer, and having at least a portion carrying a row of teeth along an inner edge, **characterized in that** each of said tapes comprises a knurled region on at least one side of the tape and on the exterior side of the fluid barrier layer, said knurled region being extended along said inner edge of tape and at least on said portion of the tape carrying said row of teeth, such that the teeth are fixed to the knurled region of the tape. Said knurled (or embossed) region is formed as a continuous longitudinal stripe parallel to said inner edge.

[0010] According to a preferred aspect of the invention, said knurled region has a width which is greater than width of root portions of said teeth. As the root portions of the teeth are portions which are fixed with to the tape, the coupling region between the teeth and the tape is fully comprised in said knurled region of tape. In a preferred embodiment, the width of the knurled region of tape is about 1.5 - 2 times the width of root portions of teeth.

[0011] According to embodiments of invention, said knurled region is provided on one side of the tapes, preferably the front side facing the exterior, or the same knurled region is provided on both front and rear sides of tapes.

[0012] The knurled region can be obtained directly during the manufacturing of the coated tapes, for example directly after the coating of the textile core layer with the fluid-barrier layer. In an equivalent manner, the knurled region may be obtained with a subsequent process step operated on a semi-finished product such as a strip of textile material coated with said fluid-barrier layer.

[0013] According to a preferred embodiment, tapes of the slide fastener are manufactured by extrusion or lamination of a selected fluid-barrier material, preferably in a melted state, onto strips of textile material. A knurling process step is performed on the coated strips, obtaining said knurled region on one or both sides of the tapes. Teeth are then fixed and made integral to said knurled region of the tapes, for example by injection molding.

[0014] A process according to the invention for making a tape for a slide fastener comprises at least the steps of:

- coating a textile strip with a fluid-barrier material;
- subjecting the coated strip to a knurling process, to obtain a knurled region on at least one side of said strip and on the exterior side of the fluid barrier layer and near an edge thereof;
- fixing a row of teeth to said knurled region of the strip;

- cutting the strip to obtain a tape of a given length.

[0015] The textile material of the core layer of tapes is chosen preferably among polyester (PE), preferably polyethylene terephthalate (PET), polyamide (PA) and their blends or copolymers.

[0016] According to another aspect of the invention, the textile material is a spun yarn of cut fibers, having an irregular surface similar to a natural fiber which tends to remain embedded in the fluid-barrier layer, enhancing the resistance to delamination. The fluid-barrier material is preferably provided on the textile core layer in a melted state, for example extruded or laminated.

[0017] Hence, the process as disclosed above preferably provides use of a textile strip of a spun yarn of cut fibers, said fibers being obtained with a cutting process of continuous fibers. More preferably, the strip of textile material is coated by extrusion or lamination of melted fluid-barrier material so that surface irregularities of the spun yarn remain embedded in the fluid-barrier layer.

[0018] The fluid-barrier layer is preferably made of a thermoplastic elastomer polyurethane (TPE-U) or a thermoplastic elastomer polyester (TPE-E). For example, said TPE-E is a polyether-ester block copolymer and said TPE-U is a block copolymer obtained from an ether and/or an ester and a isocyanate.

[0019] Teeth of the slide fastener are made, according to some embodiments, of a thermoplastic material consisting of a blend including PBT and polycarbonate (PC). Preferably, the PBT/PC weight ratio in said blend ranges between 70/30 and 30/70. According to other embodiments, the teeth are made of a blend including ABS and a polyamide (PA). More preferably, the ABS/PA weight ratio in said blend ranges between 70/30 and 30/70.

[0020] According to a more preferred embodiment, a fluid barrier layer of TPE-E is chosen in combination with teeth made of PBT. According to another embodiment, a fluid barrier layer of TPE-U is chosen in combination with teeth made of either a blend of ABS and PA or a blend of PBT and PC.

[0021] The fluid barrier layer and the teeth may include suitable additives such as, for instance fillers, pigments, binders and/or compatibilizers, the latter being incorporated to improve the physical and chemical affinity between said materials and/or between the materials used for the layered structure of the tape.

[0022] The tapes of the slide fastener may also comprise a further, optional adhesive layer between the textile core and layer and the fluid-barrier coating. Advantageously, the adhesive is selected to have a strong chemical affinity for both the materials to be joined. Preferably, the adhesive comprises a polyurethane resin.

[0023] According to the invention, sports and outdoor activity items, such as a diving suit, a sailing suit, a camping tent and the like, are made comprising a fluid-tight slide fastener as described above.

[0024] Advantages of the invention are the following. The knurled region has a non-smooth surface, with crests

alternated to embossed regions according to a direction perpendicular to the surface of the tapes, thus increasing the whole contact surface available to the coupling between the tapes and the teeth. Hence, a stronger bond between each tooth and the tape is obtained.

[0025] Moreover, it has been found that the knurled region has a retaining effect on the teeth, opposing to their movement and/or rotation respective to the tape, and thus increasing the mechanical resistance to bending.

[0026] The fluid-tight performance is also improved by the fact that the knurled region is a further obstacle to the passage of fluids like air and water at the tooth-tape interface. It may be stated that said crests and embossed areas on the surface of the tape act like a labyrinth against the passage of fluids, especially water.

[0027] In practical terms, it has been found that a fluid-tight fastener with knurled tapes as above defined has better fluid-tight performance and resistance to mechanical wear compared to known fasteners. It has also been found that the invention reduces the percentage of defective pieces, compensating for some imperfect adhesion between tapes and certain teeth, which otherwise would have led to a loss of fluid-tightness.

[0028] The preferred materials, as listed above, give a further advantage in terms of mechanical properties at both interfaces between the layers of the tapes and between the fluid barrier layer and teeth, due to a chemical bonding effect.

[0029] The use of a spun yarn for the textile core layer of the tapes has a further advantage. The spun yarns have fibers protruding from the ideal diameter of the yarn itself, which remain embedded in the material of the fluid-barrier layer, giving a further mechanical bond between the layers and enhancing the resistance to delamination.

[0030] Another advantage is that the knurled or embossed region defines a useful reference line for assembling the tapes of the slide fastener on a garment on suit. In fact, the external borderline of the knurled region indicates a limit not to overcome when assembling (e.g. sewing) the slide fastener on the garment.

[0031] Further advantages and characteristics of the slide fasteners according to the inventions will be more evident from the detailed description and examples provided here below, given as indicative and not limiting purpose.

Brief description of the drawings

[0032]

Fig. 1 is a perspective view of a fluid-tight slide fastener according to an embodiment of the present invention.

Fig. 2 is a top view of a portion of a tape of the slide fastener of Fig. 1.

Fig. 3 is a section according to line III-III of Fig. 2.

Fig. 4 is a top view of a portion of a tape of the slide fastener of Fig. 1.

Fig. 5 is a section according to line V-V of Fig. 4.

Fig. 6 is a perspective, enlarged view of a portion of tapes of Fig. 1, in the region where a tooth is coupled to the tape.

Fig. 7 and 8 are a view of a portion of the tapes of the fastener in Fig. 1, during their manufacturing process.

Fig. 9 is a simplified scheme of a process for realizing tapes for a slide fastener according to the invention.

Detailed description of preferred embodiments

[0033] With reference to figures 1, a fluid-tight slide fastener 1, in accordance with an embodiment of the present invention, comprises a pair of tapes 2, equipped with teeth 3, a bottom stop 4, top stops 5, and a slider 6.

[0034] Tapes 2 have a layered structure made of a textile core layer fully coated on both sides by a suitable fluid-barrier layer.

[0035] Each of tapes 2 is carrying a row of teeth 3. Teeth 3 are associated with a portion of the tapes 2, between bottom stop 4 and top stops 5, along inner edges 7 of said tapes 2. Teeth 3 are associated to tapes 2 in a fluid-tight manner, for example through injection molding.

[0036] Top and bottom stops 4, 5 are also fixed to the tapes 2 in a fluid-tight manner, for example through injection molding. The figures relates, in a non-limiting way, to an embodiment wherein the bottom stop 4 is made in a single piece applied on both tapes at one end of the teeth rows, whereas two top stops 5 are applied the respective tapes 2 at the opposite end of the teeth rows. In other embodiments of the invention, the top stop can be made in a single piece, or the bottom stop can be made in two half-pieces.

[0037] Each tape 2 comprises a knurled surface region 10, formed as a longitudinal stripe extending from said inner edge 7 and having a predetermined width, so that teeth 3 are associated with said knurled region 10 of the tape 2. Knurled region 10 is provided along the entire tape 2 or, at least, on the portion of tape 2 carrying the row of teeth 3.

[0038] Figs. 2 and 3 show more detail of the embodiment herein discussed. Tapes 2 comprise a textile core 20 fully enveloped by a fluid-barrier coating 21. Teeth 3 have a root portion 30, coupled to the respective tape 2, and a head portions 31 projecting from inner edge 7 for reciprocal engagement under the action of slider 6. It may be noted that edges 7 are formed by the coating 21 enveloping the textile core 20.

[0039] The knurled region 10 has a non-smooth sur-

face with a pattern of crests 11 projecting away from embossed surface areas 12, obtained as a permanent deformation of the fluid-barrier coating 21 of tapes 2. Preferably, the crests 11 are arranged according to the pattern of Fig. 2, i.e. straight lines crossing at 90° and inclined by 45° with respect to the rows of teeth 3.

[0040] The width W of knurled region 10 is preferably about 1.5 - 2 times the width of root portions 30 of teeth 3 (Fig. 2).

[0041] As seen in Fig. 3, a knurled region 10 is provided on both sides of tapes 2, namely on front surface 22, intended to face the exterior, and on the opposite rear surface 23. In a garment including the slide fastener 1, for example, front surface 22 is the outer surface exposed to environmental agents, while rear surface 23 is the inner surface. The provision of knurled regions 10 with crests 11 and embossed areas 12 on both surfaces 22 and 23 of the tapes 2, can be further seen in Figs. 4 and 5.

[0042] In other (not shown) embodiments, a knurled region 10 can be provided only on one side of the tapes 2, namely on one of said surfaces 22, 23, preferably on the front surface 22.

[0043] Fig. 6 allows a better appreciation of crests 11 projecting away from areas 12 engraved on the fluid-barrier coating 21 of tapes 2. Fig. 6 also shows a passing hole 13 which is used for molding the teeth 3. Fig. 6 also provides better appreciation of the fact that crests 11 increase the available surface for coupling with the teeth 3, compared to a perfectly smooth tape. In fact, the surface on the plane perpendicular to axis of the hole 13, which would be the only available surface on a smooth tape, is increased by the side surfaces of said crests projecting away from areas 12. A gain in available surface of 10% or more can be achieved.

[0044] Figs. 7 and 8 show a portion of a tape 2 during the manufacturing process. Referring to Fig. 7, a strip 40 is formed by coating a textile, inner core layer with a fluid-barrier layer, enveloping said inner core layer on both sides. Said strip 40 has an edge 7, also covered by said fluid-barrier layer, where teeth are associated to the strip. A knurled, longitudinal region 10, in the form of a stripe having a width W, is formed from said edge 7, by a knurling or embossing process of the strip 40. Said process defines on surface of the region 10 a pattern of crests 11 projecting away from embossed areas 12, wherein the fluid-barrier layer is made thinner.

[0045] Teeth 3 are then associated to the strip 40, for example by injection molding, along said edge 7 (Fig. 8). Teeth 3 are made integral with the knurled, longitudinal region 10 of the strip 40. Strip 40 is then cut transversally to obtain tapes 2 of a desired length, and said tapes 2 are equipped with stops and a slider, such as stops 4, 5 and slider 6, to obtain a fastener zip as seen, for example, in Fig. 1.

[0046] Referring to Fig. 9, a process for obtaining the strip 40 is schematized. A textile, continuous strip 50 is passed through a suitable extruder 51, fed with a fluid-barrier material M in a melted state, obtaining as inter-

mediate product a coated strip 52, wherein the textile strip is enveloped by the fluid-barrier material.

[0047] Then, the coated strip is passed through a couple of rolls 53 and 54, deforming both front and rear surfaces of the coated strip near an edge thereof, obtaining the strip 40 with knurled region 10. Preferably, the rolls 53, 54 are immediately downstream the extruder 51, so that the coating is still hot and easily deformed. It should be noted that the coated tapes 2 can also be made by lamination.

[0048] The strip 50 can be made of a spun yarn and coated by extrusion or lamination of melted fluid-barrier material, so that the surface irregularities of the spun yarn remain embedded in the solidified fluid-barrier layer and provides a "grasping" effect of the textile layer on the fluid-barrier layer, i.e. a stronger coupling between the layers.

[0049] As stated above, there are a number of preferred materials for the layers 20, 21 of tapes 2 and for the teeth 3 in order to obtain a chemical bonding effect which further improves the resistance to delamination.

[0050] From the previous description it can clearly be seen that the fluid-tight slide fastener according to the present invention solves the technical problem, mostly by the fact that it exhibits good long-term fluid-tight characteristics and resistance to delamination, bending and other mechanical stress especially at tooth-tape interface.

[0051] Of course, a person skilled in the art can bring numerous modifications and variants to the slide fastener described above in order to satisfy specific and contingent requirements, all of which are in any case covered by the scope of protection of the present invention, as defined by the following claims.

Claims

1. A fluid-tight slide fastener (1) comprising a pair of tapes (2), each of said tapes (2) comprising a textile core layer (20) and a fluid barrier layer (21) coating said textile layer, and having at least a portion carrying a row of teeth (3) along an inner edge (7), **characterized in that** each of said tapes (2) comprises a knurled region (10), said knurled region (10) being located on at least one side of the tape (2) and on the exterior side of the fluid-barrier layer, said knurled region (10) being extended along said inner edge (7) of tape (2) as a continuous longitudinal stripe parallel to said inner edge (7), and being extended at least on said portion of the tape (2) that is carrying said row of teeth (3) such that the teeth are fixed to the knurled region of the tape.
2. A slide fastener according to claim 1, wherein said knurled region (10) has a width (W) which is greater than width of root portions (30) of said teeth (3) fixed to the tape (2).
3. A slide fastener according to claim 2, wherein said knurled region has a width (W), in a direction perpendicular to said inner edge (7), which is about 1.5 - 2 times the width of said root portions (30) of teeth (3).
4. A slide fastener according to any one of preceding claims, wherein said knurled region (10) has a pattern of crests (11) projecting from embossed areas (12) of the tape (2).
5. A slide fastener according to claim 4, wherein said crests (11) are crossing at 90° each other and inclined by 45° with respect to the longitudinal direction of the tape (2).
6. A slide fastener according to any one of preceding claims, wherein said knurled region (10) is provided on both front and rear surfaces (22, 23) of tapes (2).
7. A slide fastener according to any one of preceding claims, wherein said textile core (20) of the tapes (2) is made with a spun yarn.
8. A slide fastener according to any one of preceding claims, wherein said fluid barrier layer is made of TPE-E and teeth are made of PBT.
9. A slide fastener according to claim 8, wherein said fluid barrier layer is made of TPE-U and teeth are made of either a blend of ABS and PA or a blend of PBT and PC.
10. A process for making a tape (2) for a slide fastener (1) according to claim 1, comprising at least the steps of:
 - coating a textile strip with a fluid-barrier material;
 - subjecting the coated strip to a knurling process, to obtain a knurled or embossed region (10) on at least one side of said strip and on the exterior side of the fluid barrier layer and near an edge (7) thereof;
 - said knurled region (10) being extended along said edge (7) of the tape (2) as a continuous longitudinal stripe parallel to said edge (7),
 - fixing a row of teeth to said embossed region of the strip;
 - cutting the strip to obtain a tape of a given length.
11. A process according to claim 10, wherein said textile strip is made of a spun yarn of cut fibers, said fibers being obtained with a cutting process of continuous fibers.
12. A process according to claim 11, wherein said strip

of textile material is coated by extrusion or lamination of said fluid-barrier material, said fluid-barrier material being in a melted state, so that surface irregularities of said spun yarn remain embedded in the fluid-barrier layer.

13. A sports and outdoor activity item, such as diving suit, sailing suit, camping tent and the like, comprising a fluid-tight slide fastener according to any one of claims 1 to 9.

Patentansprüche

1. Fluiddichter Reißverschluss (1) mit zwei Bändern (2), wobei die Bänder (2) jeweils eine textile Kernschicht (20) und eine die Textilschicht überziehende Fluidbarriereschicht (21) aufweisen, und mindestens einen Abschnitt umfassen, der entlang eines Innenrands (7) eine Reihe von Zähnen (3) trägt, **dadurch gekennzeichnet, dass** jedes der Bänder (2) einen gerändelten Bereich (10) aufweist, wobei sich der gerändelte Bereich (10) auf zumindest einer Seite des Bandes (2) auf der Außenseite der Fluidbarriereschicht befindet, wobei der gerändelte Bereich (10) entlang des Innenrands (7) des Bandes (2) als durchgehender Längsstreifen parallel zum Innenrand (7) verläuft, und sich zumindest über den Abschnitt des Bandes (2) erstreckt, der die Reihe von Zähnen (3) trägt, so dass die Zähne am gerändelten Bereich des Bandes fixiert sind.
2. Reißverschluss nach Anspruch 1, wobei der gerändelte Bereich (10) eine Breite (W) hat, die größer ist als die Breite von am Band (2) fixierten Basisabschnitten (30) der Zähne (3).
3. Reißverschluss nach Anspruch 2, wobei der gerändelte Bereich in einer zum Innenrand (7) senkrechten Richtung eine Breite (W) hat, die ungefähr das 1,5- bis 2-fache der Breite der Basisabschnitte (30) der Zähne (3) beträgt.
4. Reißverschluss nach einem der vorhergehenden Ansprüche, wobei der gerändelte Bereich (10) ein Muster aus Erhebungen (11) aufweist, die von geprägten Bereichen (12) des Bandes (2) vorstehen.
5. Reißverschluss nach Anspruch 4, wobei sich die Erhebungen (11) um 90° kreuzen und in Bezug auf die Längsrichtung des Bandes (2) um 45° geneigt sind.
6. Reißverschluss nach einem der vorhergehenden Ansprüche, wobei der gerändelte Bereich (10) sowohl an der Vorder- als auch an der Rückseite (22, 23) der Bänder (2) vorgesehen ist.
7. Reißverschluss nach einem der vorhergehenden


Ansprüche, wobei der textile Kern (20) der Bänder (2) aus einem Fasergarn hergestellt ist.

8. Reißverschluss nach einem der vorhergehenden Ansprüche, wobei die Fluidbarriereschicht aus TPE-E besteht und die Zähne aus PBT hergestellt sind.
9. Reißverschluss nach Anspruch 8, wobei die Fluidbarriereschicht aus TPE-U besteht und die Zähne aus einer Mischung aus ABS und PA oder einer Mischung aus PBT und PC hergestellt sind.
10. Verfahren zum Herstellen eines Bandes (2) für einen Reißverschluss (1) nach Anspruch 1, zumindest die folgenden Schritte umfassend:
- Beschichten eines Textilstreifens mit einem Fluidbarrierematerial;
 - Unterwerfen des beschichteten Streifens einem Rändelungsprozess, um auf zumindest einer Seite des Streifens und auf der Außenseite der Fluidbarriereschicht und nahe eines Randes (7) von diesem einen gerändelten oder geprägten Bereich (10) zu erhalten;
 - wobei der gerändelte Bereich (10) entlang des Randes (7) des Bandes (2) als durchgehender Längsstreifen parallel zum Rand (7) verläuft;
 - Fixieren einer Reihe von Zähnen am geprägten Bereich des Streifens;
 - Zerschneiden des Streifens, um ein Band gegebener Länge zu erhalten.
11. Verfahren nach Anspruch 10, wobei der Textilstreifen aus einem Fasergarn aus geschnittenen Fasern besteht, wobei die Fasern durch einen Prozess des Zerschneidens von Endlosfasern erhalten werden.
12. Verfahren nach Anspruch 11, wobei der Streifen aus textilem Material durch Extrusion oder Auflaminierung des Fluidbarrierematerials beschichtet wird, wobei das Fluidbarrierematerial in einem geschmolzenen Zustand ist, so dass Unregelmäßigkeiten der Oberfläche des Fasergarns in der Fluidbarriereschicht eingebettet bleiben.
13. Sportartikel und Artikel für eine Außenaktivität, wie z.B. ein Tauchanzug, ein Segelanzug, ein Campingzelt und dergleichen, mit einem fluiddichten Reißverschluss nach einem der Ansprüche 1 bis 9.

Revendications

1. Fermeture à glissière étanche aux fluides (1) comportant une paire de bandes (2), chacune desdites bandes (2) comportant une couche textile centrale (20) et une couche barrière aux fluides (21) revêtant ladite couche textile, et ayant au moins une partie

- portant une rangée de dents (3) le long d'un bord intérieur (7), **caractérisée en ce que** chacune desdites bandes (2) comporte une zone moletée (10), ladite zone moletée (10) étant située sur au moins un côté de la bande (2) et sur le côté extérieur de la couche barrière aux fluides, ladite zone moletée (10) étant étendue le long dudit bord intérieur (7) de la bande (2) sous la forme d'un ruban longitudinal continu parallèle audit bord intérieur (7), et étant étendue au moins sur ladite partie de la bande (2) qui porte ladite rangée de dents (3) de telle sorte que les dents sont fixées sur la zone moletée de la bande.
- 5
2. Fermeture à glissière selon la revendication 1, dans laquelle ladite zone moletée (10) a une largeur (W) qui est plus grande que la largeur de parties de base (30) desdites dents (3) fixées à la bande (2).
- 10
3. Fermeture à glissière selon la revendication 2, dans laquelle ladite zone moletée a une largeur (W), dans une direction perpendiculaire audit bord intérieur (7), qui est environ 1,5 à 2 fois la largeur desdites parties de base (30) des dents (3).
- 15
4. Fermeture à glissière selon l'une quelconque des revendications précédentes, dans laquelle ladite zone moletée (10) a un motif de crêtes (11) faisant saillie à partir de zones bosselées (12) de la bande (2).
- 20
5. Fermeture à glissière selon la revendication 4, dans laquelle lesdites crêtes (11) se croisent à 90 ° les unes des autres et sont inclinées de 45 ° par rapport à la direction longitudinale de la bande (2).
- 25
6. Fermeture à glissière selon l'une quelconque des revendications précédentes, dans laquelle ladite zone moletée (10) est agencée sur les deux surfaces avant et arrière (22, 23) des bandes (2).
- 30
7. Fermeture à glissière selon l'une quelconque des revendications précédentes, dans laquelle ladite couche textile centrale (20) des bandes (2) est fabriquée avec un filé.
- 35
8. Fermeture à glissière selon l'une quelconque des revendications précédentes, dans laquelle ladite couche barrière aux fluides est en TPE-E et les dents sont en PBT.
- 40
9. Fermeture à glissière selon la revendication 8, dans laquelle ladite couche barrière aux fluides est en TPE-U et les dents sont faites d'un mélange d'ABS et de PA, ou d'un mélange de PBT et de PC.
- 45
10. Procédé pour fabriquer une bande (2) pour une fermeture à glissière (1) selon la revendication 1, comportant au moins les étapes consistant à :
- 50
- revêtir un ruban textile d'une matière barrière aux fluides,
 - soumettre le ruban revêtu à un procédé de moletage, pour obtenir une zone moletée ou bosselée (10) sur au moins un côté dudit ruban et sur le côté extérieur de la couche barrière aux fluides et près d'un bord (7) de celle-ci,
 - ladite zone moletée (10) étant étendue le long dudit bord (7) de la bande (2) sous la forme d'un ruban longitudinal continu parallèle audit bord (7),
 - fixer une rangée de dents sur ladite zone bosselée du ruban,
 - découper le ruban pour obtenir une bande de longueur donnée.
- 55
11. Procédé selon la revendication 10, dans lequel ledit ruban textile est constitué d'un filé de fibres coupées, lesdites fibres étant obtenues par un procédé de coupe de fibres continues.
12. Procédé selon la revendication 11, dans lequel ledit ruban en matière textile est revêtu par extrusion ou lamination de ladite matière barrière aux fluides, ladite matière barrière aux fluides étant dans un état fondu, de telle sorte que des irrégularités de surface dudit filé restent noyées dans la couche barrière aux fluides.
13. Article de sport et d'activité de plein air, tel qu'une combinaison de plongée, un vêtement de navigation, une tente de camping et analogue, comportant une fermeture à glissière étanche aux fluides selon l'une quelconque des revendications 1 à 9.

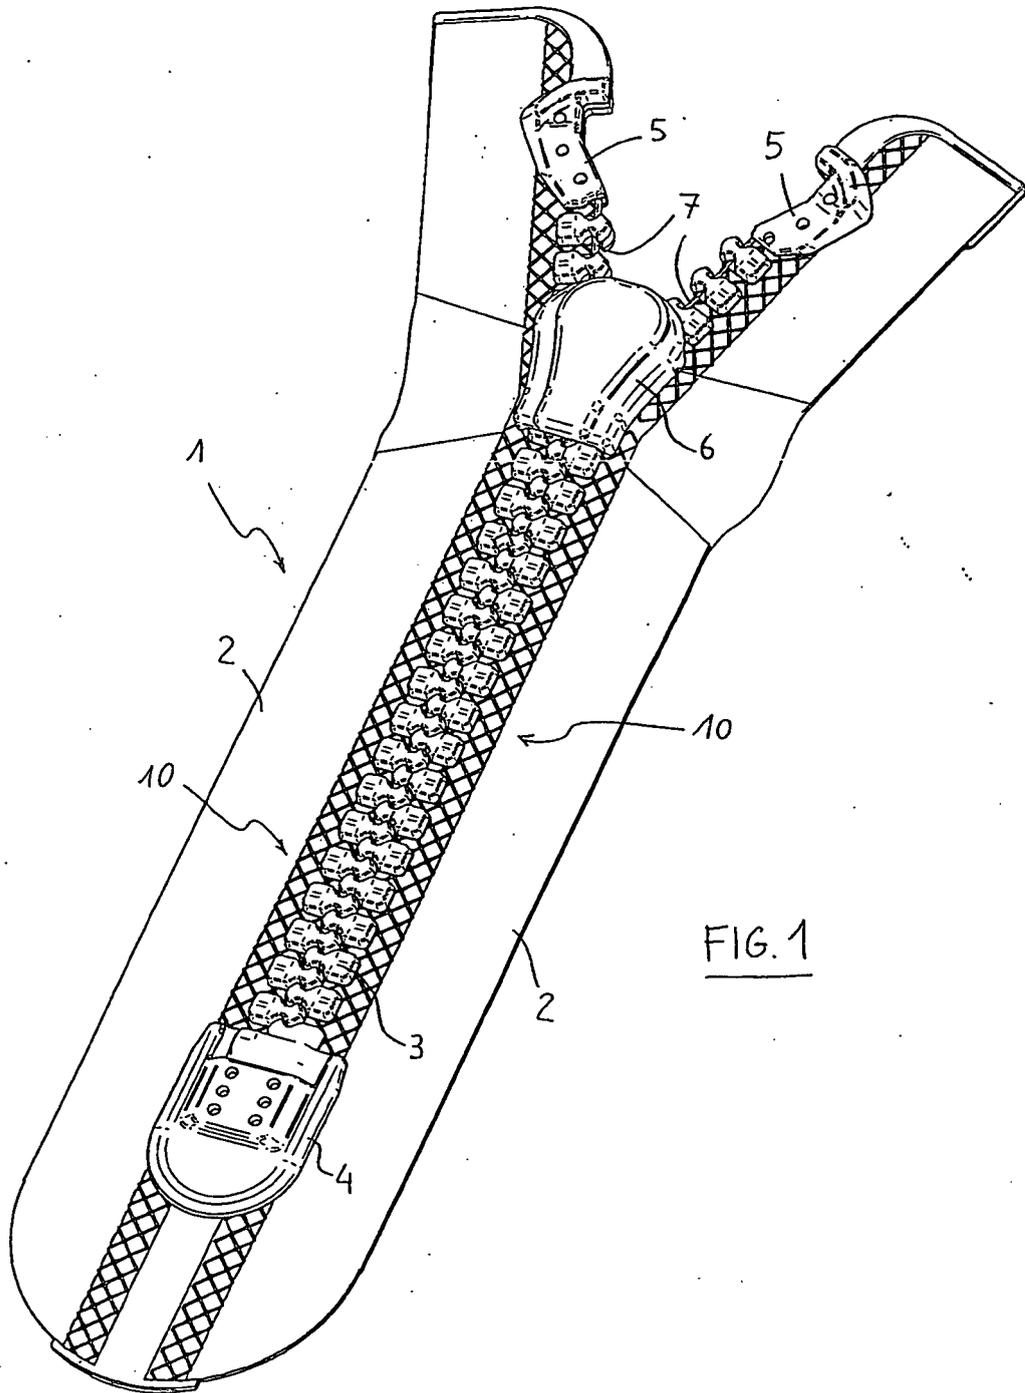

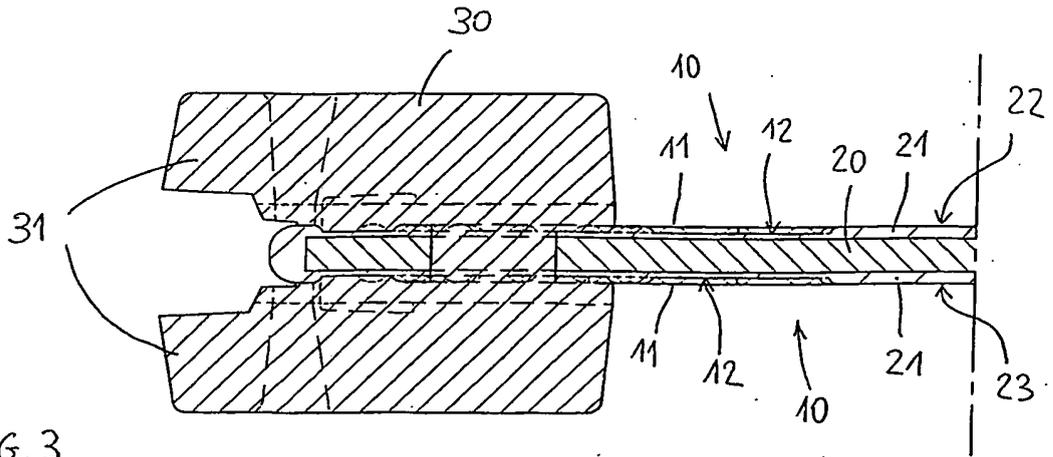


FIG. 3

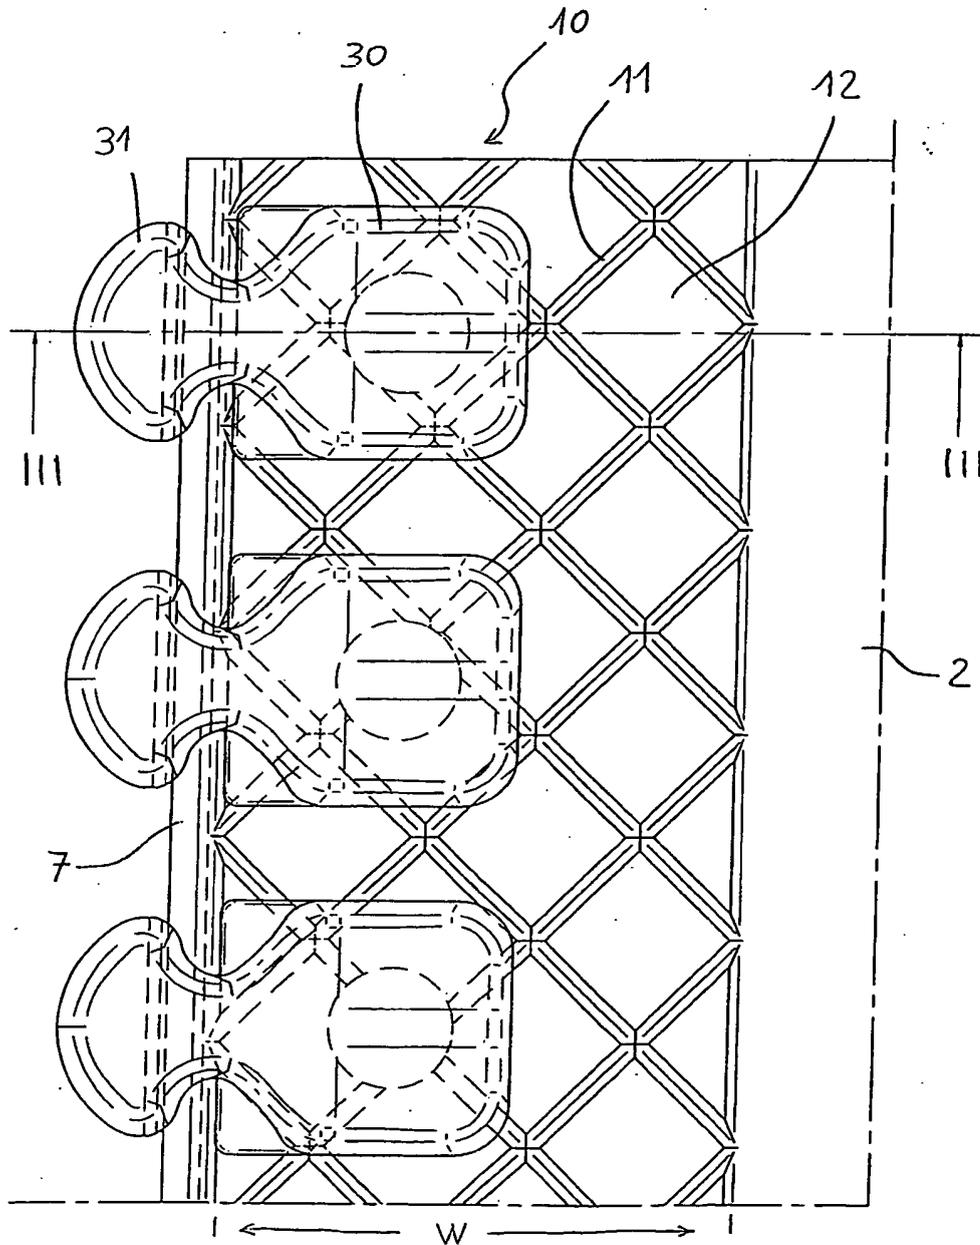


FIG. 2

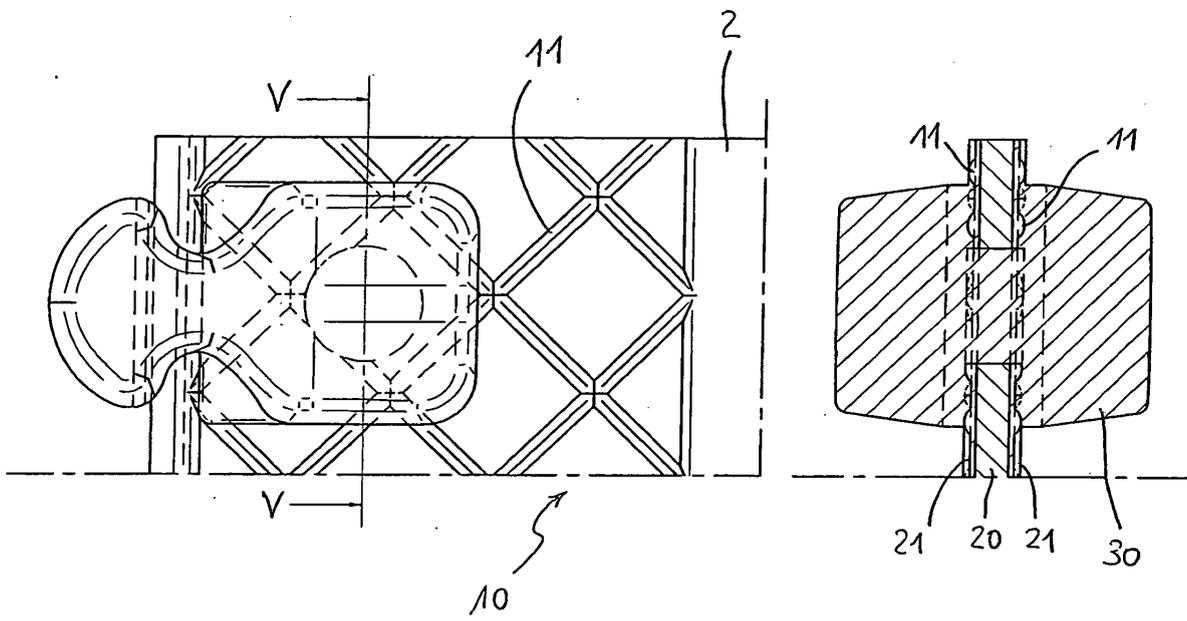


FIG. 4

FIG. 5

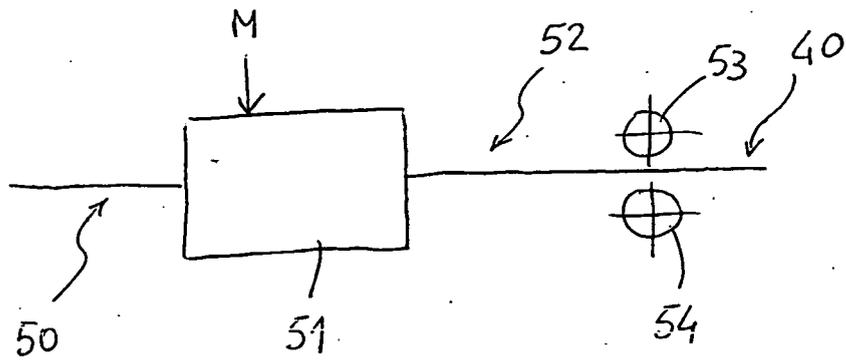


FIG. 9



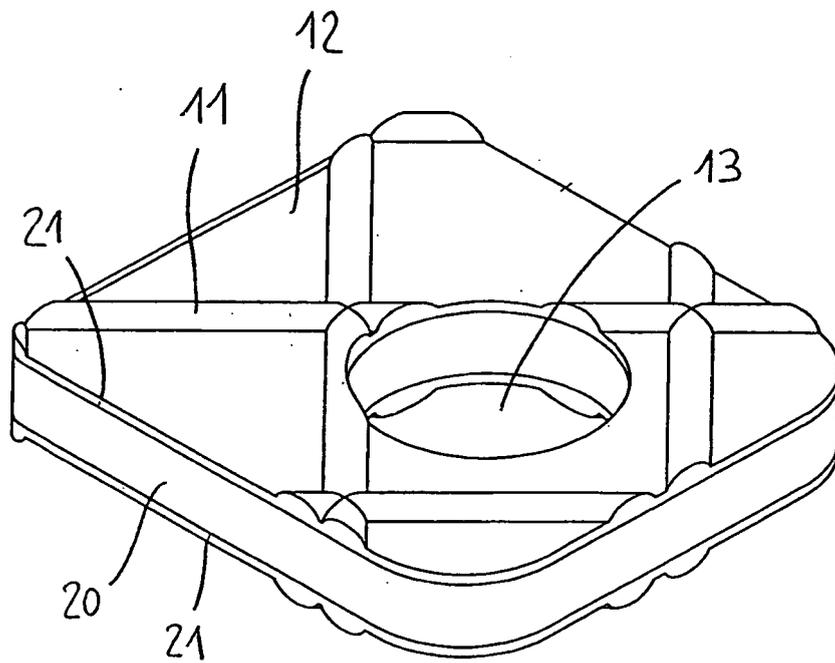


FIG. 6

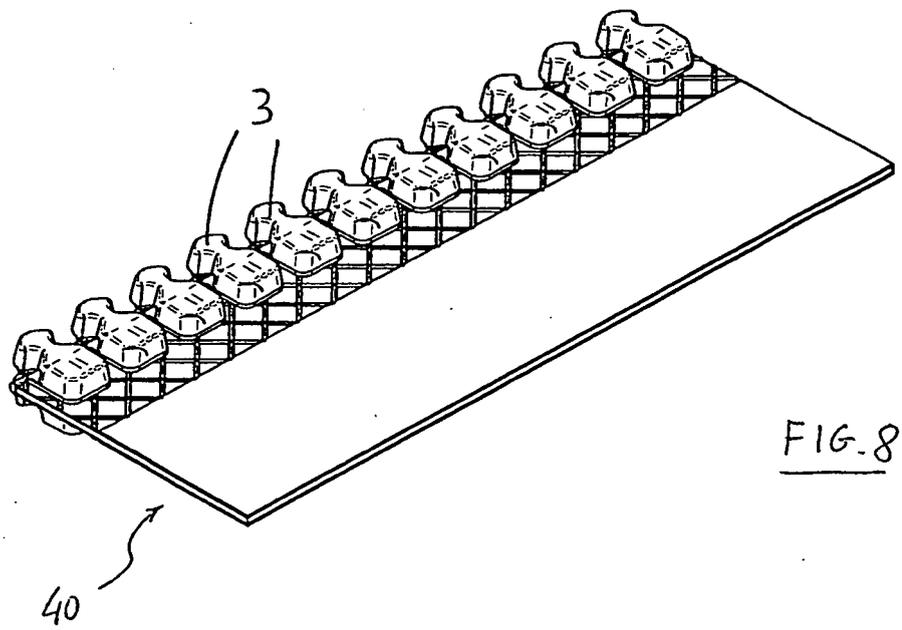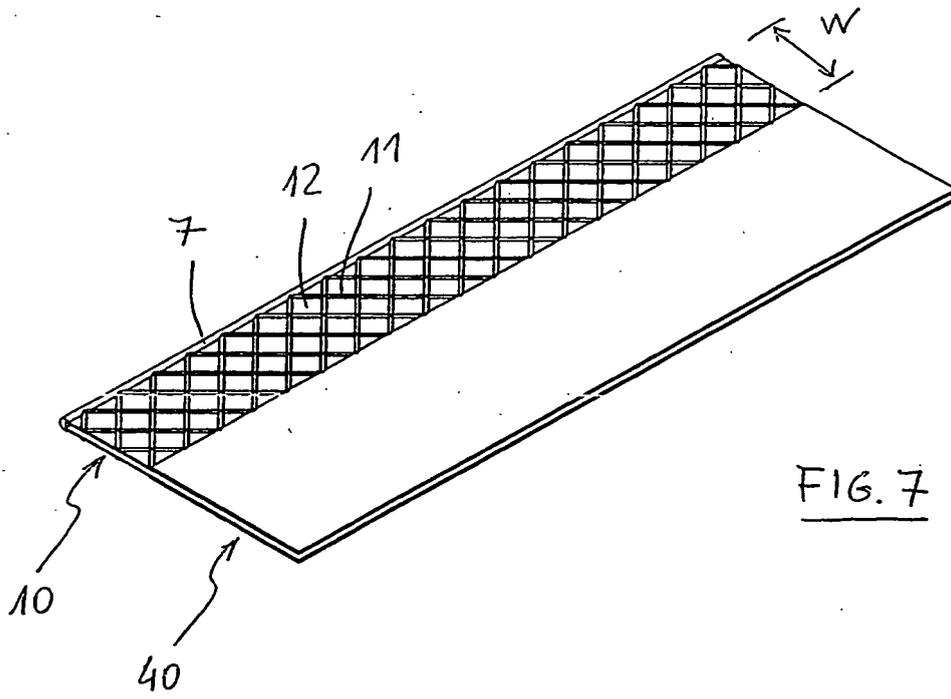

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2006101632 A [0005]
- EP 0108214 A [0005]
- US 4123830 A [0005]
- WO 0203825 A [0005]