

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 November 2007 (08.11.2007)

PCT

(10) International Publication Number
WO 2007/126489 A2

(51) International Patent Classification:
G08B 17/00 (2006.01) **G08B 21/00** (2006.01)

Research Boulevard - Law Department, Research Park
Plaza, Building III, Austen, TX 78759-2369 (US).

(21) International Application Number:
PCT/US2007/004407

(74) Agents: **FAIRBAIRN, David, R.** et al.; Kinney & Lange,
P.A., Kinney & Lange Building, 312 South Third Street,
Minneapolis, MN 55415-1002 (US).

(22) International Filing Date:
20 February 2007 (20.02.2007)

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS,
LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY,
MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS,
RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/401,074 10 April 2006 (10.04.2006) US

(71) Applicant (*for all designated States except US*): **FISHER-
ROSEMOUNT SYSTEMS, INC.** [US/US]; 12301 Re-
search Boulevard - Law Department, Research Park Plaza,
Building III, Austen, Texas 78759-2369 (US).


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **HEDTKE, Robert**
[US/US]; c/o Fisher-Rosemount Systems, Inc., 12301

[Continued on next page]

(54) Title: TEMPERATURE RESPONSIVE INDICATORS FOR PROCESS CONTROL INSTRUMENTS

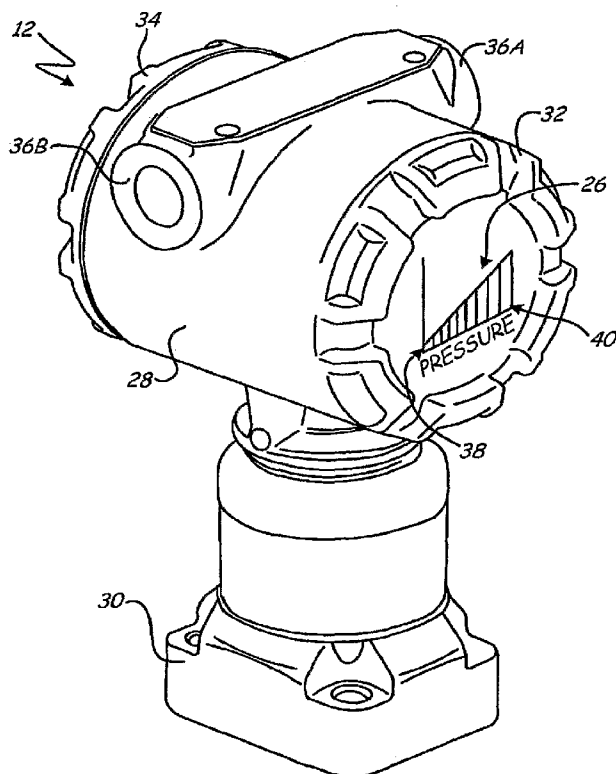

(57) Abstract: A process transmitter (12) includes a temperature responsive indicator (26, 58) to indicate an operating condition of the process transmitter (12). The operating condition may represent a level of a sensed process variable or an operating temperature of the process transmitter (12).

WO 2007/126489 A2



RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

TEMPERATURE RESPONSIVE INDICATORS FOR PROCESS CONTROL INSTRUMENTS

BACKGROUND OF THE INVENTION

5 This invention relates generally to indicators used in industrial process control systems. More particularly, the present invention relates to process transmitters having temperature responsive indicators.

 Process transmitters are used to remotely or locally monitor process variables, such as pressure, temperature, flow and level, of process
10 fluids used in industrial processes. Process transmitters include sensors or transducers that produce an electrical output in response to physical changes in the process variable. For example, capacitive pressure transducers or piezoresistive pressure transducers produce an electrical signal as a function of the pressure of a process fluid. The electrical signal of the sensor is
15 processed by the transmitter circuitry to produce an electrical output that can be monitored as an indication of pressure of the process fluid. Process transmitters also include electronics for either remotely or locally monitoring the electrical output. Remotely monitored transmitters include electronics that transmit the electrical output over a control loop or network to a central
20 monitoring location such as a control room. Locally monitored transmitters include displays, such as digital LCD screens or analog dials, that exhibit the electrical output at the site of the process transmitter in a readable format. In other embodiments, process transmitters include components for both local and remote monitoring.

25 Digital and analog displays can provide a highly precise indication of the measured process variable such that very small changes in the measured process variable are easily detected. However, such precise measurements are not always required. For certain applications, digital and analog displays provide unneeded accuracy and are therefore more expensive
30 than necessary for such applications. Sometimes, only a quick visual indication of the approximate magnitude of the process variable reading is necessary. For instance, maintenance personnel conducting routine checks of production facilities may only need to know if process transmitters are operating and the sensed process variable is at a safe level. This is

particularly so when the precise process variable reading is simultaneously being transmitted to and monitored in the control room. Thus, there is a need for an accurate, low-cost indicator for process transmitter displays.

Power consumption is another drawback associated with digital and analog displays. Process transmitters typically draw their power through the control loop or network, or through wiring systems typically found in industrial settings. In order to ensure compatibility with particular control loops or networks, process transmitters are often required to draw less than 4mA of current. As advances in micro-technology and data transmission progress, it continues to be a challenge to design electronics that are able to operate below a current draw of 4 mA and provide advanced data transmission. Having the additional burden of powering a display unit provides an additional design challenge. Thus, there is a need for process transmitter indicators that have low power consumption.

Also, process transmitters are designed to function within defined temperature ranges. Typically the ambient operating temperature limit of transmitters is -40° F (-40° C) to 185° F (85° C) and the storage temperature limit is -50° F (-51° C) to 230° F (110° C). Thus there is a need for a process transmitter having a low cost visual indication when these temperatures are exceeded.

BRIEF SUMMARY OF THE INVENTION

A process transmitter includes a temperature responsive indicator that is visible from an exterior of the transmitter and is visually responsive to a temperature change.

In a first embodiment of the invention, a process transmitter for measuring a process variable comprises a sensing element, transmitter circuitry and a temperature responsive indicator. The sensing element has an sensor output responsive to a process variable. The transmitter circuitry produces an electrical output as a function of the sensor signal. The temperature responsive indicator responds to heat produced as a function of the electrical output in order to produce a visual indication representative of the process variable.

In a second embodiment of the invention, a process transmitter for measuring a process variable comprises a sensing element, transmitter circuitry, a housing and a temperature responsive indicator. The temperature responsive indicator is positioned on the housing and is responsive to a temperature of the process transmitter housing.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows an example of a process control system in which a process transmitter of the present invention is used.

FIG. 2A shows a process transmitter of the present invention having a temperature responsive indicator used as a local display.

FIG. 2B is a block diagram of the circuitry of the process transmitter of FIG. 2A.

FIG. 2C shows a block diagram of another embodiment of the circuitry of the process transmitter of FIG. 2A.

FIG. 2D shows an exploded view of the temperature responsive indicator of FIG. 2A.

FIG. 3A shows an unactivated warning label having a second embodiment of the temperature responsive indicator of the present invention.

FIG. 3B shows the warning label of FIG. 3A in an activated state.

FIG. 3C shows an exploded view of the warning label of FIGS. 3A and 3B.

DETAILED DESCRIPTION

FIG. 1 shows process control system 10 in which process transmitter 12 of the present invention is used. Process control system 10 includes process transmitter 12, control room 14 and control loop 16. Control room 14 includes communication system 18 and power supply 20. Process transmitter 12 is coupled with piping 22, in which a process fluid flows, through manifold 24. Process transmitter 12 includes a sensor and electronics for monitoring a process variable such as temperature, pressure, flow or level of the process fluid. Process transmitter 12 generates an electrical signal based on the sensed process variable.

In one embodiment, process transmitter 12 is a two-wire transmitter for operating on a 4-20 mA loop. In such an embodiment, control loop 16 includes first wire 16A and second wire 16B for supplying power to process transmitter 12 from power supply 20. Control loop 16 also permits
5 process transmitter 12 to communicate with communication system 18. Typically, a 4 mA DC current provides sufficient energy for operating the sensor and transmitter circuitry of process transmitter 12 and a display for showing an output representing the sensed process variable. Process transmitter 12 transmits an output to communication system 18 over control
10 loop 16 utilizing a 4 mA to 20 mA output signal generated by the transmitter circuitry of process transmitter 12. The 4-20 mA output signal is a function of the magnitude of the sensed process variable. In other embodiments, process transmitter 12 communicates with control room 14 over a wireless network.

15 \ FIG. 2A shows process transmitter 12 of the present invention having temperature responsive indicator 26 used as the local display. Process transmitter 12 comprises indicator 26, housing 28 and pressure flange 30. Housing 28, front cover 32 and rear cover 34 provide a structure for protecting the electronics and providing a field wiring terminal block to
20 process transmitter 12. Front cover 32 has a glass window to allow viewing of indicator 26. Rear cover 34 is removable to allow access to a terminal block for connecting wires 16A and 16B of control loop 16 to the electronics of process transmitter 12. Housing 28 also includes conduit connections 36A and 36B that are used for feeding connecting wires 16A and 16B into
25 housing 28. Pressure flange 30 is used to connect process transmitter 12 with manifold 24 and piping 22. The electronics of process transmitter 12 produce a 4-20 mA output signal as a function of a process variable, that is transmitted across control loop 16. The 4-20 mA signal is also used in conjunction with indicator 26 to provide a local, visual indication of the
30 process variable magnitude. As indicator 26 is typically configured, first end 38 indicates low pressure and a low output signal level, while second end 40 indicates high pressure and a high output signal level.

FIG. 2B is a block diagram of one embodiment of process transmitter 12, which includes temperature responsive indicator 26, sensor 42 and transmitter circuitry 44 including signal processing circuitry 46 and interface 48. Sensor 42 produces a sensor signal proportional to the sensed pressure. Signal processing circuitry 46 receives the sensor signal and performs such conditioning functions as filtering the sensor signal and adjusting the sensor signal for temperature variations. Circuitry 46 produces a control signal that causes interface 48 to adjust loop current I_L to a value between 4mA and 20mA that is representative of the sensed process variable. The loop current I_L flows from control room 14 through wire 16A, through interface 48 and indicator 26 to wire 16B, and back to control room 14.

FIG. 2C is a block diagram of another embodiment of process transmitter 12, which includes temperature responsive indicator 26, sensor 42 and transmitter circuitry 44 including signal processing circuitry 46 and interface 48. Sensor 42 produces a sensor signal proportional to the sensed pressure. Signal processing circuitry 46 receives the sensor signal and performs such conditioning functions as filtering the sensor signal and adjusting the sensor signal for temperature variations. Circuitry 46 produces a control signal that causes interface 48 to adjust loop current I_L to a value between 4mA and 20mA that is representative of the sensed process variable. The loop current I_L flows from control room 14 through wire 16A, through interface 48 and back to control room 14. A separate current I_I signal is fed directly to indicator 26. This embodiment allows the indicator to be used with digital protocol devices such as Fieldbus.

FIG. 2D shows an exploded view of temperature responsive indicator 26 of FIG. 2A. Indicator 26 includes a conductive ink layer that is resistance heated by the 4–20 mA output signal, current I_L (or current I_I , as the case may be). The conductive ink layer thereby causes a thermochromic ink layer to change color in response to the amount of heat created in the conductive ink layer. Thus, indicator 26 provides a low-cost temperature responsive indicator that provides a visual representation of the magnitude of the sensed pressure. Indicator 26 is constructed in accordance with known principles for fabricating temperature responsive voltage indicators, some of

which are disclosed in U.S. Patent Nos. 4,006,414; 4,702,564; 4,723,656; 5,188,231 and 5,607,790.

In one embodiment, indicator 26 comprises first protective layer 50, conductive ink layer 52, thermochromic ink layer 54 and second protective layer 56. First protective layer 50 provides a substrate on which to print thermochromic ink layer 52 and conductive ink layer 54, while also protecting the ink layers. First protective layer 50 of indicator 26 may be made of any material suitable for printing on, such as paper or plastic materials.

Conductive ink layer 52 allows current I_L to be passed across indicator 26. Conductive ink layer 52 is printed onto, or otherwise adhered to, first protective layer 50 in the shape of a right-angle triangle, such that the surface area at first end 38 is smaller than the surface area at second end 40. Conductive ink layer 52 can be printed onto first protective layer 50 in any pattern in which the surface area of the conductive ink increases as it moves from one end to the other. In one embodiment, the conductive ink is Electrodag ® 725A such as is commercially available from Acheson Colloids Company, Port Huron, MI, USA.

Thermochromic ink layer 54 is printable on, or otherwise positioned adjacent to, conductive ink layer 52 and is shaped to match that of the conductive ink layer. Thermochromic ink layer 54 can have any shape that allows visual differentiation of the process variable level, such as a single bar shape or a triangular shape. Thermochromic ink layer 54 also includes discrete bars to further indicate specific levels of the process variable. Bars at first end 38 of indicator 26 indicate low pressure. Bars at second end 40 of indicator 26 indicate high pressure. As current I_L (or I_I) passes across indicator 26, the resistance of conductive layer 52 creates heat, thereby heating up thermochromic ink layer 54. As current I_L (or I_I) flows through conductive ink layer 52 the current density decreases from first end 38 to second end 40. For any given magnitude of I_L (or I_I), the current density across conductive ink layer 52 decreases toward second end 40. As a result, the amount of heat produced per unit area of conductive ink layer 52 decreases from first end 38 to second end 40. The temperature at each point

of conductive ink layer 52 depends directly on the current density at that point.

Thermochromic ink layer 54 alters its color at a threshold temperature. The threshold temperature is induced in thermochromic ink layer 54 by resistance heating of conductive ink layer 52 by current I_L (or I_1). Because the thermochromic ink is affected by ambient temperature the indicator will not function optimally under all ambient temperature conditions. However, the use of this indicator is ideally suited for factory applications where the ambient temperature is controlled, and ambient influences are known. The threshold temperature is reached at some point along the temperature gradient in conductive ink layer 52 for each level of current, and moves from first end 38 to second end 40 as the current density of current increases. At the lowest level of current (e.g. 4 mA), the threshold temperature is reached in conductive ink layer 52 toward first end 38. As current increases, the threshold temperature is reached in portions of conductive ink layer 52 occupying larger surface areas, toward second end 40. The highest level of current (e.g. 20 mA), produces enough current density, and thus enough heat, to reach the threshold temperature at second end 40 of conductive ink layer 52.

The threshold temperature can be varied according to design needs and depends on the thickness of the conductive ink and thermochromic ink layers and other factors. At a low temperature, thermochromic ink layer 54 is a first color, such as black. The thermochromic ink is formulated to change from the first color to a second color, such as green, at the threshold temperature. In other embodiments, thermochromic ink layer 54 turns transparent at the threshold temperature. The thermochromic ink can be any temperature responsive ink, such as the class of ink disclosed in U.S. Patent No. 4,717,710, or thermochromic inks such as ones distributed by Dow Corning Corporation, Midland, MI, USA or Chromatic Technologies, Inc., Colorado Springs, CO, USA.

Second protective layer 56 covers and shields the ink layers while also allowing thermochromic ink layer 54 to be viewed. In one embodiment, second protective layer 56 is a transparent plastic material.

In another embodiment of process transmitter 12, indicator 26 utilizes a liquid crystal based material rather than a thermochromic ink. Liquid crystal materials, particularly cholesteric crystal materials, are clear at room temperature and change to a color at a threshold temperature. Liquid crystal based materials are sensitive to very small changes in temperature and are suited for use where gradual temperature changes will occur, but are somewhat more expensive. Therefore, they are particularly suitable for use as an indicator where somewhat more precision is necessary and somewhat higher costs are acceptable.

FIGS. 3A and 3B show warning label 58 having a second embodiment of the temperature responsive indicator of the present invention. FIG. 3A shows thermochromic warning label 58 in an unactivated state, typically indicating operating conditions at temperatures within the normal operating range. FIG. 3B shows activated thermochromic warning label 58', typically indicating operating conditions at temperatures outside the normal operating range. Process transmitter 12 includes warning label 58 and module housing 60. Housing 60 provides protection for electronics and sensors of process transmitter 12. Thermochromic warning label 58 includes a thermochromic ink layer that alters its appearance in response to a temperature change in order to reveal a message indicating a changed operating state of process transmitter 12. Thermochromic warning label 58 is affixed to the outside of module housing 60 in a conspicuous location such that it is easily noticeable by maintenance personnel or other persons. Warning label 58 is in close contact with module housing 60 such that the thermochromic ink layer responds to temperature variations in housing 60. However, warning label 58 is responsive to both the ambient air temperature and the temperature of the process fluid inside pipe 22 (shown in FIG. 1). The combination of ambient and process temperature causes warning label 58 to exceed the maximum specified operating value of the process fluid when the process is operating outside of the normal operating range, thus activating warning label 58.

FIG. 3C shows an exploded view of the warning label of FIGS. 3A and 3B. Label 58 is constructed in accordance with known

principles for fabricating thermochromic warning labels, some of which are disclosed in U.S. Patent Nos. 4,161,557; 4,717,710; 6,649,912 and 6,761,066. In one embodiment, warning label 58 comprises substrate 62 having an adhesive on bottom side 64 and a visual message 66 on top side 68. Substrate 62 and the adhesive should be selected and applied to minimize insulating thermochromic ink layer 70 from housing 60. Thermochromic ink layer 70 is printed over visual message 66 and changes from an opaque state to a transparent state when its temperature, dictated by the temperature of module housing 60, reaches a threshold level. Thermochromic ink layer 70 can be any temperature responsive ink or fluid. In one embodiment, thermochromic ink layer 70 is of the class of ink disclosed in U.S. Patent No. 4,717,710. In other embodiments, thermochromic inks such as ones distributed by Dow Corning Corporation, Midland, MI, USA or Chromatic Technologies, Inc., Colorado Springs, CO, USA may be used. In another embodiment of warning label 58, the thermochromic fluid is a leucodye, which typically is configured to change from an opaque color, such as blue, to a clear state. Leucodye is particularly suited for warning label applications because it is inexpensive. In another embodiment, warning label 58 utilizes a liquid crystal temperature responsive layer in place of thermochromic ink layer 70. Protective layer 72 is placed over substrate 62 and thermochromic ink layer 70 to protect the printed message and the ink from damage. In one embodiment, protective layer 72 is a clear plastic laminate.

Process transmitter 12 typically has two key temperature limitations. First, the electronics of process transmitter 12 will only properly operate up to a certain temperature threshold. Second, the sensor and electronics can only physically withstand a maximum temperature threshold before they become permanently damaged. Therefore, warning label 58 can be provided to indicate when process transmitter 12 has exceeded one or both of these temperature limitations. The exact level of each temperature threshold depends on the type of sensor and electronics used. In other embodiments, warning label 58 can be used to indicate a process running at any other temperature. The threshold temperature of warning label 58 can be

specifically designed for each application, with temperature limits typically in the range of 200° F (93° C) - 300° F (149° C).

Before the threshold temperature is reached, unactivated warning label 58 of FIG. 3A displays a permanent message indicating, for example, that the label is a temperature monitor. In one embodiment, warning label 58 reads: "Temperature Monitor." Thermochromic ink layer 70 remains in an opaque state to conceal the thermochromic ink message. The presence of an unactivated warning label 58 indicates that process transmitter 12 is operating within safe temperature ranges. In one embodiment, the unactivated thermochromic ink of warning label 58 is green to conspicuously indicate normal operating conditions. If the combination of ambient air temperature and the module housing temperature exceeds the threshold temperature at module housing 60, the thermochromic ink of warning label 58 activates and turns transparent in appearance to reveal the concealed visual message. Activated warning label 58' of FIG. 3B displays a message indicating that process transmitter 12 is operating at a temperature that exceeds a threshold temperature. In one embodiment, activated warning label 58' reads: "Warning: Maximum Temperature Exceeded." In one embodiment, the message is printed on a red background to conspicuously indicate unsafe operating conditions. Thus, maintenance personnel can easily get a visual indication when the module exceeds its maximum operating temperature. This is particularly useful when process transmitter 12 does not include a local display or is not connected to a control room.

In other embodiments, warning label 58 includes a temperature limit indicator to indicate when the temperature of process transmitter 12 has exceeded a threshold temperature. In such cases, warning label 58 includes a chemical that has a desired melt point. Once the threshold temperature is reached, the chemical melts and leaves a visible indication that the process transmitter has been exposed to the threshold temperature. For example, a small circle may be white indicating that the process transmitter has not been exposed to the melt temperature. Once the melt temperature is reached the circle turns blue by the melted chemical. In one embodiment, warning label 58 may include a message such as:

“Warning: This product has exceeded its maximum operating temperature if this circle is blue!” Suitable labels, such as the MonitorMark ® line of products commercially available from 3M Corporation, St. Paul, MN, USA and the Vitsab ® line of products commercially available from Cox
5 Technologies, Inc., Belmont, NC, USA, are known in the art.

Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention.

CLAIMS:

1. A process transmitter comprising:
a housing;
a sensor within the housing producing a sensor signal as a
5 function of a process variable;
transmitter circuitry within the housing for producing an
electrical output based on the sensor signal; and
a temperature responsive indicator visible from an exterior of
the housing, the indicator being visually responsive to
10 a temperature.
2. The process transmitter of claim 1 wherein the temperature is
a temperature of the process transmitter housing.
3. The process transmitter of claim 2 wherein the temperature
responsive indicator is located on an exterior of the housing.
- 15 4. The process transmitter of claim 2 wherein the temperature
responsive indicator changes from an opaque color to a transparent color to
reveal a printed message when a threshold temperature is reached.
5. The process transmitter of claim 4 wherein the temperature
responsive indicator comprises a liquid crystal material layer.
- 20 6. The process transmitter of claim 2 wherein the temperature
responsive indicator comprises a thermochromic ink layer.
7. The process transmitter of claim 2 wherein the temperature
responsive indicator includes a temperature limit indicator.
8. The process transmitter of claim 1 wherein the temperature is
25 a temperature of the indicator induced by the electrical output of the
transmitter circuitry.
9. The process transmitter of claim 8 wherein the temperature
responsive indicator displays a visual representation of a magnitude of the
process variable.
- 30 10. The process transmitter of claim 8 wherein the temperature
responsive indicator is located within the housing and is visible through an
opening or a window in the housing.

11. A process transmitter for measuring a process variable, the process transmitter comprising:
- transmitter circuitry for producing an electrical output representative of a sensed process variable; and
- 5 a temperature responsive indicator responsive to heat produced as a function of the electrical output in order to provide a visual indication representative of the process variable.
12. The process transmitter of claim 11 wherein the visual representation of the electrical output indicates a magnitude of the process variable.
13. The process transmitter of claim 11 wherein the temperature responsive indicator includes a layer of conductive ink having an increasing surface area from a first end to a second end, wherein the electrical output is
- 15 passed from the first end to the second end causing resistance heating of the conductive ink layer.
14. The process transmitter of claim 13 wherein the temperature responsive indicator comprises a layer of thermochromic ink adjacent the layer of conductive ink, wherein the resistance heating of the conductive ink
- 20 layer causes a visual change in the appearance of the thermochromic ink layer.
15. The process transmitter of claim 13 wherein the temperature responsive indicator comprises a layer of liquid crystal material adjacent the layer of conductive ink, wherein the resistance heating of the conductive ink
- 25 layer causes a visual change in the appearance of the liquid crystal material layer.
16. A process transmitter for measuring a process variable, the process transmitter comprising:
- a sensing element for sensing the process variable;
- 30 transmitter circuitry for producing an output based on the sensed process variable;
- a housing containing the transmitter circuitry and sensing element; and

a temperature responsive indicator positioned on the housing
and responsive to a temperature of the process
transmitter housing.


17. The process transmitter of claim 16 wherein the temperature
5 responsive indicator includes a layer of material that changes from an opaque
color to a transparent color in response to a housing temperature in excess of
a threshold temperature such that the transparent colored layer of material
reveals a message.

18. The process transmitter of claim 17 wherein the layer of
10 material comprises a layer of thermochromic ink.

19. The process transmitter of claim 17 wherein the layer of
material comprises a layer of liquid crystal material.

20. The process transmitter of claim 16 wherein the temperature
responsive indicator is affixed to an exterior of the housing.

1/7

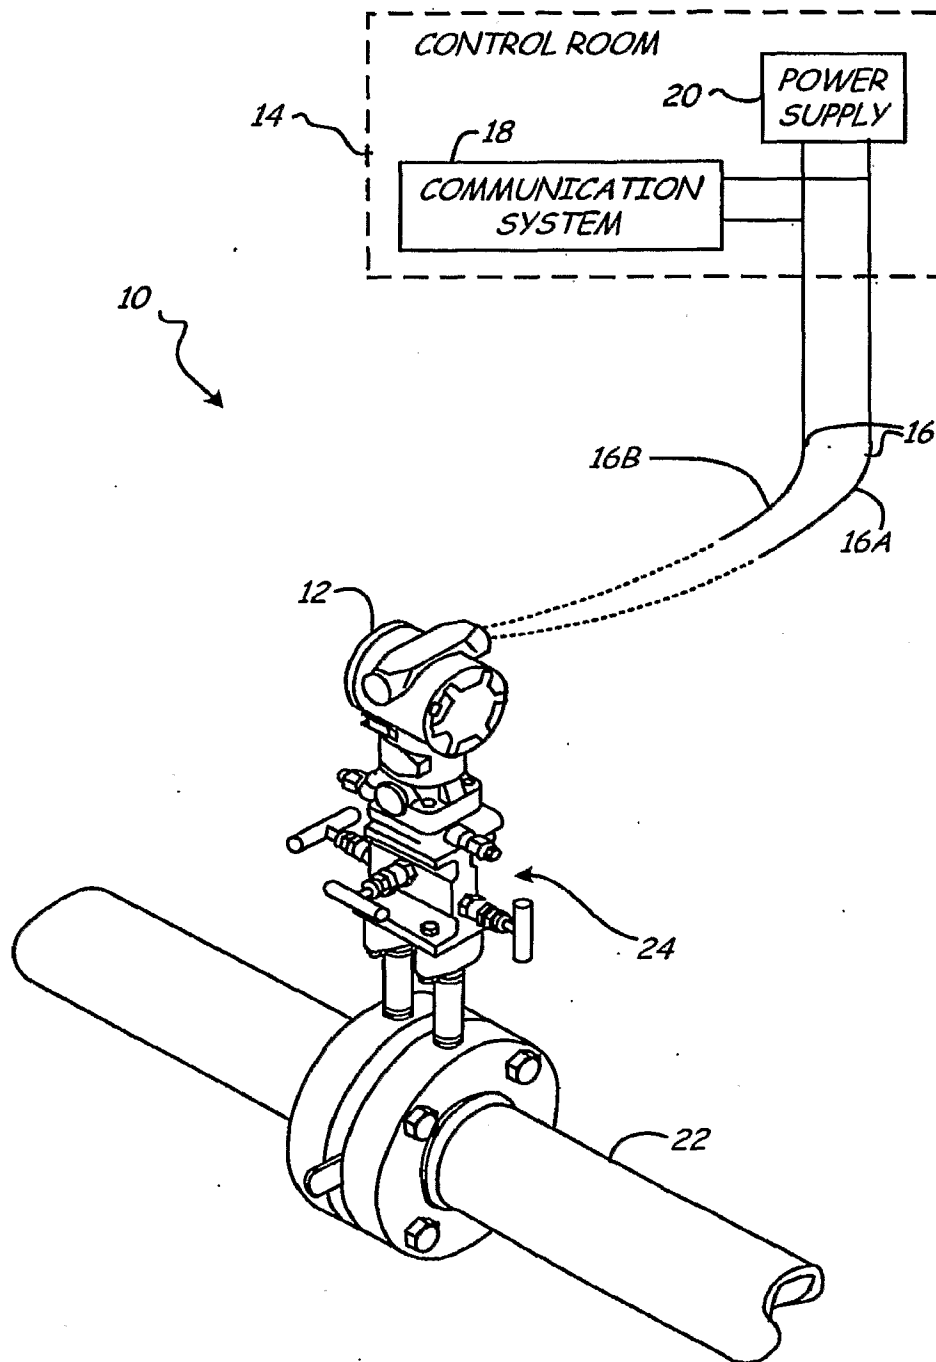*Fig. 1*

2/7

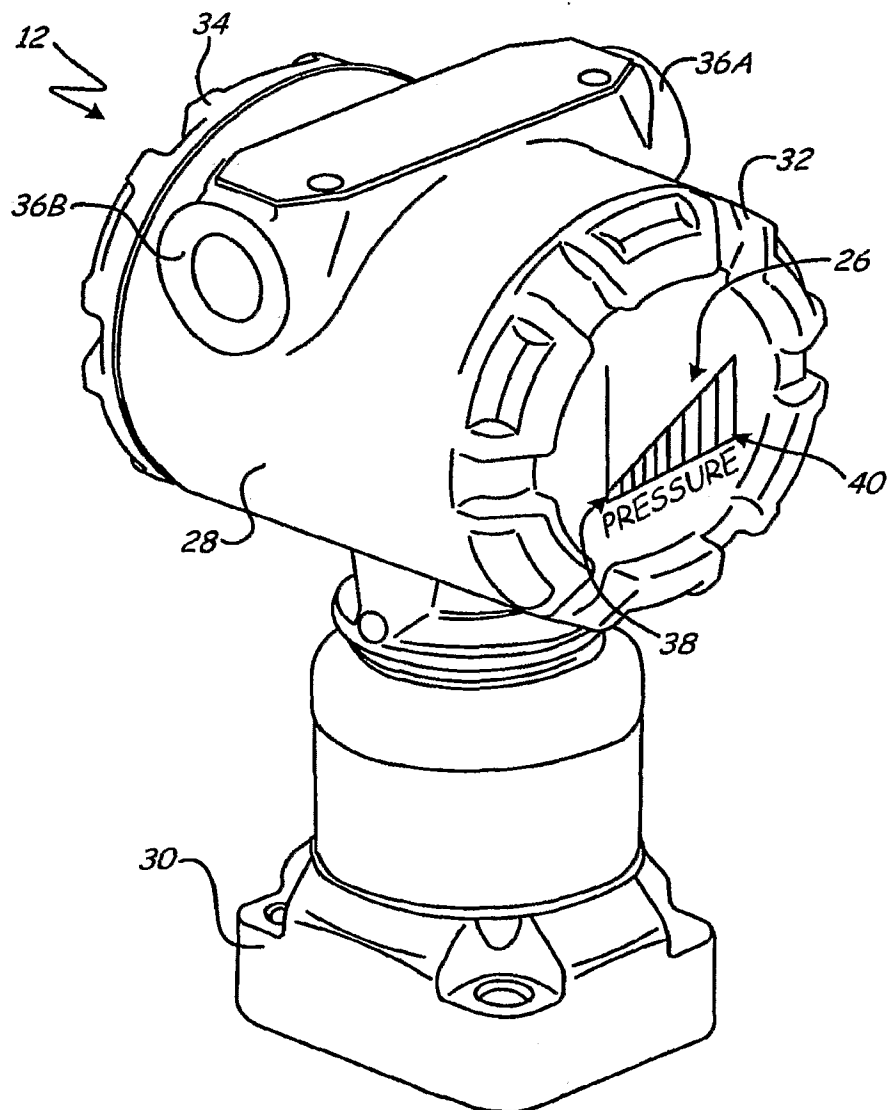


Fig. 2A

3/7

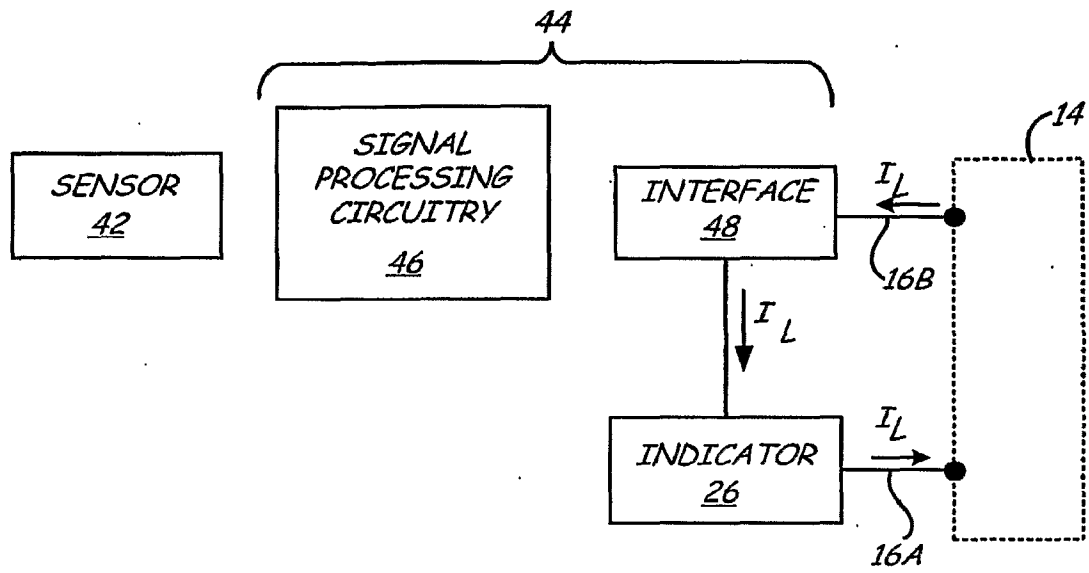


Fig. 2B

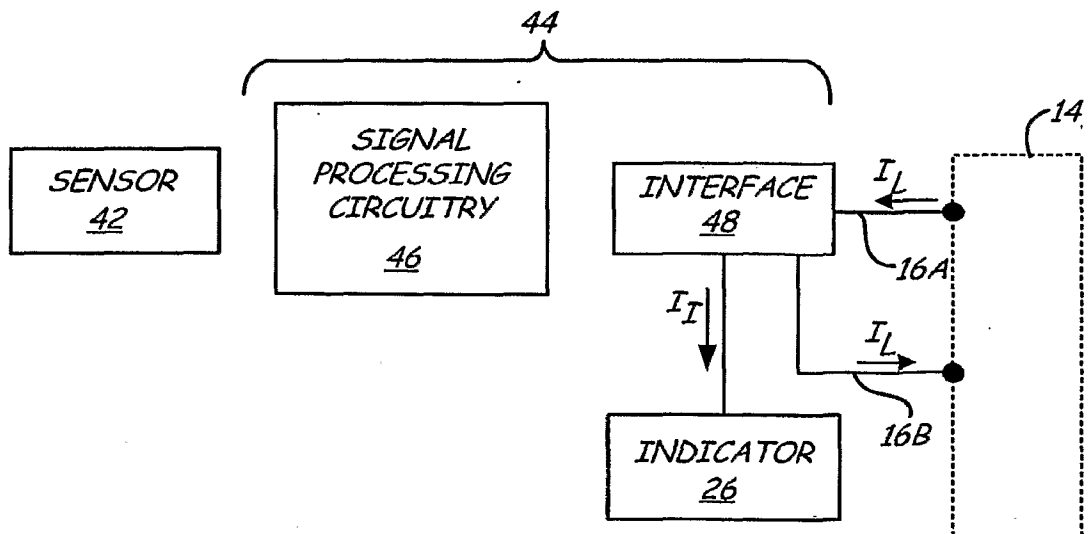


Fig. 2C

4/7

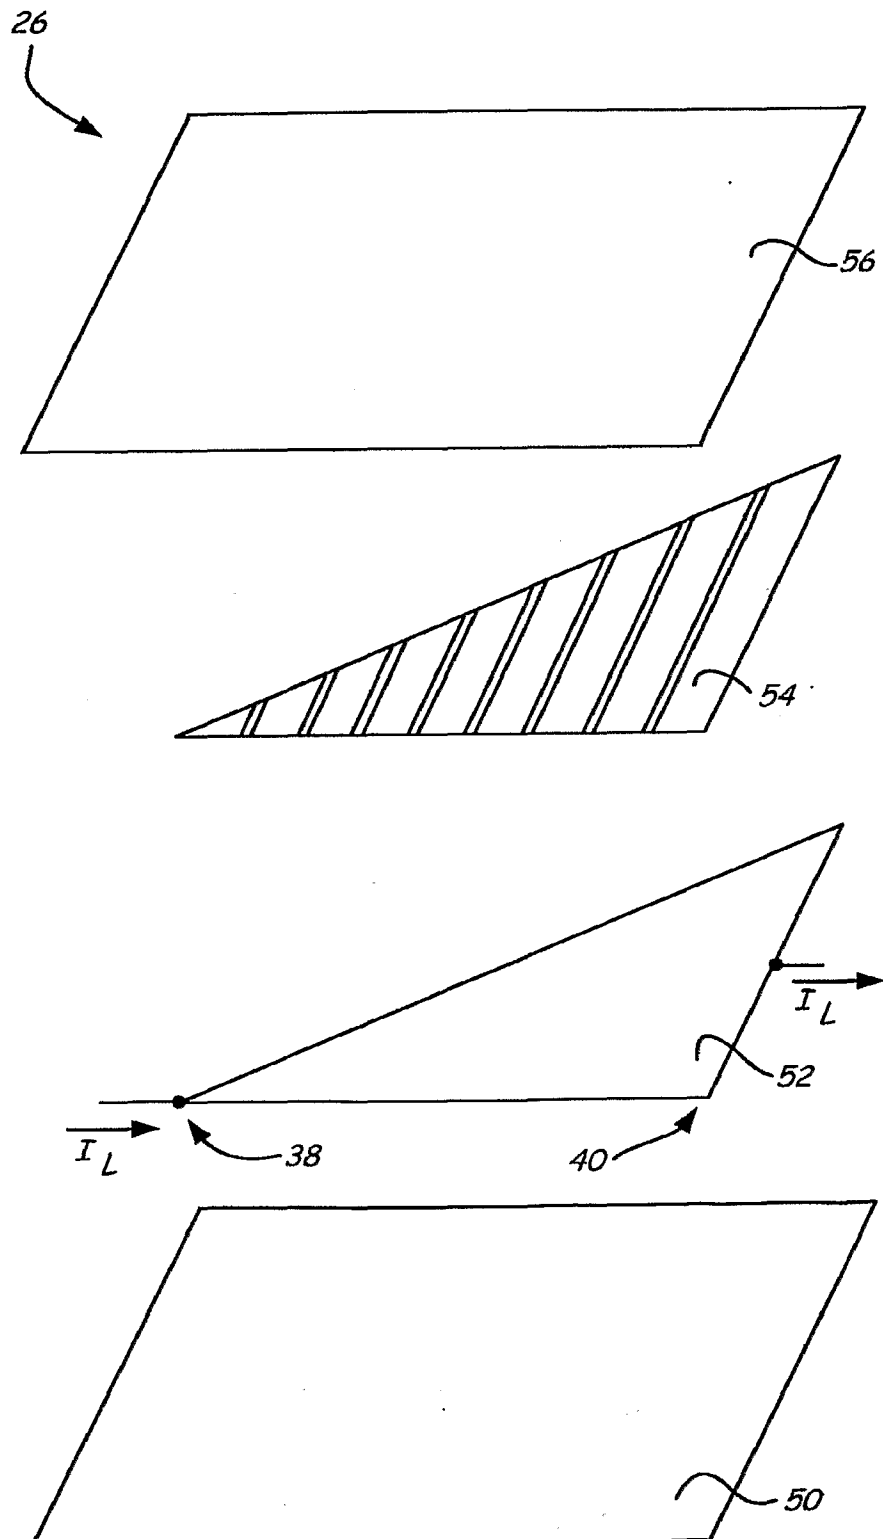


Fig. 2D

5/7

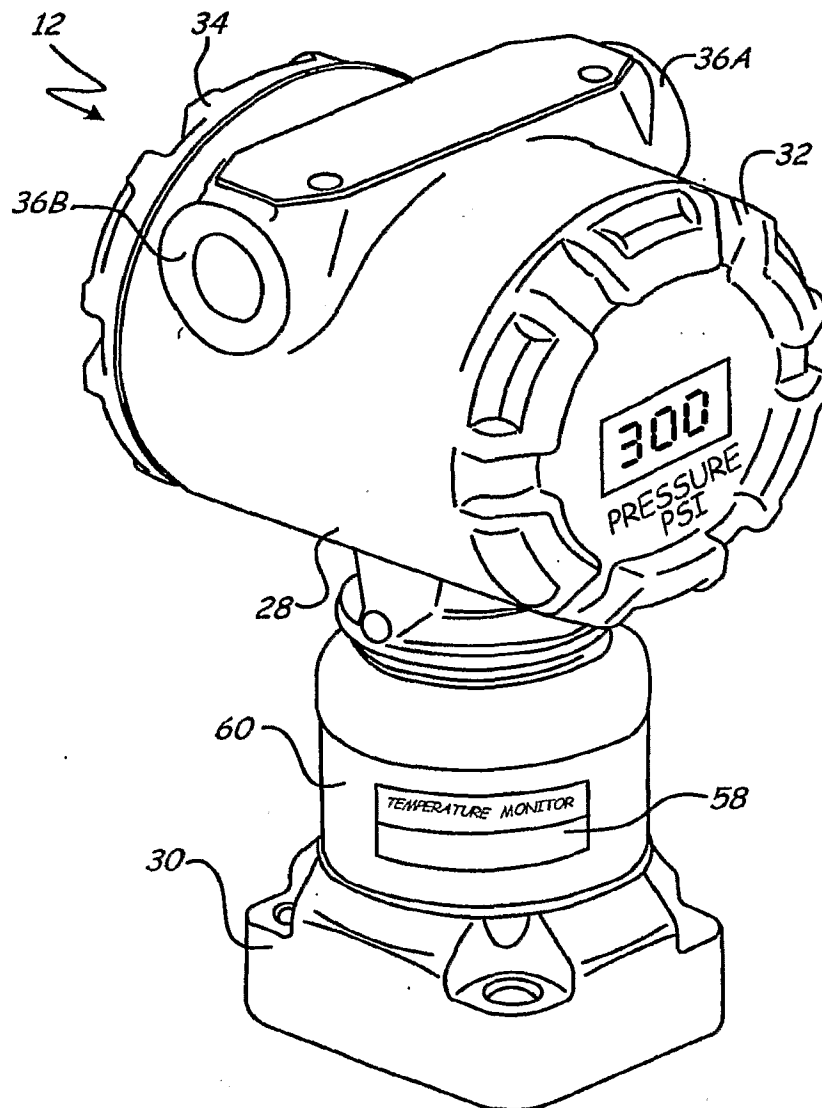
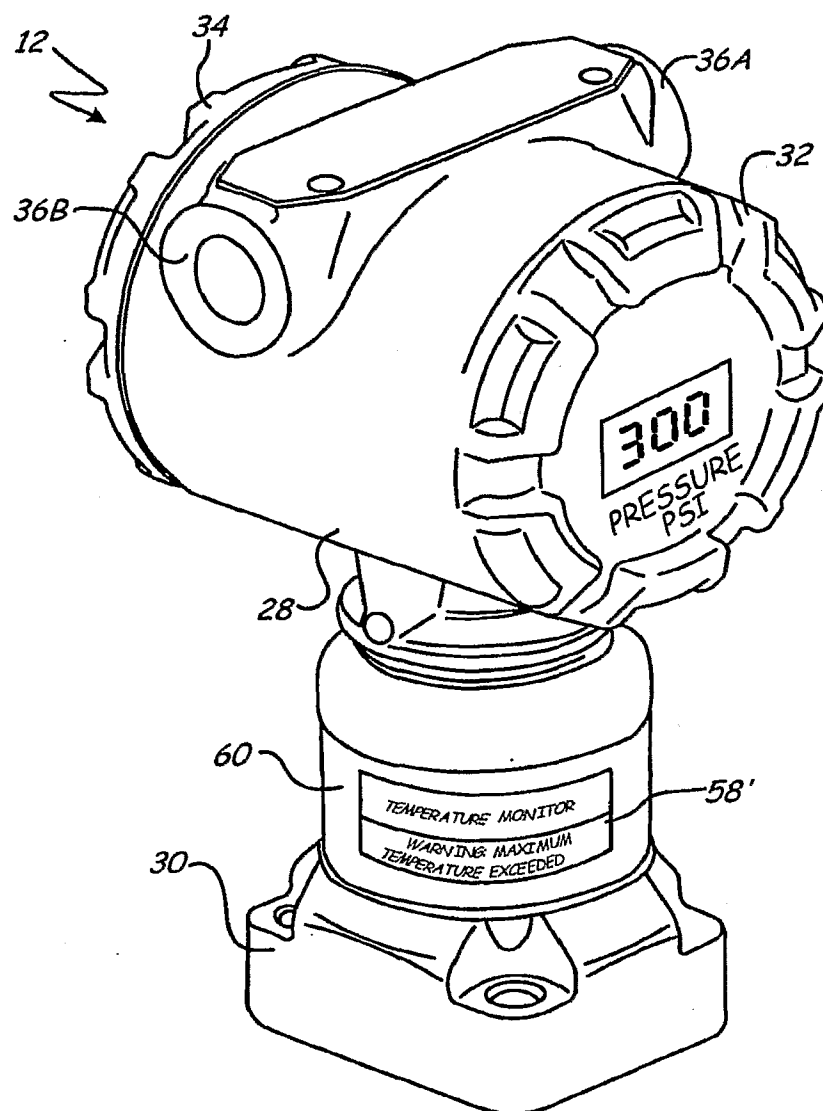


Fig. 3A

6/7

*Fig. 3B*

7/7

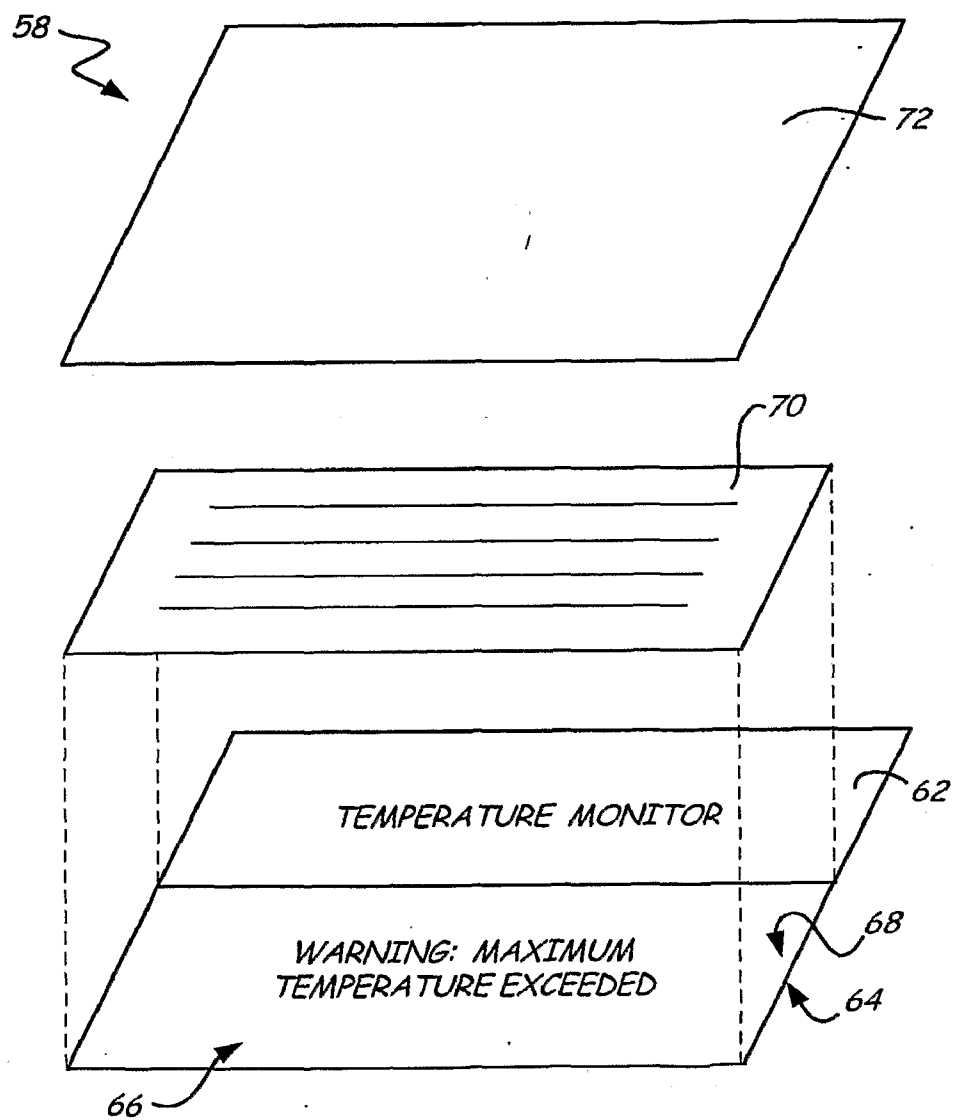


Fig. 3C