(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
8 May 2008 (08.05.2008)

PCT

(10) International Publication Number
WO 2008/052336 A1

(51) International Patent Classification:
C01B 35/04 (2006.01) *C01G 23/047* (2006.01)
C01B 35/10 (2006.01) *C25C 3/08* (2006.01)

(21) International Application Number:
PCT/CA2007/001951

(22) International Filing Date: 31 October 2007 (31.10.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/863,879 1 November 2006 (01.11.2006) US

(71) Applicant *(for all designated States except US)*: **ALCAN INTERNATIONAL LIMITED** [CA/CA]; 1188 Sherbrooke Street West, Montréal, Quebec H3A 3G2 (CA).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **DIONNE, Martin** [CA/CA]; 1781 rue Moissan, Jonquière, Quebec G7S 3H9 (CA). **HUNI, Jean-Paul** [CA/CA]; 3052 Dickie, Jonquière, Quebec G7S 2L4 (CA).


(74) Agent: **OGILVY RENAULT LLP / S.E.N.C.R.L., s.r.l.**; Suite 1600, 1981 McGill College Avenue, Montreal, Québec H3A 2Y3 (CA).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,

[Continued on next page]

(54) Title: SEMI SOLID TIB2 PRECURSOR MIXTURE

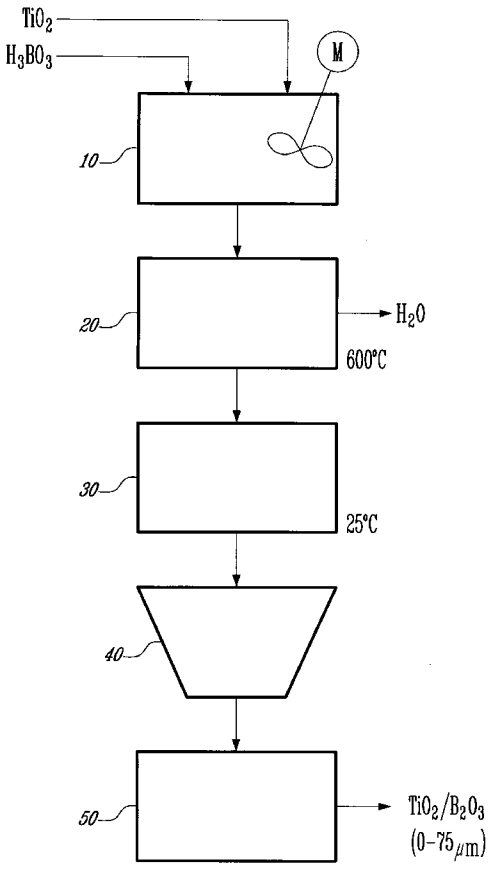

(57) Abstract: The invention relates to a metal boride precursor mixture comprising a metal oxide and a boric oxide combined in such a manner so as to produce intimately linked clusters wherein the boric oxide is found within the metal oxide. Furthermore, the invention discloses a carbon composite material made with the metal boride precursor mixture and a carbonaceous component. Finally, the invention also teaches the process for preparing the metal boride precursor mixture comprising steps of providing a metal oxide and a boron oxide, mechanically mixing the metal oxide and the boron oxide at a temperature that liquefies the boron oxide and may impregnate the metal oxide to produce an intimately linked cluster of metal oxide and boric oxide.

WO 2008/052336 A1

PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *with international search report*

— *with amended claims*

SEMI SOLID TiB_2 PRECURSOR MIXTURE

BACKGROUND OF THE INVENTION

TECHNICAL FIELD

The invention relates to the production of a metal boride precursor mixture comprising components which when combined with a carbonaceous component, produce a carbon composite material suitable for use in a cathode or cell lining of an aluminium electrolysis cell.

DESCRIPTION OF THE PRIOR ART

Metal borides, such as TiB_2 are used in an admixture with carbon components to form ramming pastes, cell linings and cathodes for electrolysis cells. Metal borides are known to improve surface wettability of the electrolytic cell components into which they are added. Although titanium diboride is preferred from the point of view of superior performance, it has the considerable disadvantage that it is very expensive.

Titanium diboride is generally formed by combining equal mole quantities of titanium oxide and boron oxide with a reducing agent. Carbon and aluminum, for example, are both known reducing agents. This reduction of the oxides to titanium diboride is also known to be possible at the start-up of an aluminium producing electrolysis cell, therefore producing TiB_2 *in situ*. However, it is known that *in situ* formation of the metal boride from the precursors proceeds suitably only if the reactants are thoroughly mixed one with the other, and in particular, contact between the metal oxide and the boron compound is required for the production of the metal boride.

Khazai et al. in U.S. Patent No. 5,160,698 teach a process for producing metal borides using finely comminuted mixtures of reactants. The mixture of particulate reactants comprises: a metal compound, carbon, and a boron source having a particle size of about 200 microns which is heated to convert the mixture to a metal boride having an average particle size of about 0.05 to about 0.5 micron. The metal compound is one which can be converted to a corresponding metal boride by a reaction with carbon and the boron source under controlled conditions and at temperatures from 1200°C to 2500°C.

Mirtchi et al. in European Patent EP 1 141 446 B1 teach a wettable and erosion/oxidation-resistant carbon composite material for use in the production of aluminium. Mirtchi et al. provide carbon composite materials which may be fashioned into cathode blocks, jointing pastes or the like that are erosion/oxidation resistant and wettable by molten aluminium when used in electrolysis cells while being relatively inexpensive and easy to produce. Mirtchi et al. utilize a precursor mixture that is preferably finely divided having average particle sizes sufficiently small to allow effective reaction of the precursor during the cell start-up to produce corresponding metal borides.

In preparing carbon composite mixtures containing the metal oxide and the boron compound, segregation of the metal oxide and boron compound may occur even when the particles are finely divided. Furthermore, boron oxide seems to have a detrimental effect on the carbon binder used in block production. Thus, mixing and baking is difficult and leads to lower quality products. It is the object of this invention to overcome at least some of the deficiencies in the prior art.

SUMMARY OF THE INVENTION

In accordance with one aspect of the invention, there is provided a metal boride precursor mixture comprising: a metal oxide, and boric oxide (B_2O_3), wherein the metal oxide and the boric oxide are physically linked in clusters and the boric oxide is intimately supported by the metal oxide.

In accordance with another aspect of the invention, there is provided a carbon composite material for use in an aluminium electrolysis cell as at least one of a cathode and a cell wall material, the composite material comprising: a carbonaceous component, and a metal boride precursor mixture comprising a metal oxide, and boric oxide, wherein the metal oxide and the boric oxide are physically linked in clusters and the boric oxide is intimately supported by the metal oxide.

In accordance with yet another aspect of the invention, there is provided a process for producing a metal boride precursor mixture comprising the steps of: providing a metal oxide wherein the metal oxide has a particle surface providing a boron component; mechanically mixing the metal oxide and the boron component to produce a particulate mix, and heating

the particulate mix to a temperature where the boron component becomes a liquefied boric oxide and impregnates the particle surface to produce a physically linked cluster of metal oxide and boric oxide, and the boric oxide is intimately supported by the metal oxide.

BRIEF DESCRIPTION OF THE DRAWINGS

Further features and advantages of the invention will become apparent from the following detailed description, taken in combination with the appended drawings, in which:

Fig. 1 is a process diagram for producing a metal boride precursor mixture according to a preferred embodiment of the invention;

Fig. 2a is a micrograph of a green carbon composite block (Block A) made using a metal boride precursor mixture according to a preferred embodiment of the invention, showing small TiO_2 particles and a B_2O_3 binder-like phase;

Fig. 2b is a micrograph of a green carbon composite block (Block B) made using finely mixed but separate TiO_2/B_2O_3 materials similar to those of EP 1 141 446 B1;

Fig. 3a is a photomicrograph of a carbon composite material microstructure of block A including a TiO_2/B_2O_3 precursor mixture according to the invention;

Fig. 3b)i) is a photomicrograph of a carbon composite material microstructure at low magnification of block B with dispersed boron oxide in the binder phase and no TiO_2 in proximity;

Fig. 3b)ii) is a photomicrograph of a carbon composite material microstructure at low magnification of block B with dispersed TiO_2 in the material and no boron oxide in proximity; and

Fig.4 is a photomicrograph of a transformed precursor mixture particle after several days of electrolysis in an aluminium reduction cell.

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 illustrates a block flow diagram according to one embodiment of a process for

the production of a metal boride precursor mixture of the invention. The precursor mixture includes a metal oxide and boric oxide.

The metal oxide of the invention may be selected from, but not necessarily limited to, titanium oxide (TiO_2), zirconium oxide (ZrO_2), hafnium oxide (HfO_2), vanadium oxide (V_2O_5 and V_2O_3), niobium oxide, tantalum oxide, chromium oxide and molybdenum oxide, and combinations thereof. In a preferred embodiment of the invention, the metal oxide is TiO_2 or ZrO_2, and in a particularly preferred embodiment is TiO_2.

The boric oxide of the precursor mixture in a preferred embodiment is produced from a boron component selected from the group consisting of *ortho*-boric acid (H_3BO_3) and *meta*-boric acid (HBO_2). Clearly, boric oxide (B_2O_3) may also be used as the boron component or starting material.

In a preferred embodiment, the metal boride precursor of the invention will have a metal oxide/boric oxide in a theoretical weight percentage needed to combine stoichiometrically under cell operations to form metal borides. Therefore, if the metal oxide is TiO_2, the amount of B_2O_3 needed to react to produce TiB_2 via Reaction 1 is 53 wt%/47 wt% TiO_2/B_2O_3 respectively. Although these weight% are preferred, small variations from these weight ratios are permissible. In particular, small excesses of the boron compound may compensate for volatilization which may still occur to a limited extent.

$$3\,TiO_2 + 3\,B_2O_3 + 10\,Al \longrightarrow 3TiB_2 + 5\,Al_2O_3 \qquad \textit{Reaction 1}$$

Where the starting boron component is not boric oxide, the weight ratio of the starting components will be different. For example, in the case of TiO_2/H_3BO_3, the ratio is 40/60 wt%/wt% respectively, that produces the required 53 wt%/47 wt% TiO_2/B_2O_3 in the metal boride precursor.

In a preferred embodiment, the metal oxide and the boron component are provided as particulate materials having an average particle size of less than 200 micron. In the first step of the process, there is a particulate mixing step 10, where the two starting materials are mechanically mixed to produce a particulate mix. In a preferred embodiment, the metal oxide includes a high level of porosity into which the boron component may enter.

The second step of the process is a heating/baking step 20, wherein the particulate mix is heated progressively up to 600°C.

In one embodiment of the process to produce the metal boride precursor mixture of the invention, the temperature may be progressively increased in the following step-wise manner:

a) from 25°C to 120°C; where the temperature of 120°C is maintained for 15 minutes – at this temperature any surface moisture is evaporated;

b) from 120°C to 400°C, where the temperature of 400°C is maintained for 15 minutes. At this temperature the reaction to produce the metal boride precursor may begin with the decomposition of the boron component and the evolution of water vapor; and

c) from 400°C to 600°C, where the temperature is maintained for more than 6 hours, or in a preferred embodiment for more than 20 hours. These longer time periods help to ensure: that the reaction goes to completion, that the B_2O_3 produced is in liquid form, and that the water vapor evolved in any decomposition reaction will have time to diffuse out of the metal boride precursor mixture. The skilled practitioner would understand that the precursor mixture can be heated in many ways to obtain a liquefied boron oxide, and up to at least about 450°C where boron oxide becomes liquid.

After the heating/baking step 20, the precursor mixture is solidified in a mold, by reducing the temperature to 25°C. In this solidifying step 30, the molten B_2O_3 that has been liquefied in the heating/baking step 20, will solidify and become intimately supported on the metal oxide particles e.g. TiO_2 crystals. In the case where TiO_2 particles include pores, the B_2O_3 may enter into these pores. Therefore, the metal oxide and the boric oxide produce a physical connection, and in a preferred embodiment, the boric oxide is found within pores of the particle surface of the metal oxide.

The solidified precursor mixture is removed from a mold, i.e. demolded. This is followed by a crushing step 40 and a pulverizing step 50. In a preferred embodiment the

crushing step 40 is performed in a jaw crusher. The pulverization step 50, is preferably performed in a rod mill or any apparatus with low heat production so as not to exceed the boron oxide melting point. The desired product size from pulverization 50, may be screened; and in a preferred embodiment, the metal boride precursor mixture has an average particle size less than 150 micron (-100 mesh).

The reactions which occur in heating/baking step 20 that produce the metal boride precursor mixture will now be discussed in greater detail by reference to the preferred embodiment in which the metal oxide is titanium oxide. If the starting boron compound is *ortho*-boric acid (H_3BO_3) a percentage of approximately 40% TiO_2 to 60% H_3BO_3 (by weight) or more exactly 39.3 wt% to 60.7 wt%, produces the appropriate weight% in the metal boride precursor (i.e. 53 wt%/47 wt% TiO_2/B_2O_3 respectively). However, to compensate for volatilization of the B_2O_3 in the final composite, as noted above, a percentage of 35% to 40% TiO_2 to 60% to 65% H_3BO_3 can be used. The heat treatment after mixing leads to the decomposition of H_3BO_3 following the approximate reaction below:

$$2H_3BO_3 \xrightarrow{170^\circ C} 2HBO_3 + 2H_2O \xrightarrow{300^\circ C} B_2O_3 + H_2O \quad \textbf{Reaction 2}$$

Thus water vapor is evolved at two temperatures, approximately 170°C and 300°C. Upon baking the metal oxide and the boron component, the global reaction from room temperature to 600°C is given by the expression:

$$H_3BO_3 \xrightarrow{600^\circ C} B_2O_3 + 2H_2O \quad \textbf{Reaction 3}$$

Therefore, if TiO_2/H_3BO_3 proportions of 40/60 wt%/wt% are used as starting materials, after completion of the Reaction 3 (above), the resulting proportions of TiO_2/B_2O_3 in the final mixture will be 53/47 wt%/wt% respectively. This final weight percentage of TiO_2/B_2O_3 equates to a theoretical loss of water of 26.5% from the starting TiO_2/H_3BO_3 mixture. This final weight percentage of TiO_2/H_3BO_3 corresponds to a molar ratio of 1:1, that is required to form one mole of TiB_2 from one mole of the precursor in Reaction 1 (previously defined).

At temperatures above 450°C, B_2O_3 is a liquid (B_2O_3 has a melting point of approximately 450°C) and wets the TiO_2 particles. It should be mentioned that metal oxides have higher melting points, in the case of TiO_2, over 1800°C, and would remain in a solid crystal form.

Under process conditions, the molten B_2O_3 coats and impregnates the TiO_2 particles. The B_2O_3 is thus intimately mixed and physically bound to the metal oxide, and produces a semi-solid. In an embodiment where the TiO_2 particles includes pores, these pores will permit better impregnation by B_2O_3 into the TiO_2, and so as to maximize the TiO_2/B_2O_3 contacts. It is believed that this intimate contact between TiO_2/B_2O_3 limits the B_2O_3/carbonaceous (binder or pitch) interaction.

It has been further found that a portion of the boron component can be $Na_2B_4O_7$. This has a melting point in excess of 700°C so cannot be used as the sole source, but as a portion of the boron component, it becomes mixed with the liquid boron oxide and coats and impregnates the TiO_2. As this compound is less volatile at higher temperatures than B_2O_3, the loss of boron can be controlled more effectively. Although not a preferred embodiment, the boron component could be solely $Na_2B_4O_7$ if higher processing temperatures are used. Similarly Borax (the hydrated form of $Na_2B_4O_7$) could be used in place of $Na_2B_4O_7$.

In order to minimize boron losses during baking, a small part of the boron oxide may be replaced by boron carbide (B_4C), which does not volatilize at normal baking temperatures. In small amounts, boron carbide will react with the titanium oxide and aluminium to form TiB_2.

The pulverized metal boride precursor mixture thus produced can now be made into carbon composite materials suitable for aluminium electrolysis cells.

The precursor is combined with a carbon material that may be graphite or calcined anthracite and a pitch binder. Preferably 10 to 40% by weight of the precursor mixture is used. More preferably 20 to 35% by weight of precursor mixture is used. The proportion of pitch to carbon material is adjusted to facilitate manufacture by normal means well known to the skilled worker.

In certain embodiments, titanium diboride may be added as well to the carbon composite mixture. This may be advantageous when a particular particle size or morphology combination is desired in the composite after it has been exposed to the cell environment, where this cannot be achieved by reaction of the precursor mixture alone. For example, combinations using from 10 to 40% by weight of precursor mixture with from 40 to 0% by weight of titanium diboride may be used.

In a typical composite material, 30% of the metal boride precursor mixture by weight is added to 51% graphite by weight, and combined with roughly 19% by weight of binder-pitch.

50 wt% of the metal boride precursor mixture has a particle size of -100 +200 mesh, while the other 50 wt% is -200 mesh.

The carbon composite mixtures produced may be further processed by conventional forming and baking operations to form carbon blocks typically used as the cathode of an electrolytic cell. Such formed components are generally baked at temperatures of about 1100 to 1200°C prior to use. Such temperatures are not sufficient to cause the carbon present to reduce the metal boride precursor mixture to the metal boride. The carbon composite mixture may also be used directly in the cell (as a "ramming mixture" to fix gaps around and between the carbon blocks, in which case the baking occurs during cell startup.

EXAMPLE 1 – Comparison of Carbon blocks.

Table 1 presents a comparison between composite carbon blocks made using two different metal boride precursor materials. Block A was prepared using the precursor mixture of the present invention while Block B used finely mixed but separate TiO_2/B_2O_3 materials (i.e. no thermal treatment and crushing prior to mixing with the carbonaceous components) similar to that of EP 1 141 446 B1.

Table 1

Components / Parameters	Block A C Composite made from material of the precursor mixture of the present invention	Block B C composite made of finely mixed separated oxide materials (Prior Art)
Oxide mixture		
TiO_2	15.9% -100 mesh *	15.9% -100 mesh *
H_3BO_3	14.1% -100 mesh	———
B_2O_3	———	7.05% -200 mesh 7.05% -100 to 200 mesh
Oxide treatment	See metal boride precursor mixture preparation	Mechanically mixed 5 minutes
Carbon composite		
Graphite	51% wt	51% wt
Binder-pitch	19% wt	19% wt
Oxides	15% -100 + 200 mesh 15% -200 mesh	30%
Mixing temperature	150 to 160°C	150 to 160°C
Mixing time	30 minutes	30 minutes
Forming method	Vibro-compacted	Vibro-compacted
Forming time	2 minutes	2 minutes
Heat treatment temperature	1150°C	1150°C
Heat Treatment ramp	approx. 25°C per hour	approx. 25°C per hour
Heat treatment time (including heating and cooling)	7 days	7 days
Time at 1150°C	40 hours	40 hours

* The TiO_2 particles used in this experiment are fine – 1 micron spheres loosely agglomerated in small clusters.

During mixing in both Block A and Block B pitch hardening was observed in both cases but to a much higher degree in Block B. In Block B, the binder had lost most of its fluidity at the end of the mixing step and formed small very hard spheres of material that

were very difficult to shape into a block form by standard procedures. The appearance of both Block A and Block B in their green (pre-baked) state is presented in Fig. 2a and 2b respectively. It can be seen that beside the upper face Block A in Fig. 2a, there are no signs of major imperfections while there appears to be porosity observed in Block B (Fig. 2b).

Not wishing to be bound by any theory, it is believed that the hardening of the binder pitch during mixing is presumably due to pitch-B_2O_3 contacts at elevated temperatures. In fact, B_2O_3 is an acid compound known for its ability to catalyze organic reactions (Kirk-Othmer *Encyclopedia of Chemical Technology,* vol. 4, 5th Edition, John Wiley and Sons, pg. 249). This has a consequence of a rapid polymerization of the medium length carbonaceous chains into longer less mobile ones which may in some way explain the loss of fluidity at the mixing step. After baking, both carbon composite materials were examined. It was observed that Block B prepared from the finely mixed separated oxide materials included important macro-porosity.

Table 2 presents some properties of the Blocks A and B measured after baking (in Table 2, S.D. is the standard deviation of the average values).

Table 2 - Properties of Blocks A and B after baking (three samples)

Material	Bulk density (g/cm^3)		Electrical resistivity ($\mu\Omega$ m)		Compressive strength (MPa)	
	Average	S.D.	Average	S.D.	Average	S.D.
A	1,7	0,004	58,0	3,28	23,4	2,81
B	1,7	0,002	74,5	2,19	28,5	1,12

Both blocks A and B have similar bulk densities and identical nominal compositions, this means that both blocks also have very similar levels of porosity after baking. The room temperature compressive strength of Block B was somewhat superior to that of Block A. This is believed to be due to the different room temperature microstructures arising from the presence of separate "glassy" B_2O_3 throughout that may improve room temperature strength. Note however that this may also result in lower mechanical strength at higher temperature since B_2O_3 will then be in its liquid state.

We see that Block B exhibits a much higher electrical resistivity than Block A. Electrical resistivity is a property that depends mostly on the nature of the raw materials and the material microstructure. Both materials have the same nominal composition and exhibit similar porosity, thus the difference is mostly due to the microstructure. In Block B the presence of a large fraction of B_2O_3 within the conductive binder phase is believed to act as an insulator and thus to considerably lower the ability of the latter to conduct electricity. Because electrical conductivity is a major property of the cathode block, this is one of the most important drawbacks of using a dry-mixed oxide.

Figs. 3a, 3b)i) and 3b)ii) represent an overview of material microstructure of Blocks A (Figure 3a) and B (Figures 3b(i) and (ii)). In Fig. 3b(i) the B_2O_3 is found dispersed in the pitch phase with no TiO_2 particles in the proximity. In Fig. 3b(ii) the TiO_2 is dispersed in the carbon mixture and we see that there are no boron oxides particles in the vicinity of the TiO_2.

On the other hand, B_2O_3 is almost always found surrounding the TiO_2 particles in Block A. In Block A as seen in Fig. 3a, instead of being spread inside the matrix, the oxide remains mostly located within clusters, and this is presumed to enable the formation of a continuous carbon network. This carbon network eventually provides the composite material of the present invention with a higher electrical conductivity.

The use of the metal boride precursor mixture of the invention in the carbon composite material has proven to be efficient in producing *in situ* TiB_2. Fig. 4 is a photomicrograph of a transformed precursor mixture particle after several days of electrolysis in an aluminium reduction cell. The micrograph shows TiB_2 particles in a matrix of alumina, which is a side product of the transformation reaction. Carbon, which is a component of the material, is also found in the vicinity of the TiB_2 particles. Observations both from laboratory specimens and samples from industrial sized cell cathodes show that TiB_2 may be formed quickly at the material surface by a reaction with metal aluminium. However, TiB_2 was also observed deep beneath the surface of the block after 200 days in a reduction cell. This may be by a reaction with the aluminium dissolved in the bath and transported through the cathode.

The metal boride precursor mixture, the carbon composite material produced from the metal boride precursor mixture and the process for producing the metal boride precursor mixture clearly offer the potential of greatly lower fabrication costs of the materials while avoiding problems encountered when simple mechanical mixtures of the components are used.

The embodiment(s) of the invention described above is(are) intended to be exemplary only. The scope of the invention is therefore intended to be limited solely by the scope of the appended claims.

CLAIMS:

1. A metal boride precursor mixture comprising:

a metal oxide, and

boric oxide (B_2O_3),

wherein the metal oxide and the boric oxide are physically linked in clusters and the boric oxide is intimately supported by the metal oxide.

2. The mixture of claim 1, wherein the metal oxide comprises a particle structure with pores and the boric oxide is found within the pores.

3. The mixture of claim 1 or 2, wherein the metal oxide is TiO_2.

4. The mixture of claim 3, wherein the weight percentage of TiO_2/B_2O_3 is 55-51 wt% TiO_2/45-49 wt% B_2O_3.

5. The mixture of claim 3 or 4, wherein the weight percentage of TiO_2/B_2O_3 is 53 wt% TiO_2/47 wt% B_2O_3.

6. The mixture of any one of claims 1 to 5, comprising an average particle size distribution less than 150 micron.

7. A carbon composite material for use in an aluminium electrolysis cell as at least one of a cathode and a cell wall material, the composite material comprising:

a carbonaceous component, and

a metal boride precursor mixture comprising

a metal oxide, and

boric oxide,

wherein the metal oxide and the boric oxide are physically linked in clusters and the boric oxide is intimately supported by the metal oxide.

8. The composite of claim 7, wherein the metal oxide comprises a particle surface with pores and the boric oxide is found within the pores.

9. The composite of claim 7 or 8, wherein the carbonaceous component is a mixture of graphite or calcined anthracite and pitch.

10. The composite of claim 9, comprising a composition of 10 to 40 wt% metal boride precursor mixture.

11. The composite of claim 10, comprising titanium diboride.

12. A carbon block component produced with the carbon composite material defined in any one of claims 7 to 11.

13. A process for producing a metal boride precursor mixture comprising steps of:

providing a metal oxide wherein the metal oxide has a particle surface

providing a boron component;

mechanically mixing the metal oxide and the boron component to produce a particulate mix, and

heating the particulate mix to a temperature where the boron component becomes a liquefied boric oxide and impregnates the particle surface to produce a physically linked cluster of metal oxide and boric oxide, and the boric oxide is intimately supported by the metal oxide.

14. The process of claim 13, wherein the boron component is selected from the group consisting of *ortho*-boric acid (H_3BO_3), *meta*-boric acid (HBO_2), and boric oxide (B_2O_3).

15. The process of claim 13, wherein the boron component is *ortho*-boric acid (H_3BO_3).

16. The process of claim 15, wherein the *ortho*-boric acid (H_3BO_3) upon heating decomposes to the liquefied boric oxide (B_2O_3) and water.

17. The process of claim 13, further comprising solidifying the boric oxide of the cluster.

18. The process of claim 13, wherein the heating is by a progressive increase of temperature of the particulate mix to greater than 450°C.

19. The process of claim 17, wherein the temperature does not exceed 600°C.

AMENDED CLAIMS
received by the International Bureau on 20 March 2008 (20.03.2008)

1. A metal boride precursor mixture comprising:

a metal oxide, and

boric oxide (B_2O_3),

wherein the metal oxide and the boric oxide are physically linked in clusters and the boric oxide is intimately supported by the metal oxide,

wherein the metal oxide comprises a particle structure with pores and the boric oxide is found within the pores.

2. The mixture of claim 1, wherein the metal oxide is TiO_2.

3. The mixture of claim 2, wherein the weight percentage of TiO_2/B_2O_3 is 55-51 wt% TiO_2/45-49 wt% B_2O_3.

4. The mixture of claim 2 or 3, wherein the weight percentage of TiO_2/B_2O_3 is 53 wt% TiO_2/47 wt% B_2O_3.

5. The mixture of any one of claims 1 to 4, comprising an average particle size distribution less than 150 micron.

6. A carbon composite material for use in an aluminium electrolysis cell as at least one of a cathode and a cell wall material, the composite material comprising:

a carbonaceous component, and

a metal boride precursor mixture comprising

a metal oxide, and

boric oxide,

wherein the metal oxide and the boric oxide are physically linked in clusters and the boric oxide is intimately supported by the metal oxide,

wherein the metal oxide comprises a particle surface with pores and the boric oxide is found within the pores.

7. The composite of claim 6, wherein the carbonaceous component is a mixture of graphite or calcined anthracite and pitch.

8. The composite of claim 7, comprising a composition of 10 to 40 wt% metal boride precursor mixture.

9. The composite of claim 8, comprising titanium diboride.

10. A carbon block component produced with the carbon composite material defined in any one of claims 6 to 9.

11. A process for producing a metal boride precursor mixture comprising steps of:

providing a metal oxide wherein the metal oxide has a particle surface

providing a boron component;

mechanically mixing the metal oxide and the boron component to produce a particulate mix, and

heating the particulate mix to a temperature where the boron component becomes a liquefied boric oxide and impregnates the particle surface to produce a physically linked cluster of metal oxide and boric oxide, and the boric oxide is intimately supported by the metal oxide.

12. The process of claim 11, wherein the boron component is selected from the group consisting of *ortho*-boric acid (H_3BO_3), *meta*-boric acid (HBO_2), and boric oxide (B_2O_3).

13. The process of claim 11, wherein the boron component is *ortho*-boric acid (H_3BO_3).

14. The process of claim 13, wherein the *ortho*-boric acid (H_3BO_3) upon heating decomposes to the liquefied boric oxide (B_2O_3) and water.

15. The process of claim 11, further comprising solidifying the boric oxide of the cluster.

16. The process of claim 11, wherein the heating is by a progressive increase of temperature of the particulate mix to greater than 450°C.

17. The process of claim 15, wherein the temperature does not exceed 600°C.

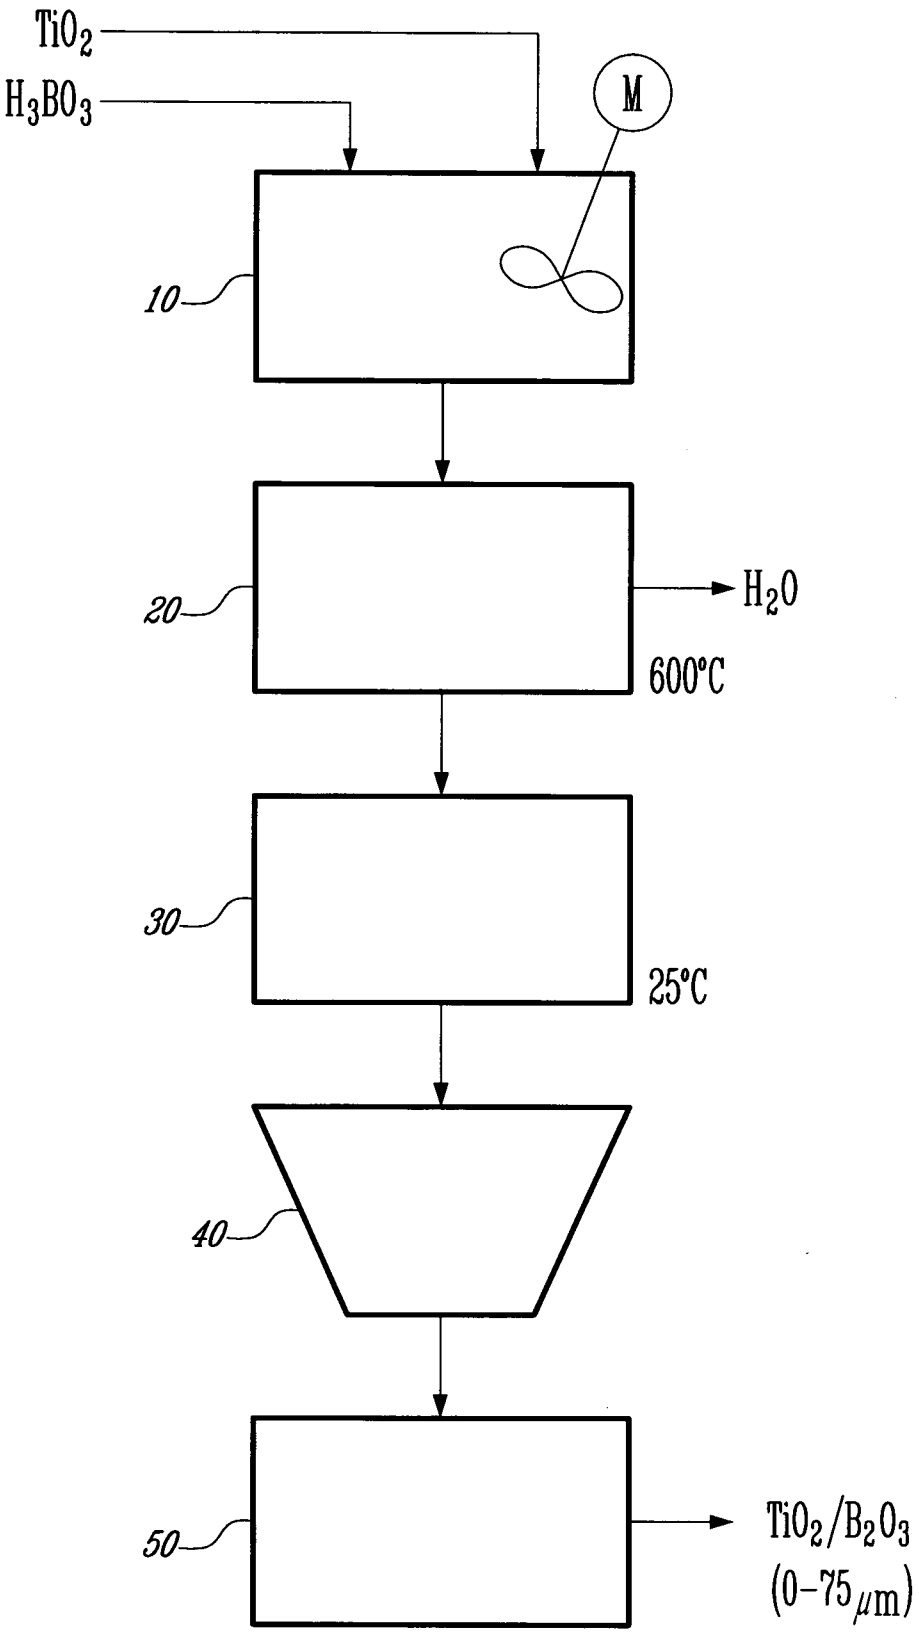


Fig. 1

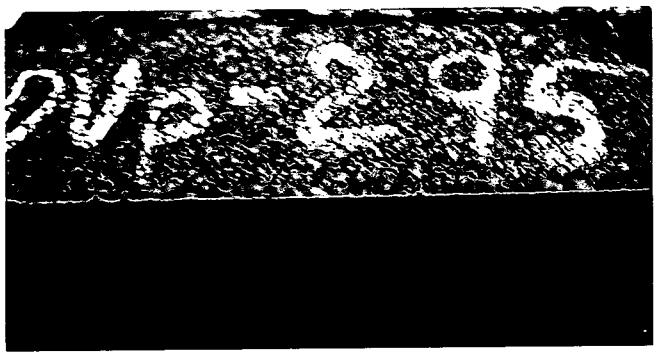


FIG_2a

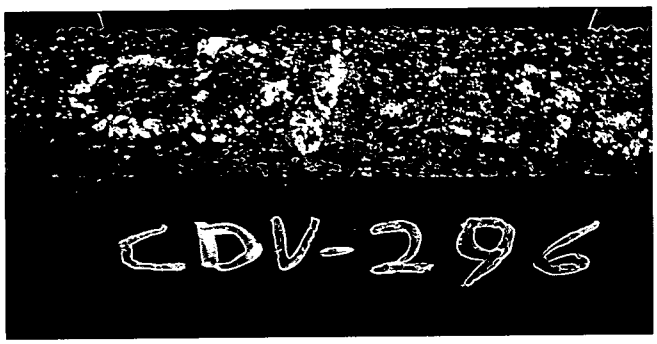


FIG_2b

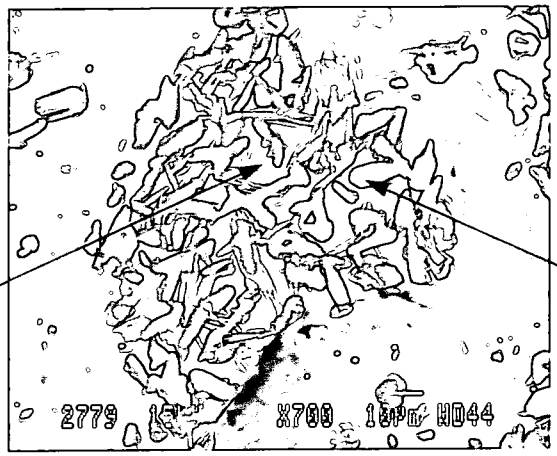


FIG_3a

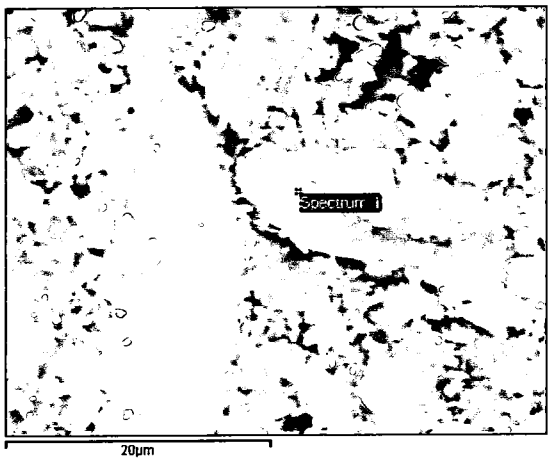


FIG_3b)i)

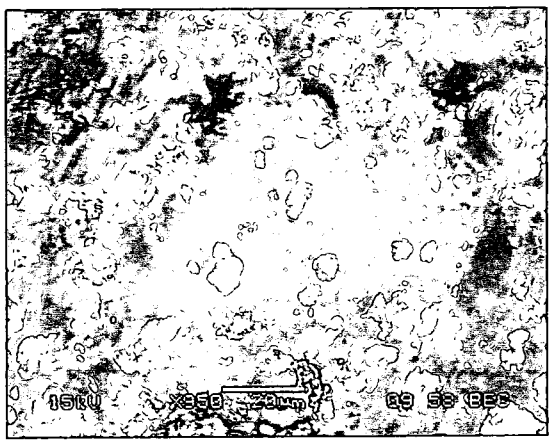


FIG_3b)ii)

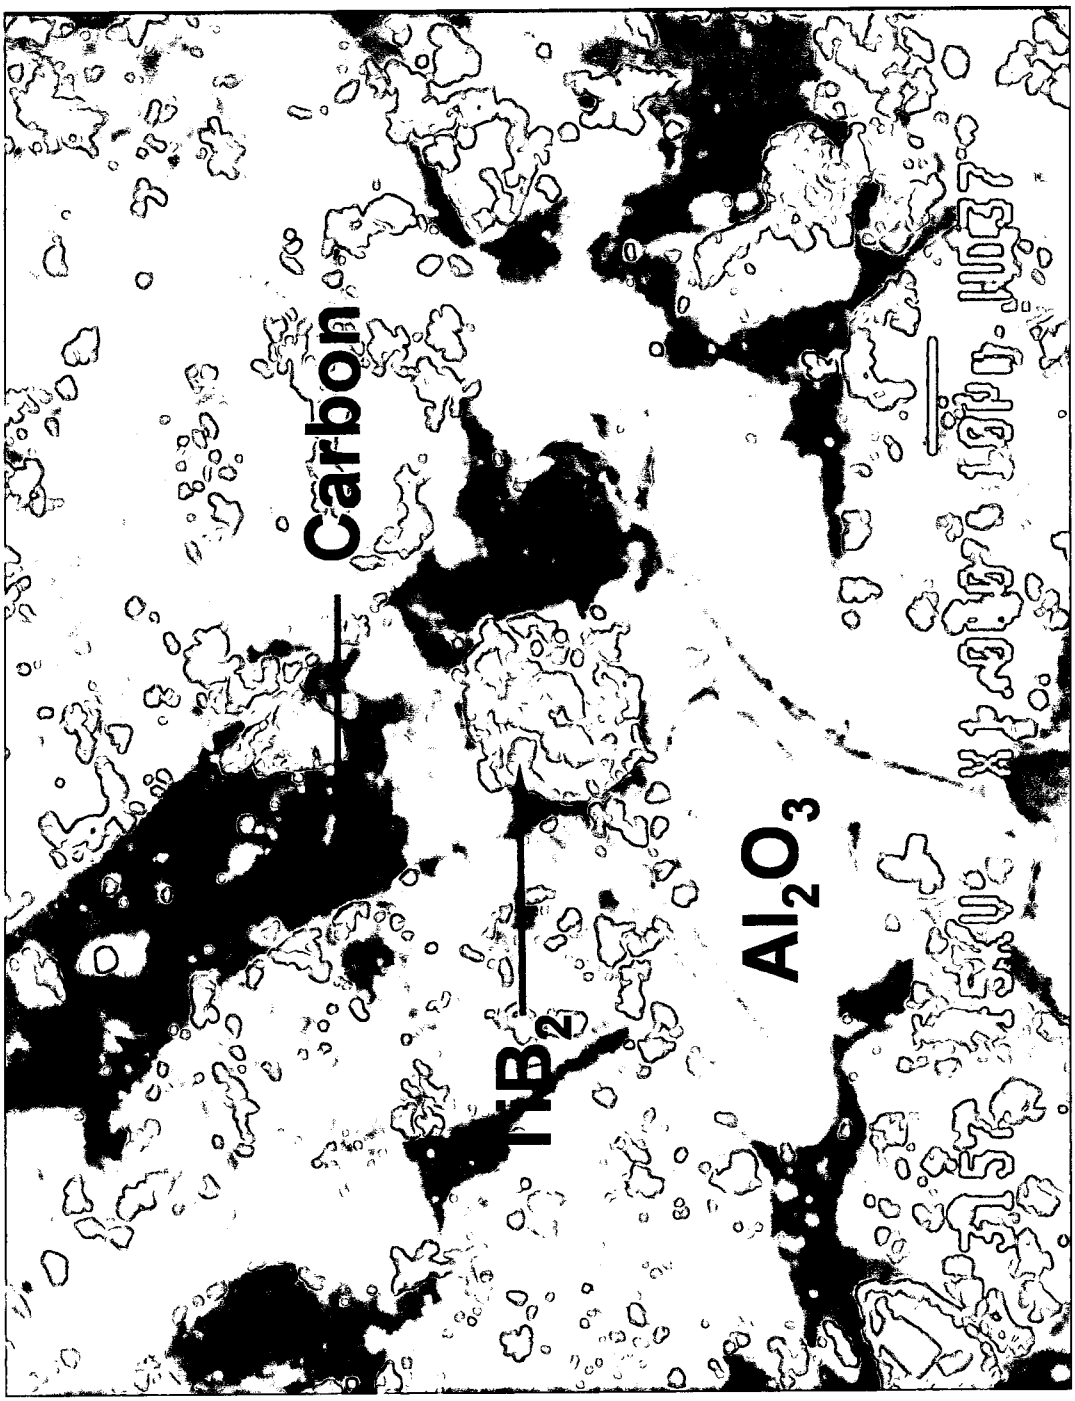


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2007/001951

A. CLASSIFICATION OF SUBJECT MATTER
IPC: ***C01B 35/04*** (2006.01) , ***C01B 35/10*** (2006.01) , ***C01G 23/047*** (2006.01) , ***C25C 3/08*** (2006.01)
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C01B 35/04 (2006.01) , C01B 35/10 (2006.01) , C01G 23/047 (2006.01) , C25C 3/08 (2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)
Delphion, Canadian Patent Database, Scopus, Google (precursor, metal boride, boride, oxide, metal oxide, titanium, intimate, boric, borate, boride, mixture)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	EP 0 115 702 A2 (ALCAN INTERNATIONAL LIMITED) 15 August 1984 (1984-08-05) Abstract, Pages 6-12	1, 3-6 7, 9-12
A	EP 0115 745 A1 (ELTECH SYSTEMS CORPORATION) 15 August 1984 (1984-08-15) Whole Document	1-19
A	US 5 160 698 (KHAZI ET AL.) 03 November 1992 (1992-11-03) Whole Document	1-19
A	US 6 001 236 (DE NORA ET AL.) 14 December 1999 (1999-12-14) Whole Document	1-19
Y	EP 1 141 446 A1 (ALCAN INTERNATIONAL LIMITED) 10 October 2001 (2001-10-10) Abstract, Paragraphs [0015], [0017], [0039]	7, 9-12

[ ] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
January 21, 2008 (05-12-2007)	21 January 2008 (21-01-2008)

Name and mailing address of the ISA/CA	Authorized officer
Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001-819-953-2476	Stewart Parsons 819- 997-4378

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2007/001951

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
EP0115702A2	15-08-1984	AU570023B B2	03-03-1988
		AU2296183 A	05-07-1984
		BR8307267 A	07-08-1984
		CA1328284 C	05-04-1994
		DE3381996D D1	20-12-1990
		ES528517D D0	16-05-1985
		JP1675389C C	26-06-1992
		NO166784B B	27-05-1991
		US4500643 A	19-02-1985
EP0115745A1	15-08-1984	AT33378T T	15-04-1988
		AU570024B B2	03-03-1988
		AU2299483 A	05-07-1984
		BR8307255 A	07-08-1984
		CA1220319 A1	14-04-1987
		DE3376207D D1	11-05-1988
		ES528542D D0	01-06-1986
		JP1795729C C	28-10-1993
		NO159994B B	21-11-1988
		US4595545 A	17-06-1986
US5160698	03-11-1992	WO9301132 A1	21-01-1993
US6001236	1999-12-14	AU664475B B2	16-11-1995
		AU672396B B2	03-10-1996
		AU677777B B2	08-05-1997
		AU3950993 A	08-11-1993
		AU4525393 A	04-01-1994
		BR9306538 A	15-09-1998
		CA2131287 A1	14-10-1993
		CA2131288 A1	14-10-1993
		CA2137816 A1	23-12-1993
		DE69319721D D1	20-08-1998
		DE69319721T T2	25-03-1999
		DE69325815D D1	02-09-1999
		DE69325815T T2	17-02-2000
		DE69327095D D1	30-12-1999
		DE69327095T T2	27-04-2000
EP1141446A1	10-10-2001	AU762779B B2	03-07-2003
		AU1144500 A	05-06-2000
		CA2350814 A1	25-05-2000
		CN1195900C C	06-04-2005
		IS5937 A	09-05-2001
		NO20012391 A	16-07-2001
		NZ511514 A	29-08-2003
		RU2232211 C2	10-07-2004
		US6649040 B1	18-11-2003
		WO0029644 A1	25-05-2000