



BD



200802400

16

SPOOR & FISHER

FORM P 8

(To be lodged in duplicate)

REPUBLIC OF SOUTH AFRICA
PATENTS ACT, 1978**PUBLICATION PARTICULARS AND ABSTRACT**

(Section 32(3)(a) – Regulation 22(1)(g) and 31)

OFFICIAL APPLICATION NO

LODGING DATE

ACCEPTANCE DATE

21st 01. 2008/02400

22 14 March 2008

43 11-02-2009

INTERNATIONAL CLASSIFICATION

NOT FOR PUBLICATION

51 D21C

CLASSIFIED BY WIPO

FULL NAMES OF APPLICANT

71 LIGNOBOOST AB

FULL NAMES OF INVENTORS

72 1 OHMAN, FREDRIK
2. THELIANDER, HANS
3. NORGREN, MAGNUS
4 TOMANI, PER
5 AXEGÅRD, PETER

EARLIEST PRIORITY CLAIMED

COUNTRY

NUMBER

DATE

33 SE

31 0402437-8

32 7 OCT 2004

TITLE OF INVENTION

54 METHOD FOR SEPARATING LIGNIN FROM A LIGNIN CONTAINING LIQUID/SLURRY

57 ABSTRACT (NOT MORE THAN 150 WORDS)

NUMBER OF SHEETS


13

If no classification is finished, Form P 9 should accompany this form
The figure of the drawing to which the abstract refers is attached



ABSTRACT

The present invention provides a method for precipitating (separation) of lignin, using small amounts of acidifying agents, whereby a lignin product or an intermediate lignin product is obtained which can be used as fuel or chemical feed stock (or as a chemical or a raw material for further refining), from a lignin containing liquid/slurry, such as black liquor. The present invention also provides a method for separation of lignin from a lignin containing liquid/slurry, such as black liquor, whereby a more pure lignin is obtained. The present invention also provides a lignin product or an intermediate lignin product obtainable by the above methods. The present invention also provides use, preferably for the production of heat or for use as chemical, of said lignin product or intermediate lignin product.

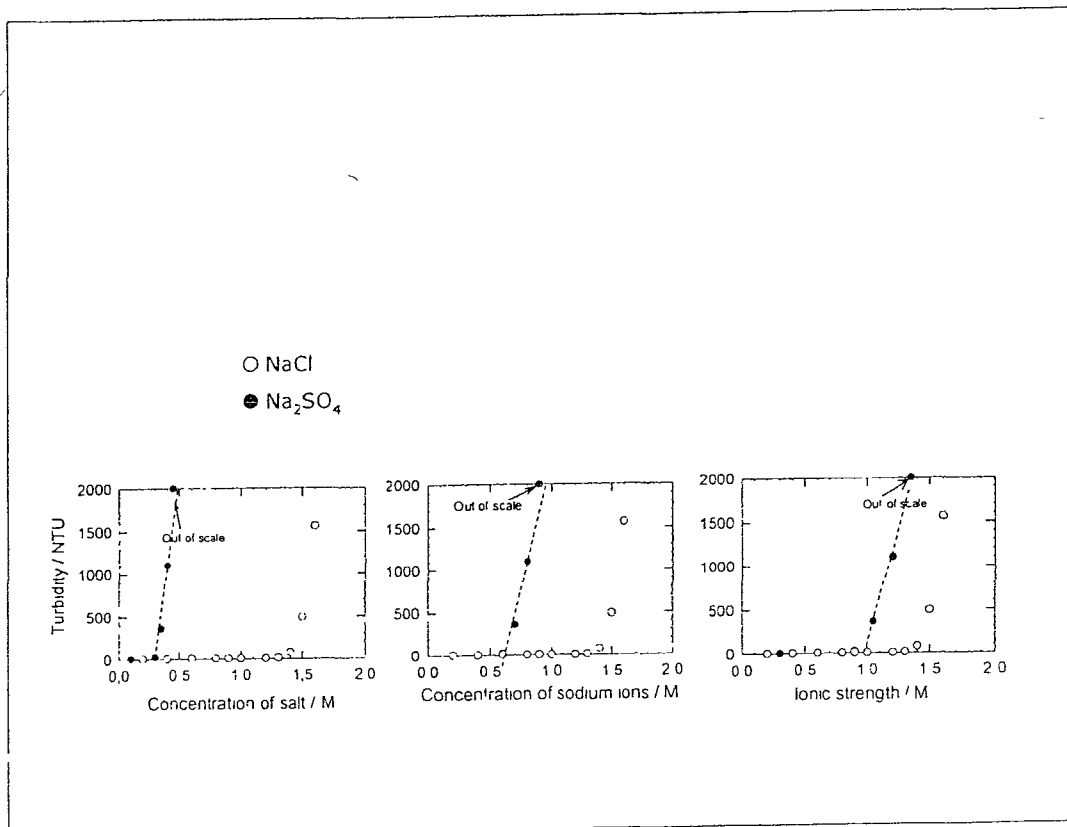



2008/02400

This invention concerns the technical field of lignin separation. In particular the present invention relates to a method for lignin separation from a lignin containing liquid/slurry, such as process liquors in a mill containing lignin, preferably black liquor

5 Further the invention relates to lignin products obtainable by the above mentioned method and use of said products

Background

In a modern, energy-optimized pulp mill, there is a surplus of energy. With today's process, bark can be exported while the remaining energy surplus, in the form of mixtures comprising other burnable residues, is burned in the recovery boiler, with a relatively low efficiency with regard to electricity production. There is also often a problem that the heat transfer capacity in the recovery boiler is a narrow sector, which limits the production of pulp in the mill. The recovery boiler is the most expensive (instrument) unit in the pulp mill.

Separation of lignin from black liquor is an interesting solution to these problems. In this way, the energy surplus can be withdrawn from the process in the form of a solid biofuel and can be exported to e.g. a power station, where the fuel can be used more efficiently than in the recovery boiler of the pulp mill. This lignin is also a valuable material for production of "green chemicals". Further, lignin extraction leaves a black liquor for combustion with a lower thermal value, which in turn leads to a lower load on the recovery boiler. This gives in a short term perspective possibilities for increased pulp production. In the long perspective lower instrument cost for the recovery boiler is expected.

There are several possible procedures for such a separation, and industrial applications have been known for a long time. Already in 1944, Tomlinson and Tomlinson Jr were granted a patent (US Patent 664811) for improvements to such a method. The separation method used today is to acidify the black liquor so that the lignin is precipitated in the form of a salt. The solid phase is separated from the liquor and can thereafter be cleaned or modified. There are industrial applications in operation today where lignin is separated from black liquor for use as special chemicals. One example of such a process is the precipitation of lignin from black liquor by acidification with carbon dioxide. The suspension is taken to a storage vessel for conditioning of the precipitate after which the solid lignin is separated and washed (with acidic wash water) on a band filter, and is finally processed to the desired state.

35 However, the present methods make use of high amounts of acidifying chemicals for separating lignin, which in turn may be used for fuel. Such procedures are thus very expensive and it would accordingly be of great benefit if it would be possible to

reduce the amount of acidifying chemicals necessary for separating lignin. Accordingly, there is a need for a method where lignin can be separated using small amounts of acidifying chemicals, e.g. sulphuric acid or carbon dioxide

5 Summary of the invention

The present invention solves one or more of the above problems by providing according to a first aspect a method for precipitating (separation) of lignin, using small amounts of acidifying agents, whereby lignin is obtained which can be used as fuel (or as a chemical feed stock; or as a chemical or a raw material for further refining), from a lignin
10 containing liquid/slurry, such as black liquor, comprising the following steps:

- a) addition of one or more compounds comprising sulphate or sulphate ions, or a mixture comprising said compound, to said liquid/slurry,
- b) adjustment of the pH level of said liquid/slurry by acidifying, and
15 c) dewatering of said liquid/slurry whereby a lignin product or an intermediate lignin product is obtained.

In this above way lignin is separated more efficiently from e.g. black liquor and the filterability increases in the liquid where the precipitated lignin earlier was present

The present invention also provides according to a second aspect a method for
20 separation of lignin from a lignin containing liquid/slurry, such as black liquor, comprising the following steps:


- i) precipitating of lignin by the adding of one or more compounds comprising sulphate or sulphate ions, or a mixture comprising said compound, to said liquid/slurry, and by acidifying said liquid/slurry, and
25 thereupon dewatering,
- ii) suspending the lignin filter cake whereupon a second suspension is obtained and adjusting the pH level to approximately the pH level of the washing water,
- iii) dewatering of the second suspension,
- 30 iv) addition of washing water and performing a displacement washing at more or less constant conditions without any dramatic gradients in the pH, and
- v) dewatering of the filter cake produced in step iv) into a high dryness and displacement of the remaining washing liquid in said filter cake, whereby a
35 lignin product or an intermediate lignin product is obtained.

By using said method of the second aspect a more pure lignin is obtained. The present invention also provides according to a third aspect a lignin product or an intermediate

lignin product obtainable by the method according to the first aspect. The present invention also provides according to a fourth aspect a lignin product or an intermediate lignin product obtainable by the method according to the second aspect. The present invention also provides according to a fifth aspect use, preferably for the production of heat or as chemical feed stock, of the lignin product or the intermediate lignin product of the third or fourth aspects.

The present invention is based upon that it has been found that sulphate ions precipitate/coagulate lignin unexpectedly efficiently compared with e.g. chloride. The previously available knowledge according to the so-called Hofmeister series - lyotropic series - (F Hofmeister 1888) says that chloride precipitates proteins from albumen better than sulphate


The anion series according to Hofmeister:



15

From above it is evident according to Hofmeister that chloride precipitates proteins from albumen better than sulphate

The cation series according to Hofmeister:



20

Detailed description of the invention

It is intended throughout the present description that the expression "lignin containing liquid/slurry" is any liquid or slurry, which contains lignin. This liquid or slurry may be a process liquor, containing lignin, in a mill, preferably said liquid or slurry is a black liquor

25

It is intended throughout the present description that the expression "compound comprising sulphate or a sulphate ion" embraces any compound comprising sulphate or a sulphate ion. This compound may be Na-, K-, (Al-), Ca-, Mg-, Fe- or organic sulfate, CaSO_4 , K_2SO_4 , Al_2SO_4 , iron sulfates or MgSO_4 . Said compound may also be comprised in recovery boiler ashes, which is a mixture, or it may be essentially pure Na_2SO_4 .

30

It is intended throughout the present description that the expression "acidifying" embraces any means for acidifying the lignin containing liquid/slurry, such as black liquor. Preferably the acidifying is performed by adding $\text{SO}_2(\text{g})$, organic acids, HCl , HNO_3 , carbon dioxide or sulphuric acid (in the form of fresh sulfuric acid or a so called "spent acid" from a chlorine dioxide generator) or mixtures thereof to said liquid/slurry (preferably black liquor) most preferred by adding carbon dioxide or sulphuric acid.

35

It is intended throughout the present description that the expression "dewatering" embraces any means for dewatering. Preferably the dewatering is performed by using centrifugation, a filter press apparatus, a band filter, a rotary filter, such as a drum filter, or a sedimentation tank, or similar equipment, most preferred a filter press apparatus is used.

5 According to a preferred embodiment of the first aspect of the invention the dewatering of step c) is performed in a filter press apparatus.

According to a preferred embodiment of the first aspect of the invention the addition of step a) is done by adding recovery boiler ashes, i.e. ashes emanating from a soda recovery unit, which is a steam generator combined with a smelting furnace for the utilization of the heat of combustion of the black liquor and the recovery of the greater part of its inorganic components, or Na_2SO_4 , CaSO_4 , K_2SO_4 , Al_2SO_4 , iron sulfates or MgSO_4 . Preferably Na_2SO_4 is used.

According to a preferred embodiment of the first aspect of the invention mixing is performed after the adjustment of the pH level in step b).

15 According to a preferred embodiment of the first aspect of the invention the pH level is adjusted to below approximately pH 9.5 in step b), preferably below approximately pH 6, most preferred the pH level is a pH from 1 to 4.

According to a preferred embodiment of the first aspect of the invention the pH level is adjusted whereby using CO_2 .

20 According to a preferred embodiment of the first aspect of the invention the temperature is varied from 20 to 100° C depending on the nature of the liquid/slurry containing lignin, such as black liquor.

According to a preferred embodiment of the first aspect of the invention the filtrate from step c) is re-circulated directly to a recovery system, preferably after re-alkalization.

25 According to a preferred embodiment of the second aspect of the invention the addition of step i) is done by adding recovery boiler ashes or Na_2SO_4 , CaSO_4 , K_2SO_4 , Al_2SO_4 , iron sulfates and/or MgSO_4 . Preferably Na_2SO_4 is used.

According to a preferred embodiment of the second aspect of the invention mixing is performed after the acidifying in step i)

30 According to a preferred embodiment of the second aspect of the invention the pH level is adjusted in step i) through acidifying whereby using CO_2 .

According to a preferred embodiment of the second aspect of the invention the temperature in step i) is varied from 20 to 100° C depending on the nature of the liquid/slurry containing lignin, such as black liquor.

35 According to a preferred embodiment of the second aspect of the invention the dewatering of step i) and/or step iii) is performed in a filter press apparatus where the filter

cake may be blown through by gas or a mixture of gases, preferably flue gases, air or vapor, most preferred air or overheated vapor, in order to dispose of the remaining lignin containing liquid/slurry such as black liquor (which is preferred).

According to a preferred embodiment of the second aspect of the invention the pH level is adjusted to below approximately pH 9.5 in step i), preferably below approximately pH 6, most preferred the pH level is a pH from 1 to 3.5.

According to a preferred embodiment of the second aspect of the invention the washing water has a pH level of below approximately pH 9.5, preferably below approximately pH 6, most preferred the pH level is a pH from 1 to 3.5.

According to a preferred embodiment of the second aspect of the invention the filter cake obtained in step i) is blown through by using gas or a mixture of gases, including e.g. flue gases, air and vapor (which preferably can be air or overheated vapor) before suspending said cake as set out in step ii).

According to a preferred embodiment of the second aspect of the invention the pH level adjustment is combined with an adjustment of the ion strength, preferably by using multivalent alkaline earth metal ions, most preferred calcium ions. In this preferred embodiment the lignin is stabilized during the washing, as set out above earlier in the preferred embodiment of the second aspect of the present invention, whereby a pH-decrease is combined with an adjustment of the ionic strength in the slurry stage, preferably with multivalent alkaline earth metal ions (e.g. calcium ions). At a given pH, a higher ionic strength in the suspension stage reduces the lignin yield losses. Here also the ionic strength and pH of the wash water essentially corresponds to the conditions in the slurry stage to avoid gradients during the washing process. A higher ionic strength in the slurry and in the wash water gives a stable lignin even at high pH-values. Besides making the washing easier, divalent calcium ions can be introduced into the lignin, which in the combustion of the lignin can bind sulfur in the form of calcium sulphate (Aarsrud et al 1990, WO 9006964).

According to a preferred embodiment of the second aspect of the invention the pH level adjustment combined with an adjustment of the ion strength corresponds to the pH level and ion strength of the washing liquid.

According to a preferred embodiment of the second aspect of the invention the filtrate from the first dewatering stage (step i) is re-circulated directly to a recovery system, preferably after re-alkalization.

According to a preferred embodiment of the second aspect of the invention the remaining washing liquor in the filter cake in step v) is removed with air or flue gases, preferably flue gases from a recovery boiler, a lime kiln or a bark boiler.

According to a preferred embodiment of the second aspect of the invention the washing liquor and a part of the filtrate from the second dewatering in step iii) is returned to the re-slurrying stage step ii) to further reduce the consumption of acid and water

Accordingly, one or more compounds comprising sulphate or a sulphate ion, or a mixture comprising said compound such as recovery boiler ashes, is added during step a) (or step i)) in the method according to the first aspect (or the method according to the second aspect) to increase the ionic strength in the lignin containing liquid/slurry, such as black liquor, and thus be able to precipitate with a lower acid consumption or alternatively achieve a greater lignin precipitation with the same amount of added acid. This is particularly interesting since the sulfate ion would, as indicated in the appended Figure 1, itself have an effect on the precipitation in addition to the fact that it increases the ionic strength. From a systems engineering perspective, it is to be expected that the sulfidity of the mill (the Na/S-balance) is influenced in a way which would require attention. Burkite precipitation in the black liquor evaporation would also be affected and the requirements for the handling of this material would increase. On the other hand, the results show that it would be possible to reduce both the investment costs (the filtration surface) and the operating costs (reduced CO₂-costs) for removing lignin from e.g. black liquor significantly.

Preferred features of each aspect of the invention are as for each of the other aspects *mutatis mutandis*. The prior art documents mentioned herein are incorporated to the fullest extent permitted by law. The invention is further described in the following examples in conjunction with the appended figure, which do not limit the scope of the invention in any way. Embodiments of the present invention are described in more detail with the aid of examples of embodiments and figure, the only purpose of which is to illustrate the invention and are in no way intended to limit its extent.

25

Short description of the figure

Fig. 1 shows results that suggest that sulfate is better at precipitating/coagulating lignin than expected according to the literature. Here, chloride and sulfate are compared.

30

Examples

Tests in laboratory, whereby studies of a separation of lignin have been performed, have shown positive results, in the form of both a yield increase and a better filterability. In the test, black liquor from Varo Mill was used (30% DS, Dry Substance). To two liters of this liquor, 100g Na₂SO₄ was added – which should be a reasonable quantity if it is assumed that 30% of the black liquor flow is treated in the lignin precipitation stage and that all the recovery boiler ashes are added to this flow. The black liquor was acidified with

35

CO₂ to a pH of ca 9.6 at 80°C. After the acidification, the slurry was allowed to stand with continuous stirring for 30 minutes, after which it was filtered. A reference test without the addition of Na₂SO₄ was carried out in the same way.

For these two tests (with and without Na₂SO₄-addition), the yield in the precipitation stage was determined (according to previously known methods). With Na₂SO₄-addition, the yield increased by 6.3 percentage points (from 60.5 to 66.8 % at the same precipitation-pH of ca. 9.6). The filterability, expressed as the specific filter resistance, was also improved dramatically from 1.6 10¹⁰ for the reference test to 6.9 10⁸ with the addition of Na₂SO₄.

10

Various embodiments of the present invention have been described above but a person skilled in the art realizes further minor alterations, which would fall into the scope of the present invention. The breadth and scope of the present invention should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents. For example, any of the above-noted methods can be combined with other known methods e.g. for separating lignin from a lignin containing liquid/slurry, such as black liquor. Other aspects, advantages and modifications within the scope of the invention will be apparent to those skilled in the art to which the invention pertains

20



CLAIMS

- 1 Method for separation of lignin from a lignin containing liquid/slurry, comprising the following steps.
 - i) precipitating of lignin by the adding of one or more compounds comprising sulphate or sulphate ions, or a mixture comprising said compound, to said liquid/slurry, and by acidifying said liquid/slurry, and thereupon dewatering,
 - ii) suspending the lignin filter cake whereupon a second suspension is obtained and adjusting the pH level to approximately the pH level of the washing water,
 - iii) dewatering of the second suspension,
 - iv) addition of washing water and performing a displacement washing at more or less constant conditions without any dramatic gradients in the pH, and
 - v) dewatering of the filter cake produced in step iv) into a high dryness and displacement of the remaining washing liquid in said filter cake, whereby a lignin product or an intermediate lignin product is obtained.
2. A method according to claim 1 wherein the lignin containing liquid/slurry is black liquor.
3. A method according to claim 1 or claim 2 wherein the addition of step i) is done by adding recovery boiler ashes or Na_2SO_4 , CaSO_4 , K_2SO_4 , Al_2SO_4 , iron sulfates and/or MgSO_4 .
4. A method according to claim 3 wherein the addition of step i) is done by adding Na_2SO_4 .
5. A method according to claim 1 or claim 2 wherein mixing is performed after the acidifying in step i)
6. A method according to claim 1 or claim 2 wherein the pH level is adjusted in step i) through acidifying whereby using CO_2 .
7. A method according to claim 1 or claim 2 wherein the temperature in step i) is varied from 20 to 100° C depending on the nature of the lignin containing liquid/slurry
8. A method according to claim 1 or claim 2 wherein the dewatering of step i) and/or step iii) is performed in a filter press apparatus where the filter cake is blown through by gas or a mixture of gases, in order to dispose of the remaining lignin containing liquid/slurry.
9. A method according to claim 9 wherein the filter cake is blown through by flue gases, air or vapor.

- 10 A method according to claim 8 wherein the filter cake is blown through by air or overheated vapour
- 11 A method according to claim 1 or claim 2 wherein the pH level is adjusted to below approximately pH 9.5 in step i).
- 12 A method according to claim 11 wherein the pH level is adjusted to below approximately pH 6 in step i).
13. A method according to claim 12 wherein the pH level is a pH from 1 to 3.5.
14. A method according to claim 1 or claim 2 wherein the washing water has a pH level of below approximately pH 9.5
- 15 A method according to claim 14 wherein the washing water has a pH level of below approximately pH 6.
16. A method according to claim 15 wherein the pH level is a pH from 1 to 3.5.
17. A method according to claim 1 or claim 2 wherein the filter cake obtained in step i) is blown through by using gas or a mixture of gases, before suspending said cake as set out in step ii).
18. A method according to claim 17 wherein the filter cake obtained in step i) is blown through by using flue gases, air or vapor.
19. A method according to claim 17 wherein the filter cake obtained in step i) is blown through by using air or overheated vapor
- 20 A method according to claim 1 or claim 2 wherein the pH level adjustment is combined with an adjustment of the ion strength.
- 21 A method according to claim 20 wherein the adjustment of the ion strength is performed by using multivalent alkaline earth metal ions.
- 22 A method according to claim 21 wherein the multivalent alkaline earth metal ions are calcium ions.

23. A method according to any one of claims 20 – 22 wherein the pH level adjustment combined with an adjustment of the ion strength corresponds to the pH level and ion strength of the washing liquid.

24. A method according to claim 1 or claim 2 wherein the filtrate from the first dewatering stage step i) is re-circulated directly to a recovery system.

25. A method according to claim 24 wherein the filtrate from the first dewatering stage step i) is re-circulated directly to a recovery system after re-alkalization.

26. A method according to claim 1 or claim 2 wherein the remaining washing liquor in the filter cake in step v) is removed with air or flue gases.

27. A method according to claim 26 wherein the remaining washing liquor in the filter cake in step v) is removed with flue gases from a recovery boiler, a lime kiln or a bark boiler.

28. A method according to claim 1 or claim 2 wherein the washing liquor and a part of the filtrate from the second dewatering in step iii) is returned to the re-slurrying stage step ii) to further reduce the consumption of acid and water.

DATED THIS 14TH DAY OF MARCH 2008



SPOOR & FISHER
APPLICANT'S PATENT ATTORNEYS

