



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>3</sup>: H01L 23/28, 23/48, 33/00; H05B 33/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 80/01860 (43) International Publication Date: 4 September 1980 (04.09.80)</p>
<p>(21) International Application Number: PCT/US80/00204 (22) International Filing Date: 29 February 1980 (29.02.80) (31) Priority Application Number: 016,576 (32) Priority Date: 1 March 1979 (01.03.79) (33) Priority Country: US (71) Applicant: AMP INCORPORATED [US/US]; 3705 Paxton Street, Harrisburg, PA 17105 (US). (72) Inventors: HINTZE, William; 228 Allendale Way, Camp Hill, PA 17011 (US). SHIRK, Albert; 139 North Locust Street, Palmyra, PA 17078 (US). (74) Agents: SEITCHIK, Jay, L. et al.; AMP Incorporated, 3705 Paxton Street, Harrisburg, PA 17105 (US).</p>		<p>(81) Designated States: AT (European patent), CH (European patent), DE (European patent), FR (European patent), GB (European patent), JP, NL (European patent), SE (European patent).  <b>Published</b> <i>With international search report</i> <i>With amended claims</i></p>
<p>(54) Title: LIGHT EMITTING DIODE PANEL DISPLAY</p> <p>(57) Abstract</p> <p>Flat panel display (2) comprises a multiplicity of LED's (12) arranged in rows (16) and columns (14). First bus conductors (32) extend parallel to the rows and each of the LED's is connected to one of the first bus conductors. Second bus conductors (34) extend parallel to the columns and each LED is connected to one of the second bus conductors. The bus conductors are on the opposite surfaces (28), (30) of a film (26) and the LED's extend through openings (40) in the film. Contact with the LED's is achieved by tap conductors (42), (46) which extend from the bus conductors. A rigid grating (52) is mounted against the film and has open cells (58). Each LED extends into one of the cells and the internal surfaces of the cells reflect the light of the LED's.</p>		

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	LI	Liechtenstein
AU	Australia	LU	Luxembourg
BR	Brazil	MC	Monaco
CF	Central African Republic	MG	Madagascar
CG	Congo	MW	Malawi
CH	Switzerland	NL	Netherlands
CM	Cameroon	NO	Norway
DE	Germany, Federal Republic of	RO	Romania
DK	Denmark	SE	Sweden
FR	France	SN	Senegal
GA	Gabon	SU	Soviet Union
GB	United Kingdom	TD	Chad
HU	Hungary	TG	Togo
JP	Japan	US	United States of America
KP	Democratic People's Republic of Korea		

DESCRIPTIONLIGHT EMITTING DIODE PANEL DISPLAY

## Technical Field of the Invention:

5 This invention relates to display devices of the type comprising a multiplicity of LED's (light emitting diodes) mounted in side-by-side coplanar relationship and including first and second bus conductors which are in electrical contact with the LED's. The LED's are energized by driver circuits to cause selective LED's to emit light and display information on the panel.

## 10 Background of the Invention:

One common method used in the electronics industry to manufacture LED display devices is to provide first and second bus conductors on a ceramic substrate with the first bus conductors extending normally of the second bus conductors. The LED's are mounted on the  
15 ceramic substrate with each LED located between, or adjacent to, two parallel first bus conductors and adjacent to, or between, two parallel second bus conductors. The bus conductors are connected to the LED's by extremely fine wires which are bonded to the bus conductors and to the LED's. The bus conductors are connected to suitable driver circuits which supply the signals for energizing the LED's.  
20

The presently known manufacturing methods, such as the one described above for producing panel displays, result in relatively high production costs, since the conductors must be provided on a ceramic substrate, the LED's must be bonded or otherwise secured to  
25 the substrate in some way, and numerous wire bonding operations must be carried out to connect each LED to one of the first bus conductors and to one of the second bus conductors. The present invention is, in accordance with one aspect thereof, directed to the achievement of an LED panel which can be produced at lower cost than is possible



by presently known manufacturing methods.

In accordance with a further aspect of the invention, a light collimating means is provided for each LED in a panel. An individual LED produces only a minor amount of illumination and the light  
5 emitted is radiated in all directions from an energized LED. The viewer positioned in front of an LED panel, therefore, sees only a portion of the relatively minor amount of illumination produced by an individual LED. Furthermore, when information is displayed, an individual LED may be energized for only an extremely short time  
10 interval, a fact which further limits the usefulness of LED display panels. A light collimating means in accordance with the present invention has the effect of focusing the light emanating from individual LED's directly towards the viewer, and enhancing the clarity of the display.

15 Brief description of the Invention:

In accordance with the present invention, a flat panel display device is manufactured by providing a thin flexible insulating film with the first and second bus conductors on the oppositely facing surfaces thereof. The first bus conductors extend parallel to each  
20 other and are arranged in rows while the second bus conductors are arranged in parallel columns which extend normally of the rows. LED receiving openings are provided between adjacent rows and between adjacent columns. First and second tap conductors extend from the first and second bus conductors to each of the openings, the tap  
25 conductors being located on the first surface of the film.

Prior to assembly of the LED's to the film, a grating having cells therein arranged in accordance with the grid pattern of the display is placed against the second surface and secured to the  
30 second surface. The individual LED's are then inserted into the openings from the first surface of the film so that portions of each LED are surrounded by the sidewalls of a cell. When the LED's are inserted, portions of the film are flexed in the direction of insertion and the tap conductors are thereby brought into contact  
35 with the LED's. The grating serves physically to support the film and the sidewalls of the cells function as reflecting surfaces for the LED's when they are energized.



## Description of the Drawing Figures:

FIGURE 1 is a semi-diagrammatic perspective view of a display assembly in accordance with the invention.

5 FIGURE 2 is a fragmentary perspective view on an enlarged scale showing the grating exploded from the flexible circuit in which the LED's are contained.

FIGURE 3 is a fragmentary perspective view of a portion of the flexible circuit with the conductors exploded from the surfaces of the film.

10 FIGURE 4 is a fragmentary perspective view of a portion of the flexible circuit illustrating the manner in which the LED's are assembled to the LED sites; the grating is omitted from this view in the interest of clarity.

15 FIGURE 5 is a view taken along the lines 5-5 of Figure 4 but showing the grating spaced from the film.

FIGURE 6 is a view taken along the lines 6-6 of Figure 4 and showing the grating positioned against the surface of the film; this view also shows potting material in the cells of the grating and encapsulating the LED.

20 FIGURE 7 is a view taken along the lines 7-7 of Figure 6.

FIGURE 8 is a fragmentary top plan view of a portion of the assembly looking towards the exposed surface of the grating.

FIGURES 9 and 10 are perspective views of an LED.

25 FIGURE 11 is a view of a display assembly and a circuit board having conductors on its surface which are connected to the access conductors on the display assembly.

FIGURE 12 is a view similar to Figure 11 but showing the pasts exploded from each other.

## Best Mode of Practice of the Invention:

30 Referring first to Figures 9 and 10, a light emitting diode 12 comprises a rectangular block having oppositely facing anode and cathode surfaces 9, 11 respectively and laterally facing surfaces 13, 15. The cathode surface 9 is entirely metallized as indicated, while the anode surface 11 has a portion of its surface metallized  
35 so that it can be distinguished from the cathode surface.

The standard thickness of an LED is 0.2 mm, and the length along the edges of the surfaces 13, 15 is 0.3 mm.

When a voltage is applied across the surfaces 9, 11, light is produced in a plane indicated at 17, which is adjacent to and which



extends parallel to, the anode surface 11. The light is transmitted in all directions from this plane 17 and radiates from the LED through the surfaces 13, 15 and from those portions of the surface 11 which are not metallized. For maximum brightness, it is desirable to mount LED's in an orientation such that the surfaces 13 or 15 are in front of the viewer rather than the surface 11. As will be explained below, an LED display assembly in accordance with the present invention, supports the LED's such that the side surfaces 13, 15 are directed towards the viewer and are in the direct line of sight of the viewer.

Referring now to Figures 1-4, an LED display assembly 2 in accordance with the invention, may be generally rectangular having parallel sides 4, 6, and parallel ends 8, 10. A multiplicity of LED's 12 are contained in the assembly and are located in accordance with a grid pattern so that the LED's are arranged in columns 14 which extend between the ends 8, 10 and parallel spaced-apart rows 16 which extend between the sides 4, 6. The individual LED's are selectively energized by access conductors 18, 22 on projecting portions 20, 24 of a substrate film which is described below. The assembly 2 comprising the film 26 having the LED's 12 mounted therein and a grating 52 against which the film is mounted so that the individual LED's have portions thereof disposed in the cells 58 of the grating.

The film 26 is preferably of a somewhat flexible insulating material, such as polyimide, (Kapton), having a thickness of about 0.05 mm. Film 26 has a first surface 28 which is directed downwardly in Figure 3 and an upwardly directed second surface 30 and has first and second bus conductors 32, 34 on the surfaces 28, 30 respectively. These conductors can be provided on the surfaces of the film by conventional, known processes, such as a selective etching of a film-metal laminate. The conductors 32, 34 are preferably of copper and have a thickness of about 0.013 mm. The conductors may be produced on the film by sensitizing the surfaces of the film to the reception of copper deposited by an electroless process, depositing an extremely thin coating of electroless copper over the surfaces, and then building up the thickness of the copper by electrolytic deposition. Photo-lithographic and etching processes are employed to produce the conductor traces required and remove the unwanted copper. For improved contact with the LED's, a final thin coating of gold or tin may be applied to the conductors.

The individual LED-receiving sites 36 in the film 26 each comprise a pair of spaced-apart openings 40 in the film and a slit 38 extending between the openings. The openings and the slit thus define tongues or flaps 39, 41 which extend towards each other and which can be flexed upwardly as viewed in Figures 3 and 4 when an LED is inserted into an LED site as will be described below.

The first bus conductors 32 on surface 28 of film 26 merge with the access conductors 18 on the extension 20 of the film and these first bus conductors extend between the ends 8, 10 of the assembly with one bus conductor 32 located between adjacent columns of the LED sites 36. The second bus conductors 34 on the second surface 30 of the film merge with the access conductors 22 and extend between the sides 4 and 6 of the assembly 2 with one conductor 34 located between adjacent rows of LED-receiving sites 36. It will thus be apparent that each LED-receiving site 36 has associated therewith a crossing point of one of the first bus conductors and one of the second bus conductors. The individual LED's are electrically connected to the first and second bus conductors of the associated crossing point in a manner which will now be described.

As shown in Figure 3, each of the first bus conductors 32 has a plurality of integral tap conductors 42 extending laterally therefrom towards the individual LED receiving sites 36. These tap conductors conform generally in shape to the tongues 39 and extend to the slit 38 of the site. The second bus conductors 34 are provided with second tap conductors 46 on the downwardly facing first surface 28 of the film and which extend across the tongues 41 at the sites 36. The second tap conductors 46 extend through the film 26 to the second bus conductors 34 as shown by the exploded sections 48, Figure 3, of via conductors. As also shown in Figure 3, the access conductors 22 are on the downwardly facing surface of the film and these access conductors 22 are connected to the second bus conductors 34 by via conductors 48 adjacent to the side 6 of the assembly. In other words, the tap conductors 46, on the left in Figure 3, and the access conductors 22 are connected to the second bus conductors by single via conductors 48. The portions of the tap conductors 42 and 46, which are immediately adjacent to the slits 38, serve as contact areas 44, 50 (Figure 6) in that they are disposed against, and in electrical contact with, the LED's.

The LED's are electrically connected to the tap conductors at the individual LED sites by locating the LED's, as diagrammatically shown in Figure 5, adjacent to the surface 28 and with the LED's oriented such that the anode and cathode sides 9, 11 disposed in planes parallel to the slit 38 of the LED site. The LED is then moved relatively towards and past the surface 28 of the film and into the LED site with accompanying flexure of the tongues 39, 41 upwardly as viewed in Figures 4 and 5, so that the contact areas 44, 50 of the tap conductors are against the anode and cathode surfaces of the LED.

10. Stable and reliable electrical contact is maintained by the contact surfaces and the LED's by virtue of the fact that each LED is force-fitted into its LED-receiving site and the contact surfaces are maintained against the LED's by the flexed tongues 39, 41 of the film which resiliently press the contact areas 44, 50 against the surfaces 9, 11 of the LED.

The grating 52, in the finished display assembly, is disposed against the second surface 30 of the film 26 and has its lower surface 66 bonded by an adhesive 65 to the film. This grating comprises first grating bars 54 which extend parallel to, and are in alignment with, the first conductors 32. Second grating bars 56 extend parallel to, and are in alignment with, the second bus conductors 34. The grating bars 54, 56 thus define a multiplicity of individual cells 58 which extend through the grating from the surface 62 to the downwardly facing surface 66 and which surround the individual LED's 12.

Grating 52 may be of any fairly rigid material and should be non-conducting on its lower surface. A firm plastic material can be used or the grating may be of metal and the individual cells produced by selective etching of the surfaces 62, 66. When the grating is of metal, the surface 66 can be coated with epoxy which serves the dual function of insulating this surface and bonding the grating to the surface 30 of the film 26. As shown by the cross-sectional views, the individual cells are generally square at the upper surface 62 but fair to a somewhat parabolic internal surface which extends to a constricted neck portion which is proximate to the lower surface 66. The lower portions of the cells have a cross-sectional area which is somewhat less than the upper portions and the openings in the lower surface 66 are somewhat smaller than the openings 60 on the upper surface 62. The internal sidewalls of the cells can be given this



shape by control of the etching process in which the cells are produced. The grating is exposed to the etchant on its upper surface 62 for a greater time than for its lower surface 66, so that the etchant will remove more material from the upper surface and produce the hour-glass shape shown. The size of the openings 64 on the lower surface can also be controlled by masking during the manufacture of the grating.

The manufacture of a display assembly 2 will be apparent from the drawing figures. After the flexible circuit 26 has been prepared by forming the openings 40 and slits 38 at the LED-receiving sites and forming the conductors 32, 34 on the surface 28, 30, the grating 52 is bonded by adhesive 65 to the surface 30 with a site 36 in alignment with each of the cells 58 in the grating. The grating serves to support the film and mechanically to isolate each of the LED-receiving sites from its neighbors for reasons which will become apparent.

The LED's are then oriented so that their anode and cathode sides are as shown in Figure 4, and they are inserted past the surface 28 of the film into the LED-receiving sites. During insertion, the tongues 39, 41 of the film and the contact portions 44, 50 of the tap conductors will be flexed upwardly as viewed in Figure 6. After completion of the insertion operation, the contact portions will thus be in contact with the LED's and the upper portion of each LED will be contained in the upper portion of the cell. The generally parabolic surfaces of the cells thus serve to reflect light from the LED and direct it past the surface 62 of the grating towards the viewer. The physical isolation of the individual LED's in the cells results in a focusing effect which in turn results in improved sharpness and enhances the brilliance of the display.

The grating, in effect, functions as a fixture during an assembly of LED's to the film in that the flexible, relatively fragile film is accurately positioned against the surface of the dimensionally accurate and precise grating so that the sites 36 are precisely located. The LED's can be assembled to the film and grating by a suitable "pick and place" apparatus having means for orienting and inserting LED's into the film. In the finished assembly, the grating also serves the mechanical function of supporting the film and protecting the LED's.



While the sub-assembly comprising the grating 52, the flexible film 26, and the LED's is relatively strong and robust, it is often desirable to pot the individual LED's with a potting compound such as epoxy, as shown at 69 in Figure 6. The potting material further  
5 strengthens the assembly and prevents loss of LED's during abusive handling. An added advantage of the use of the potting material is that the transfer of heat from the LED's is facilitated in that more heat will be removed per unit of time through the potting material than can be removed through air.

10 It has been found that a display device in accordance with the invention can be conveniently produced on an 0.76 mm grid using LED's having the dimensions noted above, that is, having a thickness of 0.2 mm along their edges. This 0.76 mm grid will produce a display having 33 lines per 25.4 millimeters, a standard which produces good  
15 resolution.

The grating 52, advantageously, has a thickness which is substantially equal to the length of the individual LED's along their edges, that is 0.3 mm. When the LED's and the flexible circuit are assembled to the grating, as shown in Figure 6, the surfaces 13 of  
20 the LED's will be close to, but recessed from, the surface 62 by a distance of about 0.05 mm to 0.10 mm. This feature is advantageous in that, while the chip is completely surrounded and protected by the grating, the surface of the chip is nonetheless immediately adjacent to the surface of the grating.

25 The sub-assembly described above can be connected to drive circuits and a power supply by any suitable packaging arrangement. Figures 11 and 12 show a packaging arrangement in which the access conductors 18, 22 are connected to conductors 72 on the upper surface 74 of a printed circuit board 70 by compressible elastomeric  
30 connectors 68, which may be of the type described in U. S. patent 3,985,413 and which comprises a cylindrical section of elastomeric material having a film 69 extending around its surface. Spaced apart narrow conductive bands are provided on this film 69 and serve as conducting paths between the access conductors and the con-  
35 ductors 72 on circuit board 70. In the embodiment shown in Figure 11, the access conductors extend in both directions from the display as shown at 20 and 20'; in other words, the extensions of the film, as shown at 20 and 22 in Figure 1, are provided at both ends and



both sides of the array. This arrangement is advantageous in that redundant circuit pattern are provided for the bus conductors and if the amperage is relatively high, power can be supplied from two directions into the array. It will also be noted that the surrounding  
5 frame 80 of the grating is somewhat enlarged in Figure 11, so that it extends over the portions 20, 20' of the film.

In the embodiment shown in Figures 11 and 12, the conductors on the upper surface 74 of circuit board 70 extend to terminals 84 to which they are soldered. Terminals 84, in turn, extend through circuit  
10 board 70 and are contained in connectors 76 on the downwardly facing surface 78 of circuit board 70. The connectors 76 are mated with additional circuit boards 81 upon which the driver circuits are mounted. It will be apparent that other arrangements might be employed to transmit the driving signals to the array; for example, the driver  
15 circuits can be remote from the array and the signals transmitted by cables extending to the connectors 76.



## CLAIMS

1. A flat panel display device (2) of the type comprising a multiplicity of LED's (12) and first (32) and second (34) bus conductors, said LED's being arranged in parallel side-by-side rows (16) and parallel side-by-side columns (14), said columns extending normally of said rows, said columns and said rows defining a grid pattern, said first bus conductors extending parallel to said rows with one first bus conductor adjacent to each row, said second bus conductors extending parallel to said columns with one second bus conductor adjacent to each of said columns, each of said LED's being electrically connected to one of said first bus conductors and to one of said second bus conductors at a crossing point of said bus conductors, said display device being characterized in that:

15                   said first and second bus conductors are on the oppositely facing first (28) and second (30) surfaces of a flexible insulating film (26), said film having openings (40) therein which are located on said grid pattern, said openings being between adjacent first bus  
20                   conductors and between adjacent second bus conductors, each of said LED's being in one of said openings and being electrically contacted by one of said first bus conductors and one of said second bus conductors.

2. A flat panel display device as set forth in claim 1,  
25                   each of said LED's being connected to one of said first bus conductors and one of said second bus conductors by first (42) and second (46) tap conductors, each of said first and second tap conductors extending laterally from said one first (32) and said one second (34) bus conductor respectively, at a location adjacent  
30                   to said crossing point of said one first and said one second bus conductor.



3. A flat panel display device as set forth in claim 2, each of said second tap conductors (46) having a via conductor (48) extending through said film from said second surface (30) to said first surface (28), each of said tap conductors having a contact  
5 terminal portion (44 and 50) on said first surface, said terminal portions being immediately adjacent to said openings.

4. A display device as set forth in claim 3, said LED's being inserted into said openings from said first surface (28) and extending past said second surface (30), portions of said film  
10 adjacent to said openings being flexed laterally and extending past said second surface, said terminal portions of said tap conductors being against, and in electrical contact with, said LED's.

5. A display device as set forth in claim 4 having a non-conducting grating (52) associated therewith, said grating  
15 being against said second surface and having grating bars (54, 56) which extend parallel to, and are in alignment with, said first and second bus conductors, said grating having columns and rows of open cells (58) conforming to said grid system, said LED's having portions thereof in said cells.

20 6. A flat panel display device (2) of the type comprising a multiplicity of LED's (12) and first (32) and second (34) bus conductors, said LED's being arranged in parallel side-by-side rows (16) and parallel side-by-side columns (14), said columns extending normally of said rows, said columns and said rows  
25 defining a grid pattern, said first bus conductors extending parallel to said rows with one first bus conductor adjacent to each row, said second bus conductors extending parallel to said columns with one second bus conductor adjacent to each of said columns, each of said LED's being electrically connected to one  
30 of said first bus conductors and to one of said second bus conductors at a crossing point of said bus conductors, said display device being characterized in that:



5           said first and second bus conductors are on the oppositely facing first (28) and second (30) surfaces of a flexible insulating film (26), said film having openings (40) therein which are located on said grid pattern, said openings being between adjacent first bus conductors and between adjacent second bus conductors, said LED's being in said openings,

10           a non-conducting rigid grating (52) disposed against said second surface, said grating having grating bars (54, 56) which extend parallel to, and are in alignment with, said first and second bus conductors, said grating having rows and columns of open cells (58) conforming to said grid system, said LED's extending into said open cells,

15           said grating being in supporting relationship to said film.

7. A display device as set forth in claim 6, said grating being bonded (65) to said second surface of said film.

20           8. A display device as set forth in claim 7, each of said cells having internal sidewalls, said sidewalls surrounding, and serving as reflecting surfaces for, said LED's.

9. A display device as set forth in claim 8, said internal sidewalls forming a substantially parabolic reflecting surface.

10. A flat panel display device as set forth in claim 6, each of said LED's being connected to one of said first bus conductors and one of said second bus conductors by first (42) and second (46) tap conductors, each of said first and second tap conductors extending laterally from said one first and said one second bus conductor respectively, at a location adjacent to said crossing point of said one first and said one second bus conductor.



11. A flat panel display device as set forth in claim 10,  
each of said second tap conductors having a via conductor (48)  
extending through said film from said second surface to said first  
surface, each of said tap conductors having a terminal portion (44,50)  
5 on said first surface, said terminal portions being immediately  
adjacent to said openings.

12. A display device as set forth in claim 11, said LED's  
being inserted into said openings from said first surface (28) and  
extending past said second surface (30), portions of said film  
10 adjacent to said openings being flexed laterally and extending past  
said second surface, said terminal portions of said tap conductors  
being against, and in electrical contact with, said LED's.

13. A flexible circuit which is intended to receive, and  
establish electrical contact with, a multiplicity of solid state  
15 devices such as LED's (12), said flexible circuit comprising:

a flexible insulating film (26) having oppositely  
facing first (28) and second (30) surfaces, a multi-  
plicity of device-receiving openings (40) in said film,  
said openings being arranged in columns and rows, said  
20 rows extending normally of said columns, said openings  
defining a grid system,

a multiplicity of first (32) and second (34) bus  
conductors on said first and second surfaces respectively,  
said first bus conductors extending parallel to said  
25 rows with one first bus conductor between adjacent rows  
of openings, said second bus conductors extending parallel  
to said columns with one second bus conductor between  
adjacent columns,

first (42) and second (46) tap conductors associated  
30 with each of said openings, each first tap conductor  
extending from an adjacent first bus conductor towards  
the associated one of said openings, each second tap  
conductor extending from an adjacent second bus conductor  
through (48), said film to said first surface and



towards said associated one of said openings, each of said first and second tap conductors having terminal portions which are immediately proximate to the said associated one of said openings,

5           each of said openings being dimensioned to receive one of said devices with accompanying flexure of portions of said film in the direction of insertion of the device whereby,

upon insertion of said devices into said openings from said first  
10 surface until said devices extend partially through said openings, portions of said film having said terminal portions of said tap conductors thereon will be flexed in the direction of insertion and said terminal portions will be against, and in electrical contact with, said devices.

15





## AMENDED CLAIMS

(received by the International Bureau on 3 July 1980 (03.07.80))

1. A flat panel display device (2) of the type comprising a multiplicity of LED's (12) and first (32) and second (34) bus conductors, said LED's being arranged in parallel side-by-side rows (16) and parallel side-by-side columns (14), said columns (14) extending normally of said rows (16), said columns (14) and said rows (16) defining a grid pattern, said first bus conductors (32) extending parallel to said rows (16) with one first bus conductor adjacent to each row, said second bus conductors (34) extending parallel to said columns (14) with one second bus conductor adjacent to each of said columns, each of said LED's (12) being electrically connected to one of said first bus conductors (32) and to one of said second bus conductors (34) at a crossing point of said bus conductors, said display device (2) being characterized in that:

said first (32) and second (34) conductors are on the oppositely facing first (28) and second (30) surfaces of a flexible insulating film (26), said film having openings (40) therein which are located on said grid pattern, said openings (40) being between adjacent first bus conductors (32) and between adjacent second bus conductors (34),-  
each of said LED's (12) being inserted into one of said openings (40),

each of said LED's (12) being connected to one of said first bus conductors (32) and one of said second bus conductors (34) by first (42) and second (46) tap conductors, each of said first (42) and second (46) tap conductors extending laterally from said one first (32) and said one second (34) bus conductor respectively at a location adjacent to said crossing point of said one first (32) and said one second (34) bus conductor, each of said second tap conductors (46) having a via conductor (48) extending through said film (26) from said second surface (30) to said



first surface (28), each of said tap conductors (42, 46) having a terminal (44, 50) on said first surface (28), said terminal portions being immediately adjacent to said openings (40).

2. A display device as set forth in claim 1, said LED's (12) being inserted into said openings (40) from said first surface (28) and extending past said second surface (30), portions of said film (26) adjacent to said openings (40) being flexed laterally and extending past said second surface (30), said terminal portions (44, 50) of said tap conductors (42, 46) being against, and in electrical contact with, said LED's (12).

3. A display device as set forth in claim 4 having a non-conducting grating (52) associated therewith, said grating being against said second surface (30) and having grating bars (54, 56) which extend parallel to, and are in alignment with, said first (32) and second (34) bus conductors, said grating having columns and rows of open cells (58) conforming to said grid system, said LED's (12) having portions thereof in said cells.

4. (As amended) A flat panel display device (2) of the type comprising a multiplicity of LED's (12) and first (32) and second (34) bus conductors, said LED's (12) being arranged in parallel side-by-side rows (16) and parallel side-by-side columns (14), said columns (14) extending normally of said rows (16), said columns and said rows defining a grid pattern, said first bus conductors (32) extending parallel to said rows (16) with one first bus conductor adjacent to each row, said second bus conductors (34) extending parallel to said columns (14) with one second bus conductor adjacent to each of said columns, each of said LED's (12) being electrically connected to one of said first bus conductors (32) and to one of said second bus (34) conductors at a crossing point of said bus conductors, said display device (2) being characterized in that:

said first (32) and second (34) bus conductors are on the oppositely facing first (28) and second (30) surfaces of a flexible insulating film



(26), said film having openings (40) therein which are located on said grid pattern, said openings (40) being between adjacent first bus conductors (32) and between adjacent second bus conductors (34), said LED's (12) being inserted into said openings,

a non-conducting rigid grating (52) disposed against said second surface (30), said grating having grating bars (54, 56) which extend parallel to, and are in alignment with, said first (32) and second (34) bus conductors, said grating (52) having rows and columns of open cells (58) conforming to said grid system, said LED's (12) extending into said open cells,

said grating (52) being in supporting relationship to, and being bonded to, said film (26).

5. A display device (2) as set forth in claim 4, said grating (52) being bonded to said second surface (30) of said film (26).

6. A display device (2) as set forth in claim 5, each of said cells (58) having internal sidewalls, said sidewalls surrounding and serving as reflecting surfaces for, said LED's.

7. A display device (2) as set forth in claim 6, said internal sidewalls forming a substantially parabolic reflecting surface.

8. A flat panel display device (2) as set forth in claim 4, each of said LED's (12) being connected to one of said first bus conductors (32) and one of said second bus conductors (34) by first (42) and second (46) tap conductors, each of said first and second tap conductors extending laterally from said one first (32) and said one second (34) bus conductor respectively, at a location adjacent to said crossing point of said one first and said one second bus conductor.

9. A flat panel display device (2) as set forth in claim 8, each of said second tap conductors (46) having a



via conductor (48) extending through said film (26) from said second surface (30) to said first surface (28), each of said tap conductors (42, 46) having a terminal portion (44, 50) on said first surface (28), said terminal portions being immediately adjacent to said openings (40).

10. A display device as set forth in claim 9, said LED's (12) being inserted into said openings (40) from said first surface (28) and extending past said second surface (30), portions of said film adjacent to said openings being flexed laterally and extending past said second surface, said terminal portions (44, 50) of said tap conductors (42, 46) being against, and in electrical contact with, said LED's (12).

11. A flexible circuit which is intended to receive, and establish electrical contact with, a multiplicity of solid state devices such as LED's (12), said flexible circuit comprising:

a flexible insulating film (26) having oppositely facing first (28) and second (30) surfaces, a multiplicity of device-receiving openings (40) in said film, said openings being arranged in columns and rows, said rows extending normally of said columns, said openings (40) defining a grid system,

a multiplicity of first (32) and second (34) bus conductors on said first (28) and second (30) surfaces respectively, said first bus conductors extending parallel to said rows with one first bus conductor between adjacent rows of openings, and second bus conductor extending parallel to said columns with one second bus conductor between adjacent columns,

first (42) and second (46) tap conductors associated with each of said openings (40), each first tap conductor (42) extending from an adjacent first bus conductor (32) towards the associated one of said openings (40), each second tap conductor (46) extending from an adjacent second bus conductor (34) through said film (26) to said

first surface (28) and towards said associated one of said openings (40), each of said first (42) and second (46) tap conductors having terminal portions (44, 50) which are immediately proximate to the said associated one of said openings (40),

each of said openings (40) being dimensioned to receive one of said devices (12) with accompanying flexure of portions of said film (26) in the direction of insertion of the device (12) whereby, upon insertion of said devices (12) into said openings (40) from said first surface (28) until said devices extend partially through said openings (40), portions of said film (26) having said terminal portions (44, 50) of said tap conductors (42, 46) thereon will be flexed in the direction of insertion and said terminal portions (44, 50) will be against, and in electrical contact with, said devices (12).



1/5

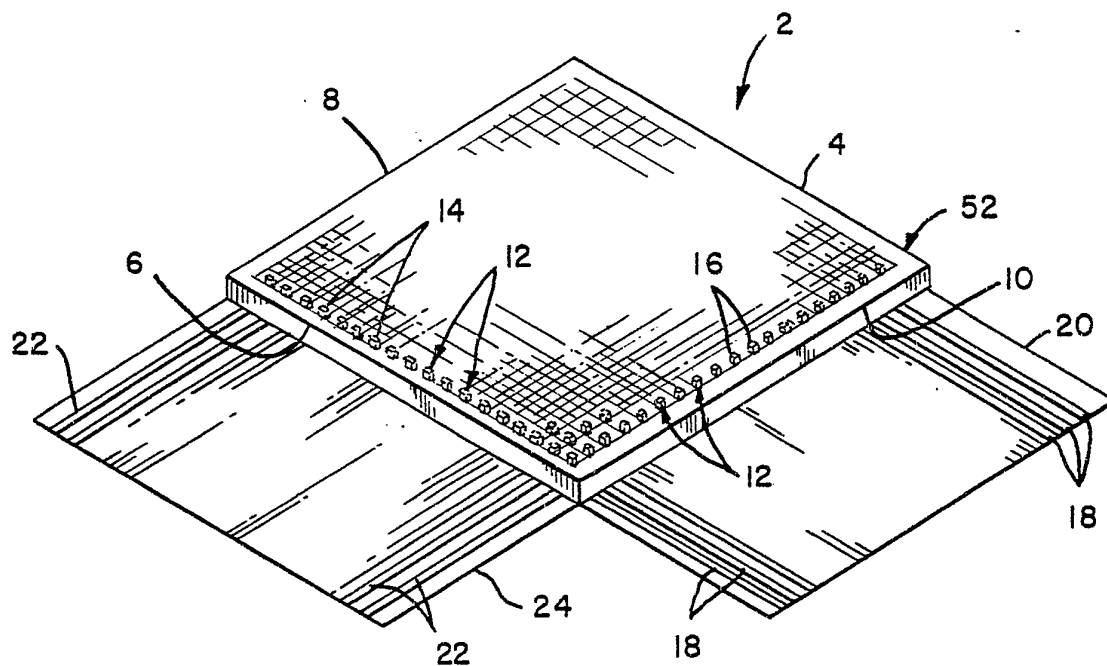


FIG. 1





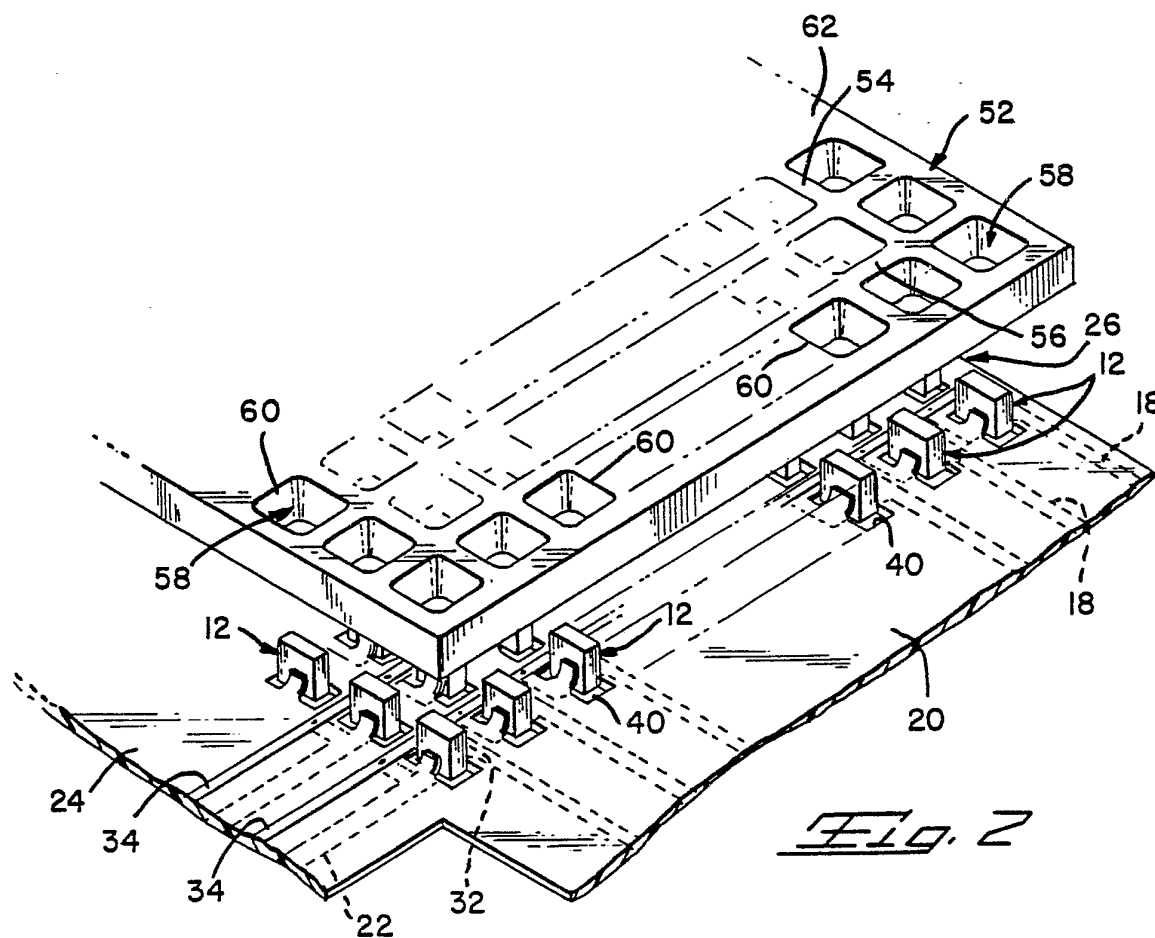


FIG. 2

2 / 5

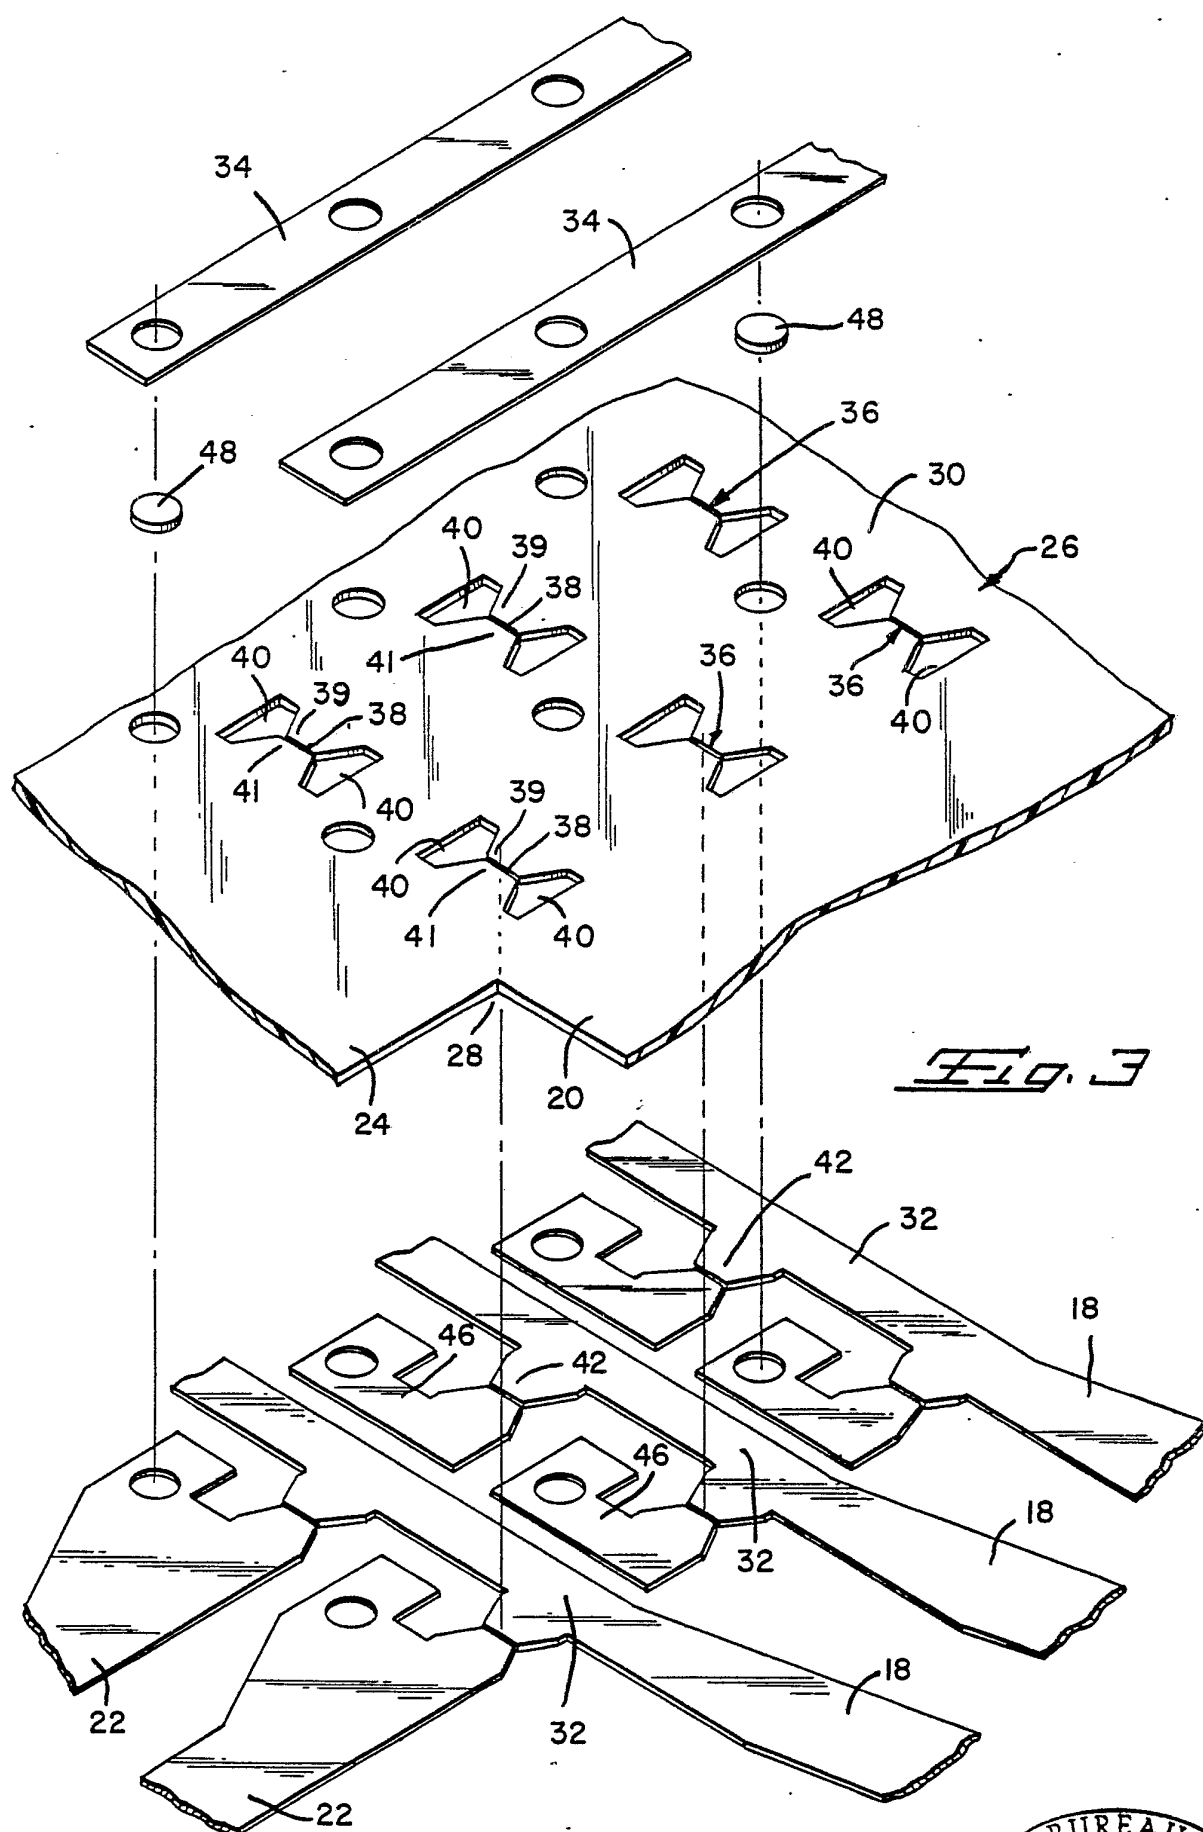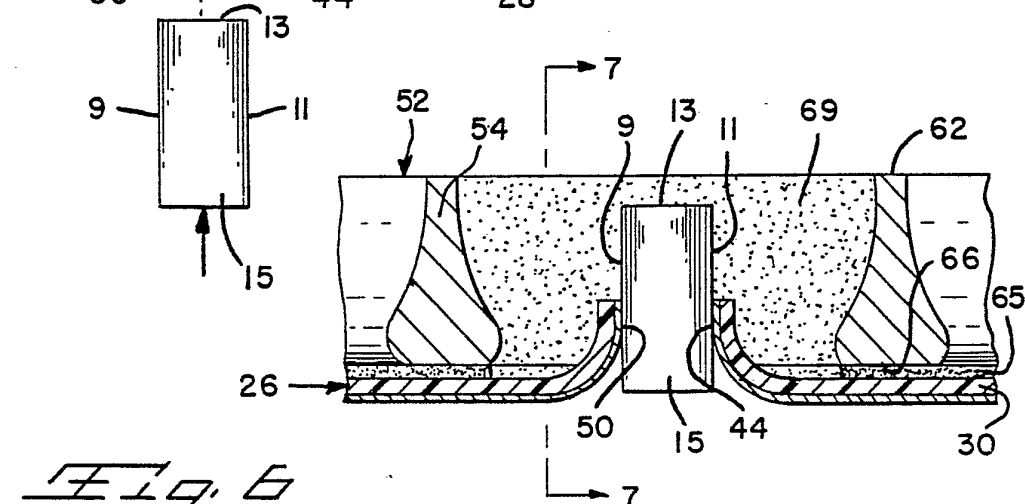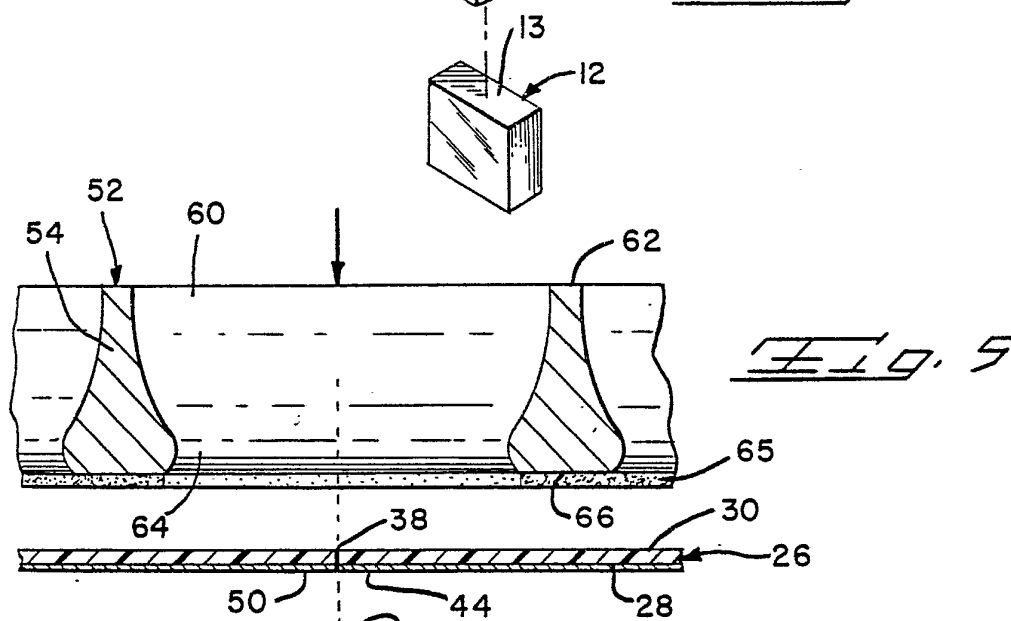

3/5

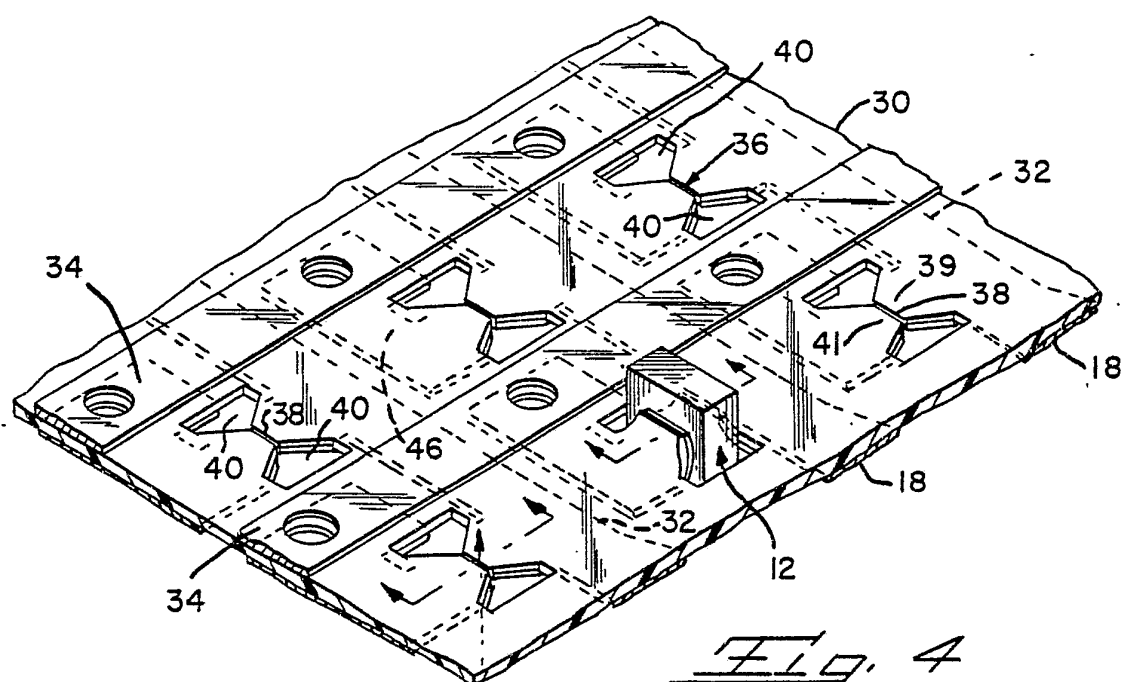



4/5

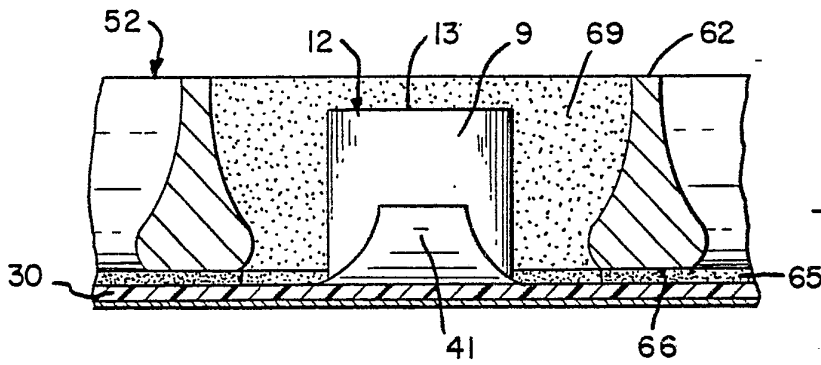


Fig. 7

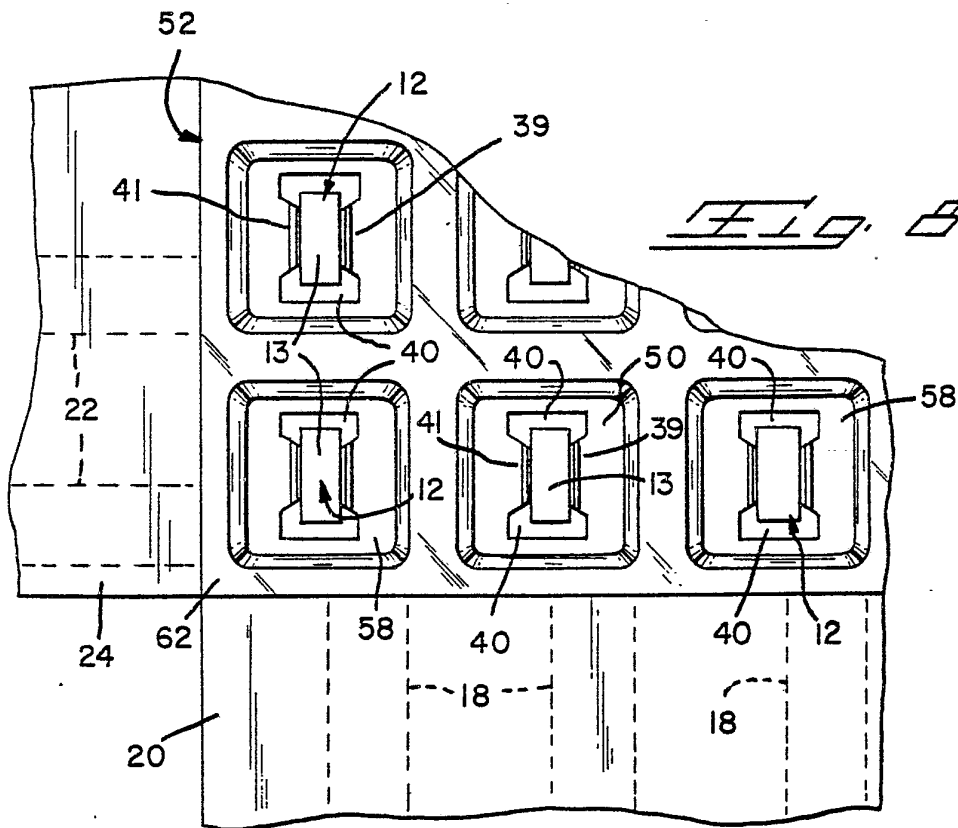


Fig. 8

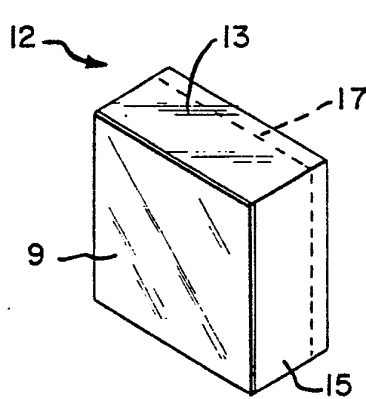


Fig. 9

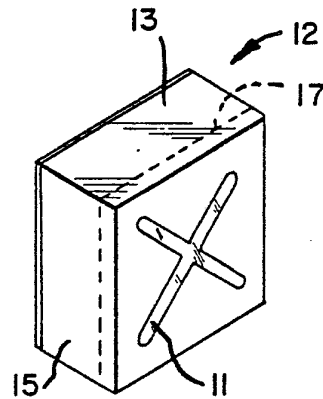
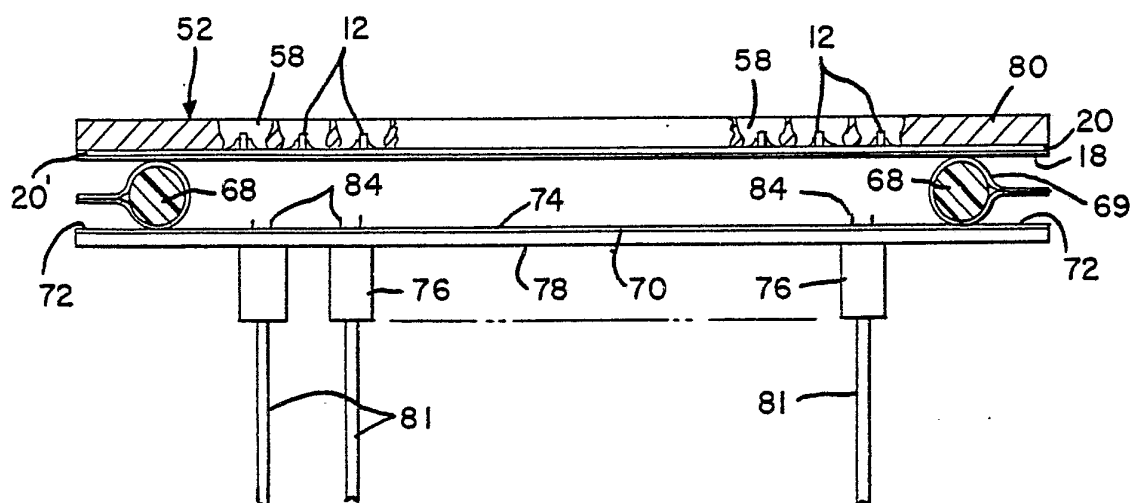
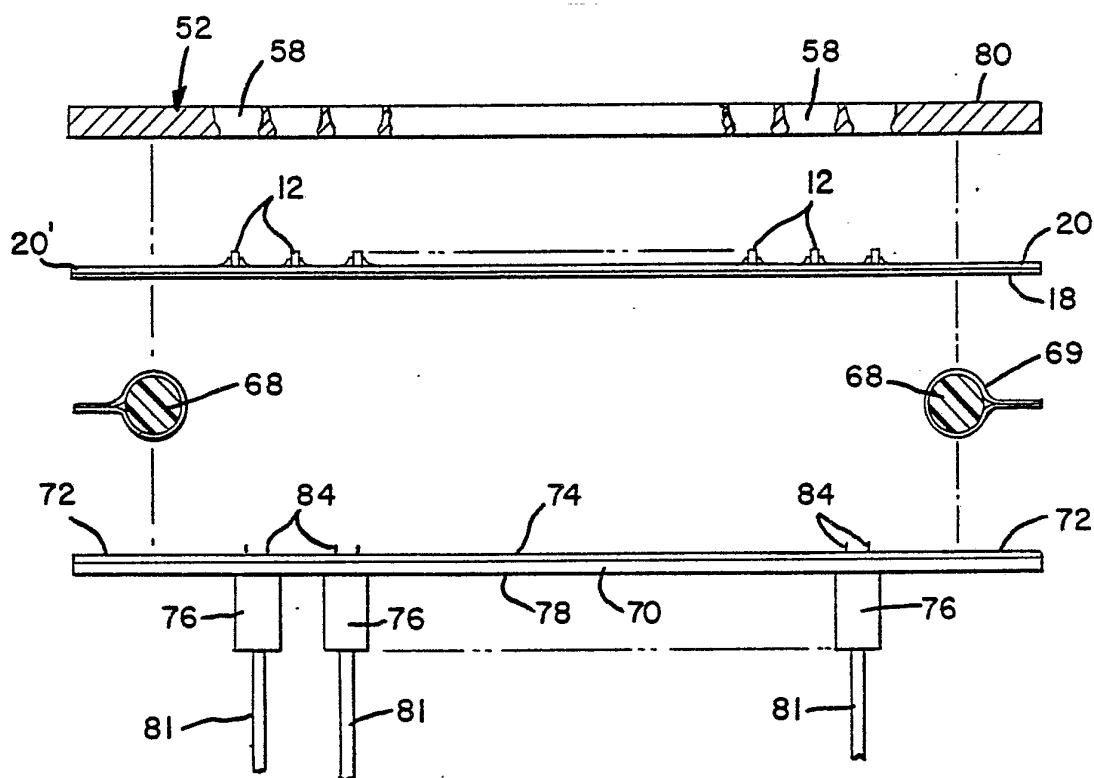


Fig. 10

5/5

Fig. 11Fig. 12

# INTERNATIONAL SEARCH REPORT

International Application No PCT/US80/00204

## I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) \*

According to International Patent Classification (IPC) or to both National Classification and IPC  
 INT. CL. H01L 23/28, 23/48, 33/00; H05B 33/00  
 U.S. CL. 313/500, 505/ 511, 512

*W080/01860*

## II. FIELDS SEARCHED

Minimum Documentation Searched \*

Classification System	Classification Symbols
U.S.	313/499, 500, 505, 511, 512 357/17

Documentation Searched other than Minimum Documentation  
to the Extent that such Documents are Included in the Fields Searched \*

## III. DOCUMENTS CONSIDERED TO BE RELEVANT <sup>14</sup>

Category *	Citation of Document, <sup>16</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>18</sup>
X	US, A, 4,024,627, Published 24 MAY 1977, Stauffer	1, 2, 6-10
X	US, A, 4,011,575, Published 08 MARCH 1977, Groves	1, 2, 6-10
X	US, A, 3,290,558, Published 6 DECEMBER 1966, Sapy	1, 2, 6-10
X	US, A, 3,366,914, Published 30 JANUARY 1968, McManus et al	1, 2, 6-10
X	US, A, 3,780,357, Published 18 DECEMBER 1973, Haitz	6-10
A	US, A, 3,290,539, Published 6 DECEMBER 1966, Lamorte	1-13
A	US, A, 3,440,716, Published 29 APRIL 1969, Dreyer	1-13
A	US, A, 3,558,974, Published 26 JANUARY 1971, Stewart	1-13
A	US, A, 3,886,581, Published 27 MAY 1973, Katsumura et al	1-13
A	US, A, 3,976,906, Published 24 AUGUST 1976, Shattuck	1-13
A	US, A, 4,000,437, Published 28 DECEMBER 1976 Lederhandler et al	1-13

\* Special categories of cited documents: <sup>15</sup>

"A" document defining the general state of the art

"E" earlier document but published on or after the international filing date

"L" document cited for special reason other than those referred to in the other categories

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but on or after the priority date claimed

"T" later document published on or after the international filing date or priority date and not in conflict with the application, but cited to understand the principle or theory underlying the invention

"X" document of particular relevance

## IV. CERTIFICATION

Date of the Actual Completion of the International Search \*

18 APRIL 1980

Date of Mailing of this International Search Report \*

12 JUN 1980

International Searching Authority <sup>1</sup>

ISA/US

Signature of Authorized Officer <sup>20</sup>

*Palmer C. Dimeo*