



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁵:

G09B 5/00

A1

(11) International Publication Number:

WO 94/12963

(43) International Publication Date:

9 June 1994 (09.06.94)

(21) International Application Number: PCT/US93/10705

(22) International Filing Date: 4 November 1993 (04.11.93)


(30) Priority Data:

07/980,649

24 November 1992 (24.11.92) US

(71)(72) Applicant and Inventor: McTAGGART, Stephen, I.
[US/US]; 6031 E. Mescal Street, Scottsdale, AZ 85254
(US).(74) Agents: KELLY, Michael, K. et al.; Streich Lang, 100 West
Washington, Suite 2100, Phoenix, AZ 85003-1897 (US).(81) Designated States: AU, BG, BR, CA, CZ, FI, HU, JP, KP,
KR, KZ, LK, NO, NZ, PL, RO, RU, SK, UA, European
patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU,
MC, NL, PT, SE).**Published***With international search report.**Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.*

(54) Title: ELECTRONIC BOOK

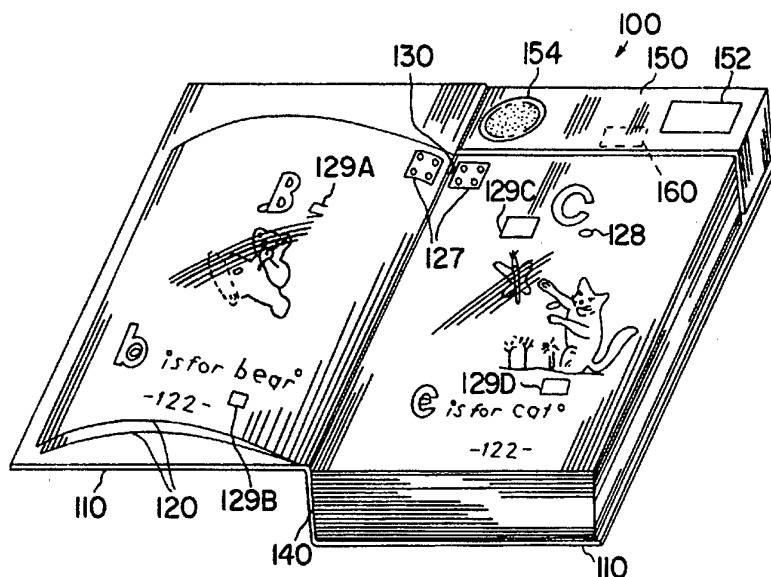

(57) Abstract

An electronic book (100) comprising a plurality of leaves (120), each leaf (120) comprising pages of printed material (126) bound at one edge to form a spine (140) with electrical circuits (123) formed in each leaf (120). A common electronic circuit (160) such as a speech generator and/or controller (168) cooperates with the electrical circuits (123) on each of the various pages, connected to the electrical circuits (123) in the leaves (120) through conductive paths (101) through the spine (140) of the book (100). The electrical circuits (123) in the leaves (120) include electrical elements such as switches (127), (129), and sensory output devices (125) (e.g., thermochromic devices, light emitting diodes, thermo-olfactory devices, electrochromic devices, and the like). The electrical elements (127), (129) are associated with particular portions of the printed material (126) so that the particular portions can be selectively highlighted or emphasized (e.g., designated by actuation of a visual or olfactory device and/or text read). A particularly advantageous switch structure formed integral to the page employing standard printing techniques, the bonding of LEDs directly into the printed circuit (112), and various advantageous methods of construction of the book (100) are also disclosed.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

ELECTRONIC BOOK

RELATED APPLICATIONS

- 5 This application is a continuation-in-part of U.S. Application Serial No. 07/685,278, filed by the same inventor on April 15, 1991, currently co-pending, which is a continuation-in-part of U.S. Application Serial No. 07/396,129, filed by the same inventor on August 21, 1989, now abandoned.

BACKGROUND OF THE INVENTION

10 Field of the Invention

This invention relates to the general field of apparatus and methods for combining audio and visual indicia of information. Specifically, the present invention relates to apparatus and methods for enhancing the comprehension and retention of information displayed in a book by combining audio and/or visual messages with the presentation of printed material.

15

Description of the Prior Art

- Comprehension of printed matter is a high priority educational objective of modern society. It is known that comprehension of all printed material depends on the viewer's ability to interpret visually perceivable information in accordance with previously acquired knowledge associated with that information. Accordingly, various attempts have been made at producing aids to enhance the process of interpretation of such visually perceived information in order to improve its comprehension and assimilation.

20

- Among the various devices found in prior art, U.S. patents No. 4,021,932 to Lipps (1977), No. 4,189,852 to Chatlien (1980), No. 4,273,538 to Ross (1981), No. 4,425,098 to Doring (1984), No. 4,752,230 to Shimizu (1988), No. 4,778,391 to Weiner (1988), and No. 4,809,246 to Jeng (1989) disclose several approaches utilized to provide effective highlighting of printed material, either for amusement purposes or for improving the comprehension and retention of a reader. U.S. Patent No. 4,809,246 to Jeng, in particular, teaches a sound illustrated book that utilizes a page sensing element that triggers an audio recording of a description of the printed matter on the page being viewed.

25

30

- In U.S. Patent No. 4,703,573 (1987), Montgomery et al. disclose an electronic book apparatus with audio and visual components for electronically generating and transmitting a combination of sound and electronic images to identify the information displayed on an open sheet. Control circuitry is provided on the sheet to coordinate the functioning of the audio and visual displays according to a predetermined sequence considered appropriate to enhance understanding of the material. Similarly, U.S. Patent No. 4,363,081 to Wilbur (1982) describes the use of light emitting diode (LED) components to highlight drawings and other printed matter in greeting cards.

35

In addition, U.S. Patent No. 4,209,824 to Kauffman (1980) discloses a book comprising pages including electrical circuitry and apertures with light emitting devices in each page to illuminate areas of pictures printed on the page. U.S. Patent No. 3,592,098 to Zadig (1971) teaches a flexible conductive ink which enables the sheet on which the ink is printed to be folded across the ink without breaking the ink circuit. In U.S. Patents
5 No. 1,545,217 (1925) and No. 1,670,254 (1928), Thurber and Gowin show the forming of conventional, non-electronic, books by folding a single sheet in accordion style. Finally, U.S. Patents No. 2,277,318 (1942) and No. 2,444,355 (1948) to Grant and Kniznick illustrate the making of conventional books by folding a plurality of sheets in half and binding them at the folds to the spine of the book.

10 A review of the prior art shows that most devices developed to date merely present an audio description or lighting of printed matter illustrated on a page. Others appear to limit the audio and/or visual enhancement to just printed words or printed images. Most importantly, though, the various kinds of apparatus used in prior art are not practical for bound book format. Moreover, the approaches taught in prior art to control the functioning of both the audio and/or visual displays are specific to the requirements of each page; therefore,
15 they are not suitable for voluminous multi-page applications. Finally, no existing electronic book utilizes visual and audio messages in interactive fashion with the reader to illustrate the printed material.

Therefore, there still exists a need for practical apparatus wherein visual information, presented in any character or image form on a page of a book (hereinafter referred to generally as visual matter, printed matter,
20 material, or information), is explained, highlighted, or in any way enhanced by sound and/or light displays systematically synchronized with the information to stress its meaning and improve comprehension and retention on the part of a reader. In particular, there is a need for a compact method of manufacturing that is suitable for assembling many pages into a single bound book in an economical and practical manner.

SUMMARY OF THE INVENTION

The present invention provides an electronic book apparatus that produces audio and/or visual enhancement of printed information.

5 In accordance with one aspect of the present invention, visual signals are produced in conjunction with the display of the printed information in the book in order to highlight and draw attention to it.

In accordance with another aspect of the present invention, an audio signal, or message, is produced in conjunction with the display of the printed information in the book to describe and facilitate the reader's
10 recognition and understanding of the material and to further highlight its presence on a page.

In accordance with yet another aspect of the present invention, synchronization between the audio and visual signals is provided in connection with any portion of the printed information to which they pertain, to clearly focus the attention of the viewer on the particular portion of interest and improve his or her comprehension
15 of the material viewed.

In accordance with still another aspect of the present invention, synchronized audio and/or visual messages are delivered according to a predetermined schedule appropriately chosen for educational or entertainment purposes.
20

In accordance with another aspect of the present invention, an interactive system is provided whereby the reader of the book can chose between alternatives to best suit his or her interest, so that the reader's attention can be further stimulated by direct involvement in the viewing progression through the material in the book.

25 Another aspect of this invention provides a novel method of manufacture of an electronic book that permits the combination of visual and audible signal circuitry in compact format for use in voluminous publications. In one embodiment, the book consists of a continuous sheet of circuitry folded in accordion fashion and bound at one end to form leaves and corresponding pages. In the preferred embodiment, the circuitry corresponding to each pair of facing pages (spread) or, in the alternative, to each book leaf (opposite pages on one sheet)
30 constitutes a module that is made functional by connection with control electronics in the head portion of the book through flexible printed circuitry in the spine of the book.

The present invention may be implemented in a variety of designs and physical embodiments to fit different implementation formats, as may be desired for different kinds of printed information. To that end, the
35 apparatus described herein can be, if desired, implemented in modular form, wherein each page of a book constitutes a modular component of the overall apparatus.

In accordance with another aspect of the present invention, an apparatus is provided that is suitable for assembly in voluminous form and wherein the visual and/or audio display of each page can be controlled directly from a central control board and independently of the other pages.

- 5 A device in accordance with the present invention can be realized in an economical and commercially viable manner. This is done by utilizing simple components and methods of manufacture that are either already available in the open market or can be developed at competitive prices.

BRIEF DESCRIPTION OF THE DRAWING

Preferred exemplary embodiments of the present invention will hereinafter be described in conjunction with the appended drawings, wherein like designations denote like elements and:

5 Figure 1 is a perspective view of the general features of an embodiment of the electronic book, the present invention, and illustrating an open spread with alphabet letters and pictorial representations of related subject matter.

10 Figure 2A illustrates a first embodiment of a book page exposing a circuit layer sandwiched between a top sheet bearing visual information and a substrate sheet according to one embodiment of the present invention.

Figure 2B illustrates leaf formed of two opposing book pages according to another embodiment of the present invention wherein a circuit is formed by conductive ink on the underside of a substrate sheet (interior of the leaf).

15 Figures 3A and 3B are block schematic diagrams of respective embodiments of the common electronic circuitry of the book of the present invention.

20 Figure 4 is a perspective view of a continuous sheet used to form the leaves of the electronic book according to another embodiment of the invention.

Figure 5 is a perspective view of the continuous sheet of Figure 4 after assembly into book leaf form.

25 Figure 6 is a cross-sectional view of a light emitting diode formed directly on the page of the book.

Figure 6A is a cross-sectional view of a thermochromic display formed integral to the book leaf.

30 Figure 7A is a perspective view of a modular substrate sheet used to form one leaf corresponding to two opposite pages of the electronic book according to another embodiment of the invention.

Figure 7B is a cross-sectional view of a through page conductor employed for inter-page connections.

35 Figure 8 is a perspective view of the modular substrate sheet of Figure 7A after assembly into a modular book leaf.

Figure 9 is a plan view of an example of a circuit printed on the modular substrate sheet of Figure 7A showing conductive paths through the center fold for connection, through the spine of the book, to electronic circuitry housed in the book cover.

- 5 Figure 10 is a perspective view of a fan-like spine for receiving each modular book leaf, as shown in Figure 8, between flaps that contain corresponding connections to the control circuitry of the book.

Figure 11 shows a perspective view of an embodiment of the invention manufactured according to the spine and modular leaf approach illustrated in Figures 8 and 10.

10

Figure 12 is a perspective view of another kind of substrate sheet used to form adjacent modular book spreads, each corresponding to two facing pages, of the electronic book according to yet another embodiment of the invention.

- 15 Figure 13 is a perspective view of the modular substrate sheets of Figure 12 after assembly into a book leaf and two corresponding book spreads.

- Figure 14 is a perspective, semi-exploded view of a fan-like spine for receiving each modular book spread while being combined to form book leaves, as shown in Figures 12 and 13, between flaps that contain
20 corresponding connections to the control circuitry of the book, wherein the spine is partially extracted for illustration.

- Figure 15 is an illustration of exemplary electrical paths used to route the circuitry of the book of Figure 12 through the last book-spread module to a terminal portion.

25

Figure 16A illustrates an exemplary layout of the circuit of the substrate sheet shown in Figure 12.

- Figure 16B is an exploded top of a momentary contact switch in accordance with one aspect of the present invention.

30

Figure 16C is a pictorial view of the contacts of a second embodiment of the switch in accordance with the present invention.

- Figure 17 shows an exemplary layout of the circuit board layer of the single-sheet last segment, featuring the
35 same set of connections of the circuit board layer of Figure 16A.

Figure 18 is a sectional view of a further embodiment of the electronic book in accordance with the present invention employing single unfolded sheet leaves.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to Figure 1, an electronic book 100 according to the present invention comprises a cover 110, a multiplicity of page leaves 120, a spine 140, a head portion 150, a battery compartment 152, a speaker 154, and electronic circuitry 160. Cover 110 suitably covers and binds page leaves 120 at an inside margin 130 to form spine 140. Head portion 150 is suitably affixed to cover 110 and preferably incorporates electronic control circuitry 160, battery compartment 152, and speaker 154.

Referring to Figures 2A, 2B and 4, the respective sides of leaves 120 form the pages 122 of book 100. As will hereinafter be more fully described, pages 122 suitably comprise a substrate 121 bearing visual material 126 and a circuit 123 (variously referred to a printed circuit 123, circuit layer 123 and circuit board layer 123). Visual material 126 is suitably in the form of printed images, alphanumeric characters, or other material suitable for affixation to a book page. Circuit 123 is suitably formed on one or both sides of substrate 121. Circuit 123 is preferably formed by printing in conductive ink, but can be formed by other conventional methods.

Circuit 123 suitably incorporates one or more electrical elements, such as, for example, switches (127, 129), active visual devices (125), heat element (resistor) and conductive terminal pads (101). For example, exposed conductive terminal pads 101 (Figure 2B) can be formed, integral to circuit 123. Pads 101 are suitably accessible through an aperture, or formed (*e.g.*, using conventional through hole techniques) on the print side of the leaf. Pads 101 are employed to provide an electrical connector to an extrinsic item, such as a figurine, including, *e.g.*, a speaker and/or active visual device. Similarly, the heat element can be used in conjunction with material that changes color (thermochromic) or releases scent (thermo-olfactory) when heated.

As illustrated in Figure 2A, printed material 126 can be disposed on a separate top sheet 124, cooperating with substrate 121 to form a laminated assembly. If desired, top sheet 124 may include one or more transparent or translucent portions or apertures 128 disposed at predetermined positions on sheet 124. Active visual devices 125 (such as, for example, light emitting diodes (LEDs), or electrochromic or thermochromic devices) may be incorporated into circuit 123, disposed in registry with non-opaque (*i.e.*, transparent, semi-transparent, or translucent) portions or apertures 128 in top sheet 124 for visual accessibility when the page 122 is assembled in its laminated form. Alternatively, top sheet 124 may comprise a non-opaque material, with visual material 126 printed by conventional reverse lay down processes on its underside (*i.e.*, the side adjacent substrate 121) unprinted (bare) portions are provided to overlie the various visual display devices 125 in circuit 123. In such an embodiment, circuit 123 is suitably formed on the side of substrate 121 adjacent top sheet 124. The layout of the circuit 123 corresponding to the page determines the exact physical location on the page of the visual signals produced by the LEDs and visible through the non-opaque portions or apertures 128 in the top sheet 124 of that page. Of course, these locations may be the same or vary from page to page

according to the specific requirements for the material being displayed. While not shown in Figure 2A, the page on the back side of the laminated embodiment of leaf 120, is suitably of similar two-sheet laminated configuration.

5 As shown in Figure 2B, page 122 can also be formed of a single (unitary) sheet bearing both the visual information (*e.g.*, printed material) and with circuit 123, circuit 123 would be formed, suitably by printing in conductive ink, on the opposite side of the sheet or on the same side of the sheet with the printed material. For example, leaves 120 can be formed by printing visual materials on one side of substrate sheet 121 and forming (*e.g.*, printing) conductive circuit 123 on the other, or by first forming (*e.g.*, printing) circuit 123 on
10 the substrate then overprinting with visual material 126.

Similarly, circuit 123 can be printed on one side of substrate 121 (or top sheet 124), and over-printed with the visual material 126.

15 Alternatively, where the substrate is non-opaque (*e.g.*, transparent, semi-transparent, or translucent) material (*e.g.*, a plastic, such as polyester Melinex, Mylar, or other synthetic materials specifically treated to facilitate multi-color printing processes), the visual material can be printed by conventional reverse lay down processes on the back of substrate 121, so that the visual material is viewed through substrate 121. Circuit 23 is then printed over the reverse laid down printing. If desired, an intermediate layer of "white-wash" can be printed
20 over the reverse laid down printed material, and circuit 123 printed over the "white-wash". To accommodate visual devices 125, the reverse laid down printed matter (and white-wash, if used) define bare areas on substrate 121, corresponding to the desired dispositions of visual devices 125. As will hereinafter be more fully described, substrate 121 would be folded to place the printed matter and circuit 123 on the interior of the fold, with the other side (*e.g.*, non-printed side) of substrate 121 facing outward on both sides. Such a
25 structure is particularly desirable in books intended for young children; the respective inks and electrical devices are secure by virtue of their location on the interior of the folded structure.

Pages 122 each suitably include one or more switches (127, 129) associated with the page, or respective portions of or images on the page. For example, each page may include, if desired, a suitable switch
30 mechanism 127 that is actuated when the book is opened to the corresponding page. Switch 127 may comprise photosensitive switch elements or phototransistors, pressure sensitive switches or electromechanical contact switch elements extending outwardly from the surface of the page, or the like. For example, with reference to Figure 1, switches 127 may be formed of contact elements on the opposite pages a spread of adjacent pages (Figure 1), so that an open circuit is created by separating the pages and separating adjacent components that
35 otherwise form a normally closed switch assembly. The contacts of switch 127 are suitably formed using conventional through hole technology, where circuit 123 is disposed on the rear of the substrate.

In addition, or alternatively, each page 122 suitably includes one or more switches 129 (*e.g.*, 129A-129D) associated with the page, or respective portions of the page in particular, images or characters on the page. Switches 129 are preferably momentary contact switches formed underlying printed indicia disposed at predetermined positions on the page, preferably in the vicinity of particular images, characters, words, or passages. As will hereinafter be explained, switches 129 may be formed, in accordance with one aspect of the present invention, employing conventional printing processes, using respective patterns of conductive, and nonconductive (*e.g.*, dielectric) ink.

As will be explained, in accordance with one aspect of the present invention, the respective pages (leaves) are assembled such that the circuit 123 of each page is electrically connected to electronic circuit 160. Switch 129 (and/or 127) on the page electronically generates and transmits an identifying signal (such as an open or a closed circuit signal) through that page's conductive circuit 123 to the electronic circuitry 160.

Electronic circuitry 160 may be any circuit which, in response to actuation of switches 129 (and/or 127), generates a predetermined audio response and/or control signals to visual elements (*e.g.*, LED 125) on pages 122 in accordance with the particular switch activated (and hence the corresponding visual material 126). Electronic circuitry 160 services all of the various pages of the book and, hence, is sometimes referred to herein as "common electronic circuitry" 160.

For example, in a book employing audio response only, circuit 160 may comprise one or more conventional data selector chips, such as a Hewlett Packard 74HP138 one of eight data selector IC, and a conventional integrated speech processor chip, such as a Texas Instrument TI TSP50C14 speech processor. The speech processor is programmed to generate signals corresponding to the desired speech or sounds, employing conventional techniques, for application to a conventional audio output device (*e.g.*, speakers, headphones or the like).

Alternatively, as shown in Figure 3A, electronic circuit 160 may include a suitable data selector (interface) circuit (or circuits) 164A (*e.g.*, conventional data selector chips), a conventional microprocessor 166, a conventional sound generator 168 (*e.g.*, speech synthesis chip, digital recorder, or the like, with internal or external memory or storage media), and a suitable output interface circuit 164B (*e.g.*, multiplexer, or decoder). Interface circuit 164A, connected, as will be explained, to switches 129 (and/or 127) through circuit 123, generates in accordance with conventional techniques, a signal to microprocessor 166, indicative of the particular switches 129 (and/or 127) which are activated (*e.g.*, rendered conductive, rendered nonconductive or otherwise change state). Microprocessor 166 responsively generates control signals to sound generator 168 and/or output interface circuit 164B.

Microprocessor 166 is programmed, in accordance with techniques well known in the art, to generate a sequence of one or more control signals to sound generator 168 and/or output interface circuit 164B in response to actuation of particular individual switches 129 (and/or 127). The sequence of control signals can be predetermined, or randomly chosen. Preferably, a particular (generally unique) sequence of control signals is associated with each individual switch 129 (and/or 127), or the sequence is chosen from a specific group of predetermined sequences corresponding to the switch, either randomly or in accordance with a predetermined criteria (*e.g.*, a count of the number of times the switch is actuated, or as a function of prior actuated switches). Sound generator 168 provides signals to a conventional audio output device 170 (*e.g.*, speaker, headphones) to generate predetermined sounds or speech in accordance with the control signals provided by microprocessor 166. Interface circuit 164B suitably effects control (*e.g.*, actuates, deactuates or causes a change of state) of one or more designated visual devices 125 in accordance with the control signals provided by microprocessor 166; *e.g.*, completes a circuit between power source 162 and the designated device 125. Thus, in response to actuation of a particular switch 129 (or 127), electronic circuit 160 effects generation of sounds and/or speech, and/or control of visual elements 125.

Referring to Figure 3B circuitry 160 may, alternatively, comprise a sequencer 165 and synchronizer 167 in cooperation with an integrated speech synthesizer. Sequencer 165 and synchronizer 167 each suitably comprise 16-to-1 analog multiplexers such as sold by the Motorola Corporation of Chicago. An on/off switch 161 selectively provides power to the respective elements of circuit 160. Switches 127 and/or 129 are connected through the associated circuit 123 to one or both sequencer 165 and synchronizer 167, which cooperate to complete a circuit through one or more designated visual devices 125, and provide a control signal indicative of the actuated switch 127, 129 to sound generator 168. In practice, sequencer 165 and synchronizer 167 may be implemented in a single chip, such as a Signetics CD694067 decoder/multiplexer/expansion sequencer, cooperating with a sound generator 168 comprising a Texas Instruments TSP-50C-11 speech synthesizer and a 10 mHz synchronization crystal. The synthesizer is appropriately programmed employing conventional techniques.

Page switches 127 may be employed if desired to effect a sequence of visual and/or audio responses associated with the material presented on a set of pages (*e.g.*, a spread of two adjacent pages as illustrated in Figure 1). Switch 127 may effect the sequence automatically when book 100 is open to that set of pages (*e.g.*, spread) or may be manually actuated.

In operation, in an exemplary embodiment employing page switches 127 associated with a spread of pages, as illustrated in Figure 1, book 100 is opened to the adjacent pages of a spread, the switch 127 associated with those pages, upon actuation, generates a signal to electronic circuitry 160. Circuit 160 then begins a sequence of visual and/or audible signals associated with the material presented on the spread. For example, the

activation of switch 127 on such adjacent pages first triggers the operation of the circuitry on the left page. Electronic circuit 160 generates signals to cause the identification and highlighting of selected portions of the printed matter 126 on that page by activating or changing the state of corresponding visual devices 125 situated next to that matter and/or through the delivery of voice messages pertaining to the printed matter, all preferably in accordance with a predetermined order and interval of presentation programmed in the electronic circuitry 160.

Common electronic circuit 160 can be programmed according to methods well known in the art of integrated circuitry, to perform any sequence of visual and/or audio signal combinations in a manner tailored to produce maximum enhancement of the material presented. If desired, when the logic of possibilities on the left page is exhausted, as determined by the specific program designed for the book, sequencer 164 automatically starts a similar series of audible and/or visual signals for the adjacent right page in conjunction with the presentation of its printed material. The sequence of signals for each page may be the same or different, depending on the preprogrammed instructions. At the conclusion of the sequence for the right page, the apparatus stops (unless forced to repeat by the reader in response to an available option, as described above for the left page) until a new pair of switch elements 127 is activated by the opening of the book at another page.

Switches 129, which may be used in conjunction with or in lieu of switch 127, preferably comprise a pressure activated momentary contact switch incorporated in the circuitry of each page and manually operated by the viewer to activate the audio and/or visual functions associated with the corresponding portion of that page (or spread of pages).

Actuation of an individual switch 129 effects a sequence or sequences associated with that switch. As previously noted, each switch 129 is preferably associated with particular visual indicia, or passage, on a page or spread of pages. Alternatively, it can be associated with an entire page, or all or part of a pair of opposing pages (spread).

Where page switches 127 are employed in conjunction with switches 129, the programmed presentation effected through electronic circuitry 160 may include interactive alternative or repetitive sequences for the viewer's choice, implemented by actuation of switches 129. For instance, at a certain point in the sequence of signal delivery effected in response to actuation of switch 29, an audible message would inform the reader of alternative progression choices in response to specific instructions communicated by the reader through the pressure switch 129 (which, in turn, could correspond to a recognizable feature in the displayed printed material). For example, after a series of light and/or sound signals associated with the printed image of a bear on the page (Figure 1), a message would be heard instructing the viewer to press the bear's nose once to repeat, twice to play a game, or not at all to continue to the next page. The game could consist of any light

and/or sound combination of signals deemed appropriate for the desired purposes and any level of interaction could be designed into the programmed sequence by requiring appropriate responses through additional pressure switches 129 similarly located to correspond to points of interest throughout the page. These various alternatives are matters of design choices concerning the audio and/or visual content of each book. Their implementation is a matter of programming electronic circuitry designed for the specific desired purpose, according to methods and apparatus that are well known in the art of speech synthesis and sequential light emission and that are not within the inventive scope of this specification. Therefore, the details of such implementation are not addressed here.

The method and apparatus of the present invention are particularly suitable for multi-leaf compilation. The approach used here utilizes novel methods for connecting the circuit 123 of each page to common electronic circuitry 160, which results in a more compact design and added versatility. A novel approach is also utilized in placing active visual devices 125 (*e.g.*, LEDs) in the circuit 123 of each page in a way that reduces manufacturing costs and minimizes the space between pages occupied by the visual device, and by forming switches 129 (and 127, if utilized), and in some instances visual devices 125 employing conventional printing techniques.

As illustrated in Figure 4, in one embodiment of the invention, a continuous circuit 186 (corresponding to the combined circuits 123 for each page of book 100) for the entire book is printed in flexible conductive ink on one side (the top side as shown in Figure 4) of a continuous sheet 180. As previously noted, sheet 180 can be a core sheet (*e.g.*, sheet 121) of a laminated page, or can itself bear visual information (printed matter) on the opposite side from, or on the same side as, (overlying or underlying) circuit 180. Referring to Figures 4 and 5, to form book 100, sheet 180 is then folded into equal segments in accordion fashion to form respective book leaves consisting of pairs of adjacent segments with inside (184) and outside (182) folds. Inside folds 184 are bound together to form the book's spine 140, while the outside folds 182 constitute the outer edges of the book's pages. Figure 5 illustrates assembly of continuous sheet 180 into book-leaf form.

As shown in both Figures 4 and 5, a terminal circuit portion 188 is included in printed circuit 186, on the last segment (leaf) L1 of sheet 180, to provide a convenient point of connection with electronic circuitry 160, directly with electronic devices in the circuitry or through conventional interconnecting devices (not shown in the figures).

Connections between circuit 186 and electronic circuitry 160 can be effected, for example through a conventional mechanical connection (*e.g.*, spring clip or spring loaded tongue connector), or through a conventional ribbon cable, connector pad or board, electrically between circuit 186 and circuitry 160. Alternatively, the terminals of circuitry 160 can be disposed to conform to the disposition of terminals in

portion 188, and directly connected, employing, for example, z-axis anisotropic conductive adhesive (as will hereinafter be more fully described). Alternatively, the connections between the various elements of electronic circuitry 160 can be effected through circuit 186 itself; circuit 186 on end leaf L1 can include the connecting conductive paths, and the respective electronic components of common circuit 160 surface mounted on leaf L1.

Visual devices 125, switches 127 and pressure switches 129 are incorporated into continuous circuit 186 in the same manner as described in conjunction with Figure 2; that is, the circuitry of each page is independently connected to the electronic circuitry 160 by separate conductive paths that run all the way from the particular page to last segment (leaf) L1 through the entire portion of the sheet 180 in between. The last segment L1 is then connected to electronic circuitry 160 via the terminal portion 188.

Where the pages are formed by lamination of continuous sheet 180 with matching printed material with non-opaque portions or apertures 128 corresponding to each in the circuit board layer of the book. Thus, the circuit 186 is covered throughout the book by sheets 124 containing printed material and non-opaque portions or apertures 128 for each underlying visual device.

Where a unitary page construction (*i.e.*, visual material 126 is disposed on the substrate) as in Figure 2B is employed, printing of the visual material (printed matter) and circuit 186, can be effected concurrently, or sequentially, on the continuous sheet, prior to folding using conventional printing equipment (*e.g.*, a Gravere printing press). Any printing equipment that is capable of effecting selective solid coverage ink transfer distribution can be utilized. It should be appreciated that by printing material corresponding to a plurality of pages of the book on the same continuous substrate (web, or large sheet) registry between the pages of printed material and printed circuits, and between the positions of the respective printed circuits, is facilitated.

Suitable printing equipment include Gravere and Flex-O-Press printing presses and screen printing apparatus. Standard multi-station offset printing presses can also be utilized, if properly configured to print circuit 186 in "solid coverage," *i.e.*, so that ink deposited by the press printing units does not include any interstices. In other words the dots of ink deposited by the press overlap or overlay to provide a continuous conductive path. Specifically, web-fed offset printing presses typically include a number of successive print stations (units). Each print station is associated with a particular color, and, typically, includes upper and lower sets of rollers to selectively apply ink of that color to both sides of the web (paper; substrate 180) on a substantially concurrent basis. The web passes through the respective printing units in sequence to develop a multi-color image. Specifically, each printing unit applies its respective ink in accordance with an associated dot matrix (corresponding to a color separation) established by a plate. The operation of the individual units is coordinated, so that the respective matrices as printed are in registry. The combinations of colors and relative

dispositions of the matrices provide a composite image having the desired form, composition, and color. Visual matter 126 and circuit 186 can be concurrently printed employing one (*e.g.*, the upper set) of print rollers in the respective units to lay down visual matter 126, and the other (*e.g.*, the lower set) of print rollers in the units to print circuit 186 (123). Disposition of a continuous conductive path (*i.e.*, solid coverage) can be facilitated by printing circuit 186 (123) employing a plurality of successive print units, each applying the conductive ink in sequence. The respective dot matrices laid down by the successive units would be slightly offset but overlay each other. The dots of ink, in effect, bleed together, to ensure a continuous conductive path. This can be facilitated by laying the conductive ink down more thickly than is typical for nonconductive ink in a typical color process.

Depending upon the layout of circuit 186, it may be desirable to provide insulation between portions of the circuitry brought into adjacency by the folding. As will hereafter be explained, this can be done by the insertion of insulative sheets, or by overprinting the conductive ink with nonconductive or dielectric ink. For example, circuit 186 can be selectively, or completely coated with a layer of flexible dielectric paint, such as the product marketed by Olin Hunt Specialty Products Inc., a subsidiary of the Olin Corporation of Ontario, California, under the name "37AC22 Curable Spacer" or equivalent insulating material. As will be explained, this process can be employed to make switches 129 in a particularly economical fashion.

Sheet 180 is preferably made of nonconductive material capable of accepting flexible conductive ink, as taught in the prior art. Any material suitable for making book leaves, such as paper or thin plastic, which can be folded without breakage, is acceptable. Typically, the fold lines are provided through what is referred to in the art of book-making as "living-hinge" technology, which involves the formation of a hinge line by scoring it or compressing it onto the material constituting the leaf of the book. The material used may vary from pure paper to pure synthetic substances, including a variety of composite materials. For example, the products sold by Paper Sources International under the trademark "Chromolux" and by the Champion International Corporation under the trademark "Cromekote" consist of paper coated on both sides with a layer of synthetic material, available in overall thicknesses from approximately 6 to 18 thousands of an inch. The product marketed by the Kimberly-Clark Corporation under the trademark "Kimdura" consists entirely of synthetic paper, a polypropylene material, available in thicknesses ranging from about 3 to 12 thousands of an inch. The materials marketed by the Spring Hill Paper Company under the trademark "Claycoat" and by the ICI Company of England under the trademark "Melinex" consist of a polyester substrate. These materials are all suitable to practice the invention and can all be folded for long-term durability by means of living hinges.

Where circuit 186 is printed on the back side of sheet 180, perforations or non-opaque portions may be provided in sheet 180 corresponding to each visual device (*e.g.*, LED), so that it becomes visible with printed information.

Visual devices 125 may comprise commercially available LEDs. Such LEDs are available in a variety of thicknesses approximately in the 20 to 50 thousands of an inch range. For example, Instruments Design Engineering Associates, Inc. of Brea, California, sells an LED approximately 50 thousands of an inch (1.3 mm) thick, which is suitable to practice this invention. A much thinner, and therefore preferable, LED is sold
5 by Citizens Electronic Company of Japan as Part No. CL-190YG-X, believed to be approximately 20 thousands of an inch thick.

Another novel aspect of this invention, suitable for embodiment in any of the configurations adopted for assembling the electronic book, is a method of manufacture of an LED structure within the circuit 186; each
10 LED component is formed directly in sheet 180 of the book. Instead of mounting commercially available LEDs into the network of the circuit, construction of each LED structure 125 directly into circuit 186 on each page results in significantly lower manufacturing cost and lower overall thickness of the page. Thus, as illustrated in the greatly enlarged cross-sectional view in Figure 6 of an LED site within a leaf of sheet 180, an LED can be operationally inserted into circuit 186 at predetermined sites using techniques similar to well
15 known methods employed for mass production of LEDs: the desired sites for the LEDs are incorporated in circuit 186 (a break of predetermined length is provided in the conductive path) during the printing process, the ends of the conductor at the break saving is terminal for the LED; a base is prepared for each LED by laying a small length of conductive tape 191 across each set of LED terminals in circuit 186; and a semiconductor die chip 192 is deposited directly into the sites. Tape 191 is adhesive on both sides and
20 laminated on the top side with a copper foil 193, appropriately scored in the middle to form two electrically separate copper strips. This kind of conductive adhesive tape is available commercially in a variety of forms produced by the 3M Company of Saint Paul, Minnesota, such as copper-foil-backed 9703 Transfer Conductive Adhesive. The section of tape used on each LED site is oriented so that each copper strip covers one of the terminals in the circuit 186. The conductivity of tape 191 is uni-directional only, so that a current can flow
25 across but not along the plane of the tape; therefore, the two copper strips 193 are initially electrically insulated from one another, but are connected through the tape 191 to the corresponding circuit terminals on which they lie, thus forming suitable electrodes for integrating semiconductor die chip 192 into circuit 186. Semiconductor die chip 192 is then placed on the cathode side and electrically connected and bonded to the anode side by a strand of conductive epoxy resin 195 deposited on the anode side and stretched to make contact
30 with the die chip. In practice, this bonding operation is performed simultaneously on multiple die chips on the tape, which is then cut to yield individual LED components. Each component is then affixed with the appropriate electrical orientation to the terminals in the LED sites of the circuit board layer and covered with a sufficient amount of nonconductive epoxy resin 196 bond it to sheet 180 and to the conductive ink of the circuit board layer 186. In addition, the resin 196 covering the site tends to acquire a curvature that forms
35 a lens over the light emitting diode, thus further enhancing its effect in providing visual signals to the reader of the book.

As explained above, where the LED is constructed on the back side of a segment constituting a page (as illustrated in Figure 6), a corresponding perforation 194 on the adjacent segment of sheet 180 is required to make the LED visible from the front side of such adjacent segment. In that case, in order to properly coordinate the functioning of the visual display, the circuitry and the LEDs corresponding to each page may be placed on the back of the segment of core sheet corresponding to the opposite page (*i.e.*, the back of the adjacent segment). This way, the LED can be seen through a perforation 194 placed on the page to which the LED pertains (*i.e.*, the page on the adjacent segment).

The LED manufacturing industry provides standard equipment that can be used to manufacture the LEDs of the invention directly on the circuit board layer, as described above. Kulicke and Soffa Industries, Inc. of Willow Grove, Pennsylvania, provide several die bonders, such as the Models 6490 and 6491 Semiautomatic Die Bonders, that have proven suitable for the task. The average combined thickness of the conductive tape 191 and copper foil 193 used in the preferred embodiment of the invention (the 3M 9703 Transfer Conductive Adhesive mentioned above) is approximately 1.4 thousands of an inch; the semiconductor LED die chip 192, a product marketed by Hewlett-Packard, National Semiconductor, and other companies, is less than five thousands of an inch thick, depending on the specific product used; and the conductive strand 195, formed using LED wire bond material as available from Kulicke and Soffa Industries, is also approximately 5-10 thousands of an inch thick, depending on how it is laid. The nonconductive protective resin 196 (also available from Kulicke and Soffa Industries) that is used to cover the assembly of the other parts varies in thickness as needed. Therefore, the overall thickness of an LED so constructed is approximately 10-20 thousands of an inch, even including the arbitrary thickness of the protective lens 196. This constitutes a thickness reduction with respect to most standard LEDs, which can reduce the overall thickness of each page and permit the construction of an electronic book containing a large number of pages.

Visual devices 125, may also comprise persistent electrochromic material, displays such as described in U.S. Patent 4,703,573 issued to Montgomery, et al., on November 3, 1987, or thermochromic material. For example, thermochromic print may be used to implement one or more of active visual devices 125. Thermochromic printing is a well known technique. Referring to Figure 6A, a layer of thermochromic paint or ink 600 and an adjacent (*e.g.*, underlying) heat element, *e.g.*, resistor 602, suitably formed of a printable layer of resistive material, such as printable carbon, between two conductive leads 186A, 186B on a support foundation (sheet 180). When electric current is passed through resistor 602, the heat generated by the current causes the thermochromic paint to change color, normally from an unobtrusive grey to a bright color of choice. Thus, this technique is particularly suitable for use as an active visual element in book 100. If desired, a protective coating 604 of clear plastic, may be deposited (printed) over thermochromic ink 600.

Just as detailed above and illustrated in Figure 6 for LEDs, the respective layers of thermochromic paint and conductive material can be laid across sets of terminals in the circuit 186 to form a thermochromic element. The thermochromic element is suitably disposed in registration with a non-opaque portion or aperture 194 in the overlying section sheet 180. Alternatively, the thermochromic element (conductor, resistor, and the thermochromic ink) can be printed on the exposed surface of sheet 180, with the conductive circuit 186 being overprinted with the visual (printed) material. Alternatively, the conductors of circuit 186 can be printed on the back side of the sheet, coupled to resistor 602 using conventional through hole techniques (*i.e.*, the conductive ink is bled through the paper through sheet 180 through perforations preformed at the desired position of the thermochromic element). Printable thermochromic paint is available in various colors from the Murfin Division of the Menasha Corporation of Neeha, Wisconsin; and printable carbon is available from Olin Hunt under the name "Advanced Thermoset Polymer Thick Film IL-I Graphite Conductor."

Thermochromic inks are normally offered in two formats. In one format the ink changes color when heated above a certain temperature and returns to its original color when cooled down. In the other format the ink is transformed into an almost transparent state by heat and returns to the original color when cooled down. The cycle can be repeated each time as the temperature is increased or decreased and is the same for both color-to-color and color-to-colorless options. There are several different types of thermochromic inks (12 offered by Menasha) with threshold temperatures ranging from -3°C to 580C. Similarly, original and changed colors can be specified within a wide range of colors, including colorless among the latter, which can be used to expose a printed design underneath the original color. Finally, thermochromic inks can be printed on most ordinary printable surfaces.

Visual devices 125 can also be implemented using electro-illuminating ink, which can be laid between terminals in the circuit board layer of the invention in the same way as LEDs and thermochromic print. This ink is conductive, like the ink used to form the circuit 186 but it becomes luminous when current flows through it. Therefore, it affords an easy tool for illuminating the printed matter in the book with a variety of glowing colors. Electro-illuminating ink is available in different colors, for example, from the Murfin Division of the Menasha Corporation.

Heat element (*e.g.*, resistor) 602 can also be employed in cooperation with materials that release a scent when heated (thermo-olfactory materials). In such case, the conductor and resistor 602 are printed on the exposed surface of sheet 180, with resistor 602 being overprinted with the scent releasing material, and conductive circuit 186 being overprinted with visual (printed) material.

In another embodiment of the invention, printed circuit 123 of each page is further simplified by a modular approach to the construction of each book leaf. This approach assumes different configurations depending on

whether a circuit 112 (corresponding to circuits 123 and 186) is printed on the front or the back side of the substrate forming the leaf. Referring now to Figures 7, 8 and 9, when circuit 112 is printed on the front side, as shown in Figure 7A, each leaf of the book consists of one substrate sheet 116 bearing printed matter (either by way of laminated printed sheet, or by directly printing on sheet 116), corresponding to two opposite pages on the same leaf, (referred to in the figure as O and E for odd and even with reference to conventional page numbering) folded at a centerline 114. Each sheet 116 bears a circuit 112 corresponding to the specific display requirements of the two pages O and E, with the same general characteristics described above for the continuous sheet 180 of Figure 4. The conductive paths of circuit 112 originate/terminate in connections 113 lying across (spanning) center fold 114 of sheet 116. Centerfold 114 becomes a common edge between the two opposite pages after folding of the core sheet and becomes part of the spine of the book after assembly into book format. Thus, the circuitry of each individual page (containing electrical elements, *e.g.*, visual devices 125, switches 129 and, if utilized, switch 127 for that page) is self-contained, independent of the circuitry in any other page, and connected to the electronic circuitry 160 through connections 113.

The circuit 112 of each page is connected in parallel to the circuitry of each other page, and is controlled directly by circuitry 160 through separate connecting terminals. As illustrated in Figure 8, by folding each sheet 116 in the direction of arrows A1 and A2 and along center fold 114, a book leaf 116 is formed wherein the edge corresponding to the center fold 114 constitutes the inside margin of each opposite page O and E (and the common edge of the folded module), and wherein each page contains the half of the circuit board layer 112 that pertains to its printed material. By properly positioning the connections 113, which span the fold 114 of leaf 116, these connections can be used as the conductive paths to electronic circuitry 160. An example of one such circuit board layer 112 is shown in Figure 9, wherein each active visual element site is shown with two LEDs.

If it is desired that centerfold 114 be employed as the outer edge of the book, and the opposite edge be bound in the spine, terminal connections would be provided along the edges opposite fold 114. Specifically, referring to Figure 7B, a perforation 113C would be formed in sheet 116 at the desired position of terminal 113. During the printing of circuit 112, conductive ink is deposited over perforation 113. As will be more fully discussed in conjunction with the unfolded leaf embodiment of Figure 18, the conductive ink will bleed through perforation 113C so that conductive terminals (113A, 113B) are established on both sides of sheet 116, to facilitate interconnection with the other leaves.

If desired, connections between the respective individual book leaf 116, and electronic circuit 160 can be facilitated through use of a specially constructed spine. Referring to Figure 10, such specially constructed spine 221, is fan like, including respective flaps 222 for receiving each book leaf 116. Flaps 222 sandwich book leaves 116 and contain connections 223 configured to correspond and, in assembly to become coupled

to, connections 113 of each leaf. A conductive path to the electronic circuitry 160 is thus formed through a last segment L2 (equivalent to the last segment L1 of the continuous sheet 180 shown in Figures 4 and 5). Like continuous sheet 180 of Figures 4 and 5, spine 221 is constructed by forming on a single sheet, suitably by printing in flexible conductive ink, a printed circuit 286 converging at end segment L2, for coupling with the electronic circuitry 160 through terminal portion 188. The continuous sheet of spine 221 is folded in accordion fashion (except for the segment L2) into equal narrow segments (flaps 222) to form spine 221 as shown in Figure 10. A specific conductive path goes from each connection 223 to the last segment L2 through spine 221 and there it is routed to a common terminal portion 188. Therefore, once inserted into the spine and coupled to connections 223 between each pair of flaps 222, connections 113 of each modular book leaf 116 are directly connected to terminal portion 188 (and therefore to the electronic circuitry 160) through the continuous circuitry printed on the continuous sheet of the spine 221. Figure 11 shows a perspective view of an embodiment 200 of the invention manufactured according to the spine and modular leaf approach just described.

One of the advantages of this modular approach is that each pair of pages O and E on the opposite sides of each leaf can be designed independently of the rest of the book, the only constraint being in the points of connection 223 through the spine 221. In addition, if the same visual display configuration, *i.e.*, circuit 112 is used for all pages in the book, the modular approach makes it possible to use the same leaf sheet (116 for example) for the entire book, identical in all respects except for one identifying connection 113, laminated or printed with different printed material for different pages, thus greatly decreasing the cost of printing individual circuits 112 for each page. By comparison, the versatility of the accordion approach of the first embodiment is limited by the requirement that all electrical paths for the entire set of pages be cumulatively run through the continuous core sheet to the last page for connection with the terminal board 188. This means that the complexity of each individual page is necessarily reflected in progressively crowded circuitry toward the last page, where it all converges for connection with the terminal board. Therefore, the complexity of the circuitry on each page is necessarily limited by corresponding physical space requirements. Moreover, the accordion approach requires that any modification to circuit 186 be reflected in a manufacturing change to the entire continuous sheet 180, instead of only one leaf 116, with obvious cost and versatility drawbacks.

Referring to Figures 12-14, the modular approach can also be employed with circuit 112 formed (*e.g.*, printed) on the back side of the substrate sheet for each page. Each module of the book comprises one substrate sheet 216 corresponding to a spread of two facing pages (E, O) on adjacent leaves. Sheets 216 have the same general characteristics described above for the continuous sheet 180 of Figure 4. By folding each sheet 216 in the direction of arrows A3 and A4, along a center fold 214, as seen in Figure 12, and by joining adjacent modules 216, as shown in Figure 13, book leaves 215 are formed with the center folds 214 constituting the inside margins of each facing page E and O. As illustrated in Figure 13, where leaves 215 are formed by

combining pairs of substrate sheet modules 216, the back sides of opposite pages come together and sandwich their respective portions of the circuit 212. A top sheet 224 bearing printed matter and light apertures 228 (or corresponding non-opaque portions) may be affixed to each page to complete a laminated assembly (as shown in Figure 13), or printed matter can be selectively printed directly on the substrate sheets. This construction is also particularly suited for printing visual material through reverse lay down processes on a non-opaque (*e.g.*, transparent) substrate, and overprinting circuit 212 on the visual material. Where a top sheet 224 or an opaque substrate is employed, the back of each page suitably contains the portion of the circuit 212 that pertains to the printed material of the opposite page of leaf 215. For example, in the embodiment of Figures 12 and 13 employing top sheet 224, the circuitry on the back of the odd page O on the left module in the figure corresponds to the printed material on the front of the even page E of the right module; similarly, the circuitry (not seen in the figures) on the back of the even page E on the right module necessarily corresponds to the printed material (also not seen) on the front of the odd page O of the left module. In any event, the respective portions of circuit 212 printed on the back of each spread are suitably connected to other portions by connections 213 along, and preferably spanning, center fold 214. Since this configuration may cause portions of the circuit on adjacent sheets 216 to be in direct contact with one another because sandwiched between segments of adjacent spreads to form book leaves, it may be desirable to protect the circuit board layers by coating them with a layer of flexible dielectric paint, such as the Olin Hunt "37AC22 Curable Spacer" product mentioned above, or equivalent insulating material.

Each substrate sheet 216 can be plugged in modular form into a matching spine 220 (seen in Figure 14) equivalent to the spine 221 of Figure 10, with the connections 213 of each circuit 212 disposed to overlap corresponding connections 223 (see Figure 10). Spine 220 is shown in Figure 14 only partially enmeshed with several substrate modules for clarity. Each module 216, comprising one spread of facing pages, is received between sets of flaps, with the flap interposed between the pages forming a leaf. Spine 220 provides the point of connection for each page to common electronic circuit 160 (not shown in Figures 12-14); each connection 223 in the spine is tied to a conductive path that is routed through the last segment L3 of the spine to the terminal portion 188 (not seen in Figure 14), which is in turn coupled to the electronic circuitry 160.

The embodiment of Figures 12-14 is particularly advantageous in that each pair of pages E and O on facing sides of each spread can be designed independently of the rest of the book, the only constraint being the disposition points of connection through the spine. In addition, if the same printed circuit layout is used for all spreads in the book, the modular approach makes it possible to use the same core sheet 216 for the entire book, with a single different connection 213 in each circuit board layer for identification purposes, laminated or printed with different printed material for different pages, thus again greatly decreasing the cost of printing individual circuits. Such modules can be created, if desired, by printing a standard circuit on all modules, then selectively overprinting various connectors 213 with nonconductive ink.

A separate spine structure (220 and 221 in Figures 14 and 10, respectively) can be physically omitted from the book, if connections 213 (or 113; Figures 7-9) in adjacent modules overlap one another, such that the abutting connections 213 (or 113) provide sufficient electrical contact, when bound together, to form the required electrical paths to the last segment of the circuit (L2 and L3 in Figures 10 and 14, respectively).

Such a construction is facilitated by use of conductors spanning the fold of the modules (leaves or spreads depending upon the mode of construction) at which the modules are bound together, *i.e.*, constituting the spine. As will be more fully described in conjunction with Figure 18, where unfolded modules are employed, through hole techniques (Figure 7B) are suitably employed to extend the conductor terminal to both sides of the module.

Referring to Figures 15 and 16, a particularly economical mechanism for completing the connection between remote pages (leaves) and electronic circuitry 160 is effected through use of free connections 213A in each module (in Figure 16A for example, 25 connections are shown as free, *i.e.*, not connected to circuit 212). Free connections 213A serve as bridges, through abutting connections in all adjacent modules, completing a connection from a module in which it is connected to circuit 212 of that particular module to a different module containing a conductor connected to the corresponding connection 213 completing the connection to electronic circuit 160. Thus, all modules may feature the same set of connections 213, but each module uses one different connection for coupling with electronic circuitry. Thus, as seen in Figure 15, the spine assemblies 220 and 221 may be functionally replaced by a single-sheet last segment L4 containing electrical paths 386 that couple each connection 213 (or 113) on the last module 216 (or 116) to terminal portion 188 and hence to circuit 160. Of course, every other connection 213 (or 113) in the adjacent modules becomes also connected to the terminal board 188 by virtue of the contact between abutting connections 213 (or 113). Single-sheet segment L4 can also be eliminated altogether by coupling electronic circuitry 160 directly to the connections 213 (or 113) in the spine of the book.

The contact between abutting connections 213 (or 113) in this embodiment of the invention, may be improved through use of selective disposition of conductive adhesive over abutting connections 213 (isolation between adjacent connections on sheet 216 maintained) or by general application of a strip of anisotropic conductive material (adhesive) along the bound edge. This material, also referred to in the industry as a z-axis conductive membrane, is characterized by its directional electric conductivity across its thickness (the z-axis) and by its otherwise insulating characteristics in any other direction. It is available in tape form, such as the Scotch Brand 9703 Conductive Adhesive Transfer Tape sold by the 3M Company of St. Paul, Minnesota; or in liquid form, as the Anisotropic Heat/Pressure-Seal Coating 41DJB130 sold by the Olin Hunt Company of Ontario, California. In either form, the anisotropic conductive material is laid on the circuit board layer 212 (or 112) to cover the connections 213 (or 113), and it is sandwiched between the modules to provide electrical contact between each pair of abutting connections without causing electrical shorting with the adjacent circuitry. Some

of these products (*e.g.*, the Scotch transfer tape) are placed on the circuit board layer as tape, which is cut to cover the desired portions of the board. Others (*e.g.*, the Olin Hunt coating) are spread as a thin layer of paint or adhesive (0.5 to 1.5 mils in thickness), and are then subjected to pressure and/or heated to cure into a membrane with the required anisotropic characteristics. In any event, with or without the aid of anisotropic conductive material, the book of the invention can be bound according to conventional book binding procedures, requiring an adhesive (such as one of the glues normally used in book-binding) to form a spine holding the modular leaves or spreads together.

It should be noted a sandwich leaf construction as illustrated in Figures 12-15 is particularly advantageous in that a single visual device (*e.g.*, LED, thermochromic element, or electro-illuminating ink site) can be used for two opposite pages. By sandwiching the visual device between two perforations 227 on opposite pages and connecting it to the circuitry of both pages, the same device becomes available for the function of the circuit board layer for each page. A lens formed, *e.g.*, with the nonconductive epoxy resin 196 shown in Figure 6, may be used on both sides of the visual device to protect it from damage through the perforations 227. In the case of thermochromic elements, two different thermochromics can be used around (*e.g.*, underlying and overlying, respectively) a single resistor (*e.g.*, strand of carbon) to produce different colors on each side. Obviously, any combination of LEDs, electro-illuminating ink, and thermochromic elements can be used throughout the circuit board layer of the invention without affecting any of the features described in this specification.

A "sandwich" leaf construction, as employed in various embodiments of the present invention, is also particularly advantageous in that it facilitates the formation of switches (*e.g.*, switches 129) employing conventional printing processes. For example, conductive pads may be printed on the interior surfaces of the respective pages of the leaf, disposed for general registry when the leaf is assembled (*e.g.*, opposing pages folded as in Figures 2B, 4, 5, or brought together in binding as in Figures 12-14), with a spacer interposed between the pages. As hereinafter will be explained, the spacer can be implemented using conventional spot gluing apparatus, or by selective printing with a nonconductive or dielectric ink. The sensitivity of the switches, both as to the pressure necessary to effect a connection, and as to the necessary localization of force, is controlled, as noted above, by the pattern and relative disposition of the spacer to the conductors.

Referring to Figure 16A, an exemplary layout of a circuit 212 (*i.e.*, used in the modular configuration described in the embodiments of Figures 12-16) implementing switches 127 and 129 for each page of the leaf. As more clearly shown in Figure 16B, switches 127 (and 129) comprise: a respective conductive pad, 127A, disposed on the interior surface of one page (*e.g.*, 216E) of the leaf; a corresponding pad (127O) in the portion of circuit 212 of the opposite page (216O) on the same leaf 216, and an interposed spacer, suitably pressure sensitive dielectric medium 217, such as the Olin Hunt 37AC22 Curable Spacer product mentioned above.

Conductive pads 127A (127B) are disposed to abut corresponding pads on the opposing pages (216E, 216O) of the leaf when module 216 is folded and the leaf assembled. Conductive pads 127A (127B), while shown in circular configuration in Figure 16B, may be of other configurations. For example, the conductive pads may be configured as fringes, with one conductor rotated 90° with respect to the others.

5

Dielectric medium 217 is interposed between pages 216E and 216O, preferably printed in a predetermined pattern on one or both of the leaf interior surfaces in predetermined positions, *e.g.*, adjacent, circumscribing or overlying, conductive pads 27. The pressure necessary to actuate the switch can be closely controlled by forming spacer 217 as a grid having lines 217A and spaces 217B, overlying pad 127A. The conductive surfaces can be forced into contact through dielectric grid spaces 217B by exerting a predetermined force; the insulating function of the dielectric medium is bypassed when a certain level of pressure is exerted upon it, thus connecting the two pads and activating the switch formed by them. Thus, the two switches formed by the switch element pairs 127a and 127b are utilized as pressure switches to activate the odd and even page, respectively, of the leaf. The amount of force necessary to effect contact is a function of the denseness of the grid. Actuation at approximately 7 ounces per square inch of pressure is preferred. A seven ounce per square inch pressure requirement can be obtained by overprinting conductive pads 127A with a grid of dielectric 0.0008 inch thick, with dielectric spacer lines 217A 0.020 inch wide, and line spacing 217B of 0.02 inch. To increase the required localization of the force, *i.e.*, require that pressure be applied directly to the switch, the dielectric includes an annulus (ring) 217C circumscribing the conductive pad. The respective pads 127A and 127o are brought into contact through spaces 217B between grid lines 217A, only in response to pressure from directly above the pads.

Specifically, in order to bring the switch elements into contact, sufficient force must be applied to create a localized deflection of one of the elements out of the plane of the page into contact with the other element through spaces 217B. Ring 217C tends to prevent pressure applied outside of the area circumscribed by the ring from causing such a localized deflection. The requirement of localized pressure (pressure specificity requirement) makes such switch construction particularly suited for use in multi-page books. The pressure specificity requirement militates against accidental actuation of switches by pressure applied to other switches on the same page or proximate pages. Intervening pages cause a dispersal of pressure, so that a switch on one page can be disposed underlying a switch on another page with only a few leaves interposed; *e.g.*, leaves with switches at other dispositions between the overlying switches (the number of necessary interposed leaves is a function of the thickness of the leaves).

A similar approach can be employed, if desired, to selectively effecting connections between two conductors disposed on the same sheet of the leaf. Referring to Figure 16C, one of the conductive pads (127A, 127o) would be replaced by respective proximate conductors, suitably interdigitized fingers, constituting the terminals

127X, 127Y of the switch printed on the interior surface of one of the leaf pages. Terminals 127X, 127Y are suitably disposed in predetermined relationship with an associated portion of the visual material on the leaf. As in the embodiment of Figure 16B, a spacer 217A is interposed between the interior surfaces of the leaf pages, and a conductive connector (not shown in Figure 16C) is formed on the interior surface of the opposite leaf page, disposed so that when the leaf is assembled (*i.e.*, opposing pages folded as in Figures 2B, 4 or 5, or brought together in binding as in Figures 12-14), it is normally set off from the switch terminals by the spacer, but effects an electrical connection between switch terminals 127X and 127Y in response to application of a predetermined force. Spacer 217A may comprise a grid or ringed grid such as shown in Figure 16B, disposed over terminals 127X and 127Y. Alternatively, spacer 217A may comprise dielectric ink overprinted on terminals 127X and 127Y, as shown in Figure 16C. Spacer 217A suitably covers approximately 60% of the surface area of terminals 127X and 127Y.

Switches 129 for interactive sequences controlled by the viewer are similarly implemented by switch elements 129A and 129B incorporated into each half of circuit 212. Thus, by combining adjacent modules in the manner shown in Figures 12 and 13, the circuit 212 of Figure 16A forms switches 127 and 129 sandwiched in each leaf 215 that are used to interact with the electronic control circuitry 160 to activate and control the various audio and/or visual functions programmed for each page on that leaf.

Figure 17 shows an exemplary layout of the last segment L4 in an embodiment of Figure 16A, featuring the same set of connections 213 for coupling with the modules 216 in the manner shown in Figure 15. Multiple switches 129 are also included in the circuitry. By covering all the switch elements 129 with the dielectric medium described above and by folding the segment L4 along a center fold 314, matching pairs of switch elements 129 form manually actuated pressure switches that give the viewer game options to enhance the recognition of printed material superimposed on each switch. For example, pressing the letter B placed over one switch may initiate a repetition of the audio display used before in the book to illustrate the letter B in conjunction with the picture of a bear, and so on.

In some instances, it may be desirable to construct an electronic book employing leaves formed of a single unfolded sheet. Referring to Figure 18, a book 1800, includes a plurality of sheets 1802 (shown in Figure 18 in greatly enlarged cross section). Sheets 1802 are suitably any material capable of accepting flexible conductive ink. Perforations 1804 are formed at predetermined positions on each sheet 1802 of the book. Printed circuits 1806 (analogous to printed circuits 123 of Figures 2A, 2B; 186 of Figure 4; 112 of Figures 7-9; and 212 of Figures 12, 15 and 16), are formed integral to sheets 1802, preferably laid down, preferably using conventional printing equipment as previously described, on each side of the sheets 1802.

Each perforation 1804 is overprinted with conductive ink, either as part of an active circuit 1806, or as a free connector 1808 (as previously discussed in connection with Figures 15 and 16). In each instance, the conductive ink flows through perforation 1804 (as previously discussed in connection with Figures 7A and 12-14) to provide for interpage connectors, for effecting electrical connections between integral circuits 1806 and common electronic circuit 160 (not shown in Figure 18). Perforations 1804 are preferably of a size and configuration (*e.g.*, round) such that a meniscus is formed extending outwardly of the opposing surface of sheet 1802 to establish the interpage connector (*e.g.*, 1808) in a single print process. However, in some instances it may be desirable, particularly in embodiments where conductive ink circuits are printed on both sides of the substrate, to deposit conductive ink over perforation 1804 from both sides of sheet to establish interpage terminals of a predetermined size and configuration on both sides of the leaf.

As in the previously described embodiments of the invention, sheets 1802 may include one or more switches 1812, associated with a portion of the visual material on the page (or set of pages). Switches 1812 suitably comprise a pair of conductive paths 1806X, and 1806Y (analogous to terminals 127X and 127Y in Figure 16C) cooperating with an overprinted dielectric spacer 1814 (analogous to spacer 217 of Figure 216). A flexible membrane 1816 having a conductive pad 1818 disposed on the undersurface thereof, a suitably printed in flexible conductive ink (analogous to pad 127O in Figure 16B) is disposed over spacer 1814. Membrane 1816 is affixed to page 1802 by a suitable adhesive. Visual material (*e.g.*, images, characters, and/or text) 1820 is then applied, suitably by conventional printing processes to pages 1802, overlying circuits 1806 and membrane 1816. To ensure a good interconnection, and to facilitate binding, an anisotropic conductive adhesive 1810 (z-axis conductive) as previously described is applied between pages 1802 at the spine. Book 100 may then be bound in accordance with conventional techniques; as will be understood the embodiment of Figure 18 is particularly suited for perfect binding techniques.

It will be understood that while various of the conductors and connections are shown in the drawing as single lines, particularly Figures 3A and 3B, they are not so shown in a limiting sense, and may comprise plural conductors or connections as understood in the art. Similarly, power connections, various control lines, and the like to the various elements are omitted from the drawing for the sake of clarity. Further, the above description is of preferred exemplary embodiments of the present invention, and the invention is not limited to the specific forms shown. Modifications may be made in the design and arrangement of the elements within the scope of the invention, as expressed in the claims.

CLAIMS

An electronic book comprising:

a plurality of leaves, each leaf comprising pages of visual material on opposing sides thereof, the leaves being bound together at one edge to form a spine;

5 each leaf including a plurality of interpage connectors located at predetermined positions proximate to the leaf bound edge;

a plurality of switches, each of the switches formed integral to an associated leaf and associated with a portion of the visual material, each switch being operatively connected to respective interpage connectors on the leaf;

10 a common electronic circuit for selectively effecting respective outputs related to respective portions of the visual material; and

interpage conductive paths through the spine electrically connecting the interpage connectors of the respective switches to the common electronic circuit, such that operation of the electronic circuit is effected in accordance with activation of the switches on the respective leaves.

15

1. The electronic book of Claim 1, wherein the switch is operatively connected to respective interpage connectors by a conductive path formed of conductive ink.

20 2. The electronic book of Claim 1, wherein at least one of the switches comprises at least one conductor formed of conductive ink disposed on a surface of said associated leaf with a spacer of predetermined pattern formed thereon.

25 3. The electronic book of Claim 1, wherein the leaves include perforations disposed at predetermined positions proximate to the leaf bound edge, and the interpage connectors are formed of conductive ink disposed over the perforations, and the interpage conductive paths are effected by disposing the interpage connectors of adjacent leaves in physical contact.

30 3. The electronic book of Claim 4, wherein the interpage conductive paths comprise anisotropic conductive material disposed between the leaves at the spine in contact with the interpage conductors of the leaves.

4. The electronic book of Claim 1, wherein said common electronic circuit includes a speech simulator circuit for selectively generating speech output related to respective portions of the visual material.

35 5. The electronic book of Claim 4, wherein the interpage conductive paths comprise a conductive adhesive selectively disposed on said interpage connectors.

6. The electronic book of Claim 1, wherein each leaf comprises first and second pages, each of the pages having interior and exterior surfaces, with the visual material viewable at the exterior surfaces, and disposed such that the interior surfaces face each other within the interior of the leaf; and

5 the interpage conductive paths comprising conductive paths formed of flexible conductive ink on a continuous sheet folded in accordion fashion, the folds of the continuous sheet being received in the interior of the leaf such that the leaf interpage connectors are in electrical contact with said continuous sheet conductive paths.

7. The electronic book of Claim 8, wherein the switches comprise:

10 at least a first conductor formed of conductive ink on the interior surface of the first page, disposed in predetermined relationship with an associated portion of the visual material of the leaf;

a spacer interposed between said page interior surfaces;

15 a second conductor formed of conductive ink on the interior surface of the second page disposed relative said first conductor and the dielectric spacer such that said first and second conductors are normally isolated from each other, but effect an electrical connection in response to a predetermined pressure applied thereto.

8. The electronic book of Claim 1, wherein the interpage conductive paths comprise anisotropic conductive material disposed between the leaves at the spine in contact with the interpage conductors of the
20 leaves.

9. The electronic book of Claim 1, wherein the interpage conductive paths comprise a conductive adhesive selectively disposed on said interpage connectors.

25 10. The electronic book of Claim 1, wherein:

the associated leaf comprises first and second pages, each of the pages having interior and exterior surfaces, with the visual material viewable at the exterior surfaces, and disposed such that the interior surfaces face each other within the interior of the leaf; and

the switches comprise:

30 at least a first conductor formed of conductive ink on the interior surface of the first page, disposed in predetermined relationship with an associated portion of the visual material of the leaf;

a spacer interposed between said page interior surfaces;

35 a second conductor formed of conductive ink on the interior surface of the second page disposed relative said first conductor and the dielectric spacer such that said first and second conductors are normally isolated from each other, but effect an electrical connection in response to a predetermined pressure applied thereto.

11. The electronic book of Claim 12, wherein said switch comprises a third conductor formed of conductive ink on the interior surface the first page, disposed in proximity to a portion of the first conductor, and said second conductor selectively effects an electrical connection between said first and third conductors.

5 12. The electronic book of Claim 12, wherein said spacer comprises a predetermined pattern of dielectric ink disposed on at least one of the first and second conductors.

13. The electronic book of Claim 14, wherein said dielectric ink covers approximately 60 percent of the area of the conductors.

10

14. The electronic book of Claim 14, wherein said dielectric ink is in a pattern of spaced apart lines.

15. The electronic book of Claim 16, wherein the dielectric ink is approximately 0.0008 inch thick, the lines of dielectric ink are 0.02 inch wide, spaced 0.02 inch apart.

15

16. The electronic book of Claim 16, wherein the spacer includes a ring of dielectric ink circumscribing at least one of the first and second conductors.

17. The electronic book of Claim 14, wherein the spacer includes a ring of dielectric ink circumscribing at least one of the first and second conductors.

20

18. The electronic book of Claim 1, further comprising at least one electrically actuated sensory output device integral to the leaf associated with a particular one of the switches, operatively connected to respective interpage connectors and associated with at least a portion of the visual material associated with the particular switch;

25

interpage conductive paths through the spine electrically connecting the interpage connectors of the electrically actuated sensory output device to the common electronic circuit, such that the operation of the electrically actuated sensory output device is effected in accordance with signals the common electronic circuit generated in accordance with activation of the particular switch.

30

19. The electronic book of Claim 20, comprising a plurality of said electrically actuated sensory output devices, each associated with at least a portion of the visual material associated with the particular switch; and said common electronic circuit includes a sequencing circuit to generate signals to the individual electrically actuated sensory output devices in a predetermined sequence in response to actuation of the particular switch.

35

20. The electronic book of Claim 20, wherein at least one of the electrically actuated sensory output devices comprises a heat generating resistor.
21. The electronic book of Claim 20, wherein at least one of the electrically actuated sensory output devices
5 comprises an active visual device.
22. The electronic book of Claim 23, wherein said active visual device is viewable from book pages of the leaf.
- 10 23. The electronic book of Claim 23, wherein said active visual device is actuatable through multiple circuit paths.
24. The electronic book of Claim 23, wherein the active visual device comprises a light emitting diode.
- 15 25. The electronic book of Claim 23, wherein the leaf associated with the particular switch includes a connecting circuit formed of flexible conductive ink connecting the active visual device to respective interpage connectors, and the active visual device comprises a semiconductor light emitting diode die chip bonded directly into said conductive ink circuit.
- 20 26. The electronic book of Claim 23, wherein the active visual device comprises electrochromic material disposed on the leaf.
27. The electronic book of Claim 23, wherein the active visual device comprises a heat generating resistor and thermochromic material disposed in proximity on the leaf.
- 25 28. The electronic book of Claim 20, wherein at least one of the leaves includes exposed contact terminals integral to the leaf operatively connected to respective interpage connectors proximate to the leaf bound edge and associated with at least a portion of the visual material associated with a particular one of the switches; and
- 30 the book further comprises interpage conductive paths through the spine electrically connecting the interpage connectors of the exposed contacts to the common electronic circuit, such that the common electronic circuit generates signals to the exposed contacts in accordance with activation of the particular switch.
29. The electronic book of Claim 20, wherein:
- 35 at least one of the leaves is formed of a sheet of non-opaque material;

the visual material comprises printed material printed on one side of the non-opaque sheet in reverse-laydown format, such that the visual material is viewed through the opposite side of the non-opaque sheet and the sensory output device is connected to the interpage connectors by conductive path formed of conductive ink overprinted on the visual material.

5

30. The electronic book of Claim 31, wherein the non-opaque material is transparent.

31. The electronic book of Claim 31, wherein the printed material is selectively disposed on non-opaque material to define at least one bare portion and the sensory output device comprises a active visual device disposed on said bare portion.

10

32. The electronic book of Claim 20, further including a cover affixed to and disposed about the plurality of leaves, wherein the common electronic circuit is disposed on said cover.

15

33. The electronic book of Claim 1, wherein the interpage connectors of each leaf, when bound, are disposed in electrical contact with corresponding interpage connectors of the adjacent leaves to effect the interpage conductive paths.

20

34. The electronic book of Claim 2, wherein at least one of the leaves is at least partly formed of a non-opaque material, with the visual material disposed thereon in reverse-laydown format, such that the visual material is viewed through the opposite side of the non-opaque material and the conductive path is disposed overlying the visual material.

35. The electronic book of Claim 1, wherein:

25

each leaf comprises a modular substrate sheet folded to form the opposing book pages;
a printed circuit of flexible conductive ink is on the front side of said modular substrate sheets, having electrical connections between said two opposing pages at said interpage connectors;
a fan-like spine having flexible conductive circuitry printed thereon for receiving said plurality of book leaves, each leaf being sandwiched between corresponding flaps in said spine, wherein said electrical connections between said two opposite pages of each leaf are coupled to corresponding electrical paths in said spine.

30

36. An electronic book comprising:

a plurality of leaves, each leaf comprising pages with visual material on opposing sides thereof, and bound at one edge to form a spine;

35

the plurality of leaves being formed of a continuous sheet folded in accordion fashion, the inside folds of which comprising the bound edges of the leaves;

each of the leaves including at least one electrical element formed therein, associated with at least a portion of the visual material, and a connecting printed circuit extending across the folds of the continuous sheet; and

a common electronic circuit cooperating with the electrical elements on the respective leaves, connected to the electrical elements through the connecting printed circuits.

37. The electronic book of Claim 38, wherein the common electronic circuit is connected to the end of the connecting circuit.

38. The electronic book of Claim 38, wherein at least one of the electrical elements comprises a semiconductor light emitting diode die chips bonded directly into said printed circuit.

39. The electronic book of Claim 38, wherein at least one of the electrical elements comprises a switch whereby operation of the electronic circuit is effected in accordance with activation of the switches on the respective leaves.

40. The electronic book of Claim 41, wherein the switch comprises:
at least the first conductor formed of conductive ink on the interior surface of one of the pages of the leaf, disposing predetermined relationship with an associated portion of the visual material of the leaf;
a second conductor formed of conductive ink on the interior surface of the other page of the leaf;
a spacer interposed between the interior surfaces of the opposing pages;
the first and second conductors and spacer being relatively disposed such that the first and second conductors are normally isolated from each other, but effect an electrical connection in response to a predetermined pressure applied thereto.

41. The electronic book of Claim 42, wherein the switch comprises: a third conductor formed of conductive ink disposed in proximity to and on the same surface as the first conductor, and said second conductor selectively effects an electrical connection between the first and third conductors.

42. The electronic book of Claim 38, wherein at least one of the electrical elements comprises a resistor.

43. The electronic book of Claim 38, wherein at least one of the electrical elements comprises an active visual device.

44. The electronic book of Claim 45, wherein the active visual device comprises a light emitting diode.
45. The electronic book of Claim 45, wherein the active visual device comprises a semiconductor light emitting diode die chip bonded directly into said connecting circuit.
- 5
46. The electronic book of Claim 45, wherein the active visual device comprises a electrochromic material disposed on the leaf.
47. The electronic book of Claim 38, wherein at least one of the electrical elements comprises exposed contact terminals.
- 10
48. An electronic book comprising:
a plurality of leaves, each leaf comprising pages with visual material on opposing sides thereof, and bound at one edge to form a spine;
15 at least one of the leaves comprising:
a portion formed of non-opaque material, the visual material disposed thereon in reverse-laydown format, such that the visual material is viewed through the opposite side of the non-opaque material; and
an electrical circuit formed of conductive ink disposed on said leaf overlying the visual
20 material.
49. The electronic book of Claim 50, wherein the non-opaque material is transparent.
50. The electronic book of Claim 50, wherein the visual material is selectively disposed on non-opaque material to define at least one bare portion and the integral electrical circuit comprises a active visual device
25 disposed on said bare portion.
51. The electronic book of Claim 52, wherein the active visual device comprises a electrochromic material disposed on the bare portion.
- 30
52. The electronic book of Claim 52, wherein the active visual device comprises a thermochromic material disposed on the bare portion.
53. An electronic book comprising:
35 a plurality of leaves, each leaf comprising pages of visual material on opposing sides thereof, and bound at one edge to form a spine;

each of the leaves including an integral electrical circuit comprising flexible conductive ink, the circuit having at least one electrically actuatable element disposed in association with a portion of the visual material, and a connector portion extending into the spine;

a common electronic circuit for selectively generating predetermined sequences of signals; and

5 conductive paths formed through the spine electrically connecting the common electronic circuit to the respective electrical circuit elements integral to the leaves, such that electrical elements integral to the leaves are actuated in accordance with the signals generated by the common electronic circuit to selectively emphasize the particular portions of the visual material associated with the electrical elements integral to the leaves.

10 54. The electronic book of Claim 55, wherein:

each leaf comprises a modular substrate sheet folded to form the opposing book pages;

the integral electrical circuit comprises a printed circuit formed on the front side of said modular substrate sheets of flexible conductive ink and having electrical connections between said two opposing pages; and

15 said book further includes a fan-like spine having flexible conductive circuitry printed thereon for receiving said plurality of book leaves, each leaf being sandwiched between corresponding flaps in said spine, wherein said electrical connections between said two opposite pages of each leaf are coupled to corresponding electrical paths in said spine.

20 55. The electronic book of Claim 55, wherein said electrically actuatable element comprises a semiconductor die light emitting diode chips bonded directly into said integral circuit.

56. An electronic book comprising:

25 a plurality of book leaves formed of a continuous sheet folded in accordion fashion to form pairs of adjacent segments, the inside folds of which are bound to form the spine, while the outside folds constitute the outer edges of the book's pages;

a printed circuit comprising flexible conductive ink on one side of said continuous sheet and extending across at least one of said folds;

printed information provided on said book leaves for communicating visual information to a user;

30 a sound generator circuit containing audio signal information corresponding to said printed information;

an audio output device responsive to a drive signal from said sound generator;

an address generator responsive to control signals applied thereto, for providing address signals to said sound generator to effect generation of predetermined sounds corresponding to said address signals; and

35 at least one switch disposed on a leaf and associated with at least a portion of the printed information on a set of pages of the book and electrically connected to said address generator through said printed circuit

to selectively effect generation of address signals to said sound generator corresponding to sounds associated with said portion of the printed information.

57. The electronic book of Claim 58, wherein:

5 said associated portion of the information comprises a passage of printed words; and
 said switch effects generation of a sequence of address signals to the sound generator corresponding to the vocalization of said printed words.

58. The electronic book of Claim 58, wherein:

10 said switch effects generation of a predetermined sequence of address signals.

59. The electronic book of Claim 58, further comprising

 at least one active visual device associated with said portion of printed information; and
 a control sequence generator, responsive to said switch and connected to said active visual device
15 through said printed circuit, for activating said active visual device in synchronism with the sounds associated with the portion of printed information.

60. The electronic book of Claim 58, wherein:

 said associated portion of printed information includes at least one printed image and
20 said book further comprises:
 an active visual device associated with said printed image; and
 means, connected to said active device through said printed circuit, for activating said
active visual device in synchronism with generation of the sounds associated with the printed
image.

25

61. An electronic book for identifying and highlighting printed information by visual signals in a sequentially organized manner, comprising:

 a plurality of book leaves comprising a continuous sheet folded in accordion fashion to form pairs of adjacent segments, the inside folds of which are bound to constitute the book's spine, while the outside folds
30 constitute the outer edges of the book's pages;

 a printed circuit on one side of said continuous sheet formed of flexible conductive ink extending across at least one of said folds;

 printed information disposed on said book leaves for communicating visual information to a user;

 a plurality of active visual elements incorporated into said printed circuit and visible to a user;

sequence control means, responsive to control signals applied thereto, for sequentially energizing said active visual elements to highlight a designated portion of said printed information on a page according to a predetermined sequence; and

5 at least one switch disposed integral to a book leaf, associated with said portion of the printed information and electrically connected to said sequence control means through said printed circuit for generating said control signals to said sequence control means to effect energization of the visual elements to highlight the printed information associated with the switch.

62. The electronic book of Claim 63, further comprising:
10 a sound signal generator for generating audio drive signals corresponding to said printed information; and

an audio output device responsive to said audio drive signals from said sound signal generator; and wherein

15 said sequence control means, responsive to said control signals for selectively activating said sound signal generator to describe said designated portion of printed information in coordination with energizing the active visual elements.

63. The electronic book of Claim 63, wherein at least one of said active visual elements comprises semiconductor light emitter diode die chip bonded directly into said continuous circuit.
20

64. The electronic book of Claim 63, wherein said continuous circuit is printed in flexible conductive ink on the front side of said continuous sheet.

65. The electronic book of Claim 63, wherein said continuous circuit is printed in flexible conductive ink on the back side of said continuous sheet and perforations are provided in said sheet matching the sites of said active visual elements to make them visible from the front side.
25

66. The electronic book of Claim 63, wherein said printed information is disposed on sheets laminated onto the respective sides of said book leaves; said information sheet being non-opaque, thereby rendering said active visual device incorporated into said printed circuit visible to a user.
30

67. An electronic book comprising:
a plurality of book spreads assembled into book leaves, each spread comprising a modular sheet folded to form two facing book pages;
35 printed circuits formed of flexible conductive ink printed on the back side of said modular sheets and having electrical connections between said two facing pages spanning the fold;

a fan-like spine having flexible conductive circuitry printed thereon for receiving said plurality of book spreads, each spread being sandwiched between corresponding flaps in said spine, wherein said electrical connections between said two facing pages of each spread are coupled to corresponding electrical paths in the spine;

5 printed information viewable on said facing pages;

 a sound generator, responsive to control signals applied thereto, for generating audio signals corresponding to said printed information;

 audio means responsive to said sound signal generator for communicating said audio signal information to a user;

10 sequence control means for selectively activating said sound signal generator to describe said printed information according to a predetermined sequence; and

 at least one switch associated with a respective portion of the printed information on each spread of the book and electrically connected to said sequence control means through said printed circuits and spine for activating said sequence control means to highlight and describe the portion of printed information.

15

68. The electronic book of Claim 69, further comprising:

 a plurality of active sensory devices incorporated into said printed circuits and visible on said facing pages;

20 synchronization control means for selectively energizing said active sensory devices in synchronism with the sound signal generator according to a predetermined schedule of delivery.

69. The electronic book of Claim 69, wherein said switch is associated with the printed information of the spread and comprises a switch actuatable by opening the book to that spread.

25 70. The electronic book of Claim 69, wherein said switch comprises a photo-sensitive switch.

71. The electronic book of Claim 69 wherein at least one of said modular sheets is formed of non-opaque material.

30 72. The electronic book of Claim 73 wherein said printed information is printed in reverse laydown format on the rear surface of the non-opaque modular sheets and the printed circuit overprinted thereon.

73. The electronic book of Claim 70, further comprising:

35 a multiplicity of pressure switches incorporated into said printed circuits for connection with said sequence control means to provide the user with predetermined alternative progression options selected by

applying pressure on recognizable features corresponding to said pressure switches in said printed information sheets.

74. A method for constructing an electronic book comprising the steps of:

5 printing in flexible conductive ink, a circuit on a continuous substrate sheet;
disposing electrical elements in said printed circuits;
printing pages of information on said continuous sheet, with particular portions of the printed information associated with said electrical elements;
10 folding the continuous sheet in accordion fashion to form pairs of adjacent pages, said printed circuit extending across the folds of said pages;
binding one set of the book's spine, the other fold constituting the outer edges of the book's pages; and
electrically connecting a common electronic circuit to said printed circuit to cooperate with the electrical elements on the respective pages.

15 75. The method of Claim 76, wherein said electrical elements comprise switches and said method further comprises printing respective switch terminals of conductive ink, and printing a spacer of dielectric ink in predetermined disposition relative to said terminals.

76. A method for constructing an electronic book comprising the steps of:

20 printing circuits in conductive ink on respective substrate sheets, said circuits including conductive portions and switch portions disposed at predetermined positions on the substrate;
printing information on said substrate sheets, respective predetermined portions of the printed information being disposed in association with said electrical elements;
folding said substrate sheet to form pages of printed information;
25 binding said folded substrate sheets such that said switch portions cooperate as switches and said conductive portions of the circuits' adjacent sheets are placed in electrical contact to form conductive paths through the book spine; and
connecting said conductive paths to a common electronic circuit to provide coordination between the operation of the common electronic circuit and said switches.

30 77. The method of Claim 78, further including the step of printing a spacer on said substrate sheets in predetermined relation to said switch portions.

78. An electronic book comprising:

35 a plurality of leaves, each leaf comprising pages of visual material on opposing sides thereof, and bound at one edge to form a spine;

each of the leaves including an integral electrical circuit including an interpage connector portion located at a predetermined position proximate to the leaf bound edge, and including elements disposed in predetermined relation to portions of the visual material;

a common electronic circuit for selectively effecting respective outputs related to respective portions of the visual material; and

interpage conductive paths comprising anisotropic conductive adhesive disposed between the respective leaves at the binding effecting electrical connections between the interpage connector portions of the electrical circuits integral to the leaves, such that the common electronic circuit and the electrical circuits integral to the leaves to cooperate to relate the operation of the electronic circuit with the visual materials on the leaves.

79. An electronic book including an electronic circuit cooperating with circuits on a plurality of pages, the book made by a process comprising the steps of:

printing material corresponding to a plurality of pages of the book on a substrate;

printing in conductive ink on said substrate respective electrical circuits associated with the respective pages of material printed on the substrate, said respective electrical circuits being disposed in predetermined relation to the page of printed material associated therewith;

forming from said substrate a plurality of book leaves;

binding said book leaves such that said respective electrical circuits are electrically coupled to said electronic circuit.

80. The electronic book of Claim 81, wherein said substrate comprises a continuous web.

81. The electronic book of Claim 81, wherein said printing circuits step comprises employing a multi-station offset printing press configured to print the circuit in solid coverage.

82. The electronic book of Claim 83, wherein said printing circuits step comprises selectively applying conductive ink employing a plurality of successive print units, each applying the conductive ink in sequence.

83. The electronic book of Claim 81, wherein said printing circuits step comprises selectively applying conductive ink employing a plurality of successive print units, each applying the conductive ink in sequence.

84. The electronic book of Claim 81, wherein said printing pages of material and printing circuits steps comprise employing a multi-station printing press, to concurrently said print pages of material and said conductive ink circuits.

85. The electronic book of Claim 81, wherein said printing pages of material and printing circuits steps comprise employing a multi-station printing press, including upper and lower sets of rollers to concurrently said print pages of material on one side of the substrate and print said conductive ink circuits on the other side of the substrate.

5

86. A method of forming an electronic book having a plurality of leaves, each leaf comprising pages of visual material on opposing sides thereof, the leaves being bound together at one edge, comprising the steps of:

10

forming perforations at predetermined positions along the edge of a substrate sheet;
overprinting with conductive ink said perforations on said substrate sheet;
printing, in conductive ink, an electrical circuit on the surface of the substrate, said printed circuit being connected to at least one of the perforation conductive overprintings;
disposing visual material over portions of the printed electric circuit; and
binding the respective leaves such that the conductive ink printed over the perforations of the leaves is placed in electrical contact with the conductive ink printed over the perforations of the adjacent leaves.

15

87. The method of Claim 88, wherein said disposing visual material step comprises overprinting portions of the printed electronic circuit.

20

88. The method of Claim 88, further including the step of disposing anisotropic adhesive between the respective leaves over the perforations.

25

89. The method of Claim 88, further including the step of selectively disposing conductive adhesive over the perforations.

30

90. A method of incorporating sensory stimuli related to printed material into a book, where the book comprises a plurality of leaves having pages of printed material on opposing sides thereof, the method comprising the steps of:

35

storing, for each of a plurality of predetermined portions of the printed material on the respective pages of the book, indicia of a command sequence for effecting a predetermined sequence of sensory stimuli relating to the particular predetermined portions of printed material;
forming, integral to the leaves, respective switches, each switch being associated with a predetermined portion of the printed material; and
responsive to actuation of each particular switch, generating the command sequence to effect the predetermined sequence of sensory stimuli relating to the particular predetermined portions of printed material associated with the particular switch.

35

91. An electronic book of the type comprising a plurality of leaves having pages of visual material on the front and back thereof, the leaves being bound together at one edge to form a spine, improved wherein at least one of the leaves of the book comprises:

first and second pages, each of the pages having interior and exterior surfaces, with the visual material viewable at the exterior surfaces, and disposed such that the interior surfaces face each other within the interior of the leaf; and

at least a first conductor formed of conductive ink on the interior surface of the first page, disposed in predetermined relationship with an associated portion of the visual material of the leaf;

a spacer interposed between said page interior surfaces;

a second conductor formed of conductive ink on the interior surface of the second page disposed relative said first conductor and the dielectric spacer such that said first and second conductors are normally isolated from each other, but effect an electrical connection in response to a predetermined pressure applied thereto.

92. The electronic book of Claim 93, wherein said switch comprises a third conductor formed of conductive ink on the interior surface the first page, disposed in proximity to a portion of the first conductor, and said second conductor selectively effects an electrical connection between said first and third conductors.

93. The electronic book of Claim 93, wherein said spacer comprises a predetermined pattern of dielectric ink disposed on at least one of the first and second conductors.

94. The electronic book of Claim 95, wherein said dielectric ink covers approximately 60 percent of the area of the conductors.

95. The electronic book of Claim 95, wherein said dielectric ink is in a pattern of spaced apart lines.

96. The electronic book of Claim 97, wherein the dielectric ink is approximately 0.0008 inch thick, the lines of dielectric ink are 0.02 inch wide, spaced 0.02 inch apart.

97. The electronic book of Claim 98, wherein the spacer includes a ring of dielectric ink circumscribing at least one of the first and second conductors.

98. The electronic book of Claim 97, wherein the spacer includes a ring of dielectric ink circumscribing at least one of the first and second conductors.

99. The electronic book of Claim 93, wherein the spacer includes a ring of dielectric ink circumscribing at least one of the first and second conductors.

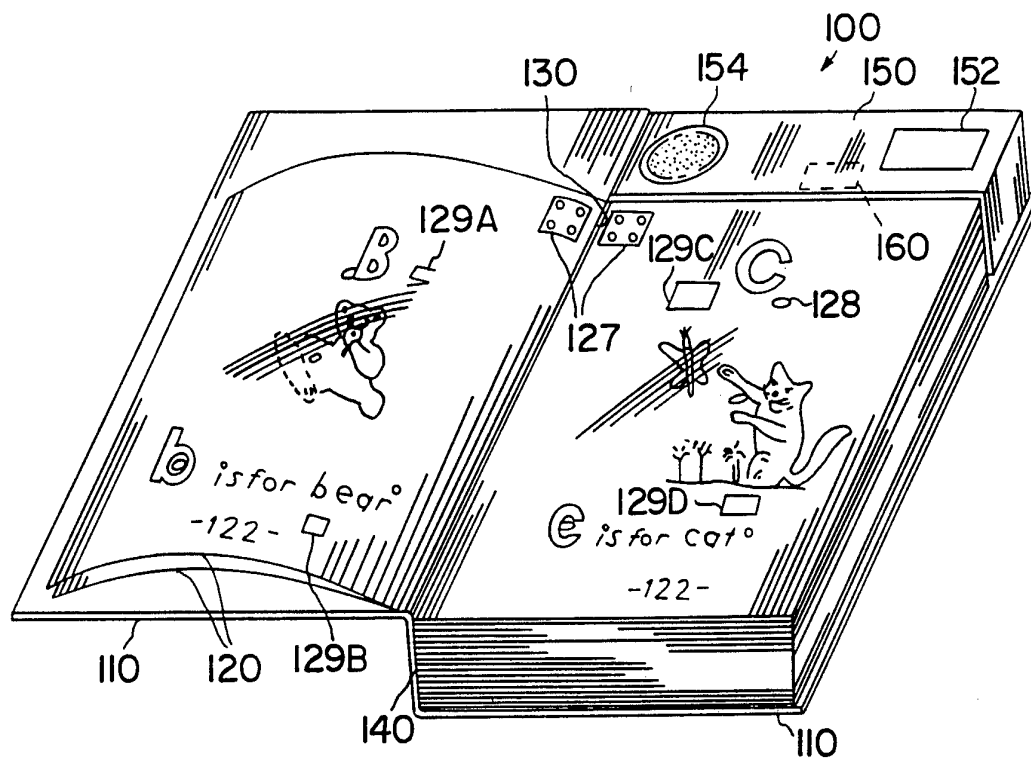


FIG. 1

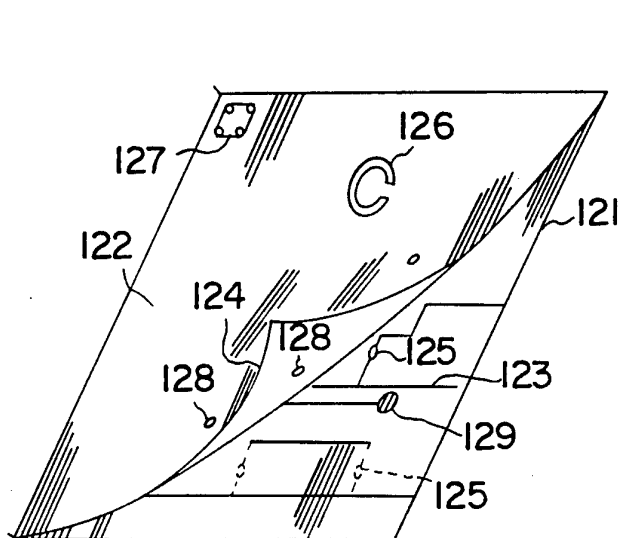


FIG. 2A

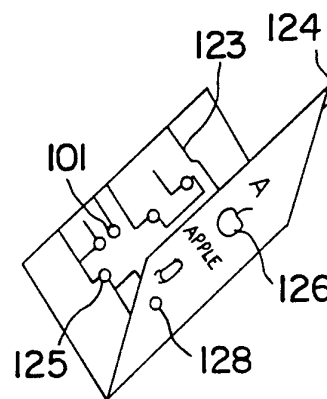


FIG. 2B

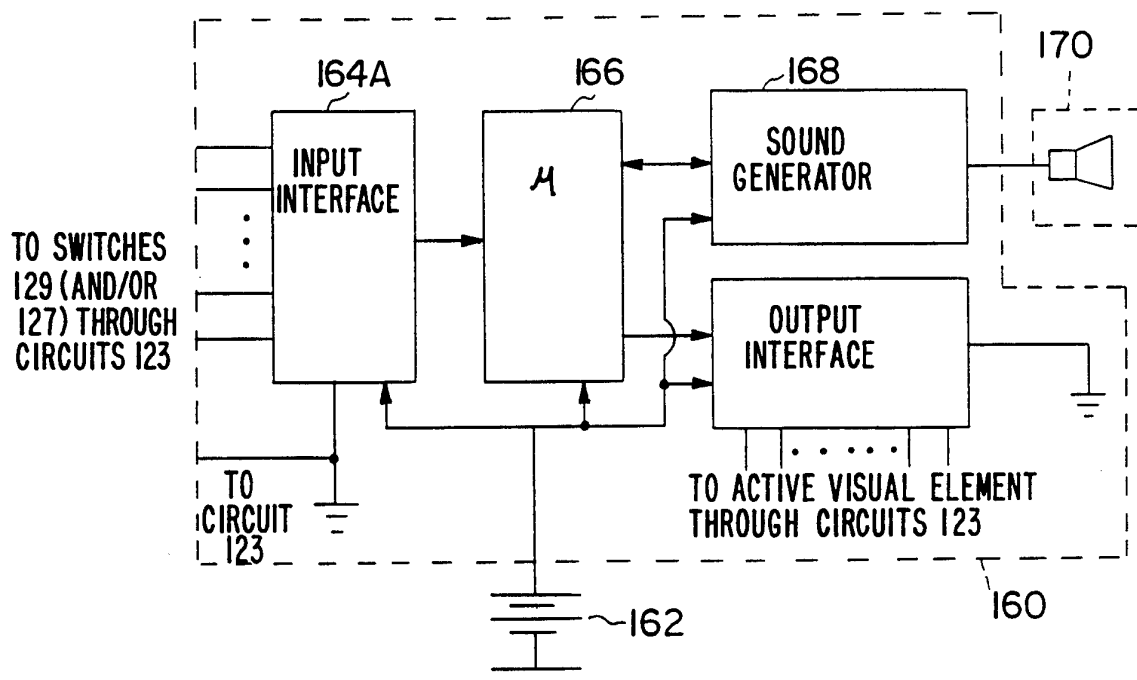


FIG. 3A

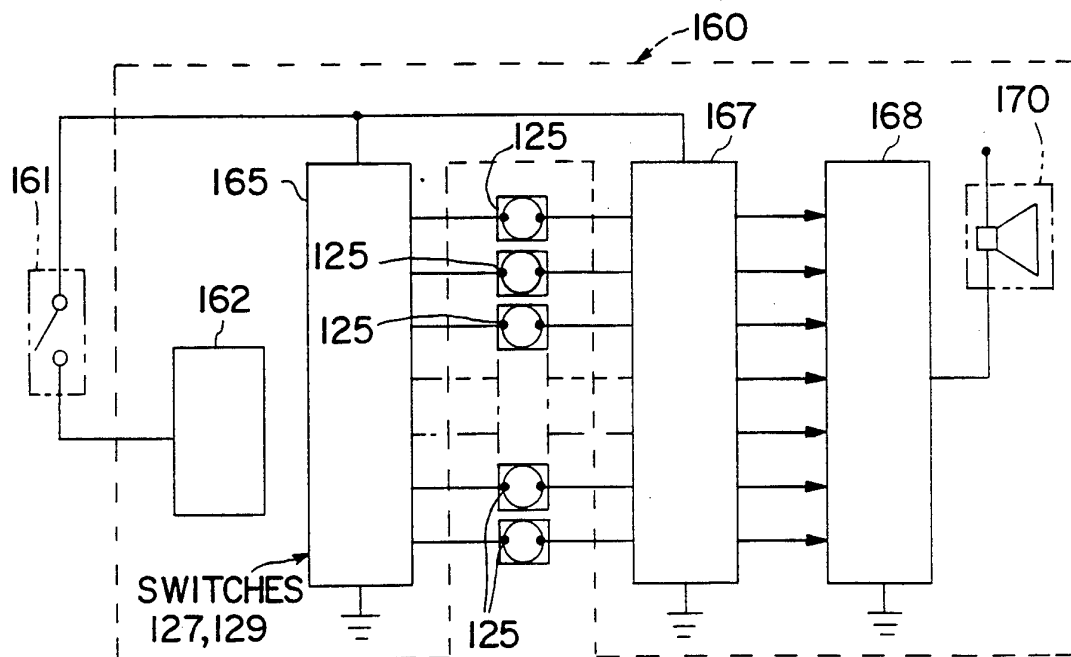
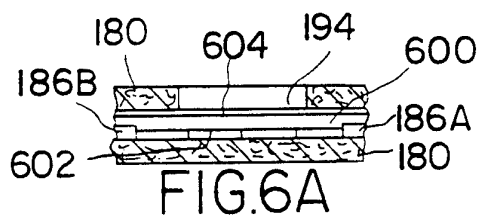
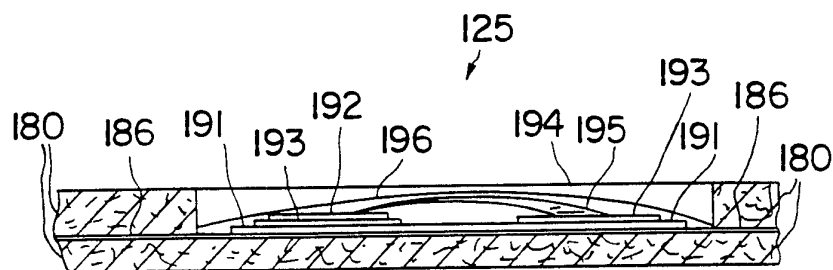
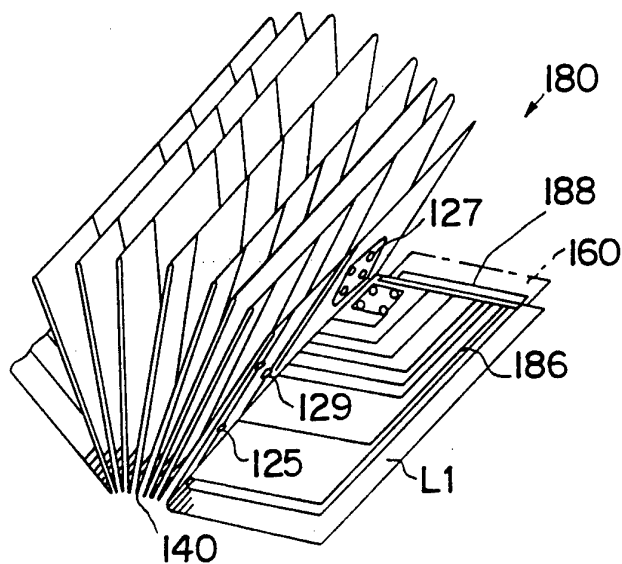
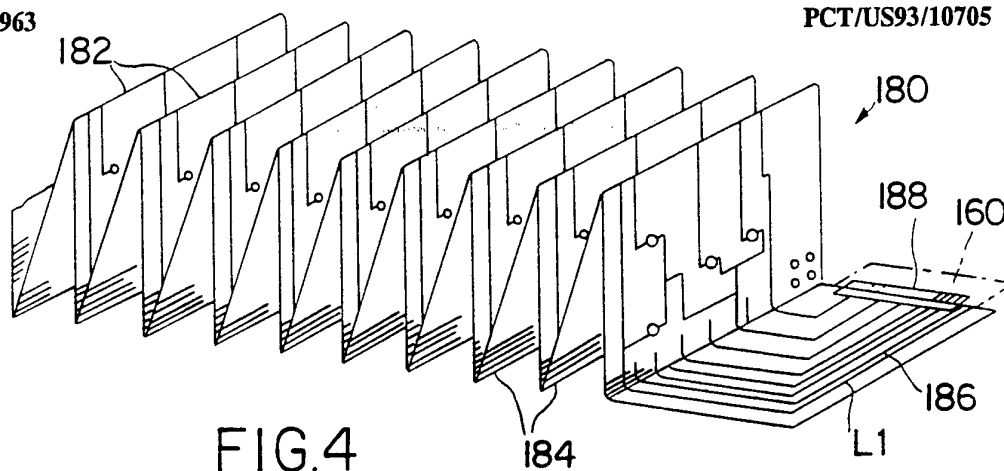


FIG. 3B



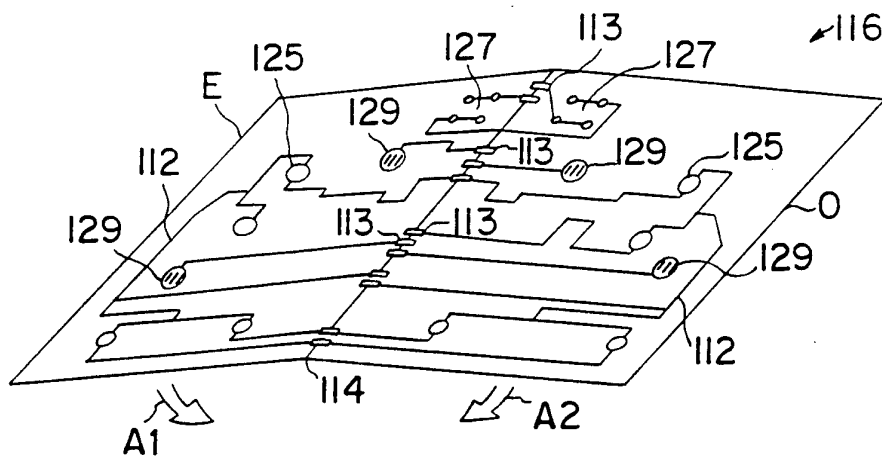


FIG. 7A




FIG. 7B

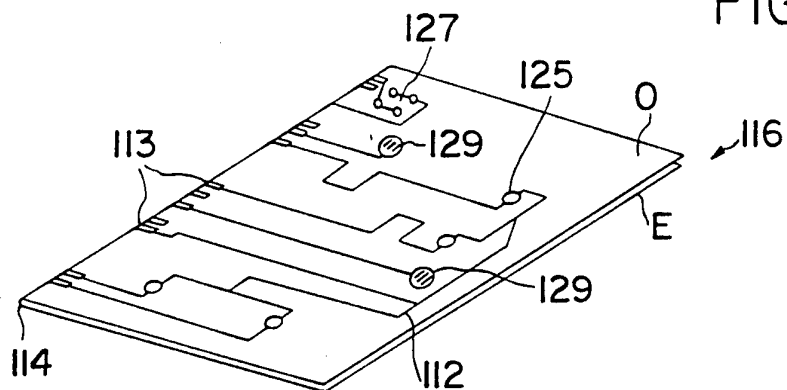


FIG. 8

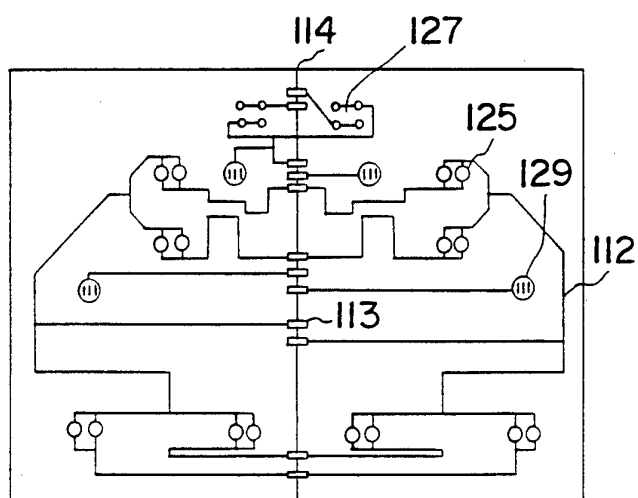


FIG. 9

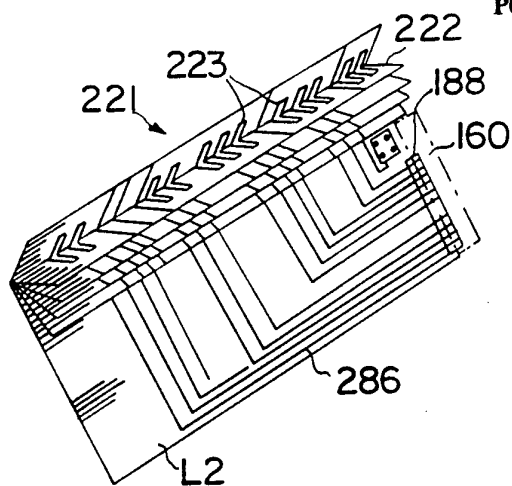


FIG. 10

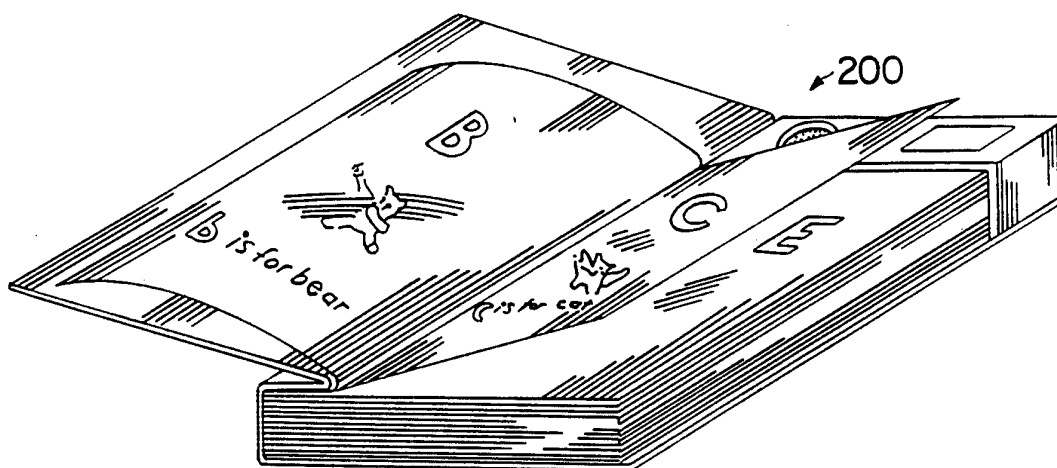


FIG. 11

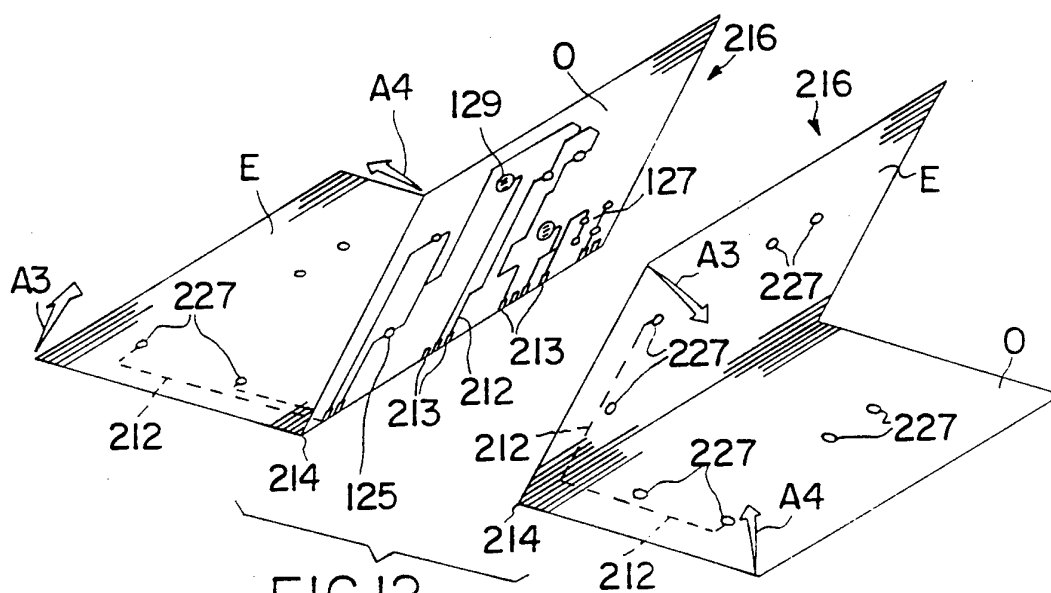


FIG. 12

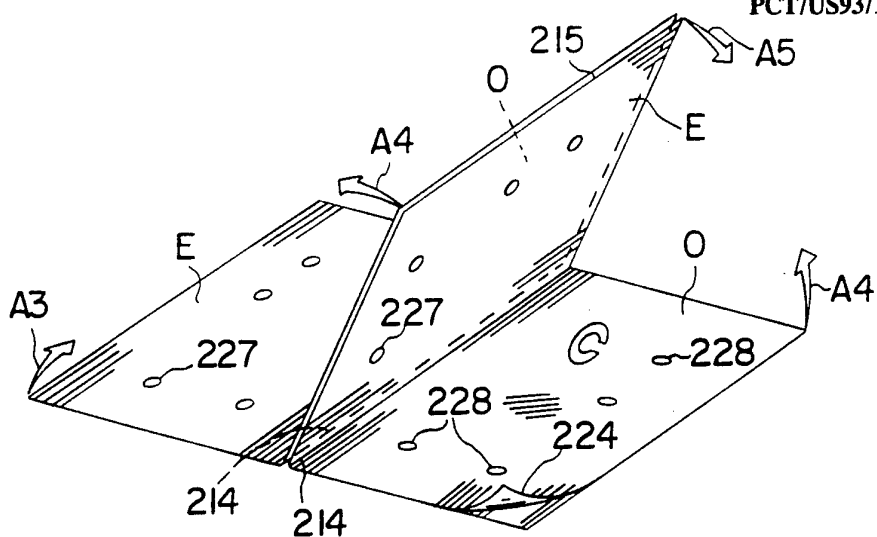


FIG. 13

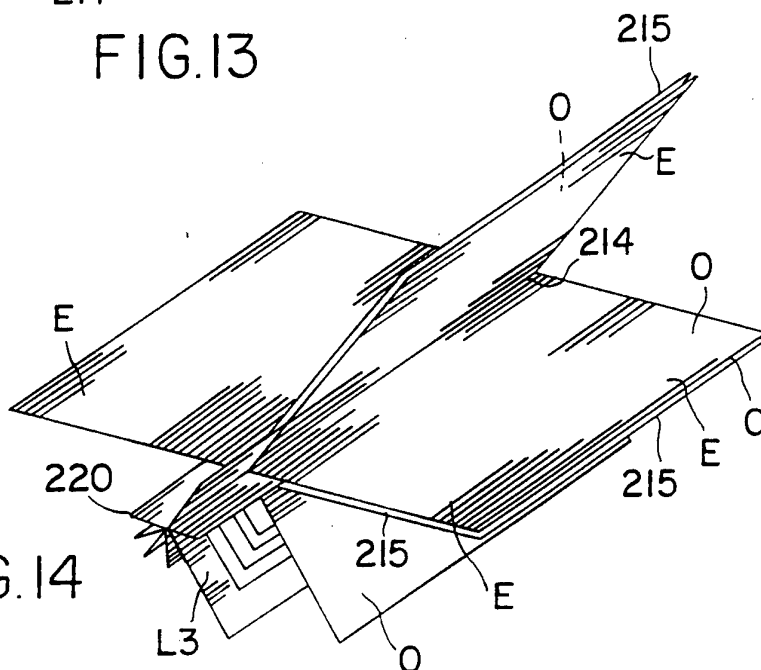


FIG. 14

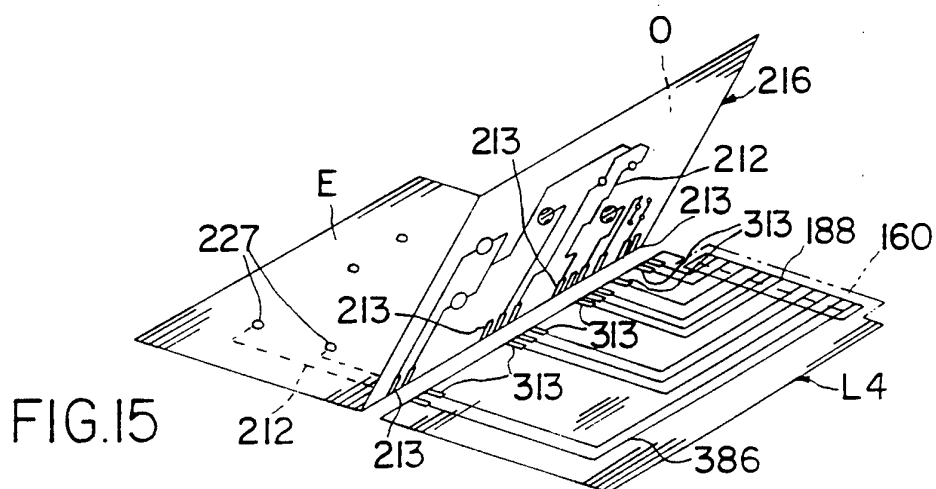


FIG. 15

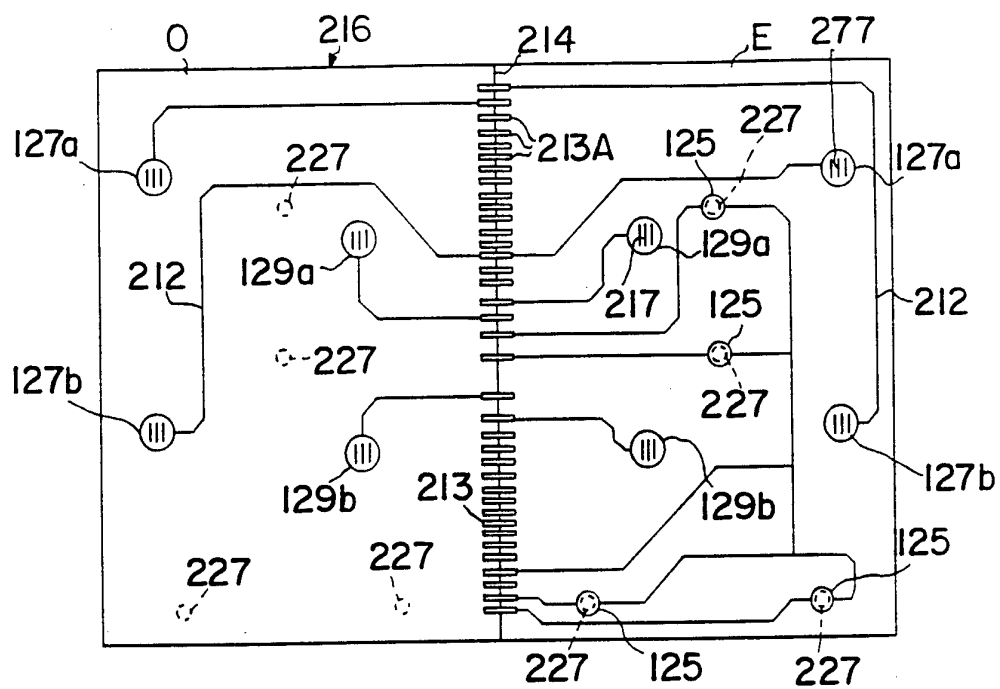


FIG. 16A

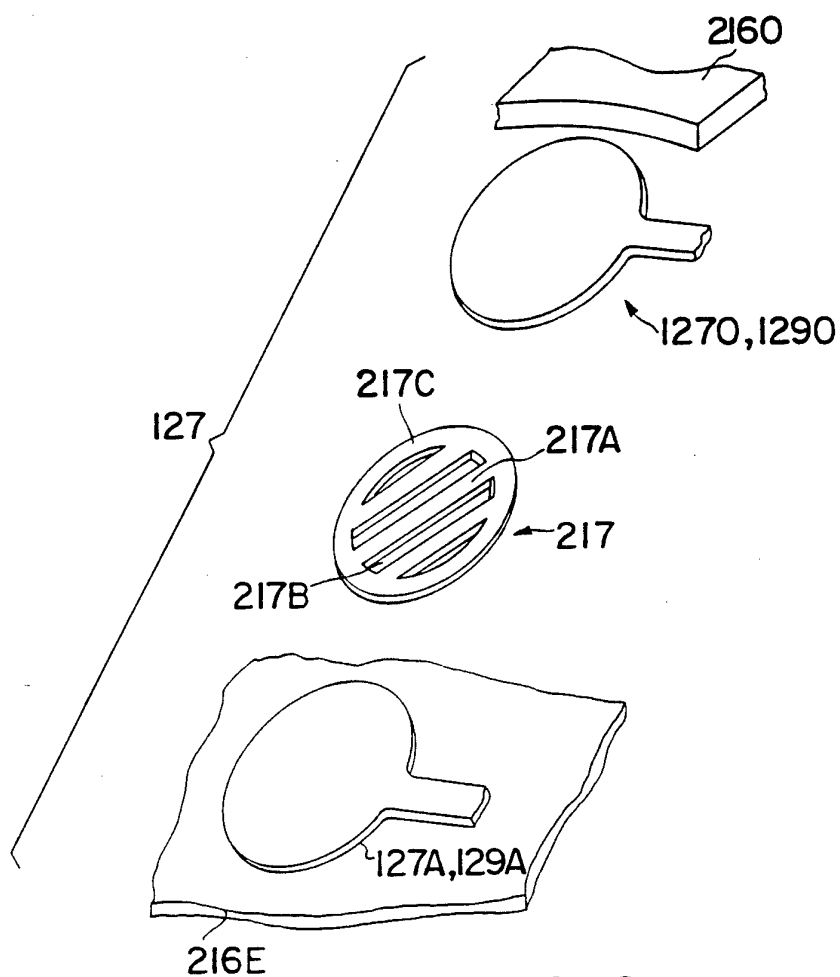


FIG. 16B

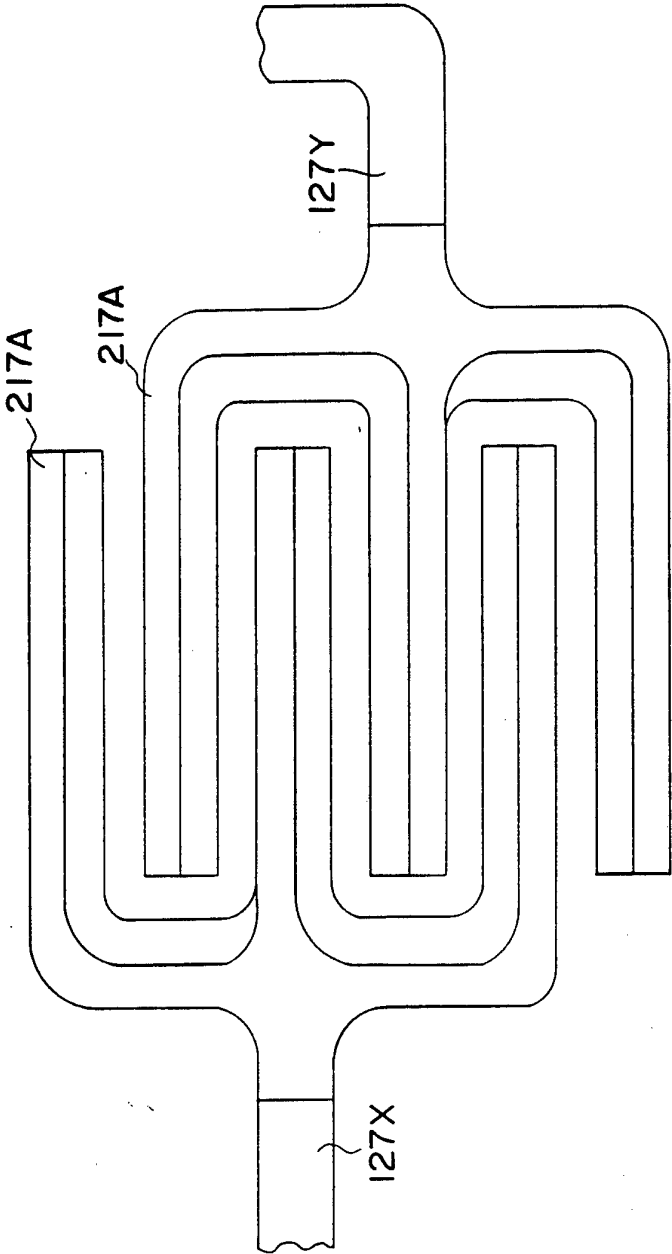


FIG. 16C

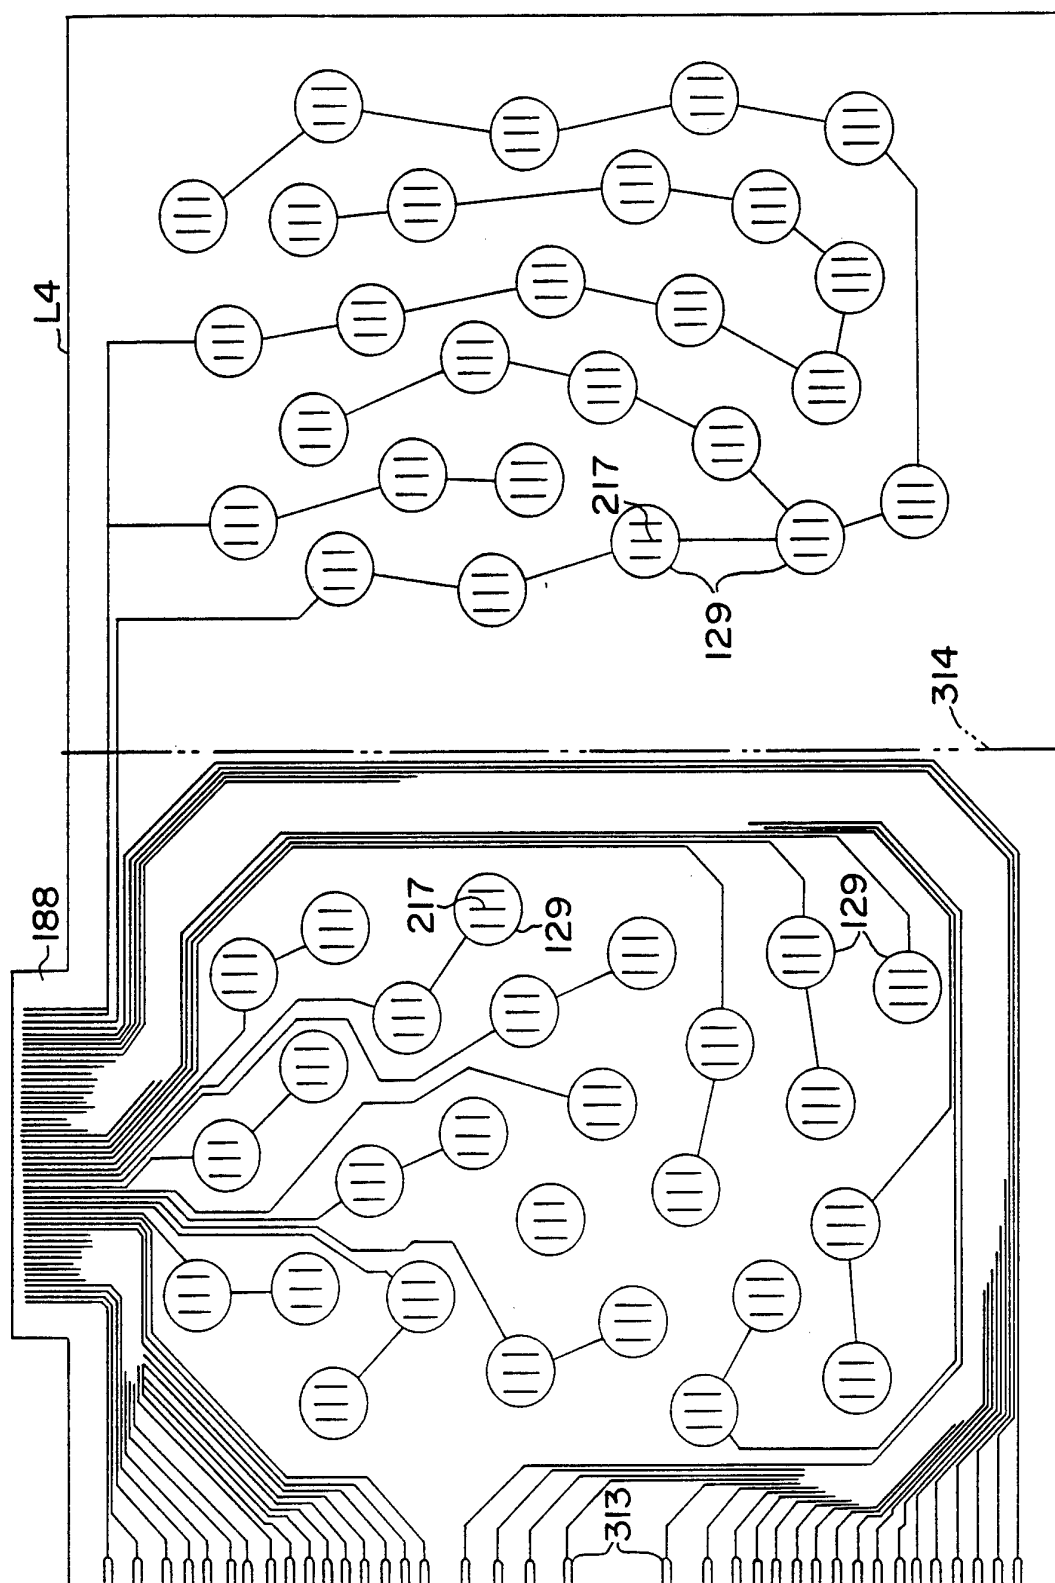


FIG. 17

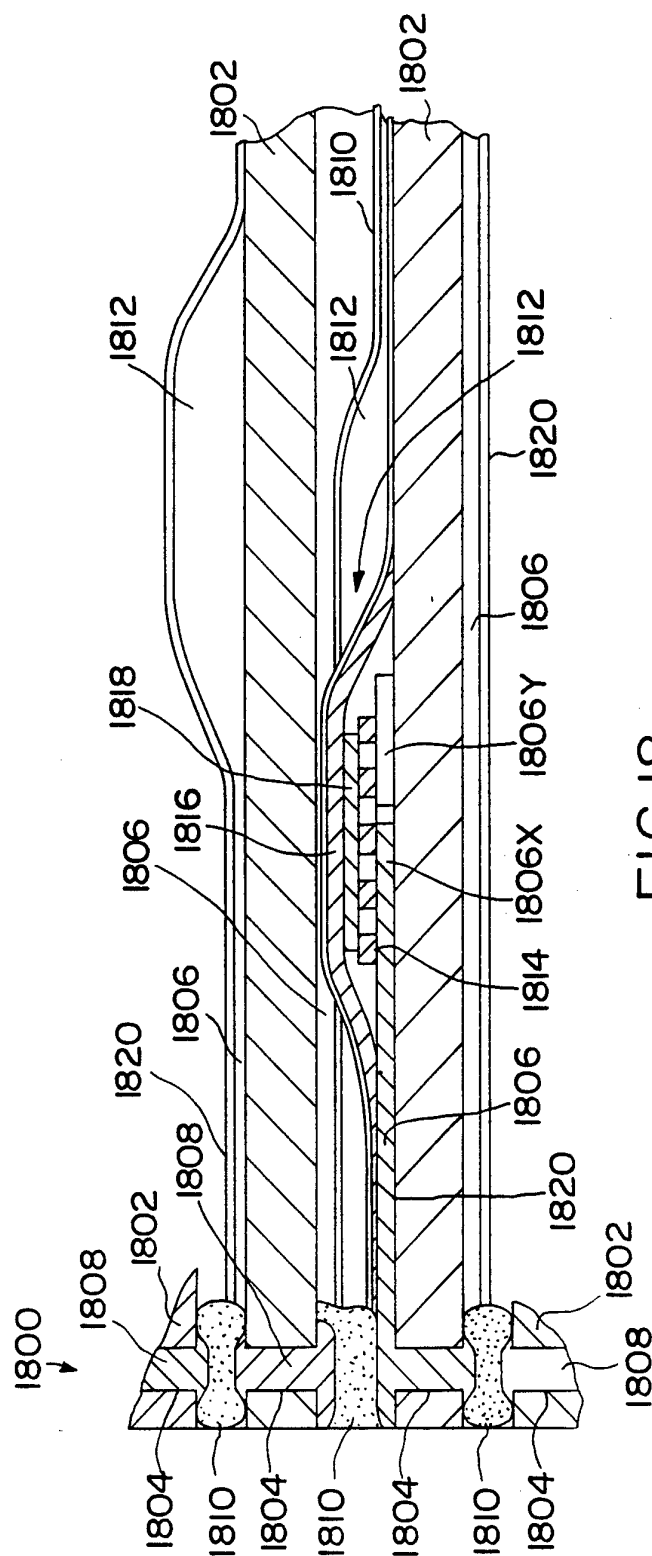


FIG. 8

INTERNATIONAL SEARCH REPORT

 International application No.
PCT/US93/10705

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) : G09B 5/00

US CL : 434/317

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : Please See Extra Sheet.

 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
None

 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
None

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ---, P Y	US, A, 5,167,508, (Mc TAGGART), 01 December 1992. See Figs. 1-6.	1-21, 23-25, 30, 36, 38, 39, 41-43, 45, 50- 52, 55, 63, 64, 66-68, 80, 93- 101 ----- 22, 29, 44, 54
Y	US, A, 3,592,098, (ZADIG), 13 July 1971. See Figs. 1-4.	1-25, 29-36, 38, 39, 41-45, 50-52, 54, 55, 63, 64, 66-68, 80, 93-101

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be part of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

28 MARCH 1994

Date of mailing of the international search report

05 May 1994

 Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

JOE H. CHENG

Telephone No. (703) 308-2667

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US93/10705

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,209,824, (KAUFMAN), 24 June 1980.- See Figs. 3-8.	1-25, 29-36, 38, 39, 41-45, 50-52, 54, 55, 63, 64, 66-68, 80, 93-101
Y	US, A, 4,236,156, (EDEN), 25 November 1980. See Fig. 6.	22, 29, 44, 54
Y	US, A, 4,703,573, (MONTGOMERY ET AL.), 03 November 1987. See Figs. 1-16.	1-25, 29-36, 38, 39, 41-45, 50, 52, 54, 55, 63, 64, 66-68, 80, 93-101

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US93/10705

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Group I. Claims 1-75, 80 and 93-101, drawn to the electronic book, classified in Class 434, Subclass 317.

Group II. Claims 76-79 and 81-92, drawn to the method of constructing an electronic book, classified in Class 283, Subclass 83.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-75, 80 and 93-101

Remark on Protest

☐

The additional search fees were accompanied by the applicant's protest.

☐

No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US93/10705

B. FIELDS SEARCHED

Minimum documentation searched

Classification System: U.S.

40/124.1, 902; 156/901; 200/46, 657; 345/106, 214, 901; 361/179; 362/98, 394, 806; 434/169, 178, 185, 307,
308, 317, 338; 462/2, 7, 8, 17, 65, 71