

(12) **UK Patent Application** (19) **GB** (11) **2476444** (13) **A**

(43) Date of Reproduction by UK Office **22.06.2011**

(21) Application No: **1107067.9**  
(22) Date of Filing: **02.10.2009**  
(30) Priority Data:  
(31) **0818002** (32) **02.10.2008** (33) **GB**  
(86) International Application Data:  
**PCT/GB2009/002359 En 02.10.2009**  
(87) International Publication Data:  
**WO2010/038036 En 08.04.2010**

(51) INT CL:  
**E03C 1/042** (2006.01) **E03C 1/02** (2006.01)  
**E03C 1/04** (2006.01)  
(56) Documents Cited by ISA:  
**GB 2435077 A** **GB 2396553 A**  
**DE 002535427 A1** **DE 001809022 A1**  
(58) Field of Search by ISA:  
INT CL **E03C**  
Other: **EPO-Internal**

(71) Applicant(s):  
**Kohler Mira Limited**  
**(Incorporated in the United Kingdom)**  
**Cromwell Road, CHELTENHAM, Gloucestershire,**  
**GL52 5EP, United Kingdom**  
(72) Inventor(s):  
**Benjamin Lea**  
**Simon Alexander Hann**  
**Paul Andrew Gostling**  
**James Alexander Scott**  
**Karl Antony Fearnley**  
(74) Agent and/or Address for Service:  
**Barker Brettell LLP**  
**100 Hagley Road, Edgbaston, BIRMINGHAM,**  
**B16 8QQ, United Kingdom**

(54) Title of the Invention: **Improvements in or relating to ablutionary installations**  
Abstract Title: **Improvements in or relating to ablutionary installations**

(57) A mixing valve (101) has a pair of inlet connector assemblies (103), (105) that are operable to connect the mixing valve to supply pipes for hot and cold water. The connector assemblies (103, 105) are adjustable to enable the mixing valve (101) to be connected to the supply pipes to compensate for variations in one or more of the spacing, depth and angular position of the supply pipes.

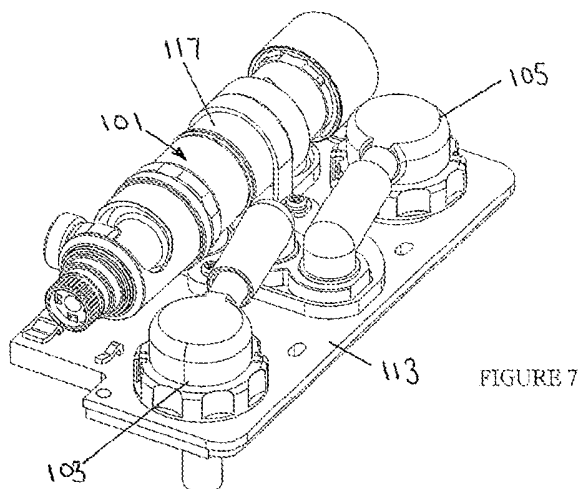


FIGURE 7

**GB 2476444 A**