



Jan. 11, 1938.

K. JAGSCHITZ

2,105,080

METHOD OF ERECTING COLLAPSIBLE GASHOLDERS

Original Filed Feb. 21, 1936 2 Sheets-Sheet 2

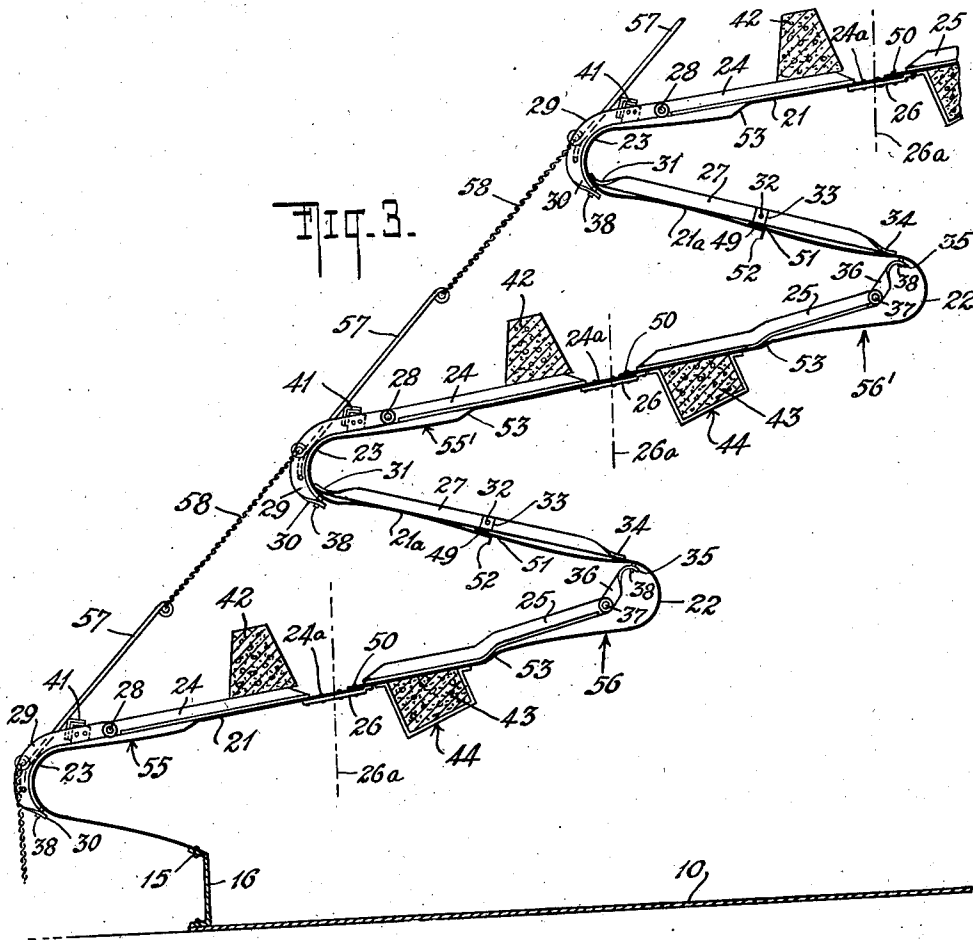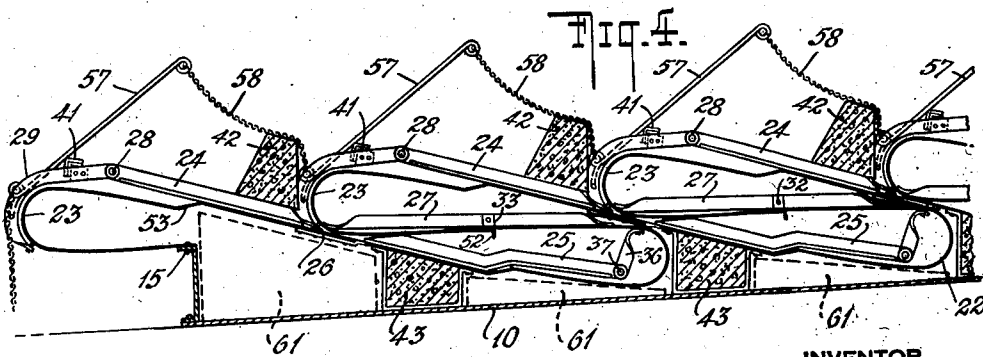

INVENTOR
KONRAD JAGSCHITZ
BY *Joseph H. ...*
ATTORNEY

UNITED STATES PATENT OFFICE

2,105,080

METHOD OF ERECTING COLLAPSIBLE
GASHOLDERS

Konrad Jagschitz, Mainz, Germany

Original application February 21, 1936, Serial No.
65,004. Divided and this application March
25, 1937, Serial No. 132,981

6 Claims. (Cl. 29-34)

The present invention relates to gasholders for the storage of large volumes of gas in the open, and more particularly to an improved method of erecting collapsible gasholders, this application being a division of my copending application, Ser. No. 65,004, filed Feb. 21, 1936.

The construction of large gasholders has presented a number of difficult problems in connection with safety, cost of construction and maintenance, size of the "dead" space (residual gas volume in the "empty" condition of the gasholder), etc. Some of these problems have theretofore not been solved at all, while others have been solved only at the cost of creating or aggravating other difficulties. Thus, the matter of the dead space has presented a serious problem from the standpoint of safety, since air may leak into such space, or is deliberately forced thereinto to drive out the residual gas to enable workmen to enter the same for repairs; in both of these events there is danger of formation of an explosive mixture which is liable to be ignited by the spark or flame of welding or other tools used in making repairs. Also, the desirability of a constant gas pressure has long been recognized, but has not generally been obtained with the known telescopic gasholders, wherein the weight of the gas-suspended shell increases to greater extents as additional sections are lifted (the area against which the gas liftingly acts increasing only slightly), so that as the gasholder becomes filled to greater extents the gas pressure increases; while conversely, as the gasholder becomes depleted and the lower section or sections come to rest on the bottom, the gas pressure falls. A further difficulty which has led to greatly increased constructional costs arises from the fact that in water-sealed bell or telescopic gasholders, the foundation must be made strong enough to withstand the pressure not only of the gas and the weight of the shell, but of the enormous column of water, which may be 40 feet or more in height. In the case of the waterless gasholder, no column of water is supported by the foundation, but on the other hand the weight of the shell of the gasholder is concentrated upon the foundation area directly below such shell, so that at least at such area the foundation must be made much stronger and much more proof against settling than the central portion which resists only the pressure of the gas. Moreover, in both the water-sealed and the waterless gasholders, sealing devices are required to prevent the escape of gas; these seals require constant attention and thus incur con-

tinuous operating expense. Also, as is well known, the water-sealed gasholder requires elaborate and expensive guiding structures for the moving shell sections, which not only increases the cost of the apparatus, but affords opportunity for binding of the guides on the shell sections against the framework, resulting in possible separation between the relatively movable parts. This causes not only loss of gas, but the more serious danger of entry of air into the gasholder and the formation of an explosive mixture therein. In the case of the waterless or disk gasholder, a dead space exists above the disk even in the uppermost position of the disk in order to accommodate the guiding structure for the disk and is confined by the shell and roof structure. This dead space not only keeps a considerable part of the shell structure idle so far as gas storage is concerned, but (especially as it increases in depth as the disk falls) requires special provisions for keeping it well ventilated to prevent gas that may leak thereinto from forming an explosive mixture.

It is the object of the present invention to provide a gasholder of simple construction in which the disadvantages of prior constructions are eliminated. In particular, it is the object of the invention to provide a collapsible gasholder which is so constructed that in the empty condition of the gasholder it lies flat upon the ground, like the upper half of a collapsed balloon, and encloses substantially no dead space.

It is also the object of the invention to provide a gasholder which, as it is filled to greater and greater extents, expands in such manner that the load on the body of gas remains substantially constant, so that the gas pressure likewise is constant.

A further object of the invention is to provide a gasholder which requires no packing or seal, so that the danger of leakage of gas or the infiltration of air through a packed space is eliminated.

It is a still further object of the invention to provide a gasholder construction in which the pressure upon the foundation is small, there being no water load; and is practically uniformly distributed, so that only a relatively inexpensive foundation is required.

These and other objects of the invention are attained by constructing the shell or side walls of the gasholder in the form of a series of convolutions, undulations or corrugations of more or less elastic, resilient, or pliable material. These convolutions, undulations or corrugations may take any of a great variety of shapes, being either

continuously curved or angular, or composed of a combination of planar and curved surfaces, the outline in the expanded condition tapering from the bottom toward the top roughly in the manner of the lateral surface of a truncated cone. The convolutions of the shell are so constructed that they have a certain degree of expansibility and compressibility, and are preferably so designed that in the collapsed condition of the gasholder the annular convolutions lie contiguously with respect to each other upon the floor or ground, the center being occupied by the top or roof of the gasholder which, together with the bottom, may be circular, polygonal, or be composed of so many sides that it is practically circular. The gasholder may be and preferably is reinforced or stiffened in any suitable manner and in the preferred embodiment of the invention, the reinforcement takes the form of an articulated skeleton framework which is attached to the various folds or convolutions of the shell and moves with the shell during its expanding and collapsing movements, the parts of the framework being so constituted and arranged as not to interfere with the movements of the shell.

The invention will be further described with the aid of the accompanying drawings, which show by way of example a preferred form of the invention, it being, however, understood that the invention is by no means limited to the specific embodiment illustrated. In said drawings,

Fig. 1 shows schematically and in vertical section a gasholder constructed in accordance with the invention, the gasholder being in the extended condition.

Fig. 2 is a fragmentary view similar to Fig. 1, but showing the gasholder in the collapsed condition in which the convoluted or undulated shell or wall and the top rest upon the ground or foundation.

Fig. 3 shows a partial section through the extended shell on an enlarged scale.

Fig. 4 is an enlarged view in vertical section of a portion of the completely collapsed gasholder, and

Fig. 5 illustrates a wear-proof connection between a part of the reinforcing framework and the shell.

As shown in Figs. 1 and 2, the gasholder consists in general of a bottom 10 resting upon the ground or foundation 11, a shell or side wall 12 and a roof or top 13. The bottom or base of the gasholder is considerably larger than the roof so that the shell extends from the bottom toward the top at an inclination to the vertical, the whole structure in the inflated condition shown in Fig. 1 resembling roughly a truncated cone or a truncated many-sided pyramid. The outline of the shell or side walls need not, however, follow a straight line from the bottom to the top, but may be slightly arched, as illustrated.

The shell is attached to the periphery of the top as shown at 14 and is anchored in or fixed to the bottom as shown at 15, as by way of a fixed rail 16 which is attached to or embedded in the bottom in gas-tight relation. The bottom may be made of gas-proof concrete, which may be covered by metal plate, or may be constructed in any other suitable or known fashion.

The shell is formed of a series of convolutions, undulations or corrugations 20 and is made of suitably elastic, resilient or pliable material so as to be extensible and collapsible, somewhat in the manner of a bellows, with the important distinction, however, that in the completely deflated

or empty condition of the gasholder the shell rests in the form of a series of continuous convolutions or undulations upon the bottom of the gasholder, while the top or roof of the gasholder rests up on the central portion of the bottom, all of the shell preferably being located in the annular space between the top 13 and the circular or polygonal line of attachment 15. In the empty condition of the gasholder, therefore, the shell consists of a series of annular convolutions extending more or less horizontally from the rim of the top to the place at which the shell is anchored in or attached to the bottom. To this end, the angle of inclination of the shell must be so determined that adequate space is afforded between the top and the place of attachment to the bottom to receive the compressed convolutions without bulge or buckle of the shell. The convolutions are so formed and their number and degree of compressibility are so determined that when the gasholder is in the collapsed condition shown in Figs. 2 and 4, the compressed convolutions fit into the annular space between the outer rim of the top 13 and the anchored lower edge of the shell.

The convolutions of the side walls are made of such depth and of such length that no excessive stresses are imposed upon the material. In the preferred method of construction as described in detail hereinbelow, the parts are so designed and related that the side walls are practically in an unstressed condition in the average condition of the gasholder, that is, when it is about half full. The maximum strain in the material is thus set up upon movement of the walls for a distance corresponding to only about half the total height of the gasholder. The shell, moreover, yields quite readily to expansion and compression, so that only slight pressure differentials are required to effect extension or collapse of the gasholder.

The convolutions 20 may all be of the same configuration, as illustrated, or they may be of different sizes and shapes. Thus while I have shown each convolution to consist of the more or less straight portions 21, 21a, an inner curved portion or bend 22 and an outer curved portion or bend 23, the curved bends may be replaced by a multi-lateral shape or broken line outline.

In accordance with a further development of the invention, the gasholder is reinforced or stiffened by an articulated skeleton framework consisting of relatively pivoting skeleton sections which may be joined together into skeleton rings surrounding the gasholder at certain convolutions or at every convolution, but having freedom of movement relatively to each other so as to be capable of collapsing with the shell. This skeleton framework may be all arranged upon the exterior of the gasholder or part of it may be positioned within the gasholder upon the inside surfaces of the shell.

In the form of the invention illustrated the reinforcing members include the bars 24 and 25 secured to the exterior of the shell, and the plate 26 and bar 27 attached to the interior of the shell. Each pair of bars 24 and 25 is attached at their adjacent ends to the gasholder shell, such attachment being accomplished by welding, riveting or in any other suitable manner. Each plate 26 preferably underlies the adjacent ends of the associated bars 24 and 25 and is likewise secured to the shell, from the inside thereof by welding, riveting, etc., the bars 24 and 25 and the plate 26 thus forming a more or less continuous rigid reinforcing structure which is secured to the por-

tion 21 of the convolution at approximately its middle section. The adjacent ends of the bars are tapered and separated by a space 24e for a purpose to be explained below. The bars 24 and 25 may, however, be joined into a single integral member and the plate 26 dispensed with.

To the outer end of each bar 24 is pivoted, as at 28, a hook-shaped member 29 which curves about the outer bend 23 of a convolution, the free end of the hook being flattened as shown at 30. This free end underlies the preferably flattened end 31 of the bar 27, located upon the inside of the shorter portion 21a of each convolution, so that pressure can thus be transmitted by the shell from the bar 27 to the member 29 and vice versa.

The bar 27 is pivoted as indicated at 32 upon an angular plate 33 whose base is secured in any suitable fashion to the shell. The bar is thus free to move about a horizontal axis to accommodate itself to changes in the curvature in the shell portion 21a.

The other end 34 of the bar 27 may likewise be flattened and is arranged to overlie the preferably curved and flattened end 35 of a link 36 which is pivoted at 37 to the bar 25 and is located beneath the bar 27 upon the exterior of the shell.

To avoid wear upon the shell by the ends 30, and at the same time hold the parts 29 and 36 in proper relation to the shell, suitable buffer means may be provided. In the form of the invention illustrated, such means comprises a headed stud or rivet 38 whose head 39 is welded or clamped to the shell in gas-tight manner. The shank 40 of the stud is received within an enlarged aperture 40a in the end of the respective part 29 or 36 so that such end has a limited freedom of movement relatively to the shell, the shank being long enough to prevent disengagement between the stud or rivet and the associated part.

The bars 24, 25, and 27 may be of any desired shape; thus they may be of angular, channel, T, or flat form; or certain of them may be of one shape and others of another.

The inclined zig-zag series of bars and plates 25, 26, 24, and 27 and link 36 is attached about the shell at intervals, say at 3 or 4 foot distances. To secure greater rigidity and insure against distortion of the shell, especially in larger gasholders, the adjacent vertical series of reinforcing members may be connected by horizontal or diagonal bars or struts; thus the adjacent hook members 29 may be connected together by tie rods or bars 41 which may be of angular or other suitable shape. Similar connecting members may be attached to the adjacent bars 24 and/or the bars 25 and 27.

It will be seen from the above that the parts 24, 25, and 26 constitute local regions of greater rigidity and are connected by the pivoted members 29 and 36 to the adjacent bars 27 so that an articulated reinforcing latticework extends from the top to the bottom of the gasholder, which serves to stiffen the gasholder and assist the latter in resisting wind pressures. These reinforcements, furthermore, are so attached and arranged that the convolutions of the shell bear against them and transmit the gas pressure to them, the reinforcements acting at all times to prevent distortion of the shell out of its predetermined shape.

The reinforcing structure may also serve as a support for part of the weighting means whereby the desired gas pressure is maintained in the gasholder. These weighting means may consist

of blocks of concrete extending along the convolutions of the shell, the blocks being spaced at certain distances along the circumference to permit relative movement therebetween. In the form of the invention illustrated, the blocks rest upon the bars somewhat less than half the distance to the next bar. All of the weights may be placed upon the outside of the shell, but some of the weights are preferably suspended from the interior surface of the shell, as shown at 43. In such case the blocks of concrete are received within casings or hangers 44 which are welded, riveted, or otherwise secured to the shell, preferably directly below the bars 25, so that the weight of such blocks is taken up by said bars. It will, of course, be understood that the concrete blocks may be replaced by slabs of iron or other suitable weighting means.

Where the blocks 43 are employed within the gasholder, it is preferable to shape the bottom surfaces 45 thereof in such a manner that when the gasholder is in the collapsed condition shown in Figs. 2 and 4, such blocks can rest flatly upon the floor of the gasholder, and thereby aid in preventing distortion of the collapsed shell.

All of the load can be placed upon the roof, but at least in certain cases it may be preferable to distribute some of it on the shell. The weights resting on the reinforcing bars 24 may be held in place by bands (not shown) or in any other suitable manner. To avoid excessive bending moments, the weights are positioned symmetrically with respect to the center 26a of the more or less rigid structure 24-26-25, and approximately midway between such center and the pivots 28 and 36.

The roof may be built up of sheet material and is attached in gas-tight relation with the shell. The load on the roof may take the form of a layer of concrete or of a large number of individual masses uniformly distributed. Suitable stiffening structure, for example, a truss frame, may be provided for the roof but has not been illustrated as it forms no part of the present invention.

As shown in Figs. 3 and 4, each convolution may be built up of two annular sections of sheet material, the first beginning at 49 and underlapping or overlapping the second section at 50, the second section terminating at 51 where it overlaps the next shell section. The ends of certain of the shell sections may be bent away from the surface of the shell to form a flange 52 which serves to stiffen the shell sections in the transverse direction. The plate 26 underlies the lap joint 50 and as already explained serves to produce a more or less rigid connection between the adjacent ends of the bars 24 and 25. To stiffen the other portions of the convolutions they may be crimped as shown at 53 to increase the resistance to transverse bending.

One of the important features of the gasholder above-described is that it can be erected entirely upon the floor or bottom of the gasholder, no scaffolding or falsework of any kind being necessary. The cost of construction is thereby very considerably reduced. In accordance with the invention the successive annular sections forming the series of convolutions are built up and attached to each other, preferably from the outermost diameter inwardly, all while the parts rest upon the bottom of the gasholder. Thus the first or outermost shell section 55 may be built up while the workmen remain upon the ground, and is attached to the rail 16 as indicated at 15, such

attachment being effected by welding, riveting, etc. After this first section has been built up into its annular form, or during the course of its construction, the second section 56 is attached thereto by being built up thereon. During these operations the parts 55 and 56 are not under external stress. The bars 24, 25, and 41 are then attached and upon the bars 24 and 25 are supported or suspended the weighting means 42 and 43. The outer or left bend 23 is thus placed under compression while the upper part of the section 56 extends into the air without tension, or under very low tension. The next section 55' is then attached to the section 56'. After the bars 27 have been mounted within the convolutions, the weighting means are mounted upon the upper portion of the section 55' and the lower portion of the section 56', so that the outer bend of this next convolution is placed under pressure while the inner bend 22 is more or less free of any stress. As the construction proceeds the successive convolutions take the position shown in Figs. 2 and 4 until finally the innermost convolution is attached to the one immediately preceding it and to the roof.

The construction of the gasholder may also proceed from the central ring outwardly. Thus the innermost annular section may be first attached to the roof and to the next outer section; to the latter is attached the next outer section, and so on. The roof may be secured to the innermost section at the beginning of the erection or subsequently. It will be noted that the joint at 26 (Fig. 4) can readily be made while the weights 43 rest on the foundation, the making of the joints at 49 being facilitated by temporarily lifting the last assembled section. It is, of course, not necessary to attach a complete annular section at one time; each section may be built up during erection of the gasholder wall or shell, and in fact the next section may be begun before the preceding ring is complete. In any event, all parts are accessible to the workmen standing on the ground, and the large and expensive scaffolding heretofore required is thus entirely dispensed with.

The degree of weighting or loading during the construction of the gasholder is preferably so determined that the stresses in the shell become zero when the gasholder is approximately half full; that is, in this condition of the gasholder the convolutions are under no pressure or tension. In this way the maximum stress in the shell is reduced.

In order to prevent excessive expansion of the gasholder, restraining means in the form of a chain or other flexible or semi-flexible device connecting the top with the bottom may be employed. In the form of the invention illustrated the chain consists of an alternating series of rigid bars or rods 57 and flexible chain members 58. To prevent the chain from becoming twisted or frozen to the gasholder shell by snow and ice, the rods 57 may be secured in any suitable manner to the outer bends of the successive convolutions or to only certain of the convolutions, the rods being preferably secured to the reinforcing structures, for example, to the hook member 29, as shown, or to the transverse connecting bars 41 between the individual, vertically extending reinforcing structures. The flexible chain attached to the unsecured end of a rod 57 may be connected to a succeeding outer bend 23, preferably through the reinforcing member, each rod and its connected flexible chain portion thus

limiting the degree of extension of the convolution or convolutions which they subtend.

The chains may be arranged in pairs at various places and provided with rings to serve as a collapsible ladder for scaling the gasholder.

To prevent dangerous rise of pressure within the gasholder any suitable safety device, such as a relief or blow-off valve 59, may be provided in the roof of the gasholder.

In the normal operation of the gasholder the convolutions readily yield to increases in the volume of gas and as easily collapse as the volume is decreased. Because of the flexibility of the convolutions, only very slight differences in pressure are required to cause expansion of the gasholder to the fullest extent and collapse of the gasholder until it rests on the bottom. The reinforcing members follow the expansion and collapsing movements of the convolutions and at the same time preserve the predetermined shape of the latter and assist the shell in resisting wind pressures, as the individual series of bars 24, 25, 27 and plates 26 may be so constructed and related that the whole articulated and inclined zig-zag framework is relatively rigid against horizontal forces. The reinforcing mechanism is thus in the form of a spider framework which embraces the shell and while articulated so as to follow the movements of the shell, nevertheless resists distortion of the flat portions of the shell by internal and external pressure.

The stability against wind pressures is greatly aided also by the fact that the bottom of the gasholder is considerably larger than the top, the structure as a whole thus possessing the highly stable equilibrium of a frustum of a cone or pyramid resting upon its larger base.

In the preferred form of the invention the convolutions overlie each other to a certain extent in the collapsed condition of the gasholder, but each occupies part of the horizontal area between the roof and the rail 16, so that the gas pressure acts on all of them and lifts them all substantially simultaneously as gas is admitted into the collapsed gasholder. As shown more clearly in Fig. 4 the outer bend of one convolution overlies the inner bend of the next outer convolution, its own inner bend being directed toward the floor of the gasholder. The convolutions may rest one on top of the other, and in order better to accommodate the overlying convolution the adjacent ends of the bar are tapered, as already described, so that the convolution together with its stiffening mechanism is received within the space between the bar ends. It will be understood that the weight 42 will be notched at suitable places to accommodate the hooks 29 where this should be necessary. It will be noted that in the collapsed condition of the convolutions the hook members 29 are rotated downwardly about their pivots, while the members 36 are moved outwardly upon their own pivots, so that the change in shape of the bends 23 and 22 as the shell collapses is not resisted. While the rest of the convolutions perform a limited rotational movement as the gasholder expands and contracts, the center points 26a as a rule move only vertically.

The inner tapered ends of the rod 27 are preferably so shaped that, as shown in Fig. 4, they provide a flat seat for the overlying inclined plate 26.

Because the shell lies flat on the base in the collapsed condition of the gasholder the dead

space, indicated at 60, is extremely small. This space may be still further reduced by providing a series of annular ribs or ridges 61 of concrete or the like which are shaped so as to fill substantially completely the spaces 60. If desired, and as shown in my copending application Ser. No. 10,533 filed March 11, 1935, the bottom may be filled with water, oil, tar or other liquid to a depth sufficient to occupy substantially all of the spaces 60.

It will be seen that when gas is admitted to the completely collapsed gasholder, the roof will rise first, but after rising for only a very short distance the whole of the shell is lifted with it by the pressure of the gas under the shell. The roof and shell thus both float upon the small body of gas in the gasholder. The gas is thus substantially immediately subjected to the complete dead weight of the gasholder and is subjected to no additional weight as the gasholder fills to greater and greater extents. The gas pressure thus remains substantially constant in all conditions of filling of the gasholder. To accomplish this result, the angle of inclination of the shell must be properly chosen, taking into consideration also the fact that the convolutions are all to lie on the bottom when the gasholder is collapsed or subtend different portions of the bottom. This angle can be determined approximately by equating the total load and weight of the shell with the total upward pressure on the shell exerted by the gas.

The base of the gasholder is preferably tapered, as illustrated, to facilitate drainage of condensed moisture. The roof may be correspondingly tapered, as shown in Fig. 2.

The gasholder shell may be made of iron, steel, aluminum, alloys, or any other metallic or non-metallic material having the necessary degree of elasticity or pliability.

It will be understood that the invention is capable of numerous structural embodiments and that various changes in the parts and in the details of construction may be resorted to without departing from the principles of the invention. Thus, the bottom plate 10, which is shown as being of metal, may be omitted, the bottom then consisting of a gas-imperious layer of concrete, stone, etc. Also, where gas of very low pressure is to be stored, no loading means being then used, the reinforcing framework may be omitted, as the shell will then not be subjected to distorting gas pressures.

I claim:

1. The method of erecting a collapsible gasholder whose shell is composed of a series of convolutions of diminishing average diameter from the bottom toward the top which comprises connecting the lowermost of the series of convoluted shell sections to the bottom, connecting the next convolution of smaller average diameter to the first convolution, then connecting the next convolution of still smaller average diameter to the second convolution and so on until finally the in-

nermost convolution is connected to the roof, all while the parts are resting upon the bottom.

2. The method of erecting a collapsible gasholder whose shell is composed of a series of convolutions of diminishing average diameter from the bottom toward the top, which comprises building up the outermost of the series of convolutions and connecting the same with the bottom, building up the second of the series of convolutions of smaller average diameter than the first and connecting the same with said first convolution, then building up the next convolution of still smaller average diameter and connecting it with the second convolution and so on until finally the innermost convolution is connected with the next preceding convolution and with the roof, all while the parts are resting upon the bottom.

3. The method of erecting a collapsible gasholder, whose shell is composed of a series of convolutions of diminishing average diameter from the bottom toward the top, which comprises building up and connecting the outermost of the series of convolutions with the bottom, placing such convolution under pressure or load, connecting the next of the series of convolutions of smaller average diameter to the first convolution, then placing the second convolution under pressure or load and so on until finally the innermost convolution is built up and connected with the next preceding convolution and with the roof.

4. The method of erecting a collapsible gasholder whose shell is composed of a series of convolutions of diminishing average diameter from the bottom toward the top, which comprises building up and connecting the outermost of a series of convolutions with the bottom, attaching weighting means to the convolution to place the same under compression, building up and connecting the next convolution of smaller average diameter with the first convolution and then attaching weighting means to the second convolution to place the latter under compression, and continuing the operation until the innermost convolution is built up and attached to the next preceding convolution and to the roof.

5. The method of erecting a collapsible gasholder, which comprises building up and connecting to each other a series of expansible and contractible convolutions whose average diameters increase from the roof toward the bottom, all while the roof and convolutions rest on the bottom of the gasholder.

6. The method of erecting a collapsible gasholder in which the bottom and top are of different diameters which comprises building up and connecting to each other a series of expansible and contractible convolutions while the latter remains supported upon the ground, connecting the convolutions to each other and to the top and bottom and maintaining the convolutions under stress so that the convolutions reach a condition of substantially no stress when the gasholder is partially filled.

KONRAD JAGSCHITZ.