



- (51) **International Patent Classification:**
C04B 35/634 (2006.01) *B28B 1/00* (2006.01)
- (21) **International Application Number:**
PCT/EP2015/066728
- (22) **International Filing Date:**
22 July 2015 (22.07.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/027,264 22 July 2014 (22.07.2014) US
15152349.5 23 January 2015 (23.01.2015) EP
- (71) **Applicant:** BASF SE [DE/DE]; 67056 Ludwigshafen (DE).
- (72) **Inventors:** NESTLE, Nikolaus; Wibiloweg 2, 69123 Heidelberg (DE). HERMANT, Marie-Claire; Collinistrasse 5, Whng. Nr. 1411, 68161 Mannheim (DE). SCHMIDT, Kris; 10354 Danube Ave, Granada Hills, 91344 (US).
- (74) **Agent:** BAIER, Martin; Ellwanger & Baier Patentanwälte Partnerschaftsgesellschaft, Friedrichsplatz 9, 68165 Mannheim (DE).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** MIXTURE FOR USE IN A FUSED FILAMENT FABRICATION PROCESS

(57) **Abstract:** The use of a mixture (M) comprising (a) from 40 to 70 % by volume of an inorganic powder (IP) based on the total volume of the mixture (M), (b) from 30 to 60 % by volume based on the total volume of the mixture (M) of a binder (B) comprising (b1) from 50 to 96 % by weight of at least one polyoxymethylene (POM) based on the total weight of the binder (B), (b2) from 2 to 35 % by weight of at least one polyolefin (PO) based on the total weight of the binder (B), (b3) from 2 to 40 % by weight of at least one further polymer (FP) based on the total weight of the binder (B) in a fused filament fabrication process.



WO 2016/012486 A1

Mixture for use in a fused filament fabrication process

Description

- 5 The present invention relates to the use of a mixture comprising an inorganic powder and a binder in a fused filament fabrication process, and to a process for producing three-dimensional objects by a fused filament fabrication process.

A task often encountered in recent times is the production of prototypes and models of
10 metallic or ceramic bodies, in particular of prototypes and models exhibiting complex geometries. Especially for the production of prototypes, a rapid production process is necessary. For this so called „rapid prototyping“, different processes are known which can be subdivided into laser-based processes and processes without the use of a laser.

15

The selective laser sintering (SLS) process is a laser-based process wherein the laser selectively fuses powdered material, for example a metal powder or a metal powder comprising a binder by scanning cross sections generated from a 3D digital description of the part on the surface of a powder bed. After each cross-section is scanned, the
20 powder bed is lowered by one layer thickness, a new layer of powder material is supplied on top and the process is repeated until the part is completed.

Laser-based processes are costly as the use of high power lasers (for example a carbon dioxide laser) is involved.

25

More economical is the fused filament fabrication process (FFF), also known as „fused deposition modeling“ (FDM). The fused filament fabrication process is an additive manufacturing technology. A three-dimensional object is produced by extruding a thermoplastic material through a nozzle to form layers as the thermoplastic material
30 hardens after extrusion. The nozzle is heated to heat the thermoplastic material past its melting and/or glass transition temperature and is then deposited by the extrusion head on a base to form the three-dimensional object in a layer-wise fashion. The thermoplastic material is typically selected and its temperature is controlled so that it solidifies substantially immediately upon extrusion or dispensing onto the base with the
35 build-up of multiple layers to form the desired three-dimensional object.

In order to form each layer, drive motors are provided to move the base and/or the extrusion nozzle (dispensing head) relative to each other in a predetermined pattern along the x-, y- and z-axis. The FFF-process was first described in US 5,121,329.

40

2

Typical materials for the production of three-dimensional objects are thermoplastic materials. The production of three-dimensional metallic or ceramic objects by fused filament fabrication is only possible if the metal or ceramic material has a low melting point so that it can be heated and melted by the nozzle. If the metal or ceramic material
5 has a high melting point, it is necessary to provide the metal or ceramic material in a binder composition to the extrusion nozzle. The binder composition usually comprises a thermoplastic material. When depositing the mixture of a metal or ceramic material in a binder on a base, the formed three-dimensional object is a so called „green body“ which comprises the metal or ceramic material in a binder. To receive the desired
10 metallic or ceramic object, the binder has to be removed and finally the object has to be sintered.

US 5,738,817 and US 5,900,207 describe a fused deposition modeling process for making a three-dimensional article by using a mixture of a particulate composition
15 dispersed in a binder. The particulate composition comprises ceramic materials, elemental metals, metal alloys and/or steels. The binder consists of a polymer, a wax, an elastomer, a tackifier and a plasticizer. The binder is removed from the article by a burnout cycle during which the article is slowly heated to cause some of the components of the binder system to melt and flow out of the article. After these
20 components are removed from the article, the temperature is increased and the other components of the binder are thermally decomposed and are removed from the article by diffusion and evaporation. This debinding process is very time consuming. Furthermore, the melting of the binder before evaporation leads to distortion of the article and moreover, the high temperatures may lead to blistering on the surface or
25 internal cracking and/or delamination of the article.

US 2012/0033002 describes a process for the preparation of three-dimensional thermomagnetic objects by fused filament fabrication using a mixture of a thermomagnetic powder and a binder system. This binder system comprises polymers
30 like polyesters, polysulfones, poly(ether sulfones) and styrene copolymers. After the printing of the three-dimensional object, the binder has to be removed. For this debinding step, very high temperatures are necessary. The high temperatures that are necessary for the debinding step may, as stated above, lead to blistering on the surface of the three-dimensional object, internal cracking and/or delamination of the
35 article.

The object underlying the present invention is therefore to provide a mixture for the use in a fused filament fabrication (FFF) process comprising an inorganic powder and a binder which does not have the above-mentioned disadvantages of the prior art or has
40 them only to a significantly reduced extent. Another object underlying the present invention is to provide a fused filament fabrication (FFF) process which should be

3

carried out more simply, safer and more cost efficient than described in the state of the art.

This object is achieved by the use of a mixture (M) comprising

5

(a) from 40 to 70 % by volume of an inorganic powder (IP) based on the total volume of the mixture (M),

10 (b) from 30 to 60 % by volume based on the total volume of the mixture (M) of a binder (B) comprising

(b1) from 50 to 96 % by weight of at least one polyoxymethylene (POM) based on the total weight of the binder (B),

15 (b2) from 2 to 35 % by weight of at least one polyolefin (PO) based on the total weight of the binder (B),

(b3) from 2 to 40 % by weight of at least one further polymer (FP) based on the total weight of the binder (B)

20

in a fused filament fabrication process.

Another object of the present invention is a process for the production of a three-dimensional green body by a fused filament fabrication process comprising the steps

25

- i) providing the inventive mixture (M) to a nozzle,
- ii) heating the mixture (M) to a temperature (T_M),
- iii) depositing the mixture (M) into a build chamber using a layer-based additive technique to form the three-dimensional green body.

30

The „layer-based additive technique“ for the purpose of the present invention is a technique wherein a first layer of material is deposited on a base in a build chamber to form a first layer of material, followed by the deposition of a second layer of material on the first layer of material, followed by the deposition of a third layer of material and so
35 on. The number of layers deposited by the layer-based additive technique depends on the size of the three-dimensional object. Moreover, the number of layers depends on the thickness of the layers deposited.

It has surprisingly been found that a mixture (M), which comprises an inorganic powder
40 (IP) as component (a) and a binder (B) as component (b), can be used in a fused filament fabrication process using the layer-based additive technique.

Polyoxymethylene (POM), the main component of the binder (B), is known to have a high crystallization rate and to harden quickly. Furthermore, polyoxymethylene (POM) is known not to be a sticky polymer as it has a low coefficient of friction.

5 Consequently, it is surprising that layers of a mixture (M) comprising an inorganic powder (IP) and a binder (B), which comprises polyoxymethylene (POM), adhere to each other, although polyoxymethylene (POM) has such a low coefficient of friction, and that as a consequence of this adherence the mixture (M) can be used in a fused filament fabrication process using the layer-based additive technique.

10

The mixture (M) shows a good flowability at the processing temperatures and at the shear rates used in the fused filament fabrication process. Moreover, no demixing of the inorganic powder (IP) and the binder (B) of the mixture (M) occurs and usually no stress cracks arise during the hardening. Another advantage of the present invention is
15 that the binder (B) can easily be removed at temperatures below the melting point of the binder (B), resulting in only little or even no deformation of the three-dimensional object.

Mixture (M)

20

The mixture (M) according to the present invention comprises as component (a) from 40 to 70% by volume of an inorganic powder (IP) and as component (b) from 30 to 60% by volume of a binder (B), based on the total volume of the mixture (M), where the % by volume of component (a) and (b) generally add up to 100%.

25

Preferably, the mixture (M) comprises as component (a) from 45 to 65 % by volume of an inorganic powder (IP) and as component (b) from 35 to 55 % by volume of a binder (B), based on the total volume of the mixture (M), where the % by volume of component (a) and (b) generally add up to 100%.

30

Particularly preferably, the mixture (M) comprises as component (a) from 48 to 60 % by volume of an inorganic powder (IP) and as component (b) from 40 to 52 % by volume of a binder (B), based on the total volume of the mixture (M), where the % by volume of component (a) and (b) generally add up to 100%.

35

In one embodiment of the present invention, the mixture (M) comprises a component (c). Preferably, the mixture (M) comprises as component (c) from 0.1 to 5% by volume of at least one dispersant, particularly preferably from 0.2 to 4 % by volume of at least one dispersant and most preferably from 0.5 to 2 % by volume of at least
40 one dispersant, based on the total volume of the mixture (M).

5

Another object of the present invention is therefore the use of a mixture (M) in a fused filament fabrication process, wherein the mixture (M) comprises as component (c) from 0.1 to 5 % by volume of at least one dispersant based on the total volume of the mixture (M).

5

To the person skilled in the art it is clear that if the mixture (M) comprises component (c) the % by volume of component (a), component (b) and component (c) generally add up to 100 %.

- 10 The mixture (M) can be prepared by any method known to the skilled person. Preferably the mixture (M) is produced by melting component (b) and mixing in component (a) and, if appropriate, component (c). For example, component (b) can be melted in a twin screw extruder at temperatures of preferably from 150 to 220 °C, in particular of from 170 to 200 °C. Component (a) is subsequently metered in the
- 15 required amount into the melt stream of component (b) at temperatures in the same range. Component (a) advantageously comprises the at least one dispersant of component (c) on the surface. However, the mixture (M) of the invention can also be produced by melting component (b) and optionally component (c) in the presence of component (a) at temperatures of from 150 to 220 °C, preferably of from 170 to 200 °C.

20

A particularly preferred apparatus for metering component (a) comprises as essential element a transport screw which is located in a heatable metal cylinder and transports component (a) into the melt of component (b). The above described process has the advantage over mixing of the components at room temperature and subsequent

25 extrusion with an increase in temperature that decomposition of polyoxymethylene (POM) used as binder as a result of the high shear forces occurring in this variant is largely avoided.

The components of the mixture (M) are presented in more detail below.

30

Component (a) / Inorganic powder (IP)

The terms "component (a)" and "inorganic powder (IP)" for the purpose of the present invention are synonymous and are used interchangeably throughout the present

35 invention.

According to the present invention, the mixture (M) comprises from 40 to 70 % by volume of component (a). In a preferred embodiment, the mixture (M) comprises from 45 to 65% by volume of component (a) and particularly preferably from 48 to 60 % by

40 volume of component (a), based on the total volume of the mixture (M).

6

As component (a), any known inorganic powder (IP) can be used. Preferably, a sinterable inorganic powder (IP) is used as component (a). In a further preferred embodiment, the inorganic powder (IP) is a powder of at least one inorganic material selected from the group consisting of a metal, a metal alloy and a ceramic material.

5

Another object of the present invention is therefore the use of a mixture (M) in a fused filament fabrication process, wherein the inorganic powder (IP) is a powder of at least one inorganic material selected from the group consisting of a metal, a metal alloy and a ceramic material.

10

“An inorganic powder (IP)” means precisely one inorganic powder (IP) as well as a mixture of two or more inorganic powders (IP). The same holds true for the term “an inorganic material”. “An inorganic material” means precisely one inorganic material as well as mixtures of two or more inorganic materials.

15

“A metal” means precisely one metal as well as mixtures of two or more metals. A metal within the present invention can be selected from any metal of the periodic table of the elements which is stable under the conditions of a fused filament fabrication process and which can form three-dimensional objects. Preferably, the metal is selected from the group consisting of aluminium, yttrium, titanium, zirconium, vanadium, niobium, chromium, molybdenum, tungsten, manganese, iron, carbonyl iron powder (CIP), cobalt, nickel, copper, silver, zinc and cadmium, more preferably, the metal is selected from the group consisting of titanium, niobium, chromium, molybdenum, tungsten, manganese, iron, carbonyl iron powder (CIP), nickel and copper. With particular preference, the metal is selected from the group consisting of titanium, iron and carbonyl iron powder (CIP).

Carbonyl iron powder (CIP) is highly pure iron powder, prepared by chemical decomposition of purified iron pentacarbonyl.

30

“A metal alloy” means precisely one metal alloy as well as mixtures of two or more metal alloys. Within the context of the present invention, the term „metal alloy“ means a solid solution or a partial solid solution, which exhibits metallic properties and comprises a metal and an other element. “A metal” means, as stated above precisely one metal and also mixtures of two or more metals. The same applies to “an other element”. “An other element” means precisely one other element and also mixtures of two or more other elements.

Solid solution metal alloys exhibit a single solid phase microstructure while partial solid solution metal alloys exhibit two or more solid phases. These two or more solid phases can be homogeneous distributed in the metal alloy, but they can also be heterogeneous distributed in the metal alloy.

40

The metal alloys can be prepared according to any process known to the person skilled in the art. For example, the metal can be melted and the other element can be added to the molten metal. However, it is also possible, to admix the metal and the other
5 element directly to the mixture (M) without the preparation of a metal alloy before. The metal alloy will then be formed during the process of the preparation of the three-dimensional object.

Concerning the metal, the above-stated embodiments and preferences for the metal
10 apply.

The other element can be selected from the metals described above. However, the other element differs from the metal comprised in the metal alloy.

15 The other element can be selected from any element of the periodic table, which forms a metal alloy that is stable under the conditions of a fused filament fabrication process or, which is stable or forms stable alloys with the metal under the conditions of a fused filament process. In a preferred embodiment of the present invention the other element is selected from the group consisting of the aforementioned metals, boron, carbon,
20 silicon, phosphorous, sulfur, selenium and tellurium. Particularly preferably, the at least one other element is selected from the group consisting of the aforementioned metals, boron, carbon, silicon, phosphorous and sulfur.

Preferably, the metal alloy according to the present invention comprises steel.
25

“A ceramic material” means precisely one ceramic material as well as mixtures of two or more ceramic materials. In the context of the present invention, the term „ceramic material“ means a non-metallic compound of a metal or a first metalloid, and a non-metal or a second metalloid.
30

“A metal” means precisely one metal and also mixtures of two or more metals. The same applies to “a non-metal” and “a first metalloid”, as well as “a second metalloid”. “A non-metal” means precisely one non-metal and also mixtures of two or more non-metals. “A first metalloid” means precisely one first metalloid and also mixtures of two
35 or more first metalloids. “A second metalloid” means precisely one second metalloid and also mixtures of two or more second metalloids.

Non-metals are known per se to the person skilled in the art. The non-metal according to the present invention can be selected from any non-metal of the periodic table.
40 Preferably, the at least one non-metal is selected from the group consisting of carbon, nitrogen, oxygen, phosphorus and sulfur.

8

5 Metalloids are as well known per se to the skilled person. The first metalloid and the second metalloid can be selected from any metalloid of the periodic table. Preferably, the first metalloid and/or the second metalloid are selected from the group consisting of boron and silicon. It should be clear that the first metalloid and the second metalloid
5 differ from each other. For example, if the first metalloid is boron, then the second metalloid is selected from any other metalloid of the periodic table of the elements besides boron.

10 In one embodiment of the present invention, the ceramic material is selected from the group consisting of oxides, carbides, borides, nitrides and silicides. In a preferred embodiment the ceramic material is selected from the group consisting of MgO, CaO, SiO₂, Na₂O, Al₂O₃, ZrO₂, Y₂O₃, SiC, Si₃N₄, TiB and AlN. Particularly preferred, the ceramic material is selected from the group consisting of Al₂O₃, ZrO₂ and Y₂O₃.

15 For the preparation of the inorganic powder (IP), the inorganic material has to be pulverized. To pulverize the inorganic material, any method known to the person skilled in the art can be used. For example, the inorganic material can be ground. The grinding for example can take place in a classifier mill, in a hammer mill or in a ball mill.

20 The carbonyl iron powder (CIP) is prepared by chemical decomposition of purified iron pentacarbonyl.

25 The particle sizes of the inorganic powders (IP) used as component (a) are preferably from 0.1 to 80 μm, particularly preferably from 0.5 to 50 μm, more preferably from 0.1 to 30 μm, measured by laser diffraction.

Another object of the present invention is therefore the use of a mixture (M) in a fused filament fabrication process, wherein the particle size of the inorganic powder (IP) is from 0.1 to 80 μm.

30

For example, the organic powder (IP) has

a D₁₀ value of < 3 μm,

35 a D₅₀ value of < 8 μm and

a D₉₀ value of < 21 μm.

40 "D₁₀ value" within the context of the present invention means that 10 vol.-% of the particles of the inorganic powder (IP) based on the total volume of the particles of the inorganic powder (IP) are smaller than the D₁₀ value and 90 vol.-% of the particles of

the inorganic powder (IP) based on the total volume of the particles of the inorganic powder (I) are larger than the D_{10} value.

5 “ D_{50} value” within the context of the present invention means that 50 vol.-% of the particles of the inorganic powder (IP) based on the total volume of the particles of the inorganic powder (IP) are smaller than the D_{50} value and 50 vol.-% of the particles of the inorganic powder (IP) based on the total volume of the particles of the inorganic powder (I) are larger than the D_{50} value.

10 “ D_{90} value” within the context of the present invention means that 90 vol.-% of the particles of the inorganic powder (IP) based on the total volume of the particles of the inorganic powder (IP) are smaller than the D_{90} value and 10 vol.-% of the particles of the inorganic powder (IP) based on the total volume of the particles of the inorganic powder (I) are larger than the D_{90} value.

15

Component (b) / Binder (B)

The terms “component (b)” and “binder (B)” for the purpose of the present invention are synonymous and are used interchangeably throughout the present invention.

20

According to the present invention, the mixture (M) comprises from 30 to 60 % by volume of component (b). In a preferred embodiment, the mixture (M) comprises from 35 to 55 % by volume of component (b) and particularly preferably from 40 to 52 % by volume of component (b), based on the total volume of the mixture (M).

25

According to the present invention, component (b) (the binder (B)) comprises as component (b1) from 50 to 96% by weight of at least one polyoxymethylene (POM), as component (b2) from 2 to 35% by weight of at least one polyolefin (PO) and as component (b3) from 2 to 40% by weight of at least one further polymer (FP), each based on the total weight of the binder (B), where the % by weight of components (b1), (b2) and (b3) generally add up to 100%.

30 In a preferred embodiment, component (b) (the binder (B)) comprises as component (b1) from 60 to 90% by weight of at least one polyoxymethylene (POM), as component (b2) from 3 to 20% by weight of at least one polyolefin (PO) and as component (b3) from 5 to 30% by weight of at least one further polymer (FP), each based on the total weight of the binder (B), where the % by weight of components (b1), (b2) and (b3) usually add up to 100%.

40 Particularly preferred, component (b) (the binder (B)) comprises as component (b1) from 70 to 85% by weight of at least one polyoxymethylene (POM), as component (b2) from 4 to 15% by weight of at least one polyolefin (PO) and as component (b3) from 10

10

to 26% by weight of at least one further polymer (FP), each based on the total weight of the binder (B), where the % by weight of components (b1), (b2) and (b3) add up to 100%.

5 According to the present invention, component (b1) differs from component (b2), component (b2) differs from component (b3) and component (b3) differs from component (b1). However, component (b1), component (b2) and component (b3) can comprise identical building units and, for example, differ in a further building unit and/or differ in the molecular weight.

10

The components (b1), (b2) and (b3) of the binder (B) are described in more detail below.

Component (b1) / Polyoxymethylene (POM)

15

The terms "component (b1)" and "polyoxymethylene (POM)" for the purpose of the present invention are synonymous and are used interchangeably throughout the present invention.

20 According to the present invention, the binder (B) comprises from 50 to 96 % by weight of component (b1). In a preferred embodiment, the binder (B) comprises from 60 to 90 % by weight of component (b1) and particularly preferably from 70 to 85 % by weight of component (b1), based on the total amount of the binder (B).

25 As component (b1), at least one polyoxymethylene (POM) is used. "At least one polyoxymethylene (POM)" within the present invention means precisely one polyoxymethylene (POM) and also mixtures of two or more polyoxymethylenes (POM).

For the purpose of the present invention, the term "polyoxymethylene (POM)"
30 encompasses both, polyoxymethylene (POM) itself, i. e. polyoxymethylene (POM) homopolymers, and also polyoxymethylene (POM) copolymers and polyoxymethylene (POM) terpolymers.

Polyoxymethylene (POM) homopolymers usually are prepared by polymerization of a
35 monomer selected from a formaldehyde source (b1a).

The term "formaldehyde source (b1a)" relates to substances which can liberate formaldehyde under the reaction conditions of the preparation of polyoxymethylene (POM).

40

The formaldehyde sources (b1a) are advantageously selected from the group of cyclic or linear formals, in particular from the group consisting of formaldehyde and 1,3,5-trioxane. 1,3,5-trioxane is particularly preferred.


5 Polyoxymethylene (POM) copolymers are known per se and are commercially available. They are usually prepared by polymerization of trioxane as main monomer. In addition, comonomers are concomitantly used. The main monomers are preferably selected from among trioxane and other cyclic or linear formals or other formaldehyde sources (b1a).

10

The expression "main monomers" is intended to indicate that the proportion of these monomers in the total amount of monomers, i. e. the sum of main monomers and comonomers, is greater than the proportion of the comonomers in the total amount of monomers.

15

Quite generally, polyoxymethylene (POM) according to the present invention has at least 50 mol-% of repeating units $-\text{CH}_2\text{O}-$ in the main polymer chain. Suitable polyoxymethylene (POM) copolymers are in particular those which comprise the repeating units $-\text{CH}_2\text{O}-$ and from 0.01 to 20 mol-%, in particular from 0.1 to 10 mol-% and very particularly preferably from 0.5 to 6 mol-% of repeating units of the formula (I),

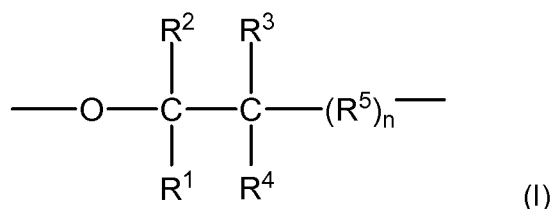

wherein

25

R^1 to R^4 are each independently of one another selected from the group consisting of H, C_1 - C_4 -alkyl and halogen-substituted C_1 - C_4 -alkyl;

R^5 is selected from the group consisting of a chemical bond, a $(-\text{CR}^{5a}\text{R}^{5b}-)$ group and a $(-\text{CR}^{5a}\text{R}^{5b}\text{O}-)$ group,

30

wherein

R^{5a} and R^{5b} are each independently of one another selected from the group consisting of H and unsubstituted or at least monosubstituted C_1 - C_4 -alkyl,

35

wherein the substituents are selected from the group consisting of F, Cl, Br, OH and C_1 - C_4 -alkyl;


n is 0, 1, 2 or 3.

If n is 0, then R⁵ is a chemical bond between the adjacent carbon atom and the oxygen atom. If R⁵ is a (-CR^{5a}R^{5b}O-) group, then the oxygen atom (O) of the (-CR^{5a}R^{5b}O-) group is bound to another carbon atom (C) of formula (I) and not to the oxygen atom (O) of formula (I). In other words, formula (I) does not comprise peroxide compounds. The same holds true for formula (II).

Within the context of the present invention, definitions such as C₁-C₄-alkyl, as for example defined above for the radicals R¹ to R⁴ in formula (I), mean that this substituent (radical) is an alkyl radical with a carbon atom number from 1 to 4. The alkyl radical may be linear or branched and also optionally cyclic. Alkyl radicals which have both a cyclic component and also a linear component likewise fall under this definition. Examples of alkyl radicals are methyl, ethyl, n-propyl, iso-propyl, butyl, iso-butyl, sec-butyl and tert-butyl.

In the context of the present invention, definitions, such as halogen-substituted C₁-C₄-alkyls, as for example defined above for the radicals R¹ to R⁴ in formula (I), mean that the C₁-C₄-alkyl is substituted by at least one halogen. Halogens are F (fluorine), Cl (chlorine), Br (bromine) and I (iodine).

The repeating units of formula (I) can advantageously be introduced into the polyoxymethylene (POM) copolymers by ring-opening of cyclic ethers as first comonomers (b1b). Preference is given to first comonomers (b1b) of the general formula (II),

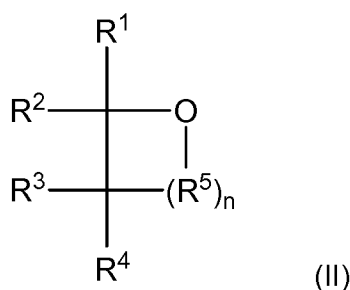

wherein



R¹ to R⁵ and n have the meanings as defined above for the general formula (I).

As first comonomers (b1b) mention may be made for example of ethylene oxide, 1,2-propylene oxide, 1,2-butylene oxide, 1,3-butylene oxide, 1,3-dioxane, 1,3-dioxolane and 1,3-dioxepane (= butanediol formal, BUFO) as cyclic ethers and also linear

13

oligoformals or polyformals such as polydioxolane or polydioxepane. 1,3-dioxolane and 1,3-dioxepane are particularly preferred first comonomers (b1b), very particular preferred is 1,3-dioxepane as first comonomer (b1b).

- 5 Polyoxymethylene (POM) polymers which can be obtained by reaction of a formaldehyde source together with the first comonomer (b1b) and a second comonomer (b1c) are likewise suitable. The addition of the second comonomer (b1c) makes it possible to prepare, in particular, polyoxymethylene (POM) terpolymers.
- 10 The second comonomer (b1c) is preferably selected from the group consisting of a compound of formula (III) and a compound of formula (IV),

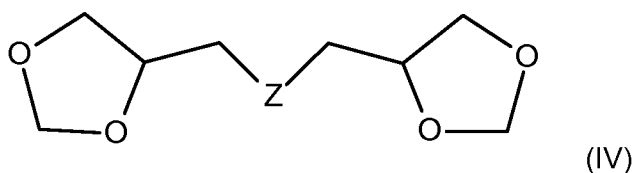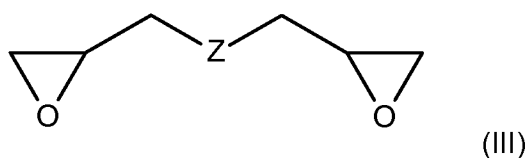

15

wherein

Z is selected from the group consisting of a chemical bond, an (-O-) group
20 and an (-O-R⁶-O-) group,

wherein

R⁶ is selected from the group consisting of unsubstituted C₁-C₈-alkylene and
25 C₃-C₈-cycloalkylene.

Within the context of the present invention, definitions such as C₁-C₈-alkylene means C₁-C₈-alkanediyle. The C₁-C₈-alkylene is a hydrocarbon having two free valences and a carbon atom number of from 1 to 8. The C₁-C₈-alkylene according to the present
30 invention can be branched or unbranched.

Within the context of the present invention, definitions such as C₃-C₈-cycloalkylene means C₃-C₈-cycloalkanediyle. A C₃-C₈-cycloalkylene is a cyclic hydrocarbon having two free valences and a carbon atom number of from 3 to 8. Hydrocarbons having two

free valences, a cyclic and also a linear component, and a carbon atom number of from 3 to 8 likewise fall under this definition.

Preferred examples of the second comonomer (b1c) are ethylene diglycidyl, diglycidyl ether and diethers prepared from glycidyl compounds and formaldehyde, dioxane or trioxane in a molar ratio of 2 : 1 and likewise diethers prepared from 2 mol of a glycidyl compound and 1 mol of an aliphatic diol having from 2 to 8 carbon atoms, for example the diglycidyl ether of ethylene glycol, 1,4-butanediol, 1,3-butanediol, 1,3-cyclobutanediol, 1,2-propanediol and 1,4-cyclohexanediol.

10

In a preferred embodiment component (b1) is a polyoxymethylene (POM) copolymer which is prepared by polymerization of from at least 50 mol-% of a formaldehyde source, from 0.01 to 20 mol-% of at least one first comonomer (b1b) and from 0 to 20 mol-% of at least one second comonomer (b1c).

15

In a particularly preferred embodiment component (b1) is a polyoxymethylene (POM) copolymer which is prepared by polymerization of from 80 to 99.98 mol-%, preferably from 88 to 99 mol-% of a formaldehyde source, from 0.1 to 10 mol-%, preferably from 0.5 to 6 mol-% of at least one first comonomer (b1b) and from 0.1 to 10 mol-%, preferably from 0,5 to 6 mol-% of at least one second comonomer (b1c).

20

In a further preferred embodiment component (b1) is a polyoxymethylene (POM) copolymer which is prepared by polymerization of from at least 50 mol-% of a formaldehyde source, from 0.01 to 20 mol-% of at least one first comonomer (b1b) of the general formula (II) and from 0 to 20 mol-% of at least one second comonomer (b1c) selected from the group consisting of a compound of formula (III) and a compound of formula (IV).


25

Another object of the present invention is therefore the use of a mixture (M) in a fused filament fabrication process, wherein component (b1) is a polyoxymethylene (POM) copolymer which is prepared by polymerization of

30

- from at least 50 mol-% of a formaldehyde source (b1a),
- from 0.01 to 20 mol-% of at least one first comonomer (b1b) of the general formula (II)

35



(II),

wherein

5 R¹ to R⁴ are each independently of one another selected from the group consisting of H, C₁-C₄-alkyl and halogen-substituted C₁-C₄-alkyl;

R⁵ is selected from the group consisting of a chemical bond, a (-CR^{5a}R^{5b}-) group and a (-CR^{5a}R^{5b}O-) group,

10 wherein

R^{5a} and R^{5b} are each independently of one another selected from the group consisting of H and unsubstituted or at least monosubstituted C₁-C₄-alkyl,

15


wherein the substituents are selected from the group consisting of F, Cl, Br, OH and C₁-C₄-alkyl;

n is 0, 1, 2 or 3;

20


and

- from 0 to 20 mol-% of at least one second comonomer (b1c) selected from the group consisting of a compound of formula (III) and a compound of formula (IV)



25

(III),



(IV),

wherein

30

Z is selected from the group consisting of a chemical bond, an (-O-) group and an (-O-R⁶-O-) group,

wherein

35

16

R⁶ is selected from the group consisting of unsubstituted C₁-C₈-alkylene and C₃-C₈-cycloalkylene.

In a preferred embodiment of the present invention at least some of the OH-end groups
5 of the polyoxymethylene (POM) are capped. Methods for capping OH-end groups are known to the skilled person. For example, the OH-end groups can be capped by etherification or esterification.

Preferred polyoxymethylene (POM) copolymers have melting points of at least 150°C
10 and weight average molecular weights M_w in the range from 5 000 g/mol to 300 000 g/mol, preferably from 6 000 g/mol to 150 000 g/mol, particularly preferably in the range from 7 000 g/mol to 100 000 g/mol.

Particular preference is given to polyoxymethylene (POM) copolymers having a
15 polydispersity (M_w/M_n) of from 2 to 15, preferably from 2.5 to 12, particularly preferably from 3 to 9.

The measurement of the weight average molecular weight (M_w) and the number
20 average molecular weight (M_n) is generally carried out by gel permeation chromatography (GPC). GPC is also known as sized exclusion chromatography (SEC).

Methods for the preparation of polyoxymethylene (POM) are known to those skilled in the art.

25 *Component (b2) / Polyolefin (PO)*

The terms "component (b2)" and "polyolefin (PO)" for the purpose of the present
invention are synonymous and are used interchangeably throughout the present
invention

30 According to the present invention, component (b), the binder (B), comprises from 2 to 35% by weight of component (b2). In a preferred embodiment, the binder (B) comprises from 3 to 20 % by weight of component (b2) and particularly preferably from 4 to 15 % by weight of component (b2), based on the total amount of the binder (B).

35 According to the present invention, component (b2) is at least one polyolefin (PO). "At least one polyolefin (PO)" within the present invention means precisely one polyolefin (PO) and also mixtures of two or more polyolefins (PO).

40 Polyolefins (PO) are known per se and are commercially available. They are usually prepared by polymerization of C₂-C₈-alkene monomers, preferably by polymerization of C₂-C₄-alkene monomers.

Within the context of the present invention, C₂-C₈-alkene means unsubstituted or at least monosubstituted hydrocarbons having 2 to 8 carbon atoms and at least one carbon-carbon double bond (C-C-double bond). "At least one carbon-carbon double bond" means precisely one carbon-carbon double bond and also two or more carbon-carbon double bonds.

In other words, C₂-C₈-alkene means that the hydrocarbons having 2 to 8 carbon atoms are unsaturated. The hydrocarbons may be branched or unbranched. Examples for C₂-C₈-alkenes with one C-C-double bond are ethene, propene, 1-butene, 2-butene, 2-methyl-propene (= isobutylene), 1-pentene, 2-pentene, 2-methyl-1-butene, 3-methyl-1-butene, 1-hexene, 2-hexene, 3-hexene and 4-methyl-1-pentene. Examples for C₂-C₈-alkenes having two or more C-C-double bonds are allene, 1,3-butadiene, 1,4-pentadiene, 1,3-pentadiene, 2-methyl-1,3-butadiene (= isoprene).

If the C₂-C₈-alkenes have one C-C-double bond, the polyolefins (PO) prepared from those monomers are linear. If more than one double bond is present in the C₂-C₈-alkenes, the polyolefins (PO) prepared from those monomers can be crosslinked. Linear polyolefins (PO) are preferred.

It is also possible to use polyolefin (PO) copolymers, which are prepared by using different C₂-C₈-alkene monomers during the preparation of the polyolefins (PO).

Preferably, the polyolefins (PO) are selected from the group consisting of polymethylpentene, poly-1-butene, polyisobutylene, polyethylene and polypropylene. Particular preference is given to polyethylene and polypropylene and also their copolymers as are known to those skilled in the art and are commercially available.

The polyolefins (PO) can be prepared by any polymerization process known to the skilled person, preferably by free radical polymerization, for example by emulsion, bead, solution or bulk polymerization. Possible initiators are, depending on the monomers and the type of polymerization, free radical initiators such as peroxy compounds and azo compounds with the amounts of initiator generally being in the range from 0.001 to 0.5% by weight, based on the monomers.

Component (b3) / Further Polymer (FP)

The terms "component (b3)" and "further polymer (FP)" for the purpose of the present invention are synonymous and are used interchangeably throughout the present invention

18

According to the present invention, component (b), the binder (B), comprises from 2 to 40% by weight of component (b3). In a preferred embodiment, the binder (B) comprises from 5 to 30% by weight of component (b3) and particularly preferably from 10 to 26% by weight of component (b3), based on the total amount of the binder (B).

5

Component (b3) according to the present invention is at least one further polymer (FP). "At least one further polymer (FP)" within the present invention means precisely one further polymer (FP) and also mixtures of two or more further polymers (FP).

- 10 As already stated above, the at least one further polymer (FP) differs from component (b1), the polyoxymethylene (POM), and component (b2), the polyolefin (PO).


According to the present invention, the at least one further polymer (FP) is preferably selected from the group consisting of a polyether, a polyurethane, a polyepoxide, a
15 polyamide, a vinyl aromatic polymer, a poly(vinyl ester), a poly(vinyl ether), a poly(alkyl(meth)acrylate) and copolymers thereof.

Another object of the present invention is therefore the use of a mixture (M) in a fused filament fabrication process, wherein the further polymer (FP) is at least one further
20 polymer (FP) selected from the group consisting of a polyether, a polyurethane, a polyepoxide, a polyamide, a vinyl aromatic polymer, a poly(vinyl ester), a poly(vinyl ether), a poly(alkyl (meth)acrylate) and copolymers thereof.

Preferably, component (b3), the at least one further polymer (FP), is selected from the
25 group consisting of a poly(C₂-C₆-alkylene oxide), an aliphatic polyurethane, an aliphatic uncrosslinked epoxide, an aliphatic polyamide, a vinyl aromatic polymer, a poly(vinyl ester) of an aliphatic C₁-C₈ carboxylic acid, a poly(vinyl ether) of a C₁-C₈ alkyl vinyl ether, a poly(alkyl(meth)acrylate) of a C₁₋₈-alkyl and copolymers thereof.

- 30 Preferred at least one further polymers (FP) are described in more detail below.

Polyethers comprise repeating units of formula (V).

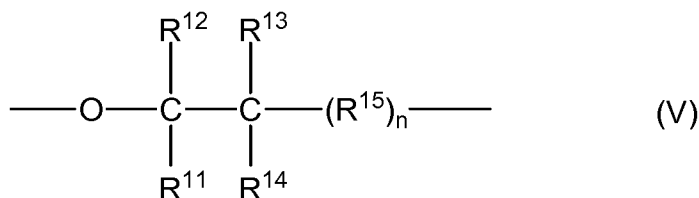

35

19

wherein

- R¹¹ to R¹⁴ are each independently of one another selected from the group consisting of H, C₁-C₄-alkyl and halogen-substituted C₁-C₄-alkyl;
- 5 R¹⁵ is selected from the group consisting of a chemical bond, a (-CR^{15a}R^{15b}-) group and a (-CR^{15a}R^{15b}O-) group,

wherein

- 10 R^{15a} and R^{15b} are each independently of one another selected from the group consisting of H and unsubstituted or at least monosubstituted C₁-C₄-alkyl,

wherein the substituents are selected from the group consisting of F, Cl, Br, OH and C₁-C₄-alkyl;

15

n is 0, 1, 2 or 3.


- If n is 0, then R¹⁵ is a chemical bond between the adjacent carbon atom and the oxygen atom. If R¹⁵ is a (-CR^{15a}R^{15b}O-) group, then the oxygen atom (O) of the (-
- 20 CR^{15a}R^{15b}O-) group is bound to another carbon atom (C) of formula (V) and not to the oxygen atom (O) of formula (V). In other words, formula (V) does not comprise peroxide compounds. The same holds true for formula (VI).

Typical polyethers as well as their preparation are known to the skilled person.

25

A preferred polyether according to the present invention is, for example, a poly(alkylene glycol), also known as a poly(alkylene oxide).

- Polyalkylene oxides and their preparation are known to the skilled person. They are
- 30 usually synthesized by interaction of water and a bi- or polyvalent alcohol with cyclic ethers, i. e. alkylene oxides, of the general formula (VI). The reaction is catalyzed by an acidic or basic catalyst. The reaction is a so called ring-opening polymerization of the cyclic ether of the general formula (VI).



35

(VI)

wherein

R¹¹ to R¹⁵ have the same meanings as defined above for formula (V).

- 5 A preferred poly(alkylene oxide) according to the present invention is derived from monomers of the general formula (VI) having 2 to 6 carbon atoms in the ring. In other words, preferably, the poly(alkylene oxide) is a poly(C₂-C₆-alkylene oxide). Particular preference is given to a poly(alkylene oxide) derived from monomers selected from the group consisting of 1,3-dioxolane, 1,3-dioxepane and tetrahydrofuran (IUPAC-name: oxolane). In other words, particularly preferably, the poly(alkylene oxide) is selected from the group consisting of poly-1,3-dioxolane, poly-1,3-dioxepane and polytetrahydrofuran.

- 15 In one embodiment, the poly(alkylene oxide) can comprise OH-end groups. In another embodiment, at least some of the OH-end groups of the poly(alkylene oxide) can be capped. Methods for capping OH-end groups are known to the skilled person. For example, the OH-end groups can be capped by etherification or esterification.

- 20 The weight average molecular weight of the poly(alkylene oxide) is preferably in the range of from 1 000 to 150 000 g/mol, particular preferably from 1 500 to 120 000 g/mol and more preferably in the range of from 2 000 to 100 000 g/mol.

- A polyurethane is a polymer having carbamate units. Polyurethanes as well as their preparation is known to the skilled person.

25

Within the present invention, aliphatic polyurethanes are preferred. They can, for example, be prepared by polyaddition of aliphatic polyisocyanates and aliphatic polyhydroxy compounds. Among the polyisocyanates, diisocyanates of the general formula (VII) are preferred

30



wherein

- 35 R⁷ is a substituted or unsubstituted C₁-C₂₀-alkylene or C₄-C₂₀-cycloalkylene, wherein the substituents are selected from the group consisting of F, Cl, Br and C₁-C₆-alkyl.

- Preferably R⁷ is a substituted or unsubstituted C₂-C₁₂-alkylene or C₆-C₁₅-cycloalkylene.

40

Within the context of the present invention, definitions such as C₁-C₂₀-alkylene means C₁-C₂₀-alkanediyle. The C₁-C₂₀-alkylene is a hydrocarbon having two free valences and

21

a carbon atom number of from 1 to 20. The C₁-C₂₀-alkylene according to the present invention can be branched or unbranched.

5 Within the context of the present invention, definitions such as C₄-C₂₀-cycloalkylene means C₄-C₂₀-cycloalkanediyne. A C₄-C₂₀-cycloalkylene is a cyclic hydrocarbon having two free valences and a carbon atom number of from 4 to 20. Hydrocarbons having two free valences, a cyclic and also a linear component and a carbon atom number of from 4 to 20 likewise fall under this definition.

10 Preferred diisocyanates are selected from the group consisting of hexamethylene diisocyanate, 2,2,4-trimethyl hexamethylene diisocyanate, 2,4,4-trimethyl hexamethylene diisocyanate, 1,2-diisocyanatomethyl cyclohexane, 1,4-diisocyanatomethyl cyclohexane and isophoron diisocyanate (IUPAC-name: 5-isocyanato-1-(isocyanatomethyl)-1,3,3-trimethyl-cyclohexane).

15

The diisocyanates may also be used in oligomeric, for example dimeric or trimeric form. Instead of the polyisocyanates, it is also possible to use conventional blocked polyisocyanates which are obtained from the stated isocyanates, for example by an addition reaction of phenol or caprolactam.

20

Suitable polyhydroxy compounds for the preparation of aliphatic polyurethanes are, for example, polyesters, polyethers, polyesteramides or polyacetals or mixtures thereof.

25 Suitable chain extenders for the preparation of the polyurethanes are low molecular weight polyols, in particular diols and polyamines, in particular diamines or water.

The polyurethanes are preferably thermoplastic and therefore preferably essentially uncrosslinked, i. e. they can be melted repeatedly without significant signs of decomposition. Their reduced specific viscosities are as a rule from 0.5 to 3 dl/g, preferably from 1 to 2 dl/g measured at 30°C in dimethylformamide.

30

A polyepoxide comprises at least two epoxide groups. The epoxide groups are also known as glycidyl or oxirane groups. "At least two epoxide groups" mean precisely two epoxide groups and also three or more epoxide groups.

35

Polyepoxides and their preparation is known to the person skilled in the art. For example, polyepoxides are prepared by the reaction of epichlorhydrine (IUPAC-name: chloromethyloxirane) and a diol, a polyol or a dicarboxylic acid. Polyepoxides prepared in this way are polyethers having epoxide end groups.

40

22

Another possibility to prepare polyepoxides is the reaction of glycidyl(meth)acrylate (IUPAC-name: oxiran-2-ylmethyl-2-methylprop-2-enoate) with polyolefins or polyacrylates. This results in polyolefins or polyacrylates having epoxy end groups.

- 5 Preferably, aliphatic uncrosslinked polyepoxides are used. Copolymers of epichlorhydrine and 2,2-bis-(4-hydroxyphenyl)-propane (bisphenol A) are particularly preferred.

Component (b3) (the at least one further polymer (FP)) can also comprise a polyamide.

- 10 Aliphatic polyamides are preferred.

The intrinsic viscosity of suitable polyamides is generally from 150 to 350 ml/g, preferably from 180 to 275 ml/g. Intrinsic viscosity is determined here from a 0.5% by weight solution of the polyamide in 96% by weight sulfuric acid at 25°C in accordance
15 with ISO 307.

Preferred polyamides are semicrystalline or amorphous polyamides.

Examples of polyamides suitable as component (b3) are those that derive from lactams
20 having from 7 to 13 ring members. Other suitable polyamides are those obtained through reaction of dicarboxylic acids with diamines.

Examples that may be mentioned of polyamides that derive from lactams are polyamides that derive from polycaprolactam, from polycaprylactam, and/or from
25 polylauro lactam.

If polyamides are used that are obtainable from dicarboxylic acids and diamines, dicarboxylic acids that can be used are alkanedicarboxylic acids having from 6 to 14 carbon atoms, preferably from 6 to 10 carbon atoms. Aromatic dicarboxylic acids
30 are also suitable.

Examples that may be mentioned here as dicarboxylic acids are adipic acid, azelaic acid, sebacic acid, dodecanedicarboxylic acid, and also terephthalic acid and/or isophthalic acid.
35

Examples of suitable diamines are alkanediamines, having from 4 to 14 carbon atoms, in particular alkanediamines having from 6 to 8 carbon atoms, and also aromatic diamines, for example m-xylylenediamine, di(4-aminophenyl)methane, di(4-aminocyclohexyl)methane, 2,2-di(4-aminophenyl)propane, 2,2-di(4-aminocyclohexyl)-
40 propane, and 1,5-diamino-2-methylpentane.

23

Other suitable polyamides are those obtainable through copolymerization of two or more of the monomers mentioned above and mentioned below, and mixtures of a plurality of polyamides in any desired mixing ratio.

- 5 Preferred polyamides are polyhexamethylenedipamide, polyhexamethylene-sebacamide, and polycaprolactam, and also nylon-6/6,6, in particular having a proportion of from 75 to 95% by weight of caprolactam units.

- Particular preference is given to mixtures of nylon-6 with other polyamides, in particular with nylon-6/6,6 (PA 6/66), particular preference being given to mixtures of from 80 to 10 50% by weight of PA 6 and from 20 to 50% by weight of PA 6/66, where the PA 6/66 comprises from 75 to 95% by weight of caprolactam units, based on the total weight of the PA 6/66 in the mixture.

- 15 The following, non-exclusive list comprises the abovementioned polyamides, and other suitable polyamides, and also the monomers comprised.

AB polymers:

- | | | |
|----|-------|-------------------------|
| 20 | PA 4 | Pyrrolidone |
| | PA 6 | ϵ -Caprolactam |
| | PA 7 | Enantholactam |
| | PA 8 | Caprylolactam |
| | PA 9 | 9-Aminopelargonic acid |
| 25 | PA 11 | 11-Aminoundecanoic acid |
| | PA 12 | Lauro lactam |

AA/BB polymers:

- | | | |
|----|----------|--|
| 30 | PA 46 | Tetramethylenediamine, adipic acid |
| | PA 66 | Hexamethylenediamine, adipic acid |
| | PA 69 | Hexamethylenediamine, azelaic acid |
| | PA 610 | Hexamethylenediamine, sebacic acid |
| | PA 612 | Hexamethylenediamine, decanedicarboxylic acid |
| 35 | PA 613 | Hexamethylenediamine, undecanedicarboxylic acid |
| | PA 1212 | 1,12-Dodecanediamine, decanedicarboxylic acid |
| | PA 1313 | 1,13-Diaminotridecane, undecanedicarboxylic acid |
| | PA 6T | Hexamethylenediamine, terephthalic acid |
| | PA MXD6 | m-Xylylenediamine, adipic acid |
| 40 | | |
| | PA 6I | Hexamethylenediamine, isophthalic acid |
| | PA 6-3-T | Trimethylhexamethylenediamine, terephthalic acid |

	PA 6/6T	(see PA 6 and PA 6T)
	PA 6/66	(see PA 6 and PA 66)
	PA 6/12	(see PA 6 and PA 12)
	PA 66/6/610	(see PA 66, PA 6 and PA 610)
5	PA 6I/6T	(see PA 6I and PA 6T)
	PA PACM 6	Diaminodicyclohexylmethane, adipic acid
	PA PACM 12	Diaminodicyclohexylmethane, laurolactam
	PA 6I/6T/PACM	as PA 6I/6T + diaminodicyclohexylmethane
	PA 12/MACMI	Laurolactam, dimethyldiaminodicyclohexylmethane, isophthalic acid
10	PA 12/MACMT	Laurolactam, dimethyldiaminodicyclohexylmethane, terephthalic acid
	PA PDA-T	Phenylenediamine, terephthalic acid

Preferred polyamides are PA 6, PA 66 and PA PACM 6.

- 15 Vinyl aromatic polymers are polyolefins having unsubstituted or at least monosubstituted styrene as monomer unit. Suitable substituents are, for example, C₁-C₆-alkyls, F, Cl, Br and OH. Preferred vinyl aromatic polymers are selected from the group consisting of polystyrene, poly- α -methylstyrene and copolymers thereof with up to 30% by weight of comonomers selected from the group consisting of acrylic esters,
- 20 acrylonitrile and methacrylonitrile.

Vinyl aromatic polymers are commercially available and known to the person skilled in the art. The preparation of these polymers is also known to the person skilled in the art.

- 25 Preferably, the vinyl aromatic polymers are prepared by free radical polymerization, for example by emulsion, bead, solution or bulk polymerization. Possible initiators are, depending on the monomers and the type of polymerization, free radical initiators such as peroxide compounds and azo compounds with the amounts of initiator generally being in the range from 0.001 to 0.5% by weight, based on the monomers.

30


- Poly(vinyl esters) and their preparation are known to the skilled person. Poly(vinyl esters) are preferably prepared by polymerization of vinyl esters. In a preferred embodiment of the present invention, the vinyl esters are vinyl esters of aliphatic C₁-C₆ carboxylic acids. Preferred monomers are vinyl acetate and vinyl propionate. These
- 35 monomers form poly(vinyl acetate) and poly(vinyl propionate) polymers.

- Poly(vinyl ethers) are prepared by polymerization of vinyl ether monomers. Poly(vinyl ethers) and their preparation are known to the skilled person. In a preferred embodiment, the vinyl ethers are vinyl ethers of aliphatic C₁-C₈ alkyl ethers. Preferred
- 40 monomers are methyl vinyl ether and ethyl vinyl ether, forming poly(methyl vinyl ether) and poly(ethyl vinyl ether) during the polymerization.

25

Preferably, the poly(vinyl ethers) are prepared by free radical polymerization, for example by emulsion, bead, solution, suspension or bulk polymerization. Possible initiators are, depending on the monomers and the type of polymerization, free radical initiators such as peroxide compounds and azo compounds with the amounts of
 5 initiator generally being in the range from 0.001 to 0.5% by weight, based on the monomers.

Poly(alkyl(meth)acrylate) within the present invention comprises poly(alkyl acrylate), poly(alkyl methacrylates) and copolymers thereof. Poly(alkyl(meth)acrylate) comprises
 10 units derived from monomers of formula (VIII),

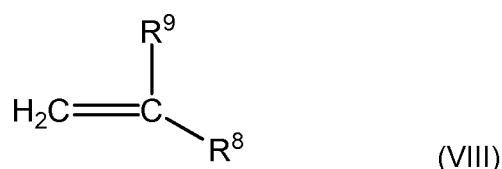

wherein

15

R⁸ is selected from the group consisting of H and C₁-C₈-alkyl and

R⁹ is a radical of formula (IX)



20 wherein

R¹⁰ is a C₁-C₁₄-alkyl.

Preferably, R⁸ is selected from the group consisting of H and C₁-C₄-alkyl, particularly
 25 preferably R⁸ is H or methyl. Preferably, R¹⁰ is a C₁-C₈-alkyl, particularly preferably, R¹⁰ is methyl or ethyl.

If R⁸ in formula (VIII) is H and R⁹ is a radical of formula (IX) and R¹⁰ in formula (IX) is
 30 methyl, then the monomer of formula (VIII) is methyl acrylate.

30

If R⁸ in formula (VIII) is H and R⁹ is a radical of formula (IX) and R¹⁰ in formula (IX) is
 ethyl, the monomer of formula (VIII) is ethyl acrylate.

If R⁸ in formula (VIII) is methyl and R⁹ is a radical of formula (IX), then the monomers of
 35 formula (VI) are methacrylic esters.

26

Poly(alkyl(meth)acrylates) comprise as monomers preferably 40 to 100% by weight of methacrylic esters, particularly preferably 70 to 100% by weight of methacrylic esters and more preferably from 80 to 100% by weight of methacrylic esters, each based on the total amount of the poly(alkyl(meth)acrylates).

5

In another preferred embodiment, the poly(alkyl(meth)acrylates) comprise as monomers from 20 to 100% by weight of methyl acrylate, ethyl acrylate or a mixture thereof, preferably from 40 to 100% by weight of methyl acrylate, ethyl acrylate or a mixture thereof and particularly preferably from 50 to 100% by weight of methyl
10 acrylate, ethyl acrylate or mixtures of thereof, each based on the total weight of the poly(alkyl(meth)acrylate).

Such polymers of monomers of the formula (VIII) with or without further monomers can be prepared in a conventional, preferably a free radical polymerization, for example an
15 emulsion, bead, solution or bulk polymerization (cf. Kirk-Othmer, Encyclopedia of Chemical Technology 3rd Ed., Vol. 1., pp. 330-342, Vol. 18, pp. 720-755, J. Wiley; H. Rauch-Puntigam, Th. Völker, Acryl- und Methacrylverbindungen). Possible initiators depending on the monomers and the type of polymerization are free radical initiators, such as peroxy or peroxy compounds and azo compounds. The amount of initiator
20 being in general within the range from 0.001 to 0.5% by weight, based on the monomers.

Suitable initiators for an emulsion polymerization are, for example, peroxydisulfates and redox systems for a bulk polymerization not only peroxides, such as dibenzoyl
25 peroxide or dilauroyl peroxide, but also azo compounds, for example azobisisobutyronitrile, similarly in the case of the solution or bead polymerization. The molecular weight may be regulated using conventional regulators, in particular mercaptans, e. g. dodecylmercaptan.

30 Preferably, the polymerization is carried out at elevated temperatures, for example above 50°C. The weight average molecular weight (M_w) is in general within the range of from 2 000 to 5 000 000 g/mol, preferably from 20 000 to 3 000 000 g/mol (determination by light scattering; cf. HoubenWeyl, Methoden der Org. Chemie, 4th edition, Volume 14/1, Georg Thieme-Verlag Stuttgart 1961).

35

The person skilled in the art knows that the monomers described above for the preparation of the components (b1), (b2) and (b3) can undergo changes in their structure during the polymerization reaction. Consequently, the building units of the polymers are not the same as the monomers from which they are derived. However,
40 the person skilled in the art knows which monomers correspond to which building unit of the polymers.

Under the conditions of compounding or processing by fused filament fabrication, virtually no transacetalization occurs between component (b1), the polyoxymethylene (POM), and component (b3), the at least one further polymer (FP), i. e. virtually no exchange of comonomer units takes place.

5

Component (c) / Dispersant

The terms “component (c)” and “dispersant” for the purpose of the present invention are synonymous and are used interchangeably throughout the present invention

10

In one embodiment of the present invention, the mixture (M) comprises from 0 to 5% by volume of component (c). In a preferred embodiment, the mixture (M) comprises from 0.1 to 4% by volume of component (c) and particularly preferably from 1 to 3% by volume of component (c), each based on the total volume of the mixture (M).

15

As component (c), at least one dispersant can be used. “At least one dispersant” according to the present invention means precisely one dispersant and also mixtures of two or more dispersants.

20 The dispersant can be selected from among known dispersants. Examples are oligomeric polyethylene oxide having a low molecular weight of from 200 to 600 g/mol, stearic acid, stearamides, hydroxystearic acids, fatty alcohols, fatty alcohol sulfonates and block copolymers of ethylene oxide and propylene oxide and also, particularly preferably, polyisobutylene.

25

Process for producing a three-dimensional object

The above mentioned embodiments and preferences in respect of the mixture (M) comprising components (a), component (b) and optionally component (c) apply
30 analogously to the process for producing the three-dimensional object.

The fused filament fabrication process for the production of three-dimensional objects is well known in the state of the art and detailed explained in the above cited documents. The fused filament fabrication process is also denominated as 3D-printing
35 process.

Another object of the present invention is a process for the production of a three-dimensional green body by a fused filament fabrication process comprising the steps

- 40 i) providing the inventive mixture (M) to a nozzle,
ii) heating the mixture (M) to a temperature (T_M),

- iii) depositing the mixture (M) into a build chamber using a layer-based additive technique to form the three-dimensional green body.

According to step (i), the mixture (M) is provided to a nozzle. Normally, the mixture (M) is provided to the nozzle in a solid state. It can be provided in form of a filament as well as in granulate or powder form. The mixture (M) comprises the above stated components. If the three-dimensional object to be prepared comprises a metal alloy, the mixture (M) can either comprise a powder of the already prepared metal alloy or a mixture of powders of the individual metal alloy constituents, i. e. the metal and the other element as described above. The metal alloy will then form during the preparation of the three-dimensional object.

Methods for the preparation of filaments, granulates or powders are well known in the state of the art.

According to step (ii), the mixture (M) is heated to a temperature (T_M). The temperature (T_M) is above the melting point of the binder (B). Methods for the determination of the melting point of the binder (B) are known to the skilled person. For example, the melting point of the binder (B) can be estimated by differential scanning calorimetry (DSC).

In a preferred embodiment according to the present invention, in process step (ii) the mixture (M) is heated to a temperature (T_M) that is at least 1°C, preferably at least 5°C and particularly preferably at least 10°C above the melting point of the binder (B).

In another preferred embodiment the mixture (M) is heated to a temperature (T_M) in the range of from 140 to 240°C, preferably of from 160 to 220°C.

Another object of the present invention is therefore a process for the production of a three-dimensional green body, wherein the temperature (T_M) in step ii) is from 140 to 240 °C.

According to step (iii), the mixture (M) is deposited into a build chamber using the layer-based additive technique. The temperature of the build chamber is usually in the range of from 30 to 100 °C, preferably of from 40 to 90 °C and particularly preferably of from 50 to 80 °C.

The fused filament fabrication process, for example, can be carried out by the sequential discharging of discontinuous drops of a thermoformable material. The thermoformable material is plasticized in the fluid phase and is introduced into a material store having at least one discharging unit which can be clocked. From there, the material is discharged in a dropwise manner by means of a discharging unit in the

direction of an object carrier for an object wherein the object carrier and an outlet opening can be moved at a relative spacing in relation to one another in space in order to influence the drop shape. The creation of the drops is supported by changing the relative space in an alternating manner in opposite directions during the discharging of
5 the drops from the discharging unit and during the application of the drops to the three-dimensional object during the production of the object. This process is described in WO 2012/028308.

In other words, in step (i) to (iii) of the inventive process, the mixture (M) generally is
10 initially present in a solid state and thereafter melted and printed to form a three-dimensional object comprising the mixture (M). The so prepared three-dimensional object is also called "three-dimensional green body".

In one embodiment of the present invention, process step (iii) is followed by a process
15 step (iv) in which at least part of the binder (B) is removed from the three-dimensional green body. The at least partial removal of the binder (B) is also called debinding. The terms "process step (iv)" and "debinding" for the purpose of the present invention are synonymous and are used interchangeably throughout the present invention.

20 Another object of the present invention is therefore a process for the production of a three-dimensional green body, wherein step iii) is followed by a step iv), in which at least part of the binder is removed from the three-dimensional green body to form a three-dimensional brown body.

25 After the partial removal of the binder (B), the resulting three-dimensional object is called a "three-dimensional brown body". The three-dimensional brown body comprises the inorganic powder (IP) and the fraction of the binder (B), which was not removed during the debinding. The person skilled in the art knows that a three-dimensional brown body comprising a ceramic material as inorganic powder (IP) is also called a
30 three-dimensional white body. However, for the purpose of the present invention, the terms "three-dimensional brown body" and "three-dimensional white body" are used synonymous and are interchangeably.

To remove at least part of the binder (B) in process step (iv), the three-dimensional
35 green body obtained by the fused filament fabrication process is preferably treated with a gaseous acid comprising atmosphere. Appropriate processes are described, for example, in US 2009/0288739 and US 5,145,900. This process step (iv) is, according to the invention, preferably carried out at temperatures below the melting temperature of the binder (B). Process step (iv) is preferably carried out at a temperature at least
40 1°C below the melting point of the binder (B), preferably at least 5°C below the melting point of the binder (B) and particularly preferably at least 10°C below the melting point of the binder (B).

Another object of the present invention is therefore a process for the production of a three-dimensional green body, wherein in step iv) the binder (B) is removed at a temperature below the melting point of the binder (B).

5

In general, the process step (iv) is carried out at a temperature in the range of from 20 to 180°C and particularly preferably of from 100 to 150°C. Preferably, process step (i) is carried out for a period of from 0.1 to 24h, particularly preferably of from 0.5 to 12h.

- 10 The treatment time required depends on the treatment temperature and the concentration of the acid in the treatment atmosphere and also on the size of the three-dimensional object.

- Another object of the present invention is therefore a process for the production of a
15 three-dimensional green body, wherein in step iv) the binder (B) is removed by acidic treatment.

- Suitable acids for process step (iv) of the present invention are, for example, inorganic acids which are either gaseous at room temperature or can be vaporized at the
20 treatment temperature or below. Examples are hydrogen halides and nitric acid. Hydrogen halides are hydrogen fluoride, hydrogen chloride, hydrogen bromide and hydrogen iodide. Suitable organic acids are those, which have a boiling point at atmosphere pressure of less than 130°C, e. g. formic acid, acetic acid or trifluoroacetic acid and mixtures thereof. Acids with boiling points above 130°C, for example
25 methanesulfonic acid, can also be utilized in process step iv) when dosed as a mixture with a lower boiling acid and/or water. Preferred acids for process step (iv) are nitric acid, a 10% by weight solution of oxalic acid in water or a mixture of 50% by volume of methanesulfonic acid in water.

- 30 Furthermore, BF_3 and its adducts with inorganic ethers can be used as acids.

- If a carrier gas is used, the carrier gas is generally passed through the acid and loaded with the acid beforehand. The carrier gas, which has been loaded in this way with the acid, is then brought to the temperature at which process step (iv) is carried out. This
35 temperature is advantageously higher than the loading temperature in order to avoid condensation of the acids. Preferably the temperature at which process step (iv) is carried out is at least 1°C, particularly preferably at least 5°C and most preferably at least 10°C higher than the loading temperature.

- 40 Preference is given to mixing the acid into the carrier gas by means of a metering device and heating the gas mixture to such a temperature that the acid can no longer condense. Preferably the temperature is at least 1°C, particularly preferably at least

5°C and most preferably at least 10°C higher than the sublimation and/or vaporization temperature of the acid and/or the carrier gas.

The carrier gas in general is any gas that is inert under the reaction conditions of the debinding step. A preferred carrier gas according to the present invention is nitrogen.

The debinding is preferably continued until the polyoxymethylene (POM), component (b1), of the binder (B) has been removed to an extent of at least 80% by weight, preferably at least 90% by weight, particularly preferably at least 95% by weight, based on the total weight of component (b1). This can be checked, for example, with the height of the weight decrease.

It is known to the skilled person that at the temperatures of the debinding step, the inorganic powder (IP) comprised in the three-dimensional green body can undergo chemical and/or physical reactions. In particular, the particles of the inorganic powder (IP) can fuse together and the inorganic powder can undergo solid state phase transitions.

The same holds true for the binder (B). During the debinding step the composition of the binder (B) can change.

Consequently, in one embodiment of the present invention, the inorganic powder (IP) and/or the binder (B) comprised in the three-dimensional green body obtained in process step (iv) differs from the inorganic powder (IP) and/or the binder (B) comprised in the three-dimensional brown body obtained in process step (iii).

Process step (iv) can be followed by a process step (v) in which the three-dimensional brown body is sintered. Process step (v) is also called sintering. The terms "process step (v)" and "sintering" for the purpose of the present invention are synonymous and are used interchangeably throughout the present invention.

Another object of the present invention is therefore a process for the production of a three-dimensional green body, wherein step (iv) is followed by a step (v), in which the three-dimensional brown body is sintered to form a three-dimensional sintered body.

After the sintering, the three-dimensional object is a three-dimensional sintered body. The three-dimensional sintered body comprises the inorganic powder (IP) and is essentially free of the binder (B).

"Essentially free of the binder (B)" according to the present invention means that the three-dimensional sintered body comprises less than 5 % by volume, preferably less than 2 % by volume, particularly preferably less than 0.5 % by volume and most

preferably less than 0.01 % by volume of the binder (B) based on the total volume of the three-dimensional sintered body..

5 It is known to the skilled person that during the sintering process the inorganic powder (IP) is sintered together to give a sintered inorganic powder. Furthermore, during the sintering process the inorganic powder (IP) can undergo chemical and/or physical reactions. Consequently, the inorganic powder (IP) comprised in the three-dimensional brown body usually differs from the sintered inorganic powder comprised in the three-dimensional sintered body.

10

In one embodiment of the present invention, after process step (iv) and before process step (v), the three-dimensional brown body obtained in process step (iv) is heated for preferably 0.1 to 12h, particularly preferably from 0.3 to 6h, at a temperature of preferably from 250 to 700°C, particularly preferably from 250 to 600°C to remove the
15 residual binder (B) completely.

The temperature as well as the duration and the atmosphere during process step (v) depends on the inorganic powder comprised in the mixture (M) as component (a). The temperature programme of the sintering process, the duration and the atmosphere is in
20 general adapted to the needs of the inorganic powder (IP) comprised in the mixture (M) as component (a). Suitable conditions for process step (v) are known to the skilled person.

In general, process step (v) is carried out under the atmosphere of a gas that is inert
25 with regard to the inorganic powder (IP) and the binder (B). Typical inert gases are for example nitrogen and/or argon.

Depending on the inorganic powder (IP) comprised in the mixture (M), it is also possible to carry out process step (v) in air, under vacuum or in hydrogen atmosphere.


30

The temperature in process step (v) is in general in the range of from 750 to 1600°C, preferably of from 800 to 1500°C and particularly preferably of from 850 to 1450 °C.

Claims

1. The use of a mixture (M) comprising
5
- (a) from 40 to 70 % by volume of an inorganic powder (IP) based on the total volume of the mixture (M),
- (b) from 30 to 60 % by volume based on the total volume of the mixture (M) of a
10 binder (B) comprising
- (b1) from 50 to 96 % by weight of at least one polyoxymethylene (POM) based on the total weight of the binder (B),
- (b2) from 2 to 35 % by weight of at least one polyolefin (PO) based on the
15 total weight of the binder (B),
- (b3) from 2 to 40 % by weight of at least one further polymer (FP) based on the total weight of the binder (B)
20
- in a fused filament fabrication process.
2. The use according to claim 1 wherein the mixture (M) comprises as component
25 (c) from 0.1 to 5 % by volume of at least one dispersant based on the total volume of the mixture (M).
3. The use according to any one of claims 1 or 2, wherein the inorganic powder (IP) is a powder of at least one inorganic material selected from the group consisting of a metal, a metal alloy and a ceramic material.
30
4. The use according to any one of claims 1 to 3, wherein component (b1) is a polyoxymethylene (POM) copolymer which is prepared by polymerization of
- from at least 50 mol-% of a formaldehyde source (b1a),
 - 35 - from 0.01 to 20 mol-% of at least one first comonomer (b1b) of the general formula (II)

34



(II),

wherein

5 R¹ to R⁴ are each independently of one another selected from the group consisting of H, C₁-C₄-alkyl and halogen-substituted C₁-C₄-alkyl;

10 R⁵ is selected from the group consisting of a chemical bond, a (-CR^{5a}R^{5b}-) group and a (-CR^{5a}R^{5b}O-) group,

10

wherein

15 R^{5a} and R^{5b} are each independently of one another selected from the group consisting of H and unsubstituted or at least monosubstituted C₁-C₄-alkyl,

15

wherein the substituents are selected from the group consisting of F, Cl, Br, OH and C₁-C₄-alkyl;


20 n is 0, 1, 2 or 3;

20

and


25 - from 0 to 20 mol-% of at least one second comonomer (b1c) selected from the group consisting of a compound of formula (III) and a compound of formula (IV)

25



(III),

35



(IV),

wherein

- 5 Z is selected from the group consisting of a chemical bond, an (-O-) group and an (-O-R⁶-O-) group,

wherein

- 10 R⁶ is selected from the group consisting of unsubstituted C₁-C₈-alkylene and C₃-C₈-cycloalkylene.

5. The use according to any one of claims 1 to 4, wherein the further polymer (FP) is at least one further polymer (FP) selected from the group consisting of a polyether, a polyurethane, a polyepoxide, a polyamide, a vinyl aromatic polymer, a poly(vinyl ester), a poly(vinyl ether), a poly(alkyl (meth)acrylate) and copolymers thereof.
- 15
6. The use according to any one of claims 1 to 5, wherein the particle size of the inorganic powder (IP) is from 0.1 to 80 μm.
- 20
7. A process for the production of a three-dimensional green body by a fused filament fabrication process comprising the steps
- 25 i) providing the mixture (M) according to any one of claims 1 to 6 to a nozzle,
 ii) heating the mixture (M) to a temperature (T_M),
 iii) depositing the mixture (M) into a build chamber using a layer-based additive technique to form the three-dimensional green body.
- 30 8. The process according to claim 7, wherein the temperature (T_M) in step ii) is from 140 to 240 °C.
9. The process according to any one of claims 7 or 8, wherein step iii) is followed by a step iv), in which at least part of the binder (B) is removed from the three-dimensional green body to form a three-dimensional brown body.
- 35

36

10. The process according to claim 9, wherein in step iv) the binder (B) is removed by acidic treatment.
- 5 11. The process according to any one of claims 9 or 10, wherein in step iv) the binder (B) is removed at a temperature below the melting point of the binder (B).
- 10 12. The process according to any one of claims 8 to 11, wherein step iv) is followed by a step v), in which the three-dimensional brown body is sintered to form a three-dimensional sintered body.

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/066728

A. CLASSIFICATION OF SUBJECT MATTER
INV. C04B35/634 B28B1/00
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
C04B B28B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009/288739 A1 (WOHLFROMM HANS [DE] ET AL) 26 November 2009 (2009-11-26) cited in the application paragraphs [0010] - [0021], [0048] - [0055] claims	1-12
A	----- US 5 900 207 A (DANFORTH STEPHEN C [US] ET AL) 4 May 1999 (1999-05-04) cited in the application column 3, paragraph 2 ----- -/--	1-12

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search 29 September 2015	Date of mailing of the international search report 07/10/2015
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Sow, Eve

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/066728

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	CN 104 057 090 A (JIANGSU TIANYI ULTRA FINE METAL POWDER CO LTD) 24 September 2014 (2014-09-24)	1-3,5-12
Y,P	example 3 claims 1,2,3,5 paragraph [0024] paragraph [0026]	4
X,P	----- CN 104 163 634 A (NO 55 INST CN ELECT SCI & TECH) 26 November 2014 (2014-11-26) claims 1-5 examples 1-4	1,3,5,7, 9,12
Y,P	----- CN 103 980 445 A (CHINESE ACAD INST CHEMISTRY) 13 August 2014 (2014-08-13) claims 1-3,6 paragraph [0002] -----	4

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/066728

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009288739	A1	26-11-2009	BR PI0714047 A2 11-12-2012
			CN 101489704 A 22-07-2009
			DK 2043802 T3 08-10-2012
			EP 2043802 A1 08-04-2009
			ES 2386651 T3 24-08-2012
			JP 5249213 B2 31-07-2013
			JP 2009542880 A 03-12-2009
			KR 20090035689 A 10-04-2009
			PL 2043802 T3 30-11-2012
			PT 2043802 E 23-07-2012
			RU 2009104739 A 20-08-2010
			SI 2043802 T1 30-11-2012
			UA 96452 C2 10-11-2011
			US 2009288739 A1 26-11-2009
			WO 2008006776 A1 17-01-2008

US 5900207	A	04-05-1999	AU 2267097 A 28-08-1997
			US 5738817 A 14-04-1998
			US 5900207 A 04-05-1999
			WO 9728941 A1 14-08-1997

CN 104057090	A	24-09-2014	NONE

CN 104163634	A	26-11-2014	NONE

CN 103980445	A	13-08-2014	NONE
