



(51) International Patent Classification:

H01F 27/10 (2006.01) **H01F 29/02** (2006.01)
H01F 27/12 (2006.01) **H01F 30/12** (2006.01)
H01F 27/14 (2006.01) **H01H 9/00** (2006.01)
H01F 27/29 (2006.01) **H02H 7/04** (2006.01)
H01F 27/30 (2006.01) **H01F 27/40** (2006.01)

(21) International Application Number:

PCT/EP2012/001087

(22) International Filing Date:

10 March 2012 (10.03.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11002900.6 7 April 2011 (07.04.2011) EP

(71) Applicant (for all designated States except US): **ABB TECHNOLOGY AG** [CH/CH]; Affolternstr. 44, CH-8050 Zürich (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BONMANN, Dietrich** [DE/DE]; Siebengebirsring 62, 53340 Meckenheim (DE). **SCHMIDT, Thomas** [DE/DE]; Unkeler Strasse 1, 53579 Erpel (DE).

(74) Agents: **PARTNER, Lothar** et al.; ABB AG, GF-IP, Wallstadter Str. 59, 68526 Ladenburg (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: FLUID INSULATED HIGH VOLTAGE COIL

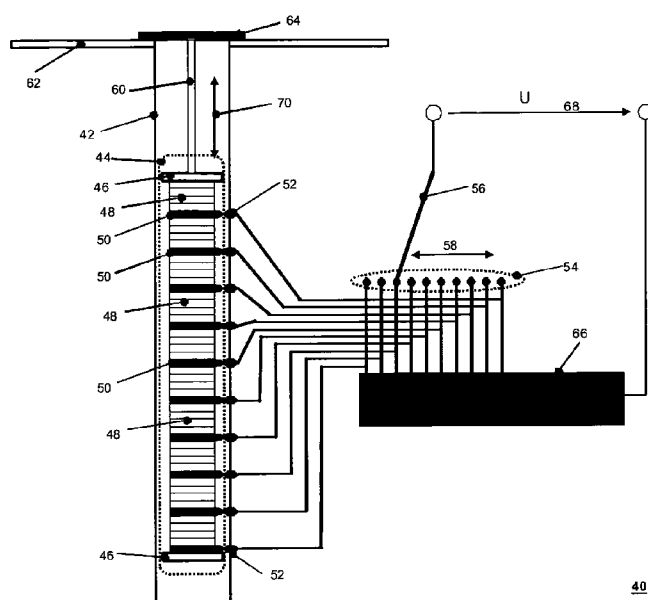


Fig. 2

(57) Abstract: The invention is related to a fluid insulated high voltage coil (12, 14, 16, 66), comprising a closed tank (22) for an insulation fluid (30) and a high voltage coil arranged therein with at least two taps (18, 54). An insulation tube (24, 42, 94) is extending into the tank (22), whereas the inner part of the tube is accessible from an outer side of the tank (22). Electric contact elements (52) are foreseen through the tube (24, 42, 94) walls along its longitudinal axis, whereas at least some of the contact elements (52) are electrically connected (32) with the taps (18, 54). A removable column-like electrical interaction device (44, 82) is arranged within the inner part of the insulation tube (24, 42, 94), which is electrically connected to the at least two taps (18, 54) by means of the contact elements (52).



Published:

— *with international search report (Art. 21(3))*

Fluid insulated high voltage coil

Description

The invention relates to a fluid insulated high voltage coil, comprising a closed tank for an insulation fluid, and a high voltage coil arranged therein with at least two taps.

It is known, that transformers are used in electrical distribution networks for coupling network sections of a first voltage level, for example 380kV, with network sections of a second voltage level, for example 110kV. Such high voltage transformers might have a rated power of several 100MVA. Due to reasons of electrical insulation the whole transformer, namely including the transformer core and the transformer coils, are typically arranged within a transformer vessel or tank, which is filled with oil or another insulation fluid.

It is also known, that such transformers are rather often equipped with a tap changer. A tap changer is an electrical switch, wherewith the transmission ratio of a transformer respectively its transformer coils can be modified. Typically a coil with a fixed amount of windings is electrically connected in series with a coil comprising several taps, whereas each tap corresponds to a certain number of turns. The tap changer connects the electrical output of such a composite coil with one of the taps and modifies the total number of active turns of the composite coil therewith.

The regulating windings of a tap-coil of power transformers are especially sensitive to overvoltages excited by external transient disturbances like lightning or switching surges. For larger regulation ranges and high voltage transformers it is often difficult or even impossible to cope with the resulting voltage stresses by a proper winding design or increased electrical insulation. In such cases it is common practice to connect metal oxide varistors as surge arresters between the conductors leading from the taps of the regulating windings to the tap changer. It is also common practice to assemble a column of the necessary number of varistor discs between copper con-

tact pieces. The varistor column is kept under compression by some composite tie rods and springs. The varistor column, or several of them, is mounted inside the transformer tank, under oil, wherever there is space left near the internal electrical connections and tap changer(s).

Disadvantageously within the state of the art is the taps of the transformer coil and also the surge arresters are under oil and are therefore not accessible in a good way. Thus internal surge arresters are not accessible for inspection, replacing or testing without draining oil from the transformer tank. Also a testing or measuring of voltages of the taps is not possible without major effort.

Based on this state of the art it is the objective of the invention to provide a high voltage coil respectively a transformer coil with tap changer that allows an easy inspection and replacing of surge arresters or testing under oil. According to the invention a high voltage coil is not only limited to a transformer coil. Moreover each kind of high voltage coil, for example such as a current limiting coil is within the scope of the invention.

This problem is solved by a high voltage coil of the aforementioned kind. This is characterized by an insulation tube extending into the tank, whereas the inner part of the tube is accessible from an outer side of the tank, whereas electric contact elements are foreseen through the tube walls along its longitudinal axis, whereas at least some of the contact elements are electrically connected with the taps and whereas a removable column-like electrical interaction device is arranged within the inner part of the insulation tube, which is electrically connected to the at least two taps by means of the contact elements.

Such an insulation tube or composite tube is similar to a tube, which is known from the diverter switch compartment in on-load tap changers for power transformers. This insulation tube has to be accessible from outside the tank, preferably from the top of the tank. According to the invention it is possible to open and close a locking device, which normally seals the upper side of the preferably vertically arranged insulation tube. Also the lower side of the tube is typically sealed to the tank, so that two different oil spaces are provided: inside and outside the insulation tube. The insulation tube

is typically connected with the inner side of a wall of the tank. According to a certain embodiment it also might be hermetically sealed to the wall. A communication channel inbetween both oil spaces might be realized by an U-shaped tube for example, which is mainly arranged outside the tank. This has to be seen as part of the upper tank wall. Hence it is possible to remove or feed in a column-like interaction device into the insulation tube from its open upper end. Electrical contact elements are foreseen through the wall of the insulation tube so inside and outside contact areas are foreseen. The outside contact areas are connected to the taps of the transformer coil. Thus it is possible to connect the interaction device in an easy way to the taps of the high voltage coil, which might be part of a transformer for example. To ensure a safe electrical contact between the contact areas of the electrical interaction device and the corresponding contact areas within the inner hollow space of the insulation tube, preferably a guiding device is foreseen, which predetermines a fixed end position of the electrical interaction device within the insulation tube. Hence it is possible to easily replace or check the removable electrical interaction device which is normally under oil.

Also a current limiter coil, which is electrically connected in series with another high voltage coil, is within the scope of the invention. Here the two connections of the current limiter coil have to be seen as two taps, which are electrically connected with the insulation tube and the electrical interaction device arranged therein.

According to a further embodiment of the invention, the high voltage coil comprises a tap changer which is electrically connected with the taps of the high voltage coil. Tap changers might produce several overvoltages when operating. Thus it is notably useful, to provide an electrical interaction device, which might be used for example for limiting overvoltages or provide possibilities for measurement.

In a variant of the invention further electric contact elements are foreseen within the electric interaction device along its longitudinal extension, whereas the corresponding longitudinal distances are adapted to the longitudinal distances of the contact elements of the insulation tube. Such further contact elements preferably contain copper, since this material is notably suitable for contacts of switches for example. Since the axial distances of the contact elements of the electrical interaction device are

adapted to the axial distances of the contact elements of the insulation tube, the electrical interaction device is electrically connected with the taps, if it is feeded into the insulation tube.

According to another variant of the invention at least some of the electric contact elements comprise a spring-loaded contact section. This improves on one side the electrical contact inbetween the contact elements, since a certain pressure force is provided, which is in principal vertical to the longitudinal extension of the electrical interaction device. The spring-loaded electrical contact section might be integrated as well in the contact elements of the electrical interaction device as in the contact elements of the insulation tube. On the other side a gliding of the electric interaction device along the electrical contacts while feeding in or feeding out is simplified in an advantageous manner.

Following a preferred embodiment of the invention, the electrical interaction device comprises stacked surge arrester elements inbetween the further electric contact elements. Thus the surge arrester elements respectively the whole arrangement of them within the column like interaction device can easily be removed from the oil tank while the transformer is switched off. Preferably the surge arrester elements are varistors, which typically have a disc-like shape, for example a diameter of roughly 10cm and a thickness of some centimetres, dependent on the voltage level they are rated for. Preferably the contact elements have a similar base area than the varistors so that they can become stacked into the column like shape in an easy way. Dependent on the voltage level to be observed inbetween the different taps of the high voltage coil, a stack of five varistors each could be arranged alternating with a contact element. The number of taps of a transformer coil might amount 27 for example, so that in total 135 varistors and 28 contact elements would be foreseen in a column like electric interaction device. A varistor might be foreseen to have a rated limiting voltage of 1kV to 5kV for example.

According to a preferred embodiment of the invention, the elements of the electric interaction device, for example varistors and contact elements, are stacked and clamped together at both ends of the stack. This might be done for example with one or more insulating screws or fixing elements, whereas at both ends of the stack typi-

cally some clamping elements are foreseen. Those clamping elements might have also a disc like shape with a slightly higher diameter than the stack of the varistors respectively clamping elements. Thus clamping screws could be fixed on the overlap, which press the whole stack together. But it is also possible to apply a spring force in the longitudinal direction of the stack.

According to another embodiment of the invention the electrical interaction device comprises electrical measurement devices or is at least connected thereto. This is useful for example in case of maintenance or testing of the transformer respectively high voltage coil on site. Hence it is possible to feed an electrical interaction device which is connected to measurement devices into the insulating tube. The contact elements are more or less comparable with those of an electric interaction device with surge arresters. The measurement device can be arranged – at least in part – within the interaction device, for example a voltage sensor. But it is also thinkable, that the interaction device contains only measurement lines which are guided to an external measurement and/or analyzing device. Hence it is possible for example to analyze the occurring over-voltages during operation of a transformer or current limiter coil for example.

According to a further embodiment of the invention the insulation tube is arranged approximately vertically and is accessible from the top of the closed tank. An opening within the walls of the tank enables the access to the insulation tube without the risk, that oil or other insulation liquid leaks out of the tank when the opening is not sealed by a locking device for example. Thus the whole electric interaction device, for example a clamped stack of 50 disc-shaped varistors, can be moved out the oil tank through the opening on the top. Of course it is also possible to arrange the insulation tube angular, for example in 45°, if this allows a smaller size of the transformer vessel. Most important issue is the accessibility from the top to avoid a leakage of the insulation fluid.

According to another embodiment of the invention a temperature measuring device is foreseen, which extends from outside the tank for an insulation fluid into the inner hollow space of the insulation tube. The temperature of the insulation liquid such as oil is important information for the operation of the transformer or other high voltage

coils containing components. Especially surge arrestors or varistors might produce some heat in case of a failure. According to the invention those components are located within the insulation tube, which builds a more or less closed room. Thus in case of a failure the temperature of the oil respectively insulation liquid surrounding the surge arrestors will rise significantly faster than the temperature of the oil in the remaining part of the tank. This enables monitoring the surge arrestors respectively the varistors by means of a temperature measuring device. Since an opening in the tank respectively transformer vessel has to be foreseen anyhow for the accessibility of the insulation tube, a thermometer or other temperature measuring device is easily to implement for example in a belonging locking device for the opening.

The aforementioned advantages of a high voltage coil according to the invention are also useable in an advantageous manner for a high voltage transformer comprising a transformer core and at least one high voltage coil according to the invention, which are arranged in a common insulation tank. This is valid of course as well for single phase as for three phase transformers.

According to a further embodiment of the invention it is foreseen to arrange at least two electrical interaction devices within the same insulation tube. So it is as well thinkable to arrange three galvanic separated electric interaction devices in a triangular layout side by side as to arrange three galvanic separated electric interaction devices in a series within the same insulation tube.

According to a preferred embodiment of the invention the tank is filled with an insulation liquid such as oil for example. This enables the high voltage component to be operated with the rated voltage. The insulation tube is not hermetically closed, thus the not used space of the insulating tube is also filled with the insulation liquid under normal operation conditions.

Further advantageous embodiments of the invention are mentioned in the dependent claims.

The invention will now be further explained by means of an exemplary embodiment and with reference to the accompanying drawings, in which:

- Figure 1 shows an exemplary high voltage transformer,
Figure 2 shows an exemplary first electric interaction device with adjacent components and
Figure 3 shows an exemplary second electric interaction device with adjacent components.

Fig. 1 shows an exemplary three phase high voltage transformer in a sectional view 10. Around the three limbs of a transformer core 28 a high voltage coil 12, 14 respectively 16 is arranged, whereas all of them comprise several taps, which are only shown for the first high voltage coil 12 with the reference number 18. Typically several tabs, such as sixteen or eighteen are foreseen. The tabs are electrically connected by means of electrical connection means 32 as well with a first insulation tube 24 as with a tap-changer 20, which is indicated by a single box. All those components are arranged within a closed tank 22, a transformer vessel, which is filled with an insulation fluid 30, in this case oil. The tank 22 comprises in its upper wall an opening, where through the insulation tube is accessible. This opening is closable by a locking device 26, for example a metal plate with a seal, which can be screwed on the upper side of the tank 22, which is preferably also made from metal.

Fig. 2 shows an exemplary first electric interaction device with adjacent components in a view 40. This can be used in part for example within the transformer shown in Fig.1. An insulation tube 42 is accessible through an opening of a top wall 62 of a tank for insulation fluid. The insulation tube 42 is mounted by a screw-joint on the top-wall 62. A removable locking device 64 is sealing this opening, so that it is hermetically closed during operation of the components. A first electric interaction device 44 is arranged within the tubular inner hollow space of the insulation tube 42. This comprises a column-like stack of four disc-shaped surge arrestors 48 respectively varistors each alternating with further contact elements 50, which are preferably made from copper. Both axial ends of the electric interaction device 44 are bordered by disc-shaped clamping elements 46, whose diameter is larger than the diameter of the varistors 48. Both clamping elements 46 are pressed together with insulating screws, which are arranged around the stack and which are not shown in this fig. Op-

tional it is also thinkable to press the stack by a spring, which might be arranged in-between the upper clamping element 46 and the top wall 62.

The shape of the electric interaction device 44 including the not shown screws is adapted to the inner diameter of the insulating tube 42, whereas axial guiding elements are foreseen, which are also not shown. Thus the electric interaction device can only be moved up and down along the arrow with the reference sign 70. In this Fig. the locking device 64 and the whole interaction device 44 are connected with a rod 60 together, so that the interaction device is fixed in an operating position.

Also indicated in this Fig. is a high voltage coil 66. This might be each kind of high voltage coil such as a transformer coil but also a current limiting coil or similar. Several taps of this coil are indicated with the reference sign 54. Those taps 54 are electrically connectable with a tap changer 56, which can selectively connect a tap with an electrical output of the coil, whose output voltage is indicated with the reference sign 68. The taps furthermore are connected with electric contact elements 52 that are equidistantly arranged along the axial extension through the wall of the insulation tube 42. Those contact elements 52 are foreseen to electrically connect the tabs 58 with the contact elements 50 of the electric interaction device 44. Preferably the contact elements 50 of the electric interaction device and/or the contact elements 52 of the insulation tube 42 have a spring-like characteristic, so that a force is applied in-between both contact elements 50, 52, so that a secure electric contact is realized.

Fig. 3 shows an exemplary second electric interaction device with adjacent components in a view 80. The main difference is that not a varistor-based first interaction element has been feeded into the insulation tube 94, but a second interaction element 82, that comprises more or less only connection lines 84 inbetween contact elements 88 and external electric measurement devices 86. Thus it is possible to easily measure the voltage at the taps of the transformer without major effort. This might be useable for test purposes on site. Afterwards the second interaction device for measurement 82 might be replaced by a varistor-based interaction device before the high voltage coil respectively the transformer is switched back to normal operation. Additionally a thermometer 90 is foreseen which extends from outside the tank into the inner hollow space of the insulation tube 94.

List of reference signs

10	exemplary high voltage transformer
12	first high voltage coil
14	second high voltage coil
16	third high voltage coil
18	taps of first high voltage coil
20	first tap changer
22	closed tank
24	first insulation tube
26	first locking device
28	transformer core
30	insulation fluid
32	electrical connection
40	exemplary first electric interaction device with adjacent components
42	second insulation tube
44	first electric interaction device
46	clamping element
48	stacked surge arresters
50	further electric contact element
52	electric contact element
54	taps of forth coil
56	second tap changer
58	movement direction of second tap changer
60	rod
62	top wall of closed tank
64	second locking device
66	fourth high voltage coil
68	voltage
70	movement direction of first electric interaction device
80	exemplary second electric interaction device with adjacent components
82	second electric interaction device
84	data transmission cable

- 86 electrical measurement devices
- 88 second further contact element
- 90 thermometer
- 92 movement direction of second electric interaction device
- 94 third insulation tube

Claims

1. Fluid insulated high voltage coil (12, 14, 16, 66), comprising

- a closed tank (22) for an insulation fluid (30),
- a high voltage coil arranged therein with at least two taps (18, 54),

characterized by

an insulation tube (24, 42, 94) extending into the tank (22), whereas the inner part of the tube is accessible from an outer side of the tank (22), whereas electric contact elements (52) are foreseen through the tube (24, 42, 94) walls along its longitudinal axis, whereas at least some of the contact elements (52) are electrically connected (32) with the taps (18, 54), whereas a removable column-like electrical interaction device (44, 82) is arranged within the inner part of the insulation tube (24, 42, 94), which is electrically connected to the at least two taps (18, 54) by means of the contact elements (52).

2. Fluid insulated high voltage coil according to claim 1, characterized in that it comprises a tap changer (20, 56) which is electrically connected with the taps (18, 54) of the high voltage coil (12, 14, 16, 66).

3. Fluid insulated high voltage coil according to claim 1 or 2, characterized in that further electric contact elements (50, 88) are foreseen within the electric interaction device (44, 82) along its longitudinal extension, whereas the belonging longitudinal distances are adapted to the longitudinal distances of the contact elements (52) of the insulation tube (24, 42, 94).

4. Fluid insulated high voltage coil according to any of the previous claims, characterized in that at least some of the electric contact elements (50, 52, 88) comprise a spring-loaded contact section.

5. Fluid insulated high voltage coil according to any of the claims 3 or 4, characterized in that the electrical interaction device (44, 82) comprises stacked surge arrester elements (48) inbetween the further electric contact elements (50).

6. Fluid insulated high voltage coil according to claim 5, characterized in that the surge arrester elements (48) are varistors.

7. Fluid insulated high voltage coil according to claim 3 to 6, characterized in that the elements (48, 50, 88) of the electric interaction device (44, 82) are stacked and clamped (46) together at both ends of the stack.

8. Fluid insulated high voltage coil according to claim 1 to 4, characterized in that the electrical interaction device (44, 82) comprises electrical measurement devices (86) or is at least connected (84) thereto.

9. Fluid insulated high voltage coil according to any of the previous claims, characterized in that the insulation tube (24, 42, 94) is arranged approximately vertically and is accessible (26, 64) from the top (62) of the closed tank (22).

10. Fluid insulated high voltage coil according to any of the previous claims, characterized by a temperature measuring device (90), which extends from outside the tank (22) for an insulation fluid (30) into the inner space of the insulation tube (24, 42, 94).

11. High voltage transformer comprising

- a transformer core (28),
- at least one high voltage coil (12, 14, 16, 66) according to any of the claims 1 to 10,

whereas the components are arranged in a common tank (22) for an insulation fluid (30).

12. High voltage transformer according to claim 11, whereas the transformer is a three phase transformer with at least three high voltage coils according to any of the claims 1 to 10.

13. High voltage transformer according to claim 11 or claim 12, characterized in that at least two electrical interaction devices (44, 82) are arranged within the same insulation tube (24, 42, 94).

14. High voltage transformer according to any of the claims 11 to 13, characterized in that the common tank (22) is filled with an insulation fluid (30).

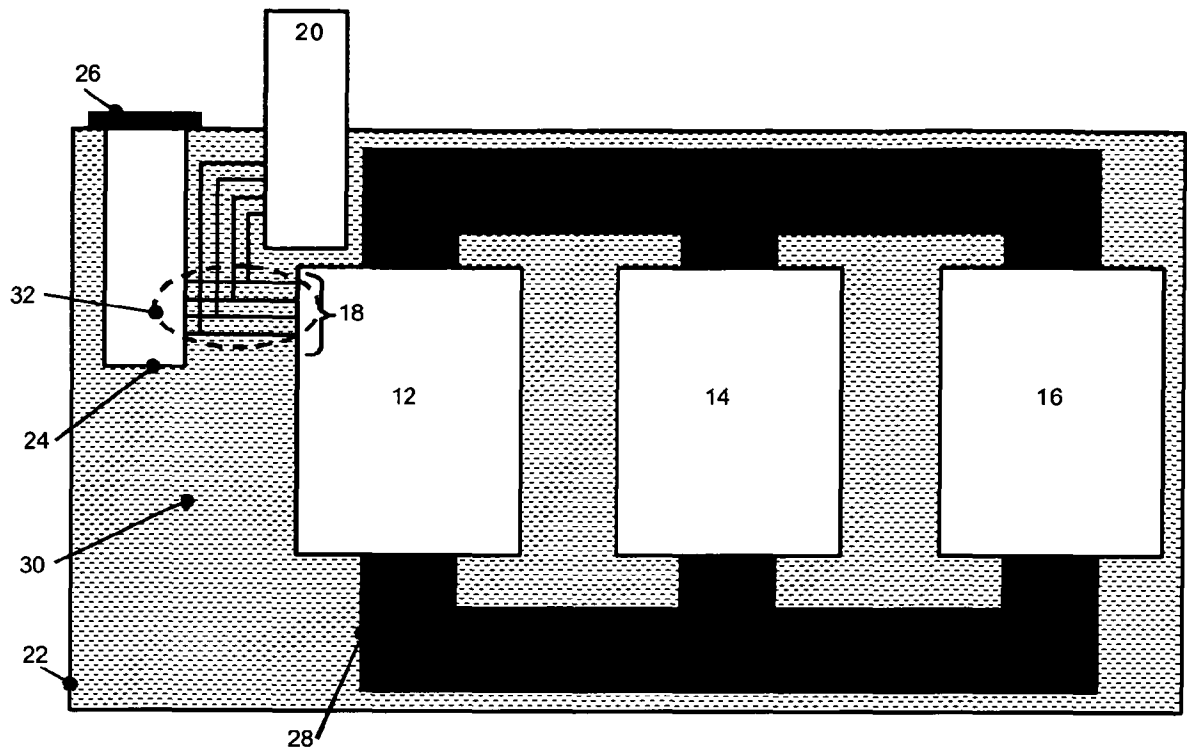


Fig. 1

2/3

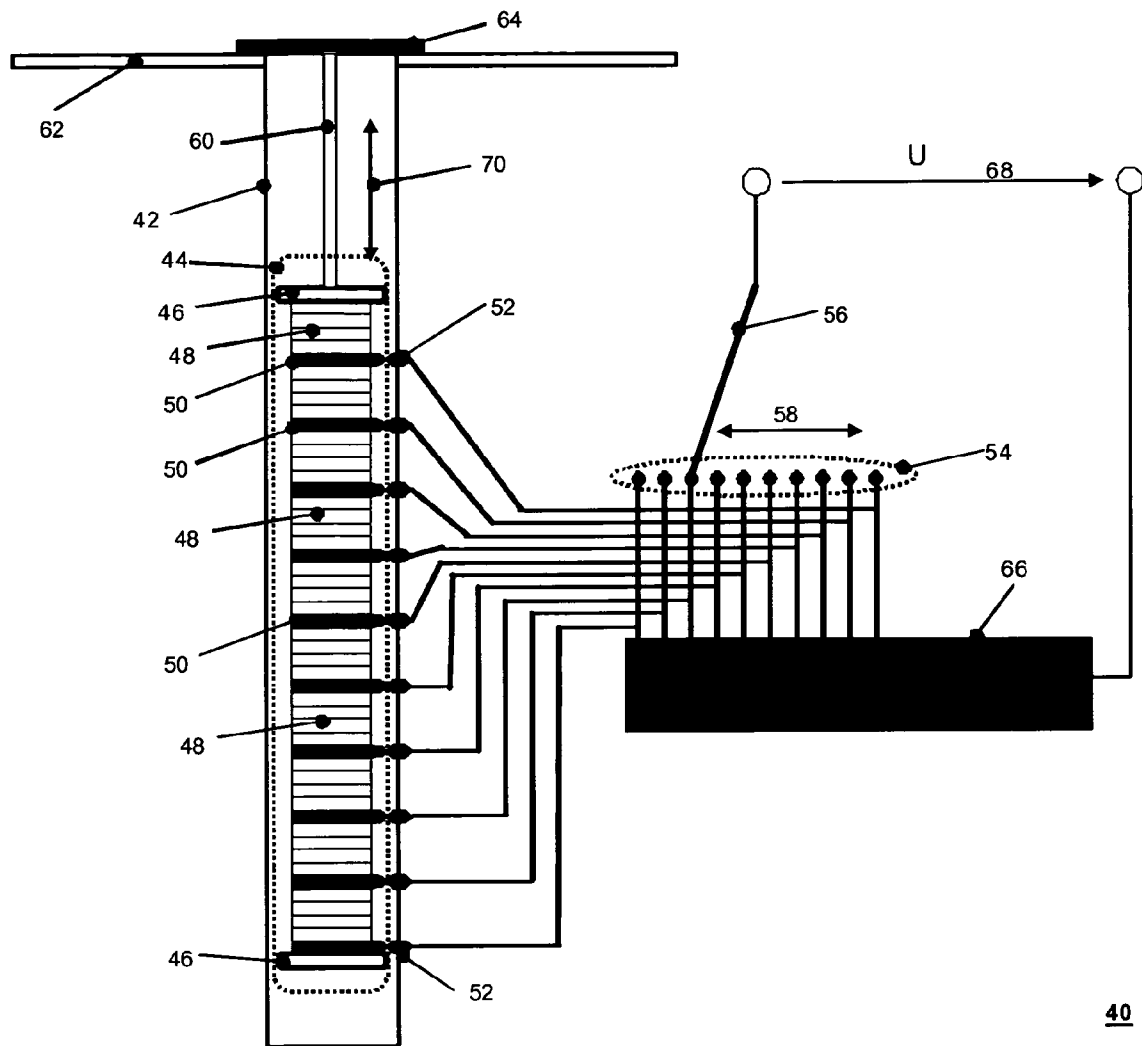


Fig. 2

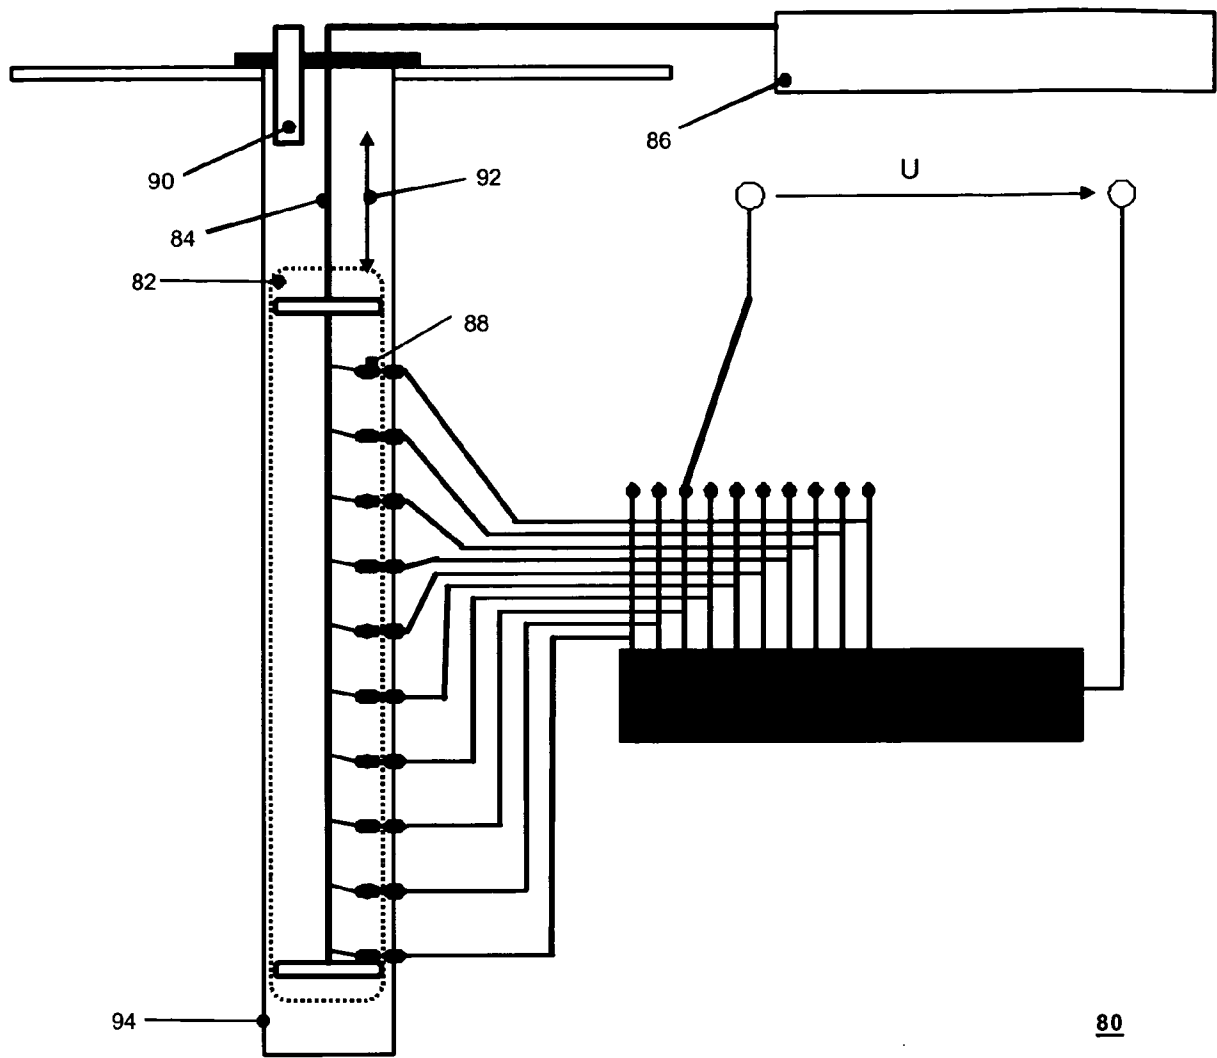


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/001087

A. CLASSIFICATION OF SUBJECT MATTER		
INV.	H01F27/10 H01F29/02	H01F27/12 H01F30/12
	H01F27/14 H01H9/00	H01F27/29 H02H7/04
	H01F27/30 H01F27/40	
ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) H01F H01H H02H		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 621 298 A (MCMILLEN CHARLES J [US]) 4 November 1986 (1986-11-04) abstract; figures 1-4 -----	1,11,14
A	WO 2008/113143 A2 (SANTOS EDUARDO PEDROSA [BR]) 25 September 2008 (2008-09-25) abstract; figure 1 -----	1
A	EP 2 282 322 A1 (ABB TECHNOLOGY AG [CH]) 9 February 2011 (2011-02-09) abstract; figure 7 -----	1
A	US 4 135 172 A (GRIMES JERRY W) 16 January 1979 (1979-01-16) abstract; figure 1 ----- -/-	1
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
Date of the actual completion of the international search 4 April 2012		Date of mailing of the international search report 07/05/2012
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Rouzier, Brice

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/001087

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 281 680 A (MICHEL DOLOUKHANOFF) 4 July 1928 (1928-07-04) the whole document -----	1
A	EP 1 122 848 A1 (TRANSFIX TOULON SOC NOUV [FR]) 8 August 2001 (2001-08-08) abstract; figures 1-3 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/001087

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4621298	A	04-11-1986	NONE
WO 2008113143	A2	25-09-2008	BR PI0700843 A 04-11-2008 EP 2132755 A2 16-12-2009 US 2010109883 A1 06-05-2010 WO 2008113143 A2 25-09-2008
EP 2282322	A1	09-02-2011	AT 535930 T 15-12-2011 AU 2010281100 A1 23-02-2012 EP 2282322 A1 09-02-2011 WO 2011015263 A1 10-02-2011
US 4135172	A	16-01-1979	BE 871577 A1 26-04-1979 FR 2407558 A1 25-05-1979 JP 54095831 U 06-07-1979 MX 146182 A 21-05-1982 US 4135172 A 16-01-1979
GB 281680	A	04-07-1928	NONE
EP 1122848	A1	08-08-2001	AT 499736 T 15-03-2011 EP 1122848 A1 08-08-2001 ES 2363209 T3 27-07-2011 FR 2804549 A1 03-08-2001