



(51) International Patent Classification:

B01J 37/03 (2006.01) B01J 35/02 (2006.01)

B01J 37/04 (2006.01) B01J 35/10 (2006.01)

B01J 37/18 (2006.01) B01J 37/00 (2006.01)

B01J 23/755 (2006.01) H01M 8/0637 (2016.01)

(21) International Application Number:

PCT/US2017/032623

(22) International Filing Date:

15 May 2017 (15.05.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/338,598 19 May 2016 (19.05.2016) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:

US 62/338,598 (CON)

Filed on 19 May 2016 (19.05.2016)

(71) Applicant: CLARIANT CORPORATION [US/US]; IP Department, 1600 West Hill Street, Louisville, Kentucky 40210 (US).

(72) Inventors: RATNASAMY, Chandra; 558 Sunset Road, Louisville, Kentucky 40206 (US). WAGNER, Jon P.; 9906 Wyncliff Court, Louisville, Kentucky 40241 (US). CAI, Yeping; 12910 Willow Forest Drive, Louisville, Kentucky 40245 (US). ROGERS, David B.; 3505 Rems Road, Louisville, Kentucky 40241 (US). SPENCER, Jason E.; 1665 Marvy Lane NE, Palmyra, Indiana 47164 (US). BRADEN, Jeffery L.; 3626 Budd Road, New Albany, Indiana 47150 (US).

(74) Agent: BEATY, Daniel; 1600 West Hill Street, Louisville, Kentucky 40210 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,

SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: REFORMING CATALYST MATERIAL AND PROCESSES FOR MAKING AND USING SAME

(57) Abstract: The present disclosure relates to nickel/aluminum-containing catalyst materials useful, for example, as reforming catalysts, processes for making them, and processes for using them in molten carbonate fuel cells. In one aspect, the disclosure provides a catalyst material including an alumina carrier in an amount in the range of about 5 wt% to about 75 wt%; and a mixed metal oxide in an amount in the range of about 25 wt% to about 95 wt%, the mixed metal oxide including at least about 90 wt% of oxides of nickel and aluminum, the mixed metal oxide having an atomic ratio of nickel to aluminum in the range of about 60:40 to about 90:10, the mixed metal oxide being substantially free of zirconium, in the form of a composite of the alumina carrier and the mixed metal oxide.



**REFORMING CATALYST MATERIAL AND PROCESSES FOR
MAKING AND USING SAME**


BACKGROUND OF THE DISCLOSURE

1. Field of the Disclosure

[0001] The present disclosure relates generally to catalyst materials and processes for making and using them. More particularly, the present disclosure relates to nickel/aluminum-containing catalyst materials useful, for example, as reforming catalysts, processes for making them, and processes for using them in molten carbonate fuel cells.

2. Technical Background

[0002] Molten-carbonate fuel cells are high-temperature fuel cells that can produce electrical energy through the net conversion of hydrogen and oxygen to water. The half-reactions are:




The electrolyte is typically alkali (e.g., Na and K) carbonate retained in a matrix (e.g., a ceramic matrix of LiAlO_2). The anode is typically nickel, and the cathode is typically nickel oxide. The CO_2 generated at the anode is typically recycled to the cathode where it is consumed.

[0003] Such fuel cells typically operate at temperatures on the order of 600-700 °C, at which temperatures, the carbonate is a highly conductive molten salt form. Operation at such high temperatures can be advantageous in that it can provide high overall efficiency, even up to 50-60% conversion of the fuel's lower heating value to electricity without recovery and conversion of the exhaust heat. Moreover, the exhaust heat from the fuel cell is relatively hot, and thus may be recovered for the generation of steam, further increasing fuel cell efficiency. Efficiencies in excess of 60% can potentially be achieved with the incorporation of a bottoming cycle.

[0004] The hydrogen used in the fuel cell can be provided by a variety of methods.

However, in many practical applications, the hydrogen is provided by the reformation of a carbonaceous fuel (e.g., natural gas, methane, petroleum gas, naptha, heavy oil, crude oil) to form hydrogen and CO₂. The water-gas shift reaction can be used to provide additional hydrogen. Example reactions for use of methane are provided below:



The reforming reaction is typically performed using a nickel catalyst. While part of the reforming is often carried out in a prereformer, in many applications, at least some of the reforming takes place within the molten-carbonate fuel cell itself. This process is known as “direct internal reforming” (DIR). As the reforming reaction is endothermic, it is advantageously performed using the heat generated in the electrochemical reaction. Moreover, the consumption of hydrogen in the cell helps to shift the equilibrium of the reformation reaction to the desired hydrogen product. However, the high operating temperature places severe demands on the corrosion stability and life of cell components. Critically, alkali hydroxides can vaporize from the electrolyte at the high operating temperatures and poison the reforming catalyst.

[0005] There remains a need for improved reforming catalysts that are suitable for use in molten carbonate fuel cells and are more resistant to alkali poisoning than conventional catalysts.

SUMMARY OF THE DISCLOSURE

[0006] In one aspect, the present disclosure provides a catalyst material including a catalyst material comprising, an alumina carrier in an amount in the range of about 5 wt% to about 75 wt%; and a mixed metal oxide in an amount in the range of about 25 wt% to about 95 wt%, the mixed metal oxide including at least about 90 wt% of oxides of nickel and

aluminum, the mixed metal oxide having an atomic ratio of nickel to aluminum in the range of about 60:40 to about 90:10, the mixed metal oxide being substantially free of zirconium, in the form of a composite of the alumina carrier and the mixed metal oxide.

[0007] In another aspect, the present disclosure provides a process for reforming a hydrocarbon, the process comprising providing a catalyst material as described herein, reducing at least some of the oxide of nickel to metallic nickel to form a reduced catalyst material, and reacting the hydrocarbon with water in the presence of the reduced catalyst material.

[0008] In another aspect, the present disclosure provides a fuel cell comprising an anode, a cathode, a metal carbonate electrolyte in contact with the anode and the cathode, and a catalyst material as described herein in fluid communication with the electrolyte.

DETAILED DESCRIPTION

[0009] Before the disclosed processes and materials are described, it is to be understood that the aspects described herein are not limited to specific embodiments, apparatus, or configurations, and as such can, of course, vary. It is also to be understood that the terminology used herein is for the purpose of describing particular aspects only and, unless specifically defined herein, is not intended to be limiting.

[0010] Throughout this specification, unless the context requires otherwise, the word “comprise” and “include” and variations (e.g., “comprises,” “comprising,” “includes,” “including”) will be understood to imply the inclusion of a stated component, feature, element, or step or group of components, features, elements or steps but not the exclusion of any other integer or step or group of integers or steps.

[0011] As used in the specification and the appended claims, the singular forms “a,” “an” and “the” include plural referents unless the context clearly dictates otherwise.

[0012] Ranges can be expressed herein as from “about” one particular value, and/or to “about” another particular value. When such a range is expressed, another aspect includes from the one particular value and/or to the other particular value. Similarly, when values are expressed as approximations, by use of the antecedent “about,” it will be understood that the particular value forms another aspect. It will be further understood that the endpoints of each of the ranges are significant both in relation to the other endpoint, and independently of the other endpoint.

[0013] As used herein, the term “contacting” includes the physical contact of at least one substance to another substance.

[0014] All percentages, ratios and proportions herein are by weight, unless otherwise specified. A weight percent (weight %, also as wt %) of a component, unless specifically stated to the contrary, is based on the total weight of the formulation or composition in which the component is included (e.g., on the total amount of the catalyst material). All mol% values are based on the moles of metal atoms.

[0015] As described above, conventional nickel oxide reformation catalysts can be poisoned by vaporization of the alkali carbonate electrolyte in DIR molten metal carbonate cells. The inventors have determined that the provision of nickel oxide as a mixed nickel/aluminum oxide supported on alumina can provide resistance to poisoning while retaining acceptable activity as an in-situ reformation catalyst. Moreover, the inventors have determined that such catalyst materials are particularly less susceptible to loss of physical integrity (e.g., crush strength, attrition) especially during the start-up procedure where nickel oxide is reduced to metallic nickel. Consequently, it is desirable for the catalyst to maintain physical integrity. Notably, such materials can be provided without the use of zirconium.

[0016] Accordingly, one embodiment of the disclosure is a catalyst material that includes an alumina carrier in an amount in the range of about 5 wt% to about 75 wt%; and a mixed metal oxide in an amount in the range of about 25 wt% to about 95 wt%. The mixed metal

oxide includes at least about 95 wt% of oxides of nickel and aluminum, and the atomic ratio of nickel to aluminum is in the range of about 60:40 to about 90:10. Notably, the mixed metal oxide is substantially free of zirconium. The catalyst material is provided as a composite of the alumina and the mixed metal oxide. Accordingly, while the material is provided as relatively larger physical units, the individual mixed metal oxide and alumina materials are discernible in the composite, e.g., by microscopy.

[0017] As used herein, “alumina” is aluminum oxide, aluminum hydroxides, and hydrated alumina (including crystalline forms of these hydrated alumina such as trihydroxides which include gibbsite, bayerite, nordstrandite, aluminum oxide-hydroxides such as crystalline boehmite, pseudo-boehmite, and diaspora), that is not a mixed metal oxide, i.e., it is substantially an aluminum oxide, aluminum hydroxide or a hydrated alumina. A number of types of alumina (e.g., in different phases) can be used in the catalyst materials described herein. In certain embodiments, the alumina carrier is selected from χ -alumina, η -alumina, ρ -alumina, γ -alumina, δ -alumina and θ -alumina. A mixture of types can optionally be used. In certain embodiments, the alumina carrier is γ -alumina, δ -alumina or θ -alumina, or a mixture thereof. In certain embodiments, the alumina carrier is at least 80%, at least 90%, at least 95%, or at least 99% γ -alumina. In certain embodiments, the alumina carrier is substantially γ -alumina. The phase character of the alumina carrier can be determined by the person of ordinary skill in the art, using, for example, x-ray diffraction techniques.

[0018] The mixed metal oxide is a mixed oxide of chiefly nickel and aluminum. As described above, at least about 95 wt% of the mixed metal oxide is oxides of nickel and aluminum. In certain embodiments, the mixed metal oxide includes at least about 95 wt%, at least about 97 wt%, at least about 98 wt%, at least about 99 wt% oxides of nickel and aluminum, or at least about 99.5 wt% oxides of nickel and aluminum. In certain embodiments, the mixed metal oxide consists essentially of, or consists of oxides of nickel and aluminum.

[0019] Of course, in other embodiments, the mixed metal oxides can include oxide(s) of one or more additional metals. In certain embodiments, the additional metals do not include both

magnesium and silicon (i.e., at levels more than 0.5 wt%, 0.2 wt%, or even 0.1 wt%). In certain embodiments, the additional metals are not magnesium or silicon (i.e., at levels more than 0.5 wt%, 0.2 wt%, or even 0.1 wt%).

[0020] As noted above, the mixed metal oxide has an atomic ratio of nickel to aluminum in the range of about 60:40 to about 90:10. In certain embodiments, the atomic ratio of nickel to aluminum is about 60:40 to about 85:15, or about 60:40 to about 80:20, or about 60:40 to about

75:25, or about 65:35 to about 90:10, or about 70:30 to about 90:10, or about 75:25 to about 90:10, or about 65:35 to about 85:15, or about 70:30 to about 80:20, or about 72:28 to about 78:22, or about 74:26 to about 76:24.

[0021] As described above, the alumina carrier is present in the catalyst material in an amount in the range of about 5 wt% to about 75 wt%. In certain embodiments, the alumina carrier is present in an amount in the range of about 30 wt% to about 70 wt%, or about 35 wt% to about 65 wt%, or about 40 wt% to about 60 wt%, or about 45 wt% to about 55 wt%, or about 47 wt% to about 53 wt%, or about 49 wt% to about 51 wt%, or about 25 wt% to about 65 wt%, or about 25 wt% to about 55 wt%, or about 35 wt% to about 55 wt%, or about 35 wt% to about 75 wt%, or about 45 wt% to about 75 wt%, or about 45 wt% to about 65 wt%.

[0022] Similarly, as described above, the mixed metal oxide is present in the catalyst material in an amount in the range of about 25 wt% to about 95 wt%. In certain embodiments, the mixed metal oxide is present in an amount in the range of about 30 wt% to about 70 wt%, or about 35 wt% to about 65 wt%, or about 40 wt% to about 60 wt%, or about 45 wt% to about 55 wt%, or about 47 wt% to about 53 wt%, or about 49 wt% to about 51 wt%, or about 25 wt% to about 65 wt%, or about 25 wt% to about 55 wt%, or about 35 wt% to about 55 wt%, or about 35 wt% to about 75 wt%, or about 45 wt% to about 75 wt%, or about 45 wt% to about 65 wt%.

[0023] As the person of ordinary skill in the art will appreciate, the catalyst material can be provided in a variety of forms, depending on the desired end use. For example, the catalyst material can be provided in the form of a plurality of tablets, pellets or extrudates. Such a catalyst material can be useful, for example, in a fixed bed process, such as those typically used in the reforming step of a Direct Internal Reforming (DIR) process. In certain embodiments, the plurality of tablets, pellets or extrudates has an average diameter in the range of about 0.7 mm to about 6 mm (e.g., about 1 mm to about 3 mm), and an average pellet length in the range of about 2 mm to about 15 mm (e.g., about 1 mm to about 5 mm). Catalyst materials as described herein can be provided in a variety of shapes, such as cylinders (hollow or otherwise), parallelepipeds (hollow or otherwise), symmetrical or asymmetrical trilobes or quadrulobes, spheres, etc. Catalyst materials may also be coated on to a substrate or support, such as a ceramic surface or an internal surface of a reactor.

[0024] As described above, the catalyst materials described herein are provided as composites of the alumina carrier and the mixed metal oxide. In certain embodiments, the catalyst material is provided as a composite of particles of the alumina carrier and particles of the mixed metal oxide.

[0025] In certain such embodiments, the particles of the alumina carrier have a median particle size in the range of about 0.3 μm to about 1 mm, for example, in the range of about 0.3 μm to about 500 μm , or about 0.3 μm to about 100 μm , or about 0.3 μm to about 50 μm , or about 1 μm to about 1 mm, or about 1 μm to about 500 μm , or about 1 μm to about 200 μm , or about 1 μm to about 50 μm , or about 5 μm to about 1 mm, or about 5 μm to about 500 μm , or about 5 μm to about 200 μm , or about 5 μm to about 50 μm , or about 10 μm to about 1 mm, or about 10 μm to about 500 μm , or about 10 μm to about 200 μm , or about 10 μm to about 50 μm . In certain such embodiments, the particles of the mixed metal oxide have a median particle size in the range of about 0.5 μm to about 2 mm, for example, in the range of about 1 μm to about 2 mm, or about 1 μm to about 1 mm, or about 1 μm to about 500 μm , or about 1 μm to about 250 μm , or about 1 μm to about 100 μm , or about 1 μm to

about 50 μm , or about 5 μm to about 2 mm, or about 5 μm to about 1 mm, or about 5 μm to about 500 μm , or about 5 μm to about 250 μm , or about 5 μm to about 100 μm , or about 5 μm to about 50 μm , or about 10 μm to about 2 mm, or about 10 μm to about 1 mm, or about 10 μm to about 500 μm , or about 10 μm to about 250 μm , or about 10 μm to about 100 μm , or about 10 μm to about 50 μm , or about 50 μm to about 2 mm, or about 50 μm to about 1 mm, or about 50 μm to about 700 μm , or about 50 μm to about 350 μm , or about 50 μm to about 150 μm , or about 50 μm to about 100 μm . Median particle sizes can be determined as the d50 value using laser light scattering techniques, evaluating the data using the Fraunhofer method.

[0026] The catalyst materials described herein can be provided with a variety of different pore volumes, depending, e.g., on the processes used for making them and the desired end use. For example, in certain embodiments, a catalyst material as described herein has a pore volume within the range of about 0.05 to about 1.5 cm^3/g , or about 0.1 to about 1.5 cm^3/g , or about 0.2 to about 1.5 cm^3/g , or about 0.3 to about 1.5 cm^3/g , or about 0.5 to about 1.5 cm^3/g , or 0.05 to about 1 cm^3/g , or about 0.1 to about 1 cm^3/g , or about 0.2 to about 1 cm^3/g , or about 0.3

to about 1 cm^3/g , or about 0.5 to about 1 cm^3/g , or 0.05 to about 0.5 cm^3/g , or about 0.1 to about 0.5 cm^3/g , or about 0.1 to about 4 cm^3/g , or about 0.2 to about 0.5 cm^3/g . The person of ordinary skill in the art can, in view of the processes described herein, provide a desired pore volume to a catalyst material. Pore volumes are measured by Hg porosimetry, and provide the total volume or pores below 5000 Å in size. The person of ordinary skill in the art can, in view of the processes described herein, provide a desired pore volume to a catalyst material.

[0027] Similarly, the catalyst materials described herein can be provided with a variety of different surface areas, depending, e.g., on the processes used for making them and the desired end use. The surface areas are measured using the Brunauer-Emmett-Teller (BET) Surface Area method. In certain embodiments, a catalyst material as described herein has a

surface area within the range of from about 10 to about 400 m²/g, or about 50 to about 400 m²/g, or about 70 to about 400 m²/g, or about 100 to about 400 m²/g, or about 200 to about 400 m²/g, or about 300 to about 400 m²/g, or about 10 to about 300 m²/g, or about 50 to about 300 m²/g, or about 70 to about 300 m²/g, or about 100 to about 300 m²/g, or about 200 to about 300 m²/g, or about 100 to about 250 m²/g, or about 10 to about 200 m²/g, or about 50 to about 200 m²/g, or about 70 to about 200 m²/g, or about 100 to about 200 m²/g. In one embodiment, a catalyst material as described herein has a surface area of about 20 to about 300 m²/g. In another embodiment, a catalyst material as described herein has a surface area of about 30 to about 200 m²/g. In another embodiment, a catalyst material as described herein has a surface area of about 70 to about 300 m²/g. The person of ordinary skill in the art can, in view of the processes described herein, provide a desired surface area to a catalyst material.

[0028] The catalyst materials described herein may be prepared by conventional procedures, as would be understood by the person of ordinary skill in the art. For example, in one embodiment, precipitation techniques are used to make the catalyst material. For example, in one embodiment, the mixed metal oxide is formed by precipitation of one or more water soluble precursor materials with a precipitation agent, for example, in the presence of the alumina carrier. Each precursor material may be a water soluble metal salt such as, but not limited to, a metal nitrate, a metal sulfate, a metal halide, or a metal acetate. The precipitation agent may be, for example, ammonium hydroxide, ammonium carbonate, a metal hydroxide, or a metal carbonate. The person of ordinary skill in the art can select other suitable precipitation agents, based on the particular metal oxide precursors and the pH-dependence of their solubility properties. Precipitated materials can be formed using conventional methods (e.g., tableting or extrusion) into a desired shape, as would be evident to the person of ordinary skill in the art. The person of ordinary skill in the art will also appreciate that such materials can be formed using optional processing aids, lubricants and/or binders, depending on the particular metals used and the desired active material

properties. The formed materials can be dried and calcined to provide the catalyst materials described herein. Various aluminum oxides and aluminum hydroxides can be used as raw material to provide the alumina carrier; as the person of ordinary skill in the art, they can be converted to a desirable alumina form via heat treatment during processing.

[0029] As noted above, the catalyst materials described herein can be used in reforming a hydrocarbon. The process can comprise providing a catalyst material as described herein, reducing at least some of the oxide of nickel to metallic nickel to form a reduced catalyst material, and reacting the hydrocarbon with water in the presence of the reduced catalyst material. The reduction can be performed, for example, with hydrogen. The reforming reaction can be performed, for example, as a direct internal reforming process in a molten metal carbonate fuel cell, for example, with the catalyst material as described herein in fluid communication with the molten metal carbonate electrolyte of the fuel cell. The reforming reaction can be performed, for example, at temperatures in the range of 300 °C to 1000 °C.

[0030] Another embodiment of the disclosure is a fuel cell that includes an anode, a cathode, a

metal carbonate electrolyte in contact with the anode and the cathode, and a catalyst material as described herein in fluid communication with the electrolyte. FIG. 1 shows the operating configuration of one embodiment of a molten carbonate fuel cell. Here, the electrolyte is disposed between an anode and a cathode. The anode can include, for example, a Ni-Cr, a Ni-Al or a Ni-Al-Cr material for catalysis of the anode half-reaction. The cathode can include, for example, a lithiated NiO-MgO material for catalysis of the cathode half-reaction. The electrolyte can be supported, for example, on a lithium/aluminum oxide carrier. The electrolyte can be, for example, a mixed alkali carbonate salt, e.g., including lithium carbonate and sodium carbonate and/or other alkali carbonates. The person of ordinary skill in the art can adapt conventional molten carbonate fuel cells and methodologies for use with the direct internal reforming catalysts described herein.

[0031] Certain aspects of the disclosure are now explained further via the following non-limiting examples.

Examples

[0032] A nickel/aluminum oxide catalyst was prepared to form tablets of a comparative material. The precipitated sample was prepared by adding together in a controlled manner at a temperature between 55 to 75 °C a solution of sodium carbonate and a solution containing a mixture of $\text{Ni}(\text{NO}_3)_2$ and $\text{Al}(\text{NO}_3)_3$ until the pH was in the range of 6 – 8. The resulting mixture was then allowed to heat to up to 80 °C and held for one hour while being continuously stirred. After aging, the resulting slurry was filtered and the resulting filter cake was washed with D.I. water until the filter cake contained less than 0.1% sodium. The precipitate was then dried, and calcined. The resulting material was sized for tablet feed. Tablets were produced on a tablet press to form a comparative material. The final catalyst consisted of 74% NiO and 26% Al_2O_3 .

[0033] A nickel/aluminum oxide catalyst according to the present disclosure was then prepared. 3 kg of the above sized material was mixed with 1 kg of alumina (BET surface area of 170 m^2/g , pore volume of 0.3 cc/g , d_{50} of the alumina is 80 μm) and 120 grams of graphite, and tablets were produced on a tablet press. The final catalyst consists of 54% NiO and 46% Al_2O_3 . **[0034]** The activity and stability of the catalyst as according to the present disclosure was compared with that of the comparative catalyst. Test reactions were performed in a $\frac{3}{4}$ " I.D. tubular reactor. Typically, 6.5 mL of catalyst material was loaded into the reactor with layers of silicon carbide balls on the top and bottom of the catalyst bed. Electrolyte (mixed alkali carbonates) was loaded on top of the catalyst bed. After reduction of the catalyst material in hydrogen, a steam reforming reaction was performed with dry feed gas consisting of 6.6% CO_2 , 2% N_2 , 65% CH_4 and 26.4% H_2 , and a steam/feed molar ratio of 2.7. The space velocity was maintained at 18,000/hr with pressure at 15 psig. The reactor temperature was increased to 700°C. An on-line gas chromatograph was used to measure inlet and outlet amounts of N_2 , CO, CO_2 and CH_4 . Methane conversion, used as an

indicator of activity, was then calculated based on the inlet and outlet flow rates. After deactivation treatment, activity of the catalyst was again measured. The activity after deactivation treatment is indicative of catalyst stability. FIG. 2 is a plot of methane conversion of the catalyst as described herein and the conventional catalyst, both before and after the deactivation treatment. The catalyst described herein exhibits high stability, as reflected by high activity after deactivation treatment in the presence of the electrolyte.

We claim:

1. A catalyst material comprising,
an alumina carrier in an amount in the range of about 25 wt% to about 75 wt%; and
a mixed metal oxide in an amount in the range of about 25 wt% to about 75 wt%, the
mixed metal oxide including at least about 90 wt% of oxides of nickel and aluminum,
the mixed metal oxide having an atomic ratio of nickel to aluminum in the range of
about 60:40 to about 90:10, the mixed metal oxide being substantially free of
zirconium,
in the in the form of a fused composite of the alumina carrier and the mixed metal oxide.
2. The catalyst material according to claim 1, wherein the alumina carrier is
substantially γ -alumina.
3. The catalyst material according to claim 1 or claim 2, wherein the mixed metal oxide
includes at least about 95 wt%, at least about 97 wt%, at least about 98 wt%, at least about
99 wt%, or at least about 99.5 wt% oxides of nickel and aluminum.
4. The catalyst material according to any of claims 1-3, wherein the mixed metal oxide
further includes oxide(s) of one or more additional metals.
5. The catalyst material according to any of claims 1-4, wherein the sum of the amount
of the alumina carrier and the mixed metal oxide in the catalyst material is at least about
90%, at least about 95%, at least about 98%, at least about 99%, or at least about 99.9%.
6. The catalyst material according to any of claims 1-5, wherein the atomic ratio of
nickel to aluminum is about 60:40 to about 85:15, or about 60:40 to about 80:20, or about
60:40 to about 75:25, or about 65:35 to about 90:10, or about 70:30 to about 90:10, or about

75:25 to about 90:10, or about 65:35 to about 85:15, or about 70:30 to about 80:20, or about 72:28 to about 78:22, or about 74:26 to about 76:24.

7. The catalyst material according to any of claims 1-6, wherein the alumina carrier is present in an amount in the range of about 30 wt% to about 70 wt%, or about 35 wt% to about 65 wt%, or about 40 wt% to about 60 wt%, or about 45 wt% to about 55 wt%, or about 47 wt% to about 53 wt%, or about 49 wt% to about 51 wt%, or about 25 wt% to about 65 wt%, or about 25 wt% to about 55 wt%, or about 35 wt% to about 55 wt%, or about 35 wt% to about 75 wt%, or about 45 wt% to about 75 wt%, or about 45 wt% to about 65 wt%.

8. The catalyst material according to any of claims 1-7, wherein the mixed metal oxide is present in an amount in the range of about 30 wt% to about 70 wt%, or about 35 wt% to about 65 wt%, or about 40 wt% to about 60 wt%, or about 45 wt% to about 55 wt%, or about 47 wt% to about 53 wt%, or about 49 wt% to about 51 wt%, or about 25 wt% to about 65 wt%, or about 25 wt% to about 55 wt%, or about 35 wt% to about 55 wt%, or about 35 wt% to about 75 wt%, or about 45 wt% to about 75 wt%, or about 45 wt% to about 65 wt%.

9. The catalyst material according to any of claims 1-8, wherein the catalyst material is in the form of a plurality of tablets, pellets or extrudates having an average diameter in the range of about 0.7 mm to about 6 mm, and an average pellet length in the range of about 2 mm to about 15 mm.

10. The catalyst material according to any of claims 1-9, wherein the fused composite is a fused composite of particles of the alumina carrier and particles of the mixed metal oxide, wherein the particles of the alumina carrier have a median particle size in the range of about 0.3 μm to about 1 mm, and wherein the particles of the mixed metal oxide have a median particle size in the range of about 0.5 μm to about 2 mm.

11. The catalyst material according to any of claims 1-10, having a pore volume within the range of about 0.1 to about 0.4 cm³/g.
12. The catalyst material according to any of claims 1-11, having a surface area within the range of from about 100 to about 300 m²/g.
13. A process for reforming a hydrocarbon, the process comprising providing a catalyst material according to any of claims 1-12, reducing at least some of the oxide of nickel to metallic nickel to form a reduced catalyst material, and reacting the hydrocarbon with water in the presence of the reduced catalyst material.
14. The process according to claim 13, performed as a direct internal reforming process in a molten metal carbonate fuel cell.
15. A fuel cell comprising an anode, a cathode, a metal carbonate electrolyte in contact with the anode and the cathode, and a catalyst material according to any of claims 1-12 in fluid communication with the electrolyte.

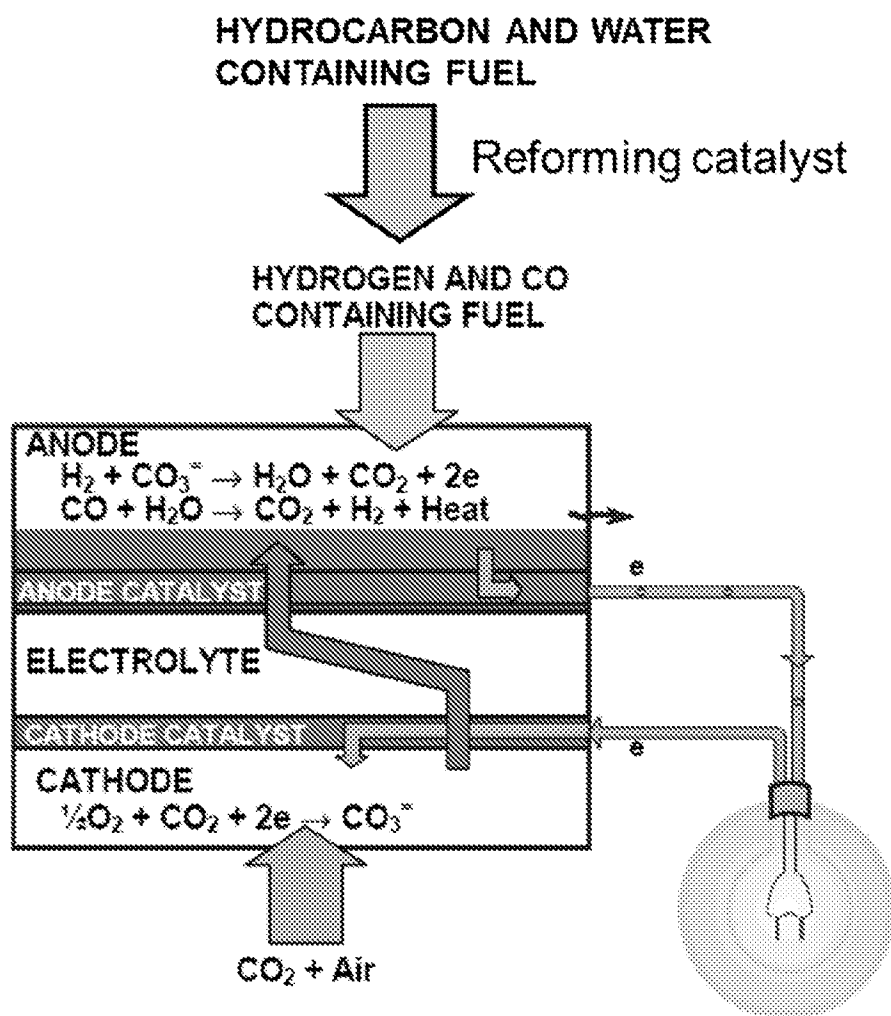


FIG. 1

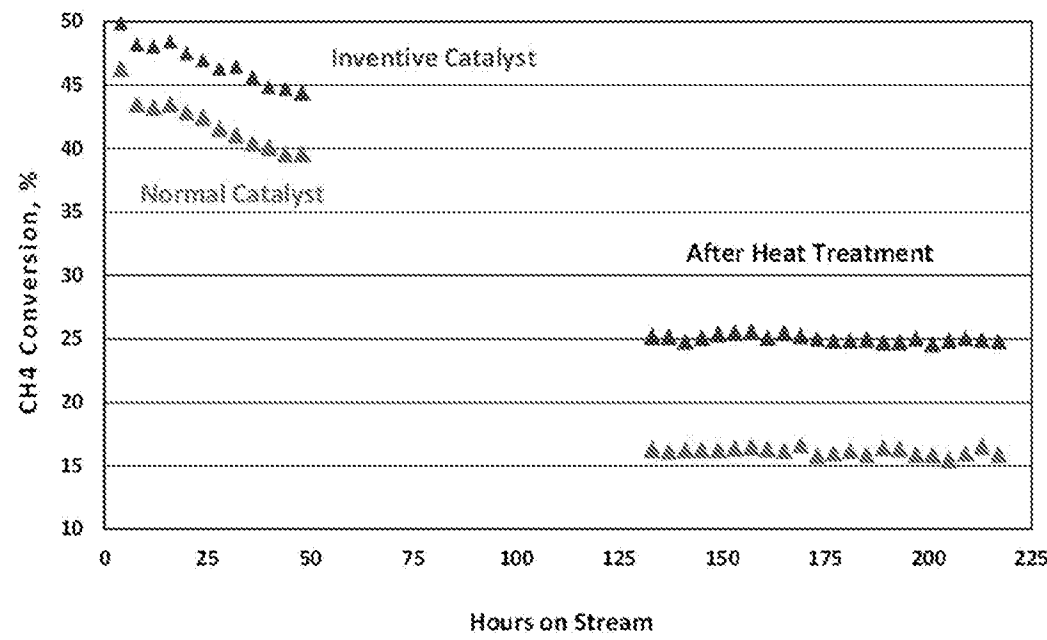


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/032623

A. CLASSIFICATION OF SUBJECT MATTER

INV. B01J37/03 B01J37/04 B01J37/18 B01J23/755 B01J35/02
B01J35/10 B01J37/00 H01M8/0637

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B01J H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 191 664 A (MCARTHUR DENNIS P [US]) 4 March 1980 (1980-03-04) examples claim 1 -----	1-13
X	US 2013/023698 A1 (KING STEPHEN W [US] ET AL) 24 January 2013 (2013-01-24) table 3 -----	1-12
X	US 2013/116118 A1 (MILANOV ANDRIAN [DE] ET AL) 9 May 2013 (2013-05-09) examples paragraph [0001] - paragraph [0002] paragraph [0011] paragraph [0016] - paragraph [0024] claim 15 -----	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 August 2017

Date of mailing of the international search report

11/08/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Omegna, Anna

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/032623

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4191664	A	04-03-1980	NONE

US 2013023698	A1	24-01-2013	BR PI0914040 A2 03-11-2015
		CN 102239002 A	09-11-2011
		EP 2352585 A1	10-08-2011
		JP 5469173 B2	09-04-2014
		JP 2012504489 A	23-02-2012
		US 2010137642 A1	03-06-2010
		US 2013023698 A1	24-01-2013
		WO 2010042157 A1	15-04-2010

US 2013116118	A1	09-05-2013	NONE
