

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 February 2006 (02.02.2006)

PCT

(10) International Publication Number
WO 2006/010249 A1

(51) International Patent Classification⁷: **G02B 5/02**,
G09F 9/35, 13/08, F21V 13/02

(21) International Application Number:
PCT/CA2005/001111

(22) International Filing Date: 15 July 2005 (15.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/591,087 27 July 2004 (27.07.2004) US

(71) Applicant (for all designated States except US): **THE UNIVERSITY OF BRITISH COLUMBIA** [CA/CA];
Industry Liaison Office, 103 - 6190 Agronomy Road,
Vancouver, British Columbia V6T 1Z3 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WHITEHEAD, Lorne A.** [CA/CA]; 3015 West 12th Avenue, Vancouver,
British Columbia V6K 2R4 (CA).

(74) Agents: **MANNING, Gavin N.** et al.; Oyen Wiggs Green
& Mutala LLP, 480 - The Station, 601 West Cordova Street,
Vancouver, British Columbia V6B 1G1 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DIFFUSER FOR LIGHT FROM LIGHT SOURCE ARRAY AND DISPLAYS INCORPORATING SAME

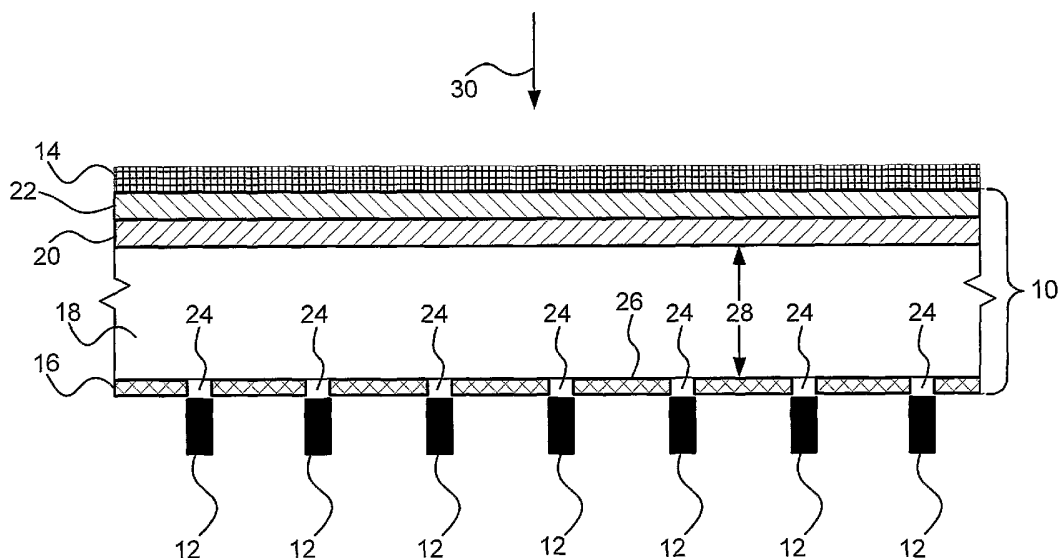

(57) Abstract: An optical structure placeable between a backlight array of point light sources and a planar display. The structure distributes light emitted by the point light sources to uniformly illuminate the plane of the display, without introducing significant viewing parallax. The emitted light is partially collimated within a preferred angular viewing range, maximizing the display's luminance when viewed from the normal direction. The structure is highly reflective, such that a substantial portion of any non-emitted light rays are internally reflected by the structure, increasing the likelihood that those rays will be subsequently emitted by the structure.

**DIFFUSER FOR LIGHT FROM LIGHT SOURCE ARRAY
AND DISPLAYS INCORPORATING SAME**

Cross Reference to Related Application

- 5 **[0001]** For purposes of the United States of America, this application claims the benefit under 35 U.S.C. §119 of U.S. patent application No. 60/591,087 filed on 27 July 2004.

Technical Field

- 10 **[0002]** This invention pertains to displays of the type which have an array of light sources serving as a backlight. Light from the light sources is distributed to achieve suitably uniform spatial and angular illumination of the display, while maintaining high luminance in the display's normal viewing direction.

15

Background

- 18 **[0003]** This invention pertains to backlights for displays which have a transmission-type light modulator illuminated by a backlight. Examples of such displays include some liquid crystal displays (LCDs)
- 20 as well as high dynamic range displays of the type disclosed in international patent publication WO 02/069030 published 6 September 2002 and in international patent publication WO 03/077013 published 18 September 2003, both of which are incorporated by reference herein.
- 25
- 28 **[0004]** High dynamic range displays like those disclosed in the above publications incorporate a light source layer (which may be called a "backlight") and a display layer that includes a light modulator. The backlight is controlled to produce a light pattern that represents a
- 30 comparatively low-resolution version of an image to be displayed. The low-resolution image is modulated by the display layer to provide a comparatively high resolution image for perception by an observer.

- 2 -

[0005] The backlight typically comprises an array of point type actively modulated light sources, such as light emitting diodes (LEDs). The display layer, which is positioned and aligned in front of the backlight, may be a liquid crystal display (LCD) panel or the like.

- 5 Maintenance of a relatively small separation distance between the two layers allows light emitted by adjacent light sources of the backlight to merge smoothly into one another such that each pixel of the high resolution image is illuminated. Suitable image compensation techniques may be applied to remove undesirable image blurring artifacts.

10

[0006] In many planar illumination applications (e.g. not only in planar displays as mentioned above, but also in some general illumination situations) it is desirable to uniformly illuminate (i.e. backlight) a plane. Multiple LEDs arranged in an array can be used in such applications since they provide a robust, low-power alternative to incandescent light sources. However, LEDs provide only point source illumination, not uniform planar illumination. It is consequently necessary to somehow distribute the light emitted by LEDs of a LED array so as to uniformly illuminate the plane.

20

- [0007] In display applications it is also desirable to avoid parallax (apparent changes in the direction of an object, due to changes in the observer's position which correspond to different lines of sight to the object) between each LED and the illuminated display area directly in front of the LED. Otherwise, an observer will perceive changes in that area if the area is viewed from different angles, which is undesirable.

25

- [0008] The parallax problem has prevented attainment of uniform planar illumination in situations where each point type light source interacts in some manner with the display area directly in front of the light source, as is the case for LED/LCD type high dynamic range displays in which each LED corresponds to a specific pixel or cluster of

30

- 3 -

pixels on the LCD display. In such displays each LED should primarily illuminate the LCD pixels directly in front of the LED. This illumination characteristic should remain substantially invariant as the observer's viewing angle changes.

5

[0009] It is also desirable that the light emitted by the backlight be partially collimated within a preferred angular viewing range, namely within about 25° of the display's normal direction in order to maximize the display's luminance when it is viewed from the normal direction. It is additionally desirable that the optical structure as a whole (i.e. anything between the light source layer and the display layer) be reasonably reflective, in order to maximize the efficiency of the reflective polarizers incorporated in state-of-the-art LCD displays and thereby minimize light loss due to polarization.

15

Summary of the Invention

[0010] This invention provides displays that include an optical structure between a backlight array of light sources and a display layer. The light sources may be point light sources such as light emitting diodes (LEDs). The structure distributes light emitted by the point light sources. The invention also provides optical structures that may be used to distribute light from arrays of point sources and related methods.

[0011] Various aspects of the invention and features of embodiments of the invention are described below.

25

Brief Description of the Drawings

[0012] The appended drawings illustrate non-limiting example applications of the invention.

30

- 4 -

[0013] Figure 1 is a greatly enlarged not-to-scale cross-sectional side elevation view of a fragmented portion of a planar light distribution structure.

- 5 [0014] Figure 2 is a greatly enlarged not-to-scale cross-sectional side elevation view of a fragmented portion of another planar light distribution structure having an additional diffuser.

Description

- 10 [0015] Throughout the following description, specific details are set forth in order to provide a more thorough understanding of the invention. However, the invention may be practiced without these particulars. In other instances, well known elements have not been shown or described in detail to avoid unnecessarily obscuring the
15 invention. Accordingly, the specification and drawings are to be regarded in an illustrative, rather than a restrictive, sense.

- [0016] Figure 1 depicts a layered planar light distribution structure 10. Some light sources 12, which may be LEDs, of a display backlight
20 13, and a display panel 14, which may comprise an LCD panel or other light modulator, are shown schematically in Figure 1. Light distribution structure 10 incorporates a rear reflector 16, a light-diffusing volume 18, an optional reflective polarizer 20, and an optional angularly selective light transmitter 22.

25

- [0017] Rear reflector 16 has an array of transparent regions 24 at locations corresponding to LEDs 12 of the backlight array. Transparent regions 12 may comprise apertures or windows that are substantially transparent to at least some light emitted by LEDs 12. One transparent
30 region 24 is provided for each LED 12. Regions 24 are sized and aligned to match the size and alignment of LEDs 12. For example, LEDs 12 may be arranged in a rectangular array, a hexagonal array, a

- 5 -

square array, or the like, and regions **24** may be arranged in a pattern that matches the arrangement of LEDs **12**. Regions **24** may also be shaped to match LEDs **12**.

5 **[0018]** In the illustrated embodiment, LEDs **12** lack lenses. Such lensless LEDs emit light approximately in a Lambertian pattern (i.e. the emitted light has an intensity that varies with viewing angle in such a way that the intensity is directly proportional to the cosine of the viewing angle). In alternative embodiments, LEDs or other light
10 sources may have lenses or may be otherwise constructed to emit light in a non-Lambertian manner. Each region **24** transmits light emitted by the corresponding, immediately adjacent LED **12** into diffusing volume **18**.

15 **[0019]** LEDs **12** may be outside diffusing volume **18**, as shown. In the alternative, LEDs **12** could extend through regions **24**, which may be apertures, and project slightly into diffusing volume **18**.

20 **[0020]** The face **26** of rear reflector **16** that faces into diffusing volume **18** is highly reflective. Face **26** is preferably at least partially specularly reflective (i.e. the angle of reflection substantially equals the angle of incidence, in contrast to a diffuse reflector) and may be substantially entirely specularly reflecting. Perforated "radiant mirror film" available from 3M Specialty Film and Media Products Division,
25 St. Paul, MN is one example of a material that can be used to form rear reflector **16**.

30 **[0021]** The thickness dimension **28** of light diffusing volume **18** (which may be an air gap in the simplest case) is preferably minimized, while retaining sufficient thickness that light rays passing from rear reflector **16** into diffusing volume **18** are asymmetrically diffused (i.e. light rays are scattered in many directions) before the rays pass through

- 6 -

reflective polarizer 20. Consequently, any directional characteristic of light rays which enter diffusing volume 18 is essentially absent from light rays which exit diffusing volume 18.

- 5 [0022] Thickness dimension 28 can be reduced in cases where diffusing volume 18 has an anisotropic scattering coefficient such that light rays which are substantially parallel to normal viewing direction 30 are more intensely scattered than light rays which are substantially perpendicular to normal viewing direction 30. Such anisotropic
- 10 scattering can be achieved by placing, within diffusing volume 18, multiple layers of a thin, weakly light-scattering sheets 19 (See Figure 2, not shown in Figure 1). Partial reflection of light at surfaces of sheets 19 causes substantial scattering of light traveling in a direction substantially parallel to normal viewing direction 30. Sheets 19 may be
- 15 made of a suitable transparent polymer material, for example. Anisotropic scattering could also be caused by providing within diffusing volume 18 a transparent medium such as a suitable resin or gel doped with white particles (e.g. particles of paint pigment or the like) or other diffusely-reflecting particles.
- 20 [0023] Optional reflective polarizer 20 (which has a polarization characteristic matched to that of reflective polarizers incorporated in LCD display panel 14) reflects rearwardly into diffusing volume 18 light rays having polarization characteristics which are unmatched to the
- 25 polarization characteristics of polarizers incorporated in LCD display panel 14. Such unsuitably polarized light rays undergo further diffusion within diffusing volume 18 and are again reflected ("recycled") by rear reflector 16 toward optional reflective polarizer 20.
- 30 [0024] Diffusion within diffusing volume 18 randomizes the polarization characteristics of recycled light rays such that some of the recycled rays are eventually able to pass through reflective polarizer 20

- 7 -

toward LCD display panel 14. Any remaining unsuitably polarized light rays are again recycled as aforesaid by reflective polarizer 20, diffusing volume 18, and rear reflector 16 until the polarization characteristics of the recycled rays matches that of polarizer 20 so that the recycled rays
5 can pass through reflective polarizer 20 toward LCD display panel 14.

[0025] Optional angularly selective light transmitter 22, may be formed by crossing, at 90° to each other, the microreplicated prism structures on two parallel sheets of Vikuiti™ Brightness Enhancement
10 Film available from 3M Specialty Film and Media Products Division, St. Paul, MN. Light transmitter 22 selectively transmits partially collimated light rays toward LCD display panel 14 in a direction substantially parallel to normal viewing direction 30, while rearwardly reflecting a substantial portion of any non-emitted light rays back
15 toward reflective polarizer 20 and rear reflector 16 so that the non-emitted rays may be further reflected ("recycled") for subsequent emission through light transmitter 22.

[0026] Layered planar light distribution structure 10 is highly
20 efficient in the sense that it is characterized by low light absorption losses. If rear reflector 16, any material within diffusing volume 18, reflective polarizer 20, if present, and angularly selective light transmitter 22, if present, are made of materials that do not substantially absorb the light emitted by LEDs 12, almost all light rays emitted by
25 LEDs 12 into structure 10 can eventually be emitted through structure 10 toward LCD display panel 14. Unwanted image artifacts are significantly reduced and, in some cases, substantially eliminated, due to the structure's highly diffuse character.

30 [0027] For clarity and conciseness various elements which can be provided by those skilled in the art are not described in detail herein. For example, a display incorporating an optical structure as described

- 8 -

herein would include suitable driving circuits to cause LEDs 12 or other light emitters to emit light. Such circuitry may optionally permit the brightness of LEDs 12 or other light sources to be individually modulated. Any suitable driving circuits may be used including those known to those of skill in the art. Further, a display typically has suitable driving circuits for operating individual pixels in a display panel to modulate light according to image data corresponding to an image to be displayed on the display. Suitable display panel driving circuits are also known to those skilled in the field of this invention. Consequently, the driving circuitry for LEDs 12, the driving circuitry for display panel 14 and other well-understood elements such as power supplies and the like are not described in detail herein.

[0028] Where a component (e.g. a member, part, assembly, sheet, collimator, reflector, etc.) is referred to above, unless otherwise indicated, reference to that component (including a reference to a "means") should be interpreted as including as equivalents of that component any component which performs the function of the described component (i.e., that is functionally equivalent), including components which are not structurally equivalent to the disclosed structure which performs the function in the illustrated exemplary embodiments of the invention.

[0029] As will be apparent to those skilled in the art in the light of the foregoing disclosure, many alterations and modifications are possible in the practice of this invention without departing from the spirit or scope thereof. For example:

- either or both of reflective polarizer 20 and angularly selective light transmitter 22 may be omitted—satisfactory results can be obtained by providing only rear reflector 16 and light diffusing volume 18 in light distribution structure 10. It is however preferable to include reflective polarizer 20 in order to increase

- 9 -

- the light output capability of structure 10, since unsuitably polarized light rays are otherwise lost. It is also preferable to include angularly selective light transmitter 22 in order to increase the brightness of light emitted by structure 10—albeit at the expense of a reduced viewing angle, since light transmitter 22 partially collimates light which passes through it. This can be offset by providing an additional diffuser 32 as shown in Figure 2 between light transmitter 22 and LCD display panel 14. Additional diffuser 32 increases the viewing angle by laterally diffusing light rays which are narrowly diffused by passage through light transmitter 22.
- When reflective polarizer 20 and angularly selective light transmitter 22 are both present they may be arranged in either order.
 - It is not necessary that rear reflector 16 be perfectly flat. Rear reflector 16 could be bumpy on a small scale (i.e. have a surface structure). The faces of diffusing volume 18 should be generally parallel to one another so that light will be emitted substantially uniformly from diffusing volume 18.

[0030] While a number of example aspects and embodiments have been discussed above, those of skill in the art will recognize certain modifications, permutations, additions and sub-combinations thereof. It is therefore intended that the following appended claims and claims hereafter introduced are interpreted to include all such modifications, permutations, additions and sub-combinations as are within their true scope.

- 10 -

What is claimed is:

1. An optical structure for distributing light emitted by light sources of a plurality of point light sources, the structure comprising:
5 a reflector having an array of transparent regions, each of the point light sources corresponding to one of the transparent regions, the regions for passing light from the point light sources into the structure; and
a light diffuser for diffusing light which passes through the reflector regions, the light diffuser anisotropically scattering light that interacts with the light diffuser.
10
2. An optical structure according to claim 1 comprising an angularly selective light transmitter for partially collimating, within a preferred angular viewing range, light which passes through the light diffuser.
15
3. An optical structure according to claim 2 comprising a reflective polarizer for polarizing light which passes from the light diffuser to the angularly selective light transmitter.
20
4. An optical structure according to claim 3, wherein the angularly selective light transmitter selectively emits partially collimated light rays in a direction substantially normal to the planar light distribution structure, and rearwardly reflects a substantial portion of any non-emitted light rays.
25
5. An optical structure according to any one of claims 1 to 4 comprising one of the transparent regions for each one of the point light sources, and wherein each one of the transparent regions is sized, shaped and aligned to match the size, shape and alignment of a corresponding one of the point light sources.
30

- 11 -

6. An optical structure according to any one of claims 1 to 5 wherein the reflector comprises a highly reflective outward surface.
- 5 7. An optical structure according to claim 6, wherein the outward surface of the reflector is at least partially specularly reflective.
8. An optical structure according to any one of claims 1 to 7 wherein the light diffuser has an anisotropic scattering coefficient
10 such that light rays which are substantially parallel to a direction normal to the planar light distribution structure are more intensely scattered than light rays which are substantially perpendicular to a direction normal to the planar light distribution structure.
- 15 9. An optical structure according to any one of claims 1 to 8 comprising a plurality of layers of a thin, weakly light-scattering sheet material within the diffuser.
10. An optical structure according to claim 9 wherein the sheet
20 material comprises a substantially transparent polymer material.
11. An optical structure according to claim 3, wherein the reflective polarizer polarizes light rays to match the polarization of a display panel oriented parallel to the angularly selective light
25 transmitter.
12. A computer display comprising an array of point light sources, a display panel, and an optical structure according to any one of claims 1 to 10 disposed between the point light sources and the
30 display panel.

- 12 -

13. A computer display according to claim 12 wherein the display panel comprises an LCD display panel.
- 5 14. A computer display according to claim 12 or 13 comprising a brightness enhancement layer between the light diffuser and the display panel.
- 10 15. A computer display according to claim 14 comprising an additional diffuser between the brightness enhancement layer and the display panel.
16. An optical structure according to any one of claims 1 to 10 wherein the point light sources comprise light emitting diodes.
- 15 17. An optical structure according to claim 16 wherein the light emitting diodes are packaged in lensless housings.
- 20 18. An optical structure according to any one of claims 1 to 10 wherein the transparent regions comprise apertures in the reflector.
- 25 19. An optical structure according to claim 19 wherein the point light sources project through the apertures into a region in front of the reflector.

1/2

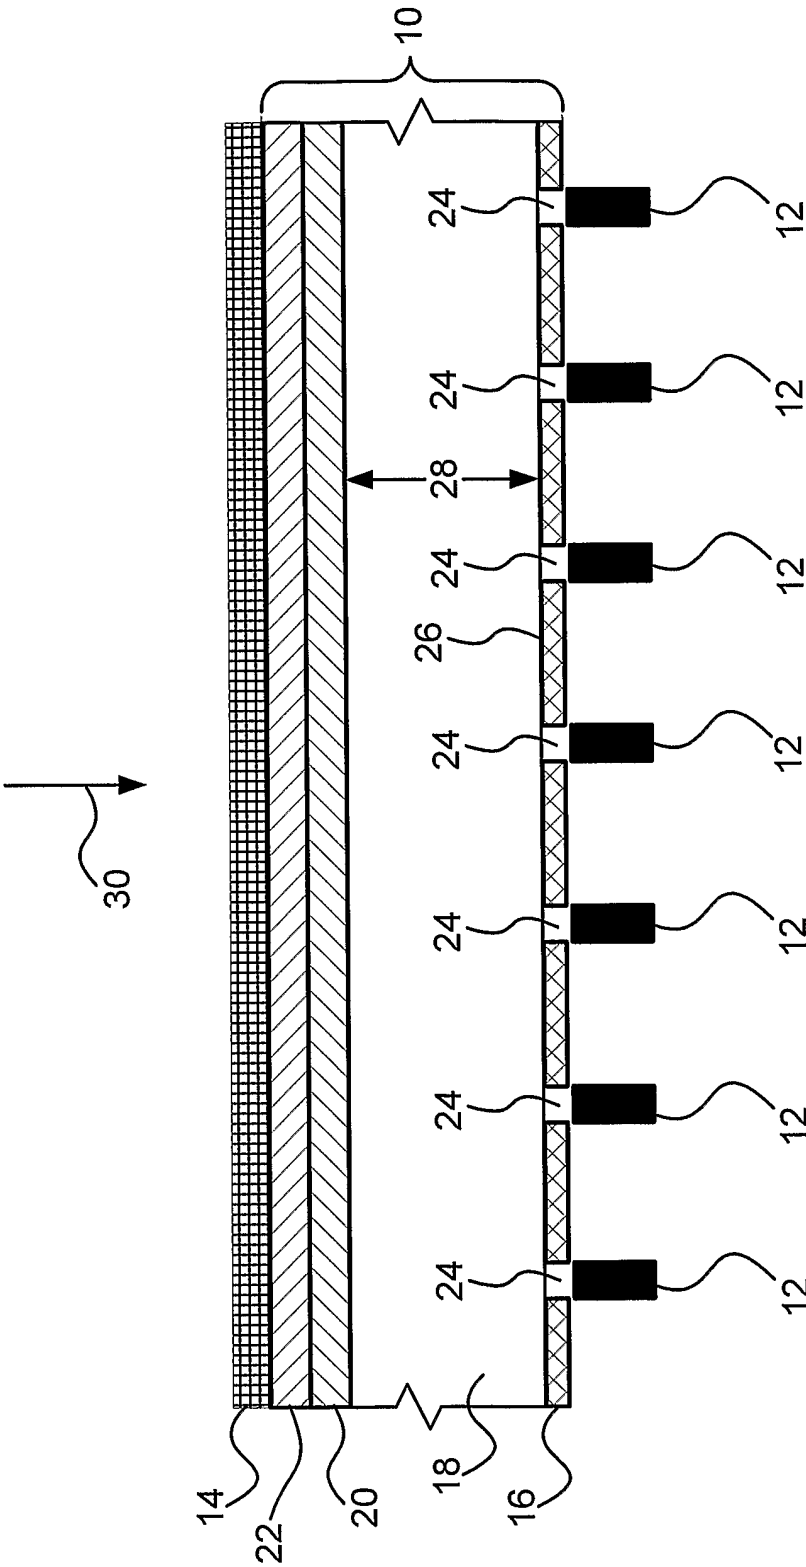


FIGURE 1

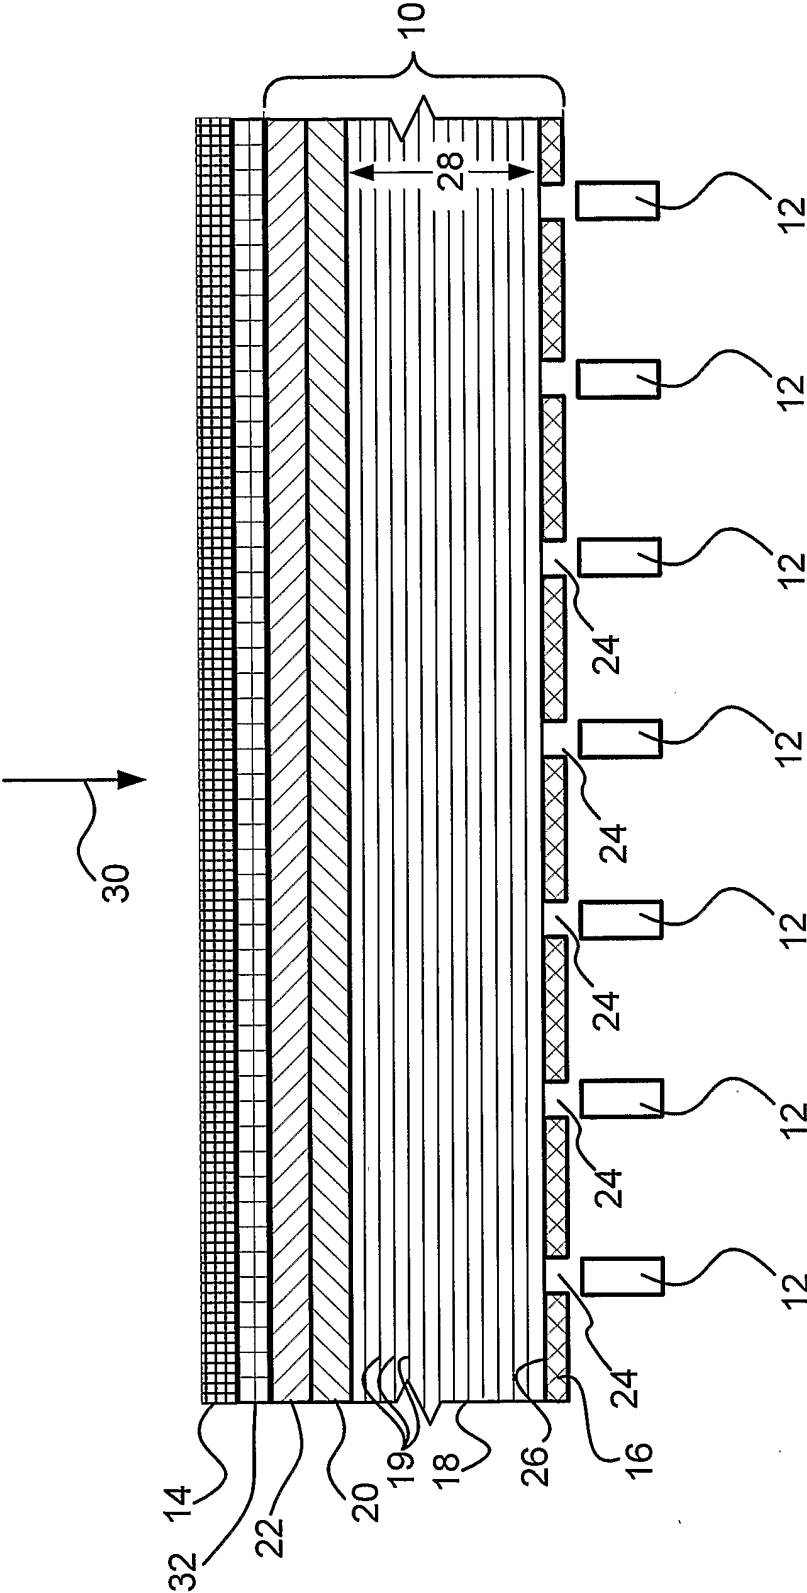


FIGURE 2

INTERNATIONAL SEARCH REPORT

International application No.
CT/CA2005/001111

A. CLASSIFICATION OF SUBJECT MATTER
IPC(7): G02B 5/02, G09F 9/35, G09F 13/08, F21V 13/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC(7) G02B, G09F, F21V in combination with keywords

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)
USPTO WEST, Delphion, Canadian Patent Database, Espacenet (keywords LED, diffuser, display, anisotropic, array, aperture)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X, P	EP 1 521 235 A2 June 4 2005 G09G-3/34 Harbers et al. (Figure 2, col. 2 line 39-col 3 line 58)	1-19
Y	US 2003 0 090 455 May 15 2003. G09G 3/36 Daly (Figure 1, paragraphs 0018-0019, 0023-0024)	1-19
Y	WO 02 079 862 A2 Oct. 10 2002 G02F Chang (Abstract, Fig. 2, page 4 lines 3-20)	1-19
Y	US 5 639 158 June 17 1997 F21V-7/00 Sato (Fig. 1B, col. 1, line 40-col. 2, line 67)	1
Y	EP 1 431 653 A2 June 23 2004 F21S-8/00 Kishimura et al. (Fig. 7, 8, col. 9 lines 7-39)	1
Y	US 6 888 663 May 3 2005 G02B 26/00 Bourdelais et al. (Col. 5 lines 4-61)	9, 10

[] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

13 October 2005 (13-10-2005)

Date of mailing of the international search report

14 November 2005 (14-11-2005)

Name and mailing address of the ISA/CA
Canadian Intellectual Property Office
Place du Portage I, C114 - 1st Floor, Box PCT
50 Victoria Street
Gatineau, Quebec K1A 0C9
Facsimile No.: 001(819)953-2476

Authorized officer

David E. Green (819) 994-8213

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/CA2005/001111

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
EP1521235	06-04-2005	EP1521235 A2 JP2005115372 A US2005073495 A1	06-04-2005 28-04-2005 07-04-2005
US2003090455	15-05-2003	US2003090455 A1 US2005083295 A1 US2005083296 A1 US2005088400 A1 US2005088401 A1 US2005088402 A1	15-05-2003 21-04-2005 21-04-2005 28-04-2005 28-04-2005 28-04-2005
WO02079862	10-10-2002	US2002159002 A1 WO02079862 A2	31-10-2002 10-10-2002
US5639158	17-06-1997	JP2725650B2 B2 US5639158 A	11-03-1998 17-06-1997
EP1431653	23-06-2004	CN1508470 A EP1431653 A2 JP3498290B1 B1 US6942361 B1	30-06-2004 23-06-2004 16-02-2004 13-09-2005
US6888663	03-05-2005	CN1474201 A CN1493892 A EP1391757 A2 EP1391758 A2 JP2004133415 A JP2004133416 A US6832037 B2 US6888663 B2	11-02-2004 05-05-2004 25-02-2004 25-02-2004 30-04-2004 30-04-2004 14-12-2004 03-05-2005