



(86) Date de dépôt PCT/PCT Filing Date: 2013/03/13
(87) Date publication PCT/PCT Publication Date: 2013/09/19
(45) Date de délivrance/Issue Date: 2018/10/02
(85) Entrée phase nationale/National Entry: 2014/09/10
(86) N° demande PCT/PCT Application No.: US 2013/030790
(87) N° publication PCT/PCT Publication No.: 2013/138440
(30) Priorités/Priorities: 2012/03/14 (US61/610,608);
2013/03/11 (US13/793,298)

(51) Cl.Int./Int.Cl. *B01D 53/14* (2006.01)
(72) Inventeurs/Inventors:
DAAGE, MICHEL, US;
FEDICH, ROBERT B., US;
SISKIN, MICHAEL, US
(73) Propriétaire/Owner:
EXXONMOBIL RESEARCH AND ENGINEERING
COMPANY, US
(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : TRANSPORT ET STOCKAGE A BASSES TEMPERATURES DE SOLUTIONS DE TRAITEMENT DE GAZ AMINOETHER
(54) Title: LOW TEMPERATURE TRANSPORT AND STORAGE OF AMINOETHER GAS TREATMENT SOLUTIONS

(57) **Abrégé/Abstract:**

A liquid aminoether acid gas absorbent which is subject to freezing in a cold climatic zone through which the aminoether is to be shipped is rendered freeze-resistant by mixing the aminoether with water prior to transport through the cold climatic zone; the aminoether/water mixture typically contains 10 to 40 weight percent water, based on the weight of the aminoether. The aminoether/water mixture can also be stored in the cold climatic zone without being externally maintained at a temperature above the inherent freezing point of the aminoether.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 September 2013 (19.09.2013)

WIPO | PCT

(10) International Publication Number
WO 2013/138440 A1

- (51) **International Patent Classification:**
B01D 53/14 (2006.01)
- (21) **International Application Number:**
PCT/US2013/030790
- (22) **International Filing Date:**
13 March 2013 (13.03.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/610,608 14 March 2012 (14.03.2012) US
13/793,298 11 March 2013 (11.03.2013) US
- (71) **Applicant:** EXXONMOBIL RESEARCH AND ENGINEERING COMPANY [US/US]; 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).
- (72) **Inventors:** DAAGE, Michel; 1847 Viola Lane, Hellertown, PA 18055 (US). FEDICH, Robert, B.; 208 Drakestown Road, Long Valley, NJ 07853 (US). SISKIN, Michael; 209 South Scotch Plains Avenue, Westfield, NJ 07090 (US).
- (74) **Agents:** SHANELY, Matthew, T. et al.; Exxonmobil Research and Engineering Company, 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— *with international search report (Art. 21(3))*

(54) **Title:** LOW TEMPERATURE TRANSPORT AND STORAGE OF AMINOETHER GAS TREATMENT SOLUTIONS

(57) **Abstract:** A liquid aminoether acid gas absorbent which is subject to freezing in a cold climatic zone though which the aminoether is to be shipped is rendered freeze-resistant by mixing the aminoether with water prior to transport through the cold climatic zone; the aminoether/water mixture typically contains 10 to 40 weight percent water, based on the weight of the aminoether. The aminoether/water mixture can also be stored in the cold climatic zone without being externally maintained at a temperature above the inherent freezing point of the aminoether.



WO 2013/138440 A1

LOW TEMPERATURE TRANSPORT AND STORAGE OF AMINOETHER GAS TREATMENT SOLUTIONS

Field of the Invention

[0001] The present invention relates to the absorption of acidic gases from a mixed gas streams containing acidic and non-acidic components.

Background of the Invention

[0002] The treatment of gases and liquids containing acidic gases such as CO₂, H₂S, CS₂, HCN, COS and sulfur derivatives of C₁ to C₄ hydrocarbons with amine solutions to remove these acidic gases is well established. The amine usually contacts the acidic gases and the liquids as an aqueous solution containing the amine in an absorber tower with the aqueous amine solution passing in countercurrent to the acidic fluid. In typical cases using common amine sorbents such as monoethanolamine (MEA), diethanolamine (DEA), methyldiethanolamine (MDEA), diisopropylamine (DIPA), or hydroxyethoxyethylamine (DGA). The liquid amine stream contained the sorbed acid gas is typically regenerated by desorption of the sorbed gases in a separate tower with the regenerated amine and the desorbed gases leaving the tower as separate streams. The various gas purification processes which are available are described, for example, in *Gas Purification*, Fifth Ed., Kohl and Neilsen, Gulf Publishing Company, 1997, ISBN-13: 978-0-88415-220-0.

[0003] The treatment of acid gas mixtures containing CO₂ and H₂S with amine solutions typically results in the simultaneous removal of substantial amounts of both the CO₂ and H₂S. It is often desirable, however, to treat acid gas mixtures containing both CO₂ and H₂S so as to remove the H₂S selectively from the mixture, thereby minimizing removal of the CO₂. Selective removal of H₂S results in a relatively high H₂S/CO₂ ratio in the separated acid gas which simplifies the conversion of H₂S to elemental sulfur using the Claus process. Selective H₂S removal is applicable to a number of gas treating operations including treatment of hydrocarbon gases from oil sands, coal and shale pyrolysis, refinery gas and natural gas having a low H₂S/CO₂ ratio and is particularly

- 2 -

desirable in the treatment of gases wherein the partial pressure of H₂S is relatively low compared to that of CO₂ because the capacity of an amine to absorb H₂S from the latter type gases is very low. Examples of gases with relatively low partial pressures of H₂S include synthetic gases made by coal gasification, sulfur plant tail gas and low-Joule fuel gases encountered in refineries where heavy residual oil is being thermally converted to lower molecular weight liquids and gases.

[0004] Although primary and secondary amines such as MEA, DEA, DPA, and DGA absorb both H₂S and CO₂ gas, they have not proven especially satisfactory for preferential absorption of H₂S to the exclusion of CO₂ because in aqueous solution, the amines undergo more selective reaction with CO₂ to form carbamates. The tertiary amine, MDEA, has been reported to have a high degree of selectivity toward H₂S absorption over CO₂ (Frazier and Kohl, *Ind. and Eng. Chem.*, 42, 2288 (1950)), but its commercial utility is limited because of its restricted capacity for H₂S loading and its limited ability to reduce the CO₂ content of the gas. Similarly, diisopropylamine (DIPA) is relatively unique among secondary amino alcohols in that its use has been reported, alone or with a physical solvent such as sulfolane, for selective removal of H₂S from gases containing H₂S and CO₂.

[0005] U.K. Patent Publication No. 2,017,524-A (Shell) disclosed that aqueous solutions of dialkylmonoalkanolamines, and particularly N,N-diethyl-monoethanolamine (DEAE), have higher selectivity and capacity for H₂S removal at higher loading levels than MDEA solutions. Nevertheless, even DEAE is not very effective for the low H₂S loading frequently encountered in the industry. Also, DEAE has a boiling point of 161° C., and as such, it is characterized as being a low-boiling, relatively highly volatile amino alcohol. Such high volatilities under most gas scrubbing conditions result in large material losses with consequent losses in economic advantages.

[0006] A number of severely sterically hindered amino ether compounds, notably amino ether alcohols, diamino ethers and alkoxy amino ether alcohols have been developed for the selective removal of H₂S in the presence of CO₂. U.S. Patents Nos. 4,405,581; 4,405,583; 4,405,585, 4,471,138 and 4,894,178 and U.S. Patent Publication 2010/0037775 disclose these highly effective hindered amino ethers, their synthesis and use in selective gas separation processes. Specific amino ethers described in these

patents include BTEE (bis (*tert.*-butylamino-ethoxy)-ethane synthesized from tertiary-butylamine and bis-(2-chloroethoxy)-ethane as well as EEETB (ethoxyethoxyethanol-*tert*-butylamine, synthesized from *tert*-butylamine and chloroethoxy-ethoxyethanol). U.S. 4,894,178 indicates that a mixture of BTEE and EEETB is particularly effective for the selective separation of H₂S from CO₂. U.S. 2010/0037775 describes the preparation of alkoxy-substituted etheramines as selective sorbents for separating H₂S from CO₂. Compared to aqueous MDEA, these severely sterically hindered amines lead to much higher selectivity at high H₂S loadings.

[0007] A significant problem arises with some of these absorbent materials during their transport from the manufacturing site to the location of use in cold climates; this problem arises when the pour point of the material is relatively high, typically at least -20°C and the climatic conditions at their location of use is below that value or close to it. Such climatic zones include, for example, the North Sea areas of the UK and Norway, Ft. McMurray in Alberta, Canada and Billings, Montana. In zones such as these, there is the danger that the liquid will freeze solid or become unpourable to the extent that it cannot be readily or conveniently transferred or used unless they are thawed, but this takes time and provision needs be made for warmed defrosting and storage facilities, especially on offshore platforms where space may be very limited. It would therefore be desirable to transport the sorbents without having them solidify under the temperatures likely to be encountered during shipping from one location to another.

Summary of the Invention

[0008] We have now found that liquid aminoether sorbents of high pour point can be transported in cold climatic conditions without significant danger of freezing by the addition of water in judicious amounts. While both the aminoethers themselves and the water would freeze under those same conditions, mixtures of the two are resistant to freezing. While other pour point depressants could be expected to be effective also, the use of water is particularly attractive since the amines are typically used in the form of an aqueous solution; shipping with the added water therefore enables the use of additives which might interfere with the processing to be avoided. In addition, the use of water is economical and avoids the use of possibly expensive chemicals. In offshore locations,

the addition of the water prior to shipping also reduces the amount of water needed to be added at the site of use offshore where fresh water supplied may be limited.

[0009] According to the present invention, therefore, a liquid, severely sterically hindered, aminoether acid gas absorbent which is subject to freezing in a cold climatic zone by reason of a pour point (ASTM D-97 or equivalent, e.g. Autopour), of -20°C or higher, is rendered freeze-resistant by mixing the aminoether with water prior; the aminoether/water mixture typically contains 10 to 80 more typically 10 to 50, weight percent water, based on the weight of the aminoether although the exact proportions can be adjusted according to the absorbent itself and the projected temperatures during transport, storage and use. The amount of water necessary may be as low as 10 or 20 percent for a useful lowering of the pour point. The aminoether/water mixture can transported through or into cold climatic zones with reduced risk of freezing and can be stored there without being maintained at a temperature above the freezing point of the aminoether. The treated aminoether absorbents in the form of the aqueous mixture can therefore be transported from a first location to a second location in a cold climatic zone for use in an acid gas treatment process with increased convenience.

[0010] In typical cases, the aminoether/water mixture will be transported from a first, relatively warmer climatic zone which has an ambient temperature at which the aminoether remains unfrozen to a second climatic zone, colder relative to the first zone, which has an ambient temperature below the freezing point of the aminoether itself; the concentration of water in the aminoether/water mixture is adjusted to be sufficient to depress the freezing point of the mixture to a temperature below the ambient temperature of the second climatic zone. The aminoether/water mixture can stored at a location in the second climatic zone at a temperature below the freezing point of the aminoether itself, e.g. in an unheated warehouse.

[0010a] In a further aspect, the present disclosure provides a method for transporting a liquid aminoether acid gas absorbent having a pour point not lower than -20°F for use in an acid gas treatment process through a first and second climatic zone, wherein the aminoether absorbent is transported as a mixture, said mixture consisting essentially of the aminoether absorbent and water, wherein the aminoether absorbent is mixed with water prior to being transported through the second climatic zone to form an aminoether/water mixture with about 10 to 40 weight percent water, based on the weight of the aminoether; wherein the aminoether/water mixture is transported from the first climatic zone to the second climatic zone, the first climatic zone being warmer relative to the second climatic zone, the first climatic zone having an ambient temperature

at which the aminoether remains unfrozen, the second climatic zone having an ambient temperature below the freezing point of the aminoether itself and water itself, the concentration of water in the aminoether/water mixture being sufficient to depress the freezing point of the mixture to a temperature below the ambient temperature of the second climatic zone; wherein the first climatic zone and the second climatic zone are in different geographic locations.

[0010b] In a further aspect, the present disclosure provides A method for transporting a liquid aminoether acid gas absorbent having a pour point not lower than -20°F for use in an acid gas treatment process through a first and second climatic zone, wherein the aminoether absorbent is transported as a mixture, said mixture consisting essentially of the aminoether absorbent and water, wherein the aminoether absorbent is mixed with water prior to being transported through the second climatic zone to form an aminoether/water mixture with about 10 to 40 weight percent water, based on the weight of the aminoether; wherein the aminoether/water mixture is transported from the first climatic zone to the second climatic zone, the first climatic zone being warmer relative to the second climatic zone, the first climatic zone having an ambient temperature at which the aminoether remains unfrozen, the second climatic zone having an ambient temperature below the freezing point of the aminoether itself and water itself, the concentration of water in the aminoether/water mixture being sufficient to depress the freezing point of the mixture to a temperature below the ambient temperature of the second climatic zone; wherein the first climatic zone and the second climatic zone are in different geographic locations.

Detailed Description


Aminoether Absorbents

[0011] While the proposed transport scheme is applicable to the broad class of liquid amines which may be used for the absorption of acidic gases such as H₂S and CO₂

from gas streams such a natural gas, syn gas etc, the preferred amine sorbents are those which may be used for the selective sorption of H₂S from acidic gas streams which are mixtures of H₂S with CO₂ and other acidic gases such as CS₂, HCN, COS and sulfur derivatives of C₁ to C₄ hydrocarbons. This preferred class of aminoethers is represented by the derivatives of diethylene glycol or polyethylene glycols which contain severely sterically hindered amino groups as well as by their corresponding derivatives derivatized on the alcohol group to form the corresponding ether or ester derivatives and their corresponding sulfonate and phosphonate salts. In general, the preferred severely sterically hindered aminoether derivatives will have a cumulative Es (Taft steric hindrance constant) value greater than 1.75 (see below for further explanation of this constant and its calculation).

[0012] Preferred examples of these aminoethers are disclosed in U.S. Patents Nos. 4,405,583; 4,405,585, 4,471,138, 4,894,178 and U.S. Patent Publication 2010/0037775, to which reference is made for a full description of these materials, their synthesis and their use in selective acidic gas separation processes. Their disclosures are summarized below for convenience.


[0013] US 4,405,583: The hindered diamino ethers disclosed in this patent are defined by the formula:

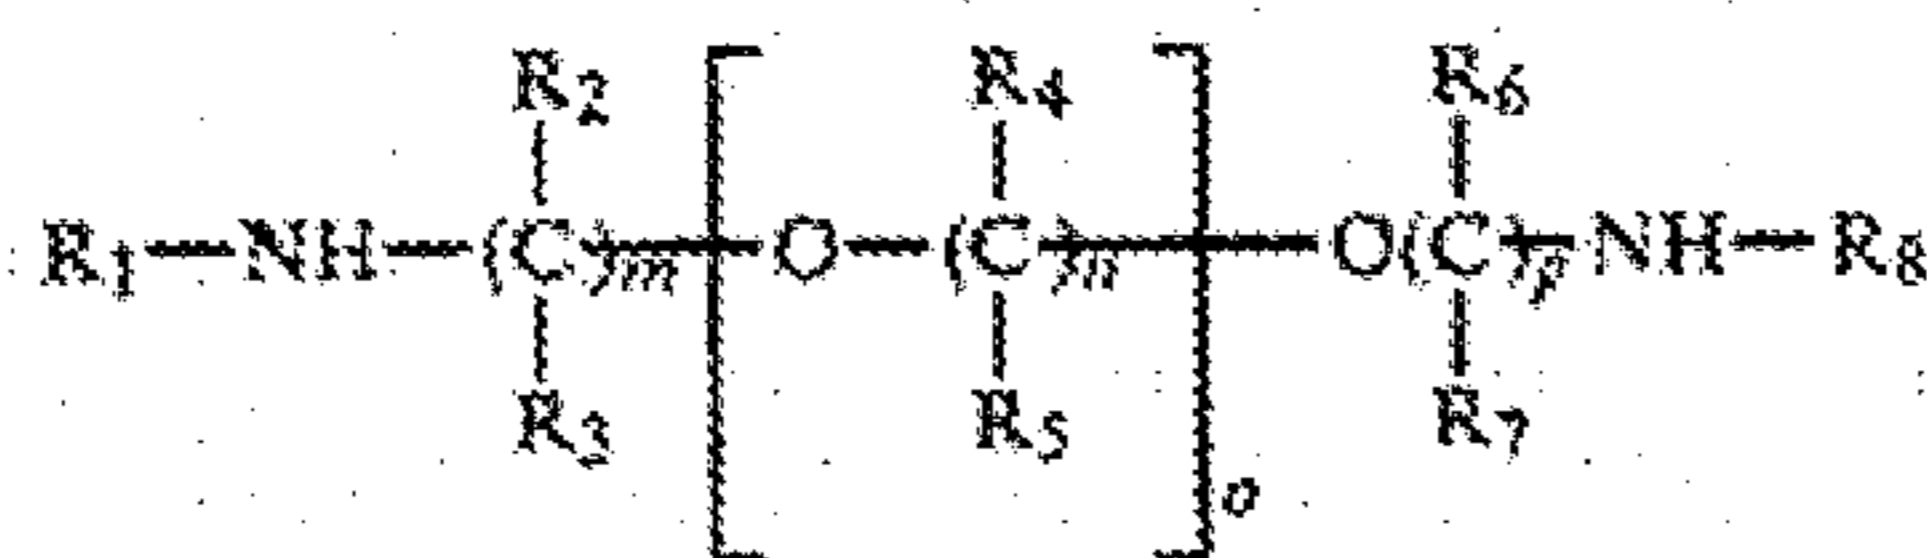

where R¹ and R⁸ are each C₁ to C₈ alkyl and C₂ to C₈ hydroxyalkyl groups, R², R³, R⁴, R⁵, R⁶, and R⁷ are each hydrogen, C₁-C₄ alkyl and hydroxyalkyl groups, with certain provisos to define the adequately hindered molecule and m, n, and p are integers from 2 to 4 and o is zero or an integer from 1 to 10. A typical diamino ether of this type is 1,2-bis(tert-butylaminoethoxy) ethane, a diamino derivative of triethylene glycol.


- 6 -

[0014] US 4,405,585: The hindered amino ether alcohols disclosed in this patent are defined by the formula:

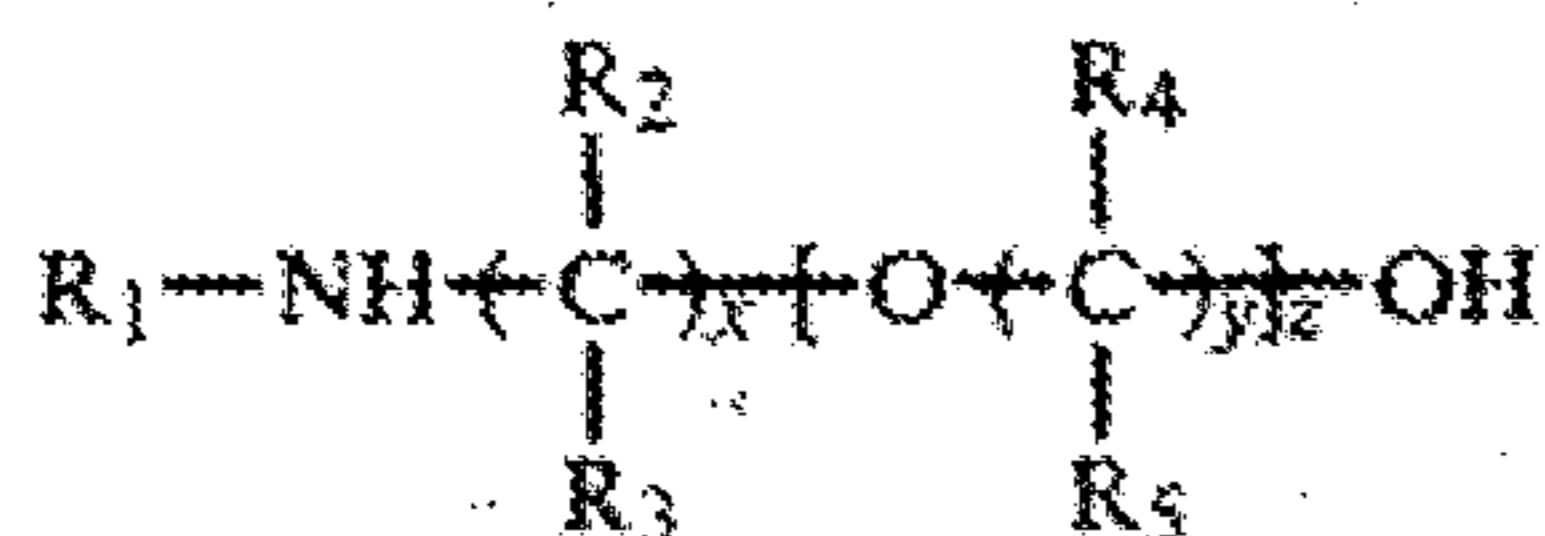

where R¹ is C₁-C₈ primary alkyl and primary C₂-C₈ hydroxyalkyl, C₃-C₈ branched chain alkyl and branched chain hydroxyalkyl and C₃-C₈ cycloalkyl and hydroxycycloalkyl, R², R³, R⁴ and R⁵ are each hydrogen, C₁-C₄ alkyl and C₁-C₄ hydroxyalkyl radicals, with the proviso that when R¹ is a primary alkyl or hydroxyalkyl radical, both R² and R³ bonded to the carbon atom directly bonded to the nitrogen atom are alkyl or hydroxyalkyl radicals and that when the carbon atom of R¹ directly bonded to the nitrogen atom is secondary at least one of R² or R³ bonded to the carbon atom directly bonded to the nitrogen atom is an alkyl or hydroxyalkyl radical, x and y are each positive integers from 2 to 4 and z is an integer from 1 to 4. Exemplary compounds of this type include the amino ether alcohol tert-butylaminoethoxyethanol, a derivative of diethylene glycol.


[0015] US 4,471,138: This patent discloses the desirability of using a combination of a diamino ether with an aminoether alcohol. The two compounds are represented by the respective formulae:

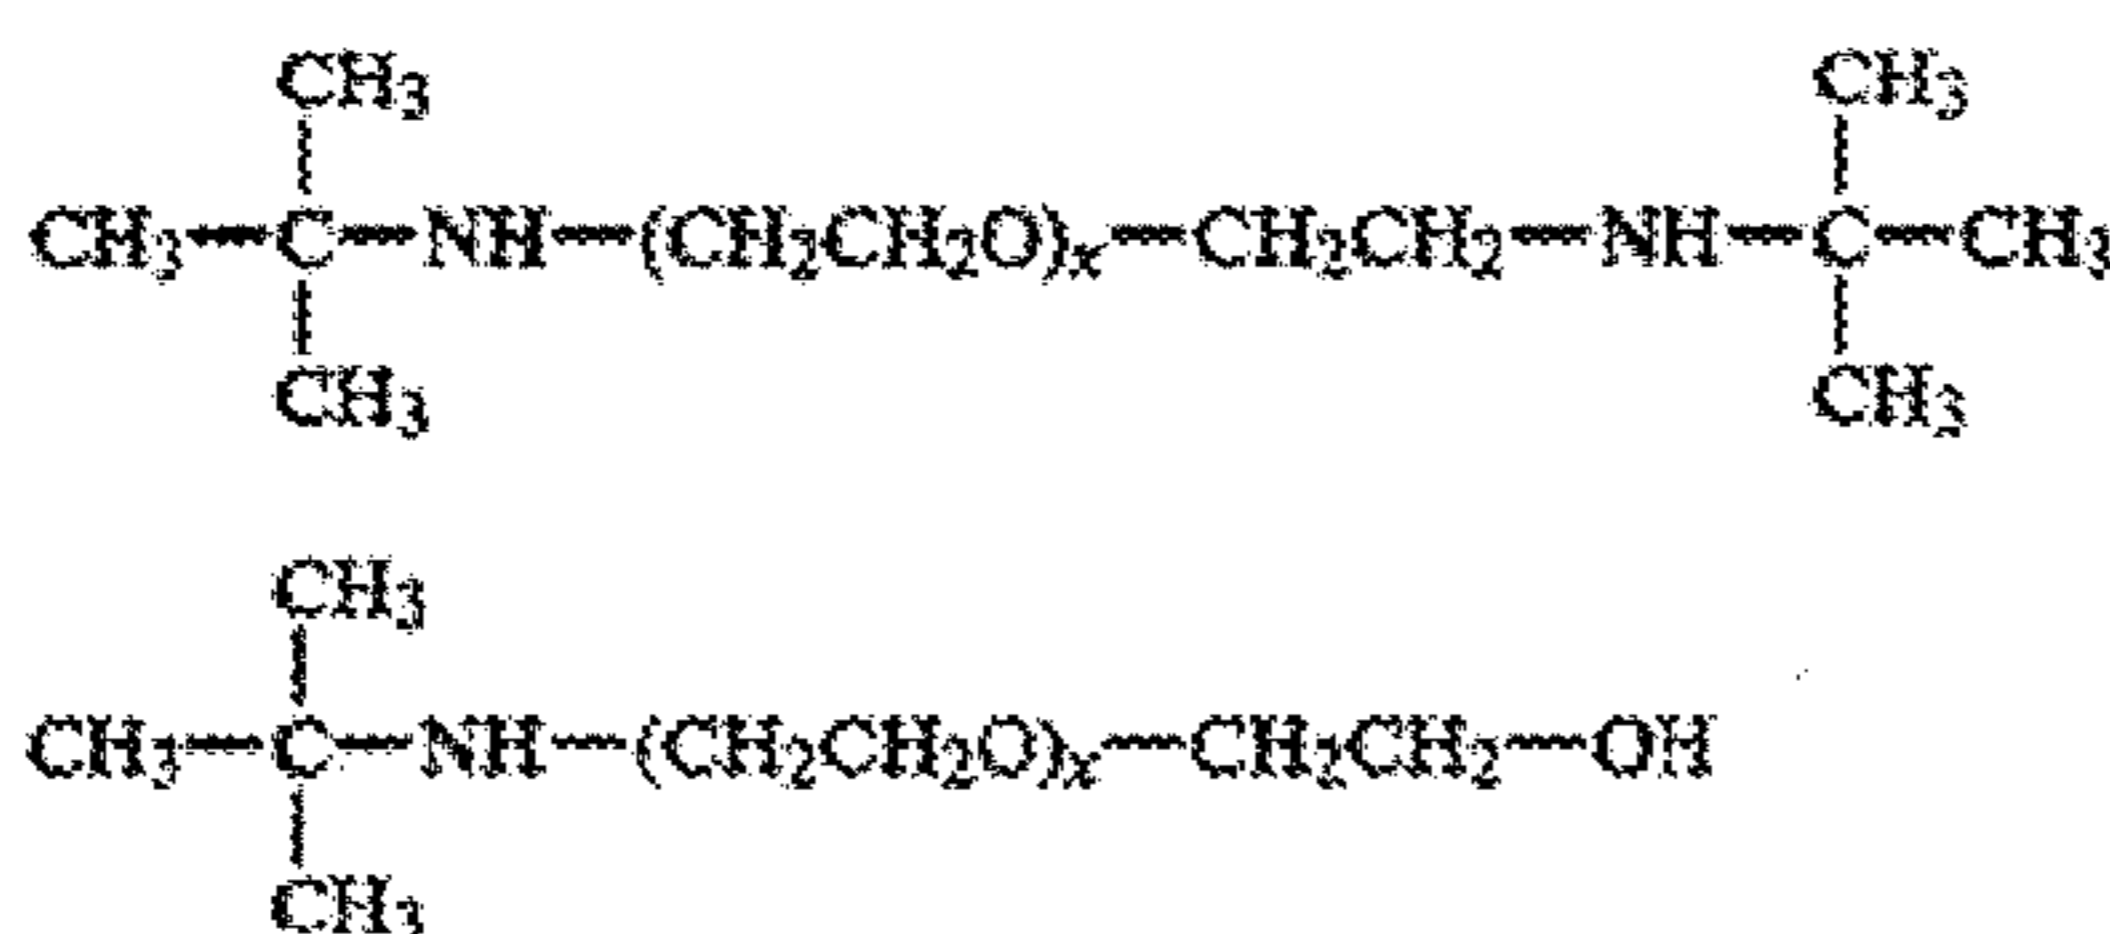

where x is an integer ranging from 2 to 6. This mixture can be prepared in the novel one-step synthesis, by the catalytic tertiary butylamination of a polyalkenyl ether glycol, HO-(CH₂CH₂O)_x-CH₂CH₂-OH, or halo alkoxyalkanol. For example, a mixture of bis-(*tert*-butylaminoethoxy)ethane (BTEE) and ethoxyethoxyethanol-*tert*-butylamine (EEETB) can be obtained by the catalytic *tert*-butylamination of triethylene glycol. The severely hindered amine mixture, e.g., BTEE/EEETB, in aqueous solution can be used for the selective removal of H₂S in the presence of CO₂ and for the removal of H₂S from gaseous streams in which H₂S is the only acidic component, as is often the case in refineries.

- 7 -

[0016] US 4,894,178: A specific combination of diamino ether and aminoalcohol represented by the respective formulae:

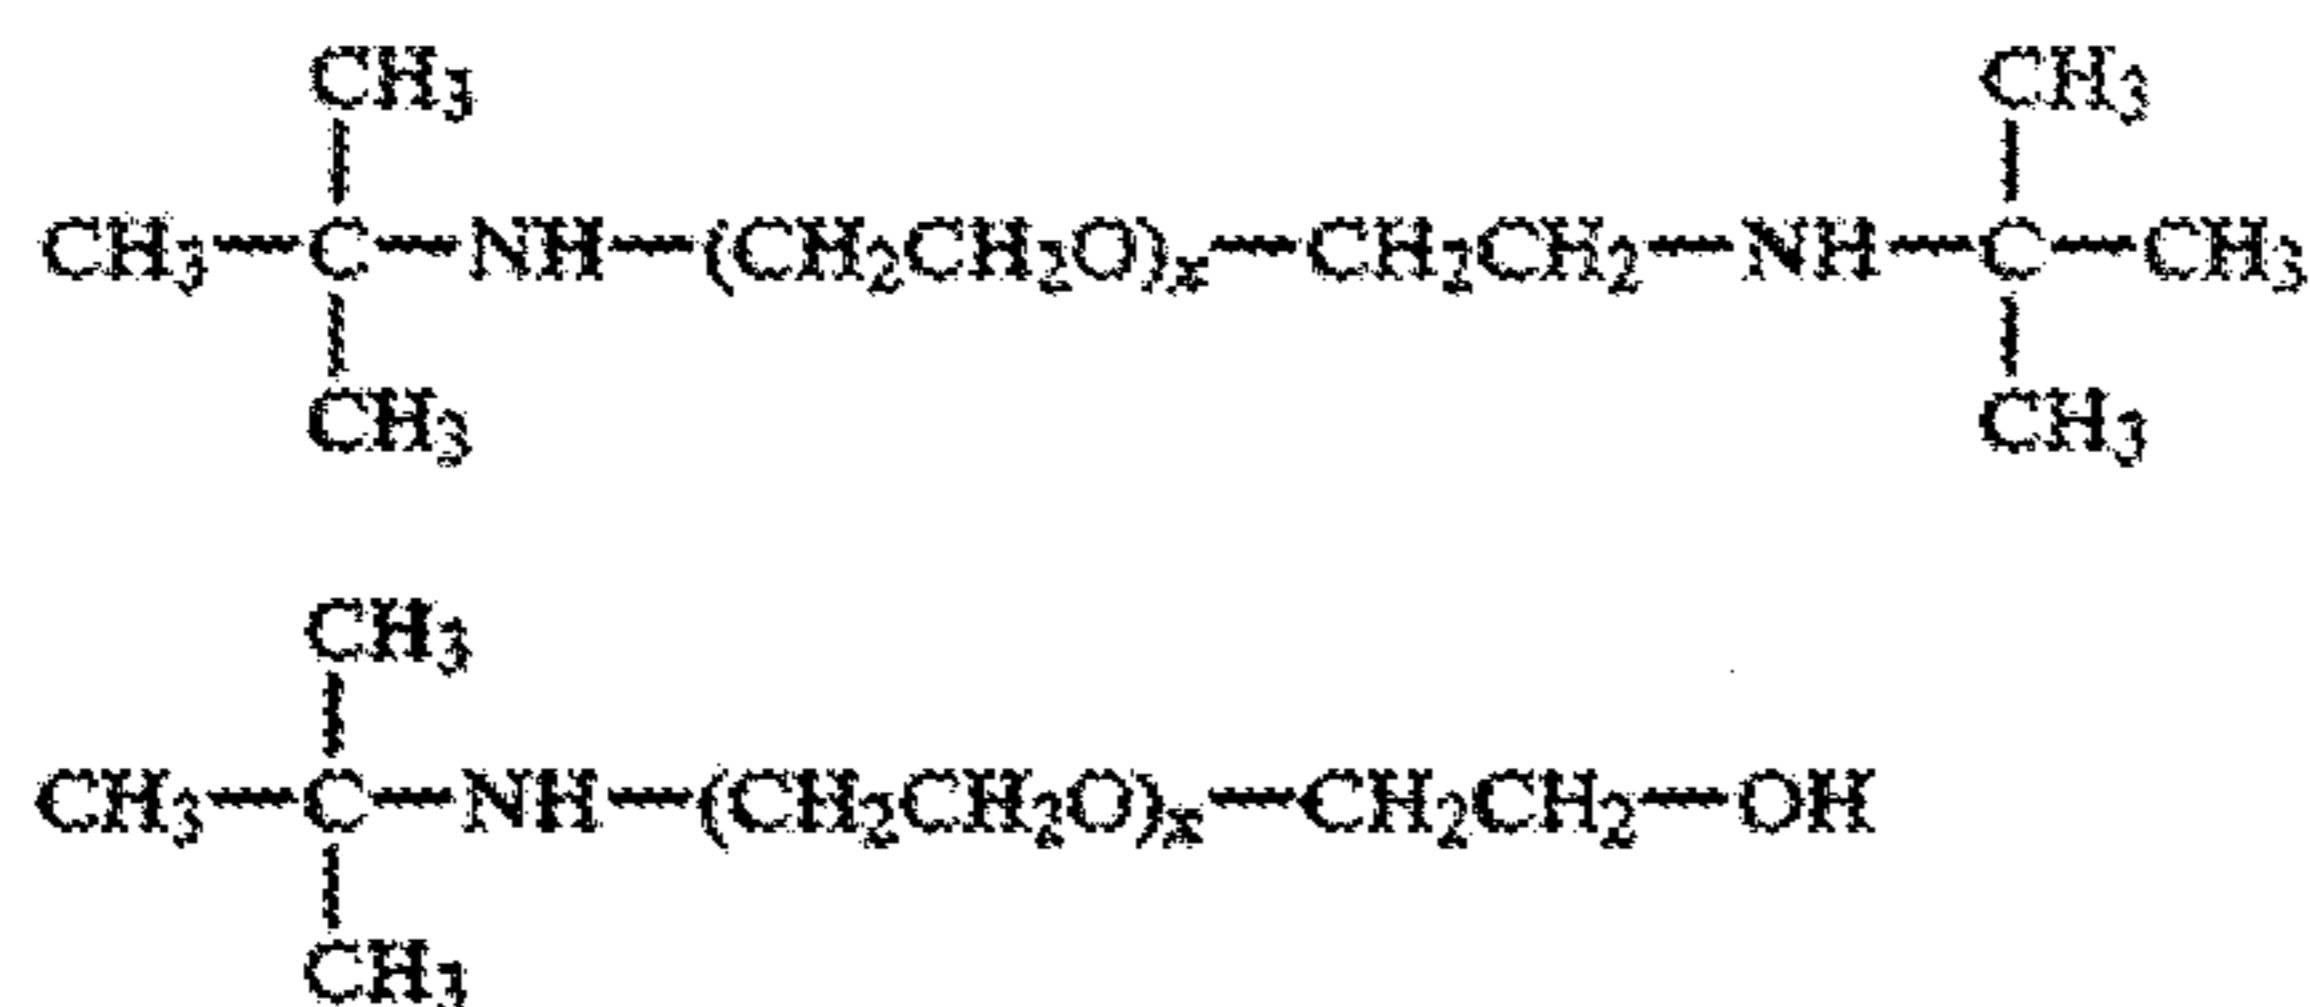

with x being an integer ranging from 2 to 6 and the weight ratio of the first amine to the second amine ranging from 0.23:1 to 2.3:1 and preferably 0.43 to 2.3:1. This mixture can be prepared in the one-step synthesis, by the catalytic *tert*-butylation of the corresponding polyalkenyl ether glycol, for example, by the catalytic *tert*-butylation of triethylene glycol. This mixture is one of the preferred absorbents for use in offshore gas processing.

[0017] US 2010/0037775: The reaction of a polyalkenyl ether glycol with a hindered amine such as *tert*-butylamine to form useful aminother absorbents is improved by the use of an alkoxy-capped glycol in order to preclude the formation of an unwanted cyclic by-product, *tert*-butyl morpholine (TBM). A preferred capped glycol is methoxy-triethylene glycol although the ethoxy-, propoxy- and butoxy homologs may also be used. The reaction between triethylene glycol and *tert*-butylamine is shown to produce a mixture of bis-(*tert*-butylaminoethoxy) ethane and *tert*-butylaminoethoxyethanol in a weight ratio of about 65-67%: 33% for a total yield of about 95% of the mixture over an extended reaction time while the reaction with the alkoxy-capped glycol produces the mono-amino reaction product in comparable yield after a significantly shorter reaction time.


[0018] The aminoether compounds may be used in conjunction with other related materials such as an amine salt as described in U.S. Patent No. 4,618,481. The severely sterically hindered amino compound can be a secondary amino ether alcohol or a dissecondary amino ether. The amine salt can be the reaction product of the severely sterically hindered amino compound, a tertiary amino compound such as a tertiary

- 8 -


alkanolamine or a triethanolamine, with a strong acid, or a thermally decomposable salt of a strong acid, i.e., ammonium salt or a component capable of forming a strong acid.

[0019] Similarly, U.S. Pat. No. 4,892,674 discloses a process for the selective removal of H₂S from gaseous streams using an absorbent composition comprising a non-hindered amine and an additive of a severely-hindered amine salt and/or a severely-hindered amino acid. The amine salt is the reaction product of an alkaline severely hindered amino compound and a strong acid or a thermally decomposable salt of a strong acid, i.e., ammonium salt.

[0020] A preferred class of aminoethers for offshore application is defined by the formula:

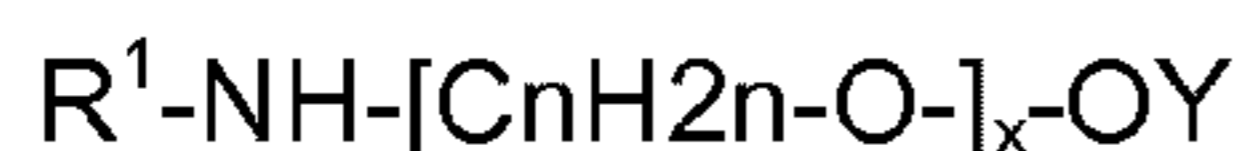

where R¹ is a secondary or tertiary alkyl group of 3 to 8 carbon atoms, preferably a tertiary group of 4 to 8 carbon atoms, Y is H or alkyl of 1 to 6 carbon atoms, n is a positive integer from 3 to 8 and x is a positive integer from 3 to 6. The preferred R¹ group is tertiary butyl and the most preferred amino ethers are those derived from triethylene glycol (n is 2, x is 3). When Y is H, the amino ether is an amino ether alcohol such as tert-butylamino ethoxyethoxyethanol, derived from triethylene glycol; when Y is alkyl, preferably methyl, the amino ether is an alkoxy amino ether, with preference for tert-butylamino methoxy-ethoxyethoxyethanol. The monoamino ethers may be used in blends with diamino ethers in which the terminal OH group of the ether alcohol or the terminal alkoxy group of the alkoxy amino ether is replaced by a further hindered amino group as expressed in the formula:

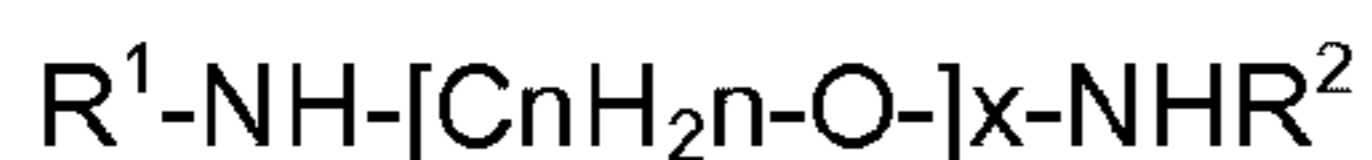

where R¹, n and x are as defined above and R², which may be the same or different to R¹, is a secondary or tertiary alkyl group of 3 to 8 carbon atoms. A preferred diamino ether of this type is bis-(tert-butylamino ethoxy) ethane which may conveniently be used as a mixture with tert-butylamino methoxy-ethoxyethoxyethanol in a weight ratio of about 65-67wt%: 33-35wt%.

[0021] The severely sterically hindered secondary aminoether mentioned above are characterized by acyclic or cyclic moieties attached to the amino nitrogen atom(s). The term "severely sterically hindered" signifies that the nitrogen atom of the amino moiety is

- 9 -

attached to one or more bulky carbon groupings. Typically, the severely sterically hindered aminoether alcohols have a degree of steric hindrance such that the cumulative E_s value (Taft's steric hindrance constant) greater than 1.75 as calculated from the values given for primary amines in Table V in D. F. DeTar, *Journal of Organic Chemistry*, 45, 5174 (1980), to which reference is made for a description of this parameter.

[0022] Another means for determining whether a secondary amino compound is "severely sterically hindered" is by measuring its ^{15}N nuclear magnetic resonance (NMR) chemical shift. It has been found that the sterically hindered secondary amino compounds have a ^{15}N NMR chemical shift greater than about $\delta+40$ ppm, when a 90% by wt. amine solution in 10% by wt. D_2O at 35°C is measured by a spectrometer using liquid (neat) ammonia at 25°C . as a zero reference value. Under these conditions, the tertiary amino compound used for comparison, methyldiethanolamine, has a measured ^{15}N NMR chemical shift value of $\delta 27.4$. For example, 2-(2-tertiarybutylamino) propoxyethanol, 3-(tertiarybutylamino)-1-propanol, 2-(2-isopropylamino)-propoxyethanol and tertiarybutylaminoethoxyethanol had measured ^{15}N NMR chemical shift values of $\delta+74.3$, $\delta+65.9$, $\delta+65.7$ and $\delta+60.5$ ppm, respectively, whereas the ordinary sterically hindered amine, secondary-butylaminoethoxyethanol and the non-sterically hindered amine, n-butylaminoethoxyethanol had measured ^{15}N NMR chemical shift values of $\delta+48.9$ and $\delta 35.8$ ppm, respectively. When the cumulative E_s values is plotted against the ^{15}N NMR chemical shift values of the amino compounds mentioned above, a straight line is observed. Amino compounds having an ^{15}N NMR chemical shift values greater than $\delta+50$ ppm under these test conditions had a higher H_2S selectivity than those amino compounds having an ^{15}N NMR chemical shift less than $\delta+50$ ppm.

[0023] The sterically hindered aminoether absorbents which require special attention during cold storage, transport and use are those which have a Pour Point (ASTM D-97 or equivalent) of -20°C or higher. Absorbents with lower pour points generally present no problem and accordingly it is not normally considered necessary for them to be mixed with water before shipping out from the manufacturing location. Mixtures of aminoether absorbents may require treatment with water if their freeze points vary below those of the individual components of the mixtures having adequately low freeze/pour points.

Aminoether Blending, Transport, Storage

[0024] The aminoether absorbent or mixture of aminoether absorbents is blended with water to confer the desired resistance to freezing during shipping and storage. While the use of other suitable pour point depressants would be similarly effective, the use of water is particularly attractive since the amines are typically used in the form of an aqueous solution; shipping with the added water therefore avoids the use of other possibly expensive additives.

[0025] Exemplary freezing points for H₂S selective hindered aminoether absorbents are:

Absorbent	Pour Point (°F/°C)
MEEETB (1)	<-75/<-59
BisTEGTB (2)	-60/-51
TEG, 7.3 wt%; TEGTB, 57.9 wt%; Bis-TEGTB, 34.9 wt%.	-20/-29
EETB 95 wt% (3)	-15/-26

Notes:

1. Methoxy ethoxyethoxyethanol -*t*-butylamine (MEEETB) 97.8% purity, with methoxy- triethylene glycol (TEGM), 2.2wt.%
2. Bis(*t*-butylamino) triethylene glycol (BisTEGTB) 91.6 wt% purity, with triethylene glycol (TEG) 0.5 wt%; triethylene glycol-*t*-butylamine (TEGTB) 5.75 wt%.
3. Ethoxyethanol-*t*-butylamine.

[0026] While the freezing points of the BisTEGTB and MEEETB are low enough that no problems are normally to be expected in the terrestrial environment, EETB and the blend of aminoethers have a pour/freezing point high enough that they can be expected to freeze in normal winter conditions in the higher latitudes. By adding water, however, the freezing point can be lowered to a useful extent, facilitating transport and storage in climates with a harsh climate as shown by the following data recording the pour points achieved by adding water to these materials:

:

Absorbent	Concn. (wt%) in water	Pour Point, F°/C°
TEG, 7.3 wt%; TEGTB, 57.9 wt%; Bis-TEGTB, 34.9 wt%	80	-30/-34
TEG, 7.3 wt%; TEGTB, 57.9 wt%; Bis-TEGTB, 34.9 wt%	60	-45/-43
EETB 95 wt%	80	-30/-34
EETB 95 wt%	60	-35/-37

[0027] The water, in an amount from about 10-50, preferably 20-40, weight percent, based on the weight of the amine, is simply blended into the liquid aminoether using conventional mixing techniques, e.g., stirred tank mixer. The blended water/aminoether is then readied for shipping, for example, by loading into 200-l drums, ISO liquid containers, bulk liquid containers, Flexitanks, road tank trucks, rail tank cars, etc. The blended liquid is then shipped to the cold climatic location using conventional means without the need for maintaining it at temperatures above freezing. Upon arrival at the cold climatic location, the aminoether/water blend can be diluted if necessary to the final desired concentration, typically from 5 to 30 v/v percent, and used in the absorption process. Alternatively, it can be stored in an unheated location until wanted for use.

[0028] The present transport scheme is useful when the aminoether is to be shipped through a climatic zone where sub-freezing temperatures for the aminoether, typically below about 0°C, prevail. It is especially useful when shipping through a zone where the temperature is expected to be more than ~10 °C below the freezing temperature of the aminoether, especially when temperatures more than ~20 °C below the freezing point of the aminoether are expected.

[0029] The amount of water required to confer resistance to freezing will depend upon the identity of the aminoether. As noted above, 10 to 45 wt. percent is normally sufficient with amounts within this range varying according to the undiluted freezing point of the aminoether.

CLAIMS:

1. A method for transporting a liquid aminoether acid gas absorbent having a pour point not lower than -20°F for use in an acid gas treatment process through a first and second climatic zone, wherein the aminoether absorbent is transported as a mixture, said mixture consisting essentially of the aminoether absorbent and water, wherein the aminoether absorbent is mixed with water prior to being transported through the second climatic zone to form an aminoether/water mixture with about 10 to 40 weight percent water, based on the weight of the aminoether; wherein the aminoether/water mixture is transported from the first climatic zone to the second climatic zone, the first climatic zone being warmer relative to the second climatic zone, the first climatic zone having an ambient temperature at which the aminoether remains unfrozen, the second climatic zone having an ambient temperature below the freezing point of the aminoether itself and water itself, the concentration of water in the aminoether/water mixture being sufficient to depress the freezing point of the mixture to a temperature below the ambient temperature of the second climatic zone; wherein the first climatic zone and the second climatic zone are in different geographic locations.
2. A method according to claim 1 in which the aminoether/water mixture is stored at a location in the second climatic zone at a temperature below the freezing point of the aminoether itself.
3. A method according to claim 1 in which the aminoether comprises a diethylene glycol derivative or triethylene glycol derivative containing a severely hindered amino group and having an Es value (Taft) of at least 1.75.
4. A method according to claim 1 in which the aminoether comprises tertiary-alkylamino diethylene glycol or a tertiary-alkylamino triethylene glycol.

5. A method according to claim 4 in which the aminoether comprises a mono-tertiary-alkylamino diethylene glycol, a mono-tertiary-alkylamino triethylene glycol, a bis-(tertiary-alkylamino) diethylene glycol or a bis-tertiary-alkylamino triethylene glycol.
6. A method according to claim 5 in which the tertiary alkylamino group comprises a tertiary-butylamino group.
7. A method according to claim 5 in which the aminoether comprises a mixture of bis-(tertiarybutylaminoethoxy)-ethane (BTEE) and ethoxyethoxyethanol-tertiary-butylamine (EEETB).
8. A method according to claim 5 in which the aminoether comprises a mixture in which the weight ratio of the diamino compound to the monoamino in the mixture is from 0.23:1 to 2.3:1.
9. A method according to claim 1 in which the aminoether comprises a alkoxy-*tert*-alkylamino-ether.
10. A method for storing a liquid aminoether acid gas absorbent for use in an acid gas treatment process in a cold climatic zone having an ambient temperature below the freezing point of the aminoether itself and water itself, wherein the aminoether adsorbent is stored as a mixture, said mixture consisting essentially of the aminoether adsorbent and water, wherein the aminoether absorbent is mixed with water prior to storage in the cold climatic zone to form an aminoether/water mixture with about 10 to 45 weight percent water, based on the weight of the aminoether; the concentration of water in the aminoether/water mixture being sufficient to depress the freezing point of the mixture to a temperature below the ambient temperature of the cold climatic zone.
11. A method according to claim 10 in which the aminoether/water mixture is transported from a first, relatively warmer climatic zone to the cold climatic zone, the first climatic zone having an ambient temperature at which the aminoether remains

unfrozen, the concentration of water in the aminoether/water mixture being sufficient to depress the freezing point of the mixture to a temperature below the ambient temperature of the cold climatic zone; wherein the first, relatively warmer climatic zone is in a different geographic location than the cold climatic zone.

12. A method according to claim 11 in which the aminoether/water mixture is transported from the first climatic zone to the location in the cold climatic zone at a temperature below the freezing point of the aminoether itself.

13. A method according to claim 10 in which the aminoether comprises an ethylene glycol or polyethylene glycol compound containing a severely hindered amino group having an Es value (Taft) of at least 1.75.

14. A method according to claim 10 in which the aminoether comprises tertiary-alkylamino diethylene glycol or a tertiary-alkylamino triethylene glycol.

15. A method according to claim 14 in which the aminoether comprises a mono-tertiary-alkylamino diethylene glycol, a mono-tertiary-alkylamino triethylene glycol, a di- tertiary-alkylamino diethylene glycol or a di -tertiary-alkylamino triethylene glycol.

16. A method according to claim 15 in which the tertiary alkylamino group comprises a tertiary-butylamino group.

17. A method according to claim 15 in which the aminoether comprises a mixture of bis-(tertiarybutylaminoethoxy)-ethane (BTEE) and ethoxyethoxyethanol-tertiarybutylamine (EEETB).

18. A method according to claim 15 in which the aminoether comprises a mixture in which the weight ratio of the diamino compound to the monoamino is from 0.23:1 to 2.3:1.

19. A method according to claim 11 in which the aminoether comprises an alkoxy-*tert*-alkylamino-ether.