

1 563 316

(21) Application No. 39966/76 (22) Filed 27 Sept. 1976
 (31) Convention Application No.
 619 347 (32) Filed 3 Oct. 1975 in
 (33) United States of America (US)
 (44) Complete Specification published 26 March 1980
 (51) INT. CL.³ E05D 3/10
 (52) Index at acceptance
 E2F 608 652 CC



(54) IMPROVEMENTS IN HINGES

(71) We, FORD MOTOR COMPANY LIMITED, of Eagle Way, Brentwood, Essex CM13 3BW, a British Company, do hereby declare the invention for which we pray 5 that a patent may be granted to us, and the method by which is to be performed, to be particularly described in and by the following statement:—

The invention relates to a hinge system 10 supporting in an opening in a structure, such as a vehicle body a closure for swingable movement between closed and opened positions.

The hinging of closures in the openings 15 in some structures particularly the hinging of deck lids, hoods, and doors, providing access to luggage compartments, engine compartments and passenger compartments, respectively, of automobiles presents unique 20 problems. It is the practice in automotive design to conceal the hinges so that for aesthetic reasons none of the hinge elements are visible from the exterior of the vehicle structure sheet metal panes. Be- 25 cause deck lids, hoods and doors in vehicle body structure are not flat like an ordinary cupboard door or house door but are contoured to follow the vehicle body contour, they are not swingable about a hinge line or 30 axis located at the edge of the opening in the structure. In order to provide proper movement into and out of the engagement with the weather strips or seals around the opening in the vehicle body structure, 35 the vehicle closures are generally bodily swingable about an axis displaced from the edge of the opening and located interiorly of the compartment. The hinge devices, particularly those mounting the deck lids 40 or hoods, are relatively large devices which intrude into the interior compartment space.

For example, most deck lid hinges have 45 large goose-neck arms which in deck lid closed position projected downwardly into

the luggage compartment, see U.S. Patent 2,986,769 issued June 6, 1961 to A. J. Hammond for a deck lid hinge. The hood hinges have compound link systems which pro- 50 trude into the vehicle engine compartment in closed position of the hood, see U.S. Patent 2,994,907 issued August 8, 1961 to A. J. Hammond for a hood device. The goose-neck arms and compound link sys- 55 tems are required for guiding the deck lids and hoods for swinging movement in a path that avoids interference between the hinge elements and the body structure defining the openings into and out of which the closure is swingable.

According to the present invention 60 there is provided a hinge system supporting in an opening in a structure, such as a vehicle body, a closure for swingable movement between closed and opened 65 positions comprising, a pair of hinge devices spaced from each other, each hinge device having a first attachment member mounted on a structural member of the 70 structure at one boundary of the opening and a second attachment member mounted on the closure, each first attachment member being mounted internally of the opening and each second attachment member being mounted on the inner surface of the 75 closure adjacent one edge thereof, each hinge device having a first hinge member pivotally coupled to its first attachment member for swinging movement about a first axis and a second hinge member pivot- 80 ally coupled to its second attachment member for swinging movement about a sec- 85 ond axis, and pivot means pivotally coup- ling distal ends of the first and second hinge members of each hinge device for swinging movement about a third axis inter- mediate the first and second axes, each hinge device being mounted with all three axes obliquely positioned relative to one another and intersecting at a point out- 90

side the surface of the closure when the latter is in a closed position in the structure opening to provide a pivot point externally of the opening, the pair of pivot 5 points provided by the pair of hinge devices coacting to define an external hinge axis about which the closure is swingable to and from an opened position, and the arrangement being such that said inner 10 surface of the closure spans the opening when the closure is in said closed position.

The invention will now be described with reference to the accompanying drawings, wherein:

15 FIG. 1 is a fragmentary perspective view of the cowl end of a vehicle engine compartment illustrating a hinge system for mounting the compartment closure or hood thereon, the hinge system utilizing hinge 20 devices in accordance with the present invention;

FIG. 2 is an enlarged view of one of the hinges of FIG. 1, the hinge device being shown in closure closed position;

25 FIG. 3 is a view in part similar to FIG. 1 showing the hinge in closure opened position;

FIG. 4 is a diagrammatic representation of the hinge system of FIG. 1; and 30 axis 41 of each hinge device 14.

FIG. 5 is a diagrammatic representation of the hinge system when applied to a closure swingable about an upright axis instead of a substantially horizontal axis as 35 shown in FIG. 4.

Referring now more particularly to the drawings, it will be noted that FIG. 1 illustrates a portion of a vehicle body structure, generally designated 10, defining a 40 compartment 11 open at its top and having a hinged closure 12 mounted for swinging movement into and out of compartment 11 closed position. The compartment 10 is shown as a vehicle engine compartment and 45 the closure 12 as the hood. It will be understood, however, that the compartment 10 could have been shown as a luggage compartment and the closure 12 as the deck lid for the luggage compartment.

50 The closure 12 is supported on the rear vehicle wall 13 of the compartment 11 by a hinge system embodying the present invention. The hinge system comprises a pair of hinge devices, each designated 14, spaced 55 laterally on the vehicle body structure. Each hinge device 14 has a first base plate 15 forming an attachment member fastened to the wall 13 by bolts 16 or the like at the upper boundary of the latter beneath the 60 opening receiving the closure or hood 12. Each hinge device 14 has a second base plate 17 bolted or otherwise fastened to the underside of the closure or hood adjacent the rear edge 18 of the latter.

65 Each hinge device 14 has a first hinge

member 19 pivotally coupled to first base plate 15. As best seen in FIG. 2 and 3, the first hinge member 19, as exemplified, is formed of rod stock of cylindrical cross section. This hinge member 19 is formed in a substantially U-shape with its base 21 elongated and journaled within a semi-tubular channel 22 formed in a plate 23 overlying the base plate 15. The hinge member 19 has parallel upstanding legs 24 70 and 25 with the leg 24 somewhat longer than the leg 25.

The leg 24 terminates in a flattened end portion 26 having an aperture 27 therein. The leg 25 terminates in a right angle end 80 portion 28 axially aligned with the axis of the aperture 27.

Each hinge device 14 has a second hinge member 29 pivotally coupled to the second base plate 17. As in the case of the first 85 hinge member 19, the second hinge member 29 is formed of rod stock of cylindrical cross section and is of substantially U-shape with an elongated base 31 and parallel legs 32 and 33 extending at right angles 90 to each end of the base. The base 31 is journaled within a semi-tubular channel 34 formed in a plate 35 overlying the base plate 17. The leg 32 is somewhat longer than the leg 33 and terminates in an outwardly 95 turned right angle end portion 36 which is journaled in the aperture 27 of the leg 24 of the hinge member 19. The shorter leg 33 has a flattened end portion 37 having an aperture 38 receiving the right angle end 100 portion 28 on the leg 25 of the hinge member 19.

From the foregoing it is thus seen that each hinge device 14 comprises a first attachment member in the form of a base 105 plate 15 attached to the vehicle body wall 13 and the second attachment member in the form of a base plate 17 attached to the closure 12. A first hinge member 19 is pivotally coupled to the attachment member 110 for swinging movement about a pivot axis 39 defined by the axis of the base portion 21 of the hinge member 19. A second hinge member is pivotally coupled to the second attachment for swinging movement 115 about a pivot axis 41 defined by the axis of the base portion 31 of the hinge member 29. The two hinge members 19 and 29 are pivotally coupled to each other at their distal ends, the ends of the respective 120 arms 24-32 and 25-33. The cylindrical end portion 36 of arm 32 is journaled in the aperture 27 in the end portion 26 of the arm 24 and the cylindrical end portion 28 of arm 25 is journaled in the aperture 38 in the end portion 37 of arm 33. The cylindrical end portions 28 and 36 are 125 axially aligned and define a pivot axis 42 about which the hinge members 19 and 29 are swingable relative to one another. 130

The axes 39, 41 and 42 of each hinge device 14 are obliquely positioned relative to one another and intersect at a point outside of and above the surface of the closure 12 when the latter is in closed position in the compartment opening to provide externally of the opening a pivot point about which the closure is swingable to and from an opened position. In FIG. 3, the intersection point of the three axes 39, 41 and 42 is labeled "A". Referring to FIG. 1, the corresponding intersection on the opposite side of the vehicle for the opposite hinge 14 is labeled "B". The line A-B represents the desired hinge line or axis about which the closure 12 is bodily swingable.

Reference now is made to FIG. 4 for a diagrammatic representation and explanation of the hinge system that has been structurally described above. Line A-B represents a desired closure (hood, deck lid or door) pivot line or hinge axis. Lines A-C and B-C are the pivot axes of the hinge members 19, the lines A-C and B-C corresponding to the pivot axis 39 of each hinge device 14. Lines A-D and B-D are the pivot axes of the hinge members 29, the lines A-D and B-D corresponding to the pivot

Primary links M and N are attached to the vehicle wall 13 through the attachment members 15 for swinging movement about pivot axes A-C and B-C (axis 39 of each hinge device 14). The primary link M comprises the coacting arms 24-25 of the left hinge member 19 as viewed in FIG. 1. Correspondingly, the primary link N comprises the coacting arms 24-25 of the right hinge member 19, as viewed in FIG. 1. Secondary links P and R are attached to the closure for swinging movement about pivot axes A-D and B-D (axis 41 of each hinge). The secondary link P comprises the coacting arms 32-33 of the left hinge member 19 and the secondary link R comprises the coacting arms 32-33 of the right hinge member 19, as viewed in FIG. 1.

The primary links M and N are joined to the secondary links P and R along lines A-E and B-E, respectively. The lines A-E and B-E correspond to pivot axis 42 of each hinge 14. As noted above, all hinge pivot lines or axes intersect at points "A" and "B", respectively.

In operation, since the hinge pin of link P, that is, the hinge pin extending along line A-E or 42 of the left hinge, can only operate in line with point "A" and the hinge pin of link R, that is the hinge pin extending along line B-E or 42 of the right hinge, can only operate in line with point "B", as viewed in FIG. 1, and both are attached to closure 12 along pivot lines A-D and B-D or 41 of each hinge, the closure can radiate only around the line extending between "A" and "B", as indi-

cated by the line 43 in FIG. 3.

The present invention thereby utilizes a system of opposing hinge joints which cause the compound attaching links to describe a definite travel and positioning movement. In automotive applications (but not limited thereto), this concept allows greater freedom from surface configuration hinge limitations and is readily adaptable to inside surface mounting, such as on the inner cowl top or the upper back panel reinforcements of the vehicle body structure. The relative angle of the opposing hinge pins also makes it possible that this concept can be used for side doors (typically vertical hinge line) to permit door swing away in an attitude more conducive of ingress and egress requirements. In a normal application for a deck lid or a hood, a natural hold open feature can be obtained by the use of a tension spring operating between the idler hinge pin joint (of the primary to secondary link joint) of the opposing hinge assemblies.

The angles and mounting attitudes of the hinge assemblies are limited only by the outside surface configuration and the desired location of the common instant center points (A and B). Thus in a side door application, these pivoting control points can be above the vehicle and below the ground with any desired verticle angle. The application of the hinge system to a vehicle side door is diagrammatically illustrated in FIG. 5. Since the reference numerals apply to FIG. 5 are the same as those applied to FIG. 4, no detailed explanation is believed necessary.

Although the several links have been illustrated as being formed of rod stock, it will be understood that the links may be formed of sheet metal stampings coupled to each other by pivot pins.

WHAT WE CLAIM IS:—

1. A hinge system supporting in an opening in a structure, such as a vehicle body, a closure for swingable movement between closed and opened positions comprising:

a pair of hinge devices spaced from each other,

each hinge device having a first attachment member mounted on a structural member of the structure at one boundary of the opening and a second attachment member mounted on the closure,

each first attachment member being mounted internally of the opening and each second attachment member being mounted on the inner surface of the closure adjacent one edge thereof

each hinge device having a first hinge member pivotally coupled to its first attachment member for swinging movement about a first axis and a second hinge mem-

ber pivotally coupled to its second attachment member for swinging movement about a second axis.

and pivot means coupling distal ends of 5 the first and second hinge members of each hinge device for swinging movement about a third axis intermediate the first and second axes,

each hinge device being mounted with all 10 three axes obliquely positioned relative to one another and intersecting at a point outside of the surface of the closure when the latter is in a closed position in the structure opening to provide a pivot point externally of the opening,

the pair of pivot points provided by the pair of hinge devices coacting to define an external hinge axis about which the closure is swingable to and from an opened position, and the arrangement being such that 20 said inner surface of the closure spans the opening when the closure is in said closed position.

2. A hinge system constructed and arranged to provide an external hinge axis about which a closure is swingable to and from closed and opened positions in an opening in a structure, such as a vehicle body,

30 the hinge axis having predetermined end points A and B externally of the closure when the latter is in a closed position in the opening,

the system comprising a first pair of 35 spaced attachment members attached to a structural member at an edge of the opening internally of the latter and a second pair of attachment members attached to the inner surface of the closure adjacent

one edge thereof,

hinge pin means journaled in each of 40 said first pair of attachment members defining hinge pivot lines A-C and B-C,

hinge pin means journaled in each of 45 said second pair of attachment members defining hinge pivot lines A-D and B-D,

a pair of primary links M and N journaled on the hinge pin means journaled 50 in the first pair of attachment members,

the primary links M and N being swingable about the hinge pivot lines A-C and 55 B-C, respectively,

a pair of secondary links P and R journaled on the hinge pin means journaled 60 in the second pair of attachment members,

the second links P and R being swingable about the hinge pivot lines A-D and 65 B-D, respectively, and

a hinge pin means joining the primary links M and N to the secondary links P 70 and R along pivot lines A-E and B-E, respectively,

hinge pivot lines A-C, A-D and A-E intersecting at point A and hinge pivot lines B-C, B-D and B-E intersecting at 75 point B, the arrangement being such that said inner surface of the closure spans the opening when the closure is in the closed position.

3. A hinge system according to claim 2, in which:

hinge pivot lines A-D and B-D are swingable about hinge axis A-B with the closure.


4. A hinge system substantially as hereinbefore described with reference to and as 80 shown in the accompanying drawings.


PETER ORTON,
Chartered Patent Agent.

1563316 COMPLETE SPECIFICATION

4 SHEETS *This drawing is a reproduction of
the Original on a reduced scale
Sheet 1*

FIG. 1

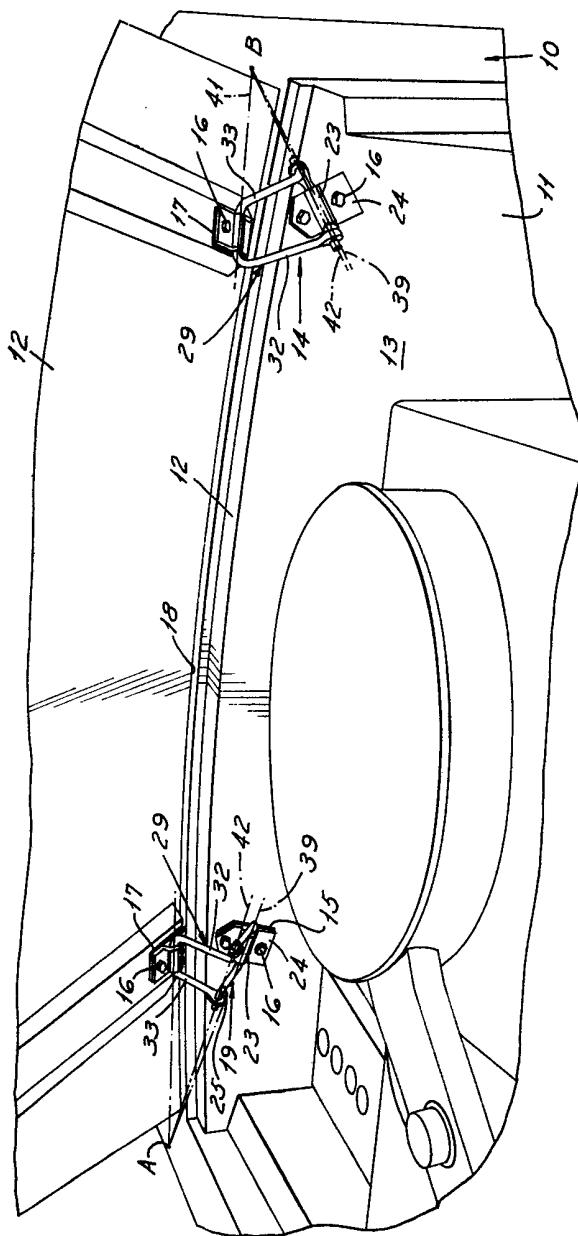

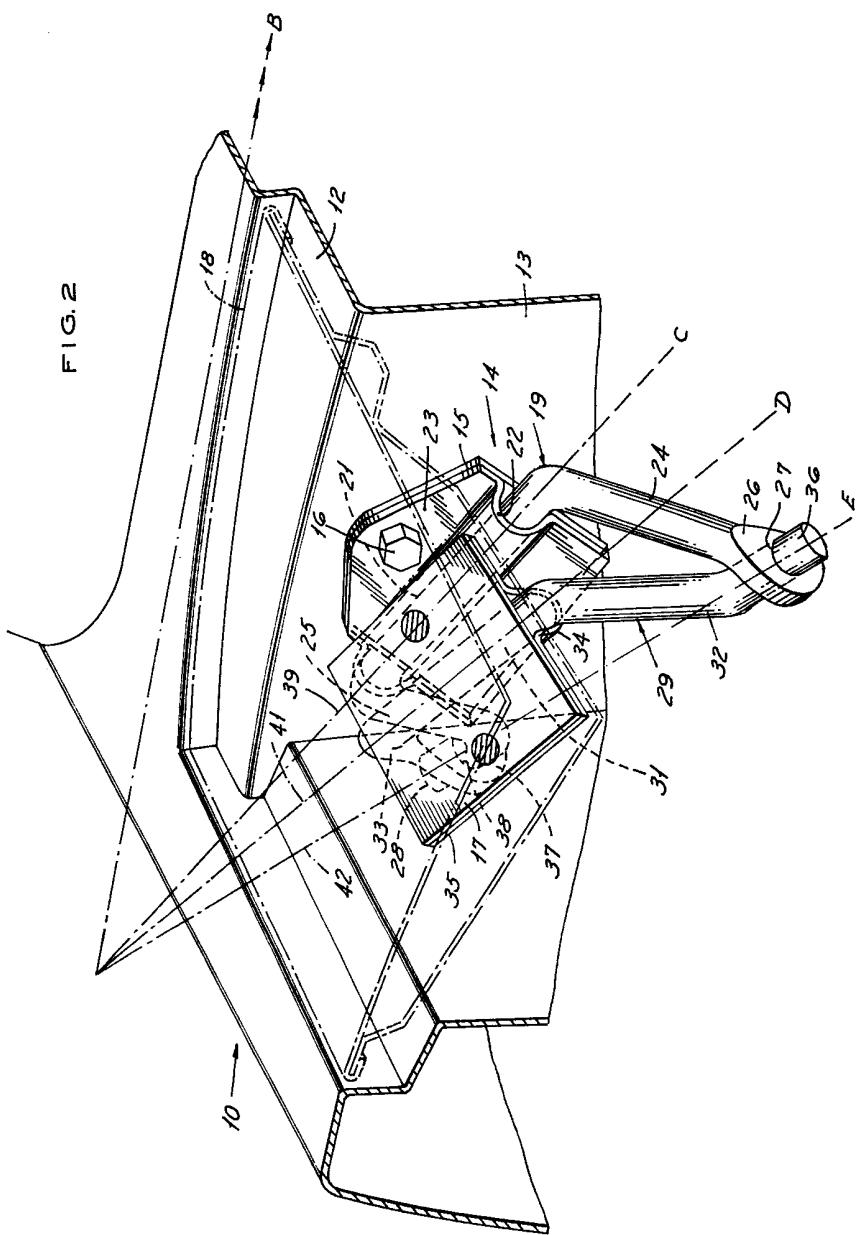

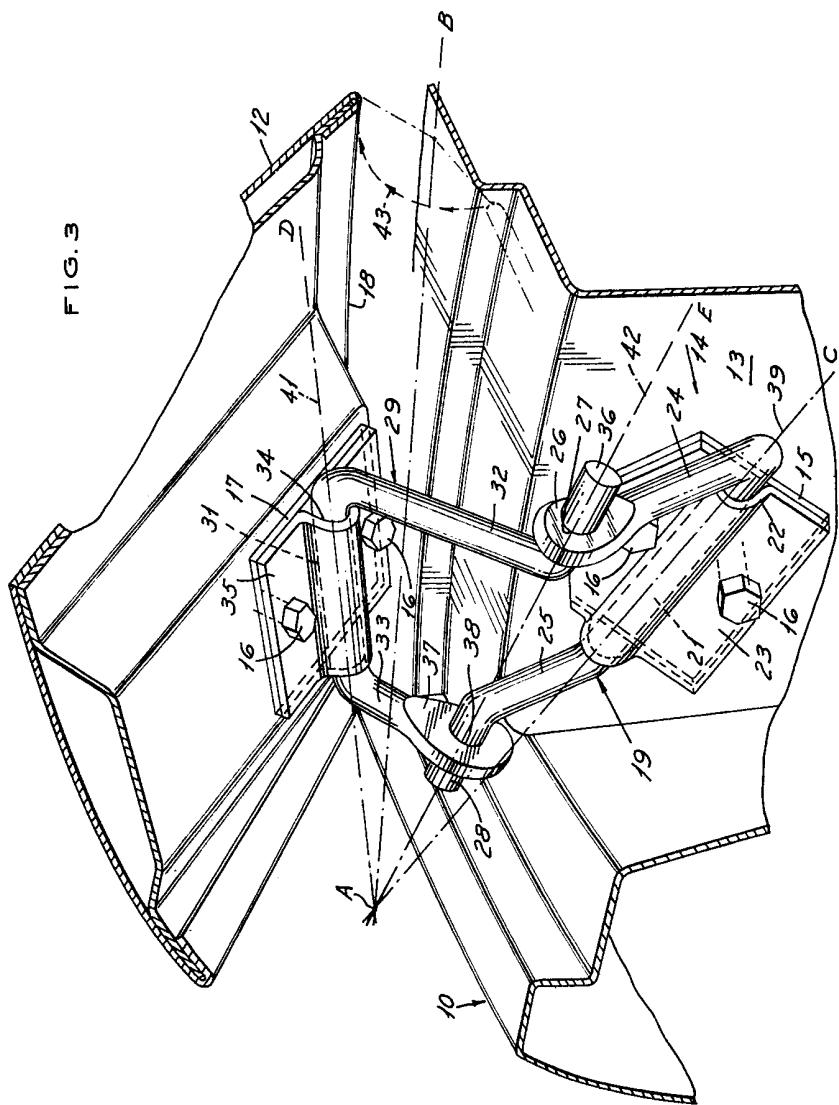


FIG. 4

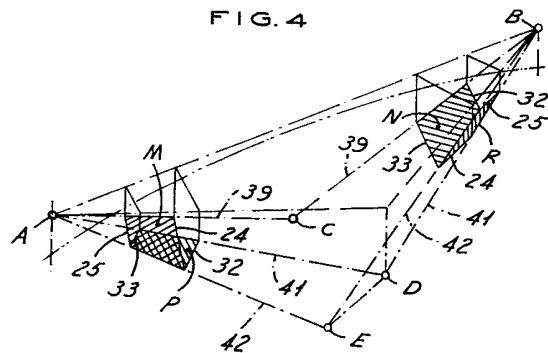


FIG. 5

