



(51) International Patent Classification:

E04F 13/07 (2006.01) *F16S 1/02* (2006.01)
E04B 1/74 (2006.01) *F16S 1/10* (2006.01)
E04C 2/284 (2006.01)

(21) International Application Number:

PCT/AU2015/050225

(22) International Filing Date:

8 May 2015 (08.05.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2014901723 9 May 2014 (09.05.2014) AU

(72) Inventor; and

(71) Applicant : NELSON, Cameron David [AU/AU]; 18 Trevellyan Street, Cronulla, New South Wales 2230 (AU).

(74) Agents: ELLIS TERRY et al.; PO Box 10932, The Terrace, Wellington, 6143 (NZ).

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,



WO 2015/168745 A1

(54) Title: PANEL SYSTEMS AND METHODS

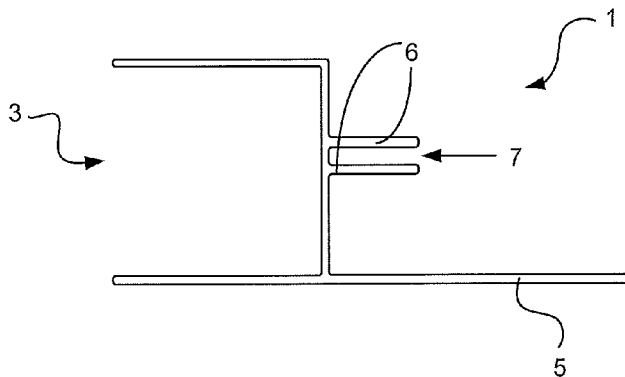


Figure 1

(57) Abstract: A panel for a surface covering system of a plurality of like panels, the panel comprising: a base layer; a first joint extrusion attached along a first edge of the base layer; a second joint extrusion attached along a second edge of the base layer, opposite the first edge; a covering layer covering at least part of the first joint extrusion and at least part of the second joint extrusion; wherein the first extrusion is configured to join to a second extrusion of an adjacent like panel, and the covering layer substantially conceals the first extrusion and the second extrusion when installed.

PANEL SYSTEMS AND METHODS

FIELD

- 5 The invention relates to panel systems for covering surfaces such as walls, ceilings or the like.

BACKGROUND

- 10 Various panel systems are used for covering internal and external wall or ceiling surfaces. The Applicant has proposed various modular systems in Australian Patent Application No. 2008288672. The Applicant has made further developments in modular panel systems.
- 15 Reference to any document in this specification does not constitute an admission that such document is prior art, that it is validly combinable with other documents or that it forms part of the common general knowledge.

- The present invention may provide an improved panel system, or may at least to
20 provide the public with a useful choice.

SUMMARY

- In a first aspect a panel for a surface covering system of a plurality of like panels
25 includes:
a base layer;
a first joint extrusion attached along a first edge of the base layer;
a second joint extrusion attached along a second edge of the base layer, opposite
the first edge;
30 a covering layer covering at least part of the first joint extrusion and at least part of
the second joint extrusion;

wherein the first extrusion is configured to join to a second extrusion of an adjacent like panel, and the covering layer substantially conceals the first extrusion and the second extrusion when installed.

- 5 In a second aspect an acoustic surface covering system includes a plurality of like panels, each panel including an acoustically absorbent base layer and a perforated covering layer.

10 In a third aspect a method of forming a panel includes providing a rigid base layer; attaching a first joint extrusion along a first edge of the base layer; attaching a second joint extrusion along a second edge of the base layer, the second edge being opposite the first edge; and attaching a covering layer onto a front surface of the base layer and onto at least part of at least one of the first and second joint extrusions.

15

The terms “include”, “includes”, “including”, “comprise”, “comprises” and “comprising” may, in each jurisdiction, be independently attributed with either an exclusive or an inclusive meaning. For the purpose of this specification, and unless otherwise noted, these terms are all intended to have an inclusive meaning – i.e. they mean an inclusion of the listed components which the use directly references, and possibly also of other non-specified components or elements.

20

BRIEF DESCRIPTION OF THE DRAWINGS

25 The invention will now be described by way of example only, with reference to the accompanying drawings, in which:

- Figure 1** is a cross-section through a first joint extrusion;
- Figure 2** is a cross-section through a second joint extrusion;
- 30 **Figure 3** is a cross-section of the first joint extrusion of Figure 1 engaged with the second joint extrusion of Figure 2;

- Figure 4** is a perspective view of the first joint extrusion of Figure 1 engaged with the second joint extrusion of Figure 2;
- Figure 5** is a perspective view of a panel according to one embodiment;
- Figure 6** is a cross-section of first and second panels arranged side by side;
- 5 **Figure 7** is a cross-section of the first and second panels of Figure 6 engaged with each other;
- Figure 8** is a front view of several panels installed on an underlying support or structure;
- Figure 9** is a cross-section of a panel engaged with a blank extrusion;
- 10 **Figure 10** is a flow diagram of a method of manufacturing;
- Figure 11** is a cross-section through a first joint extrusion according to a second embodiment;
- Figure 12** is a cross-section through a second joint extrusion according to a second embodiment; and
- 15 **Figure 13** is a cross-section of the first joint extrusion of Figure 11 engaged with the second joint extrusion of Figure 12.

DETAILED DESCRIPTION

- 20 According to a first embodiment a panelling system is provided. The panelling system may be used for ceiling or wall panelling for example. The panelling may provide flexibility in architectural design features for high end domestic or commercial premises. It may allow a wide range of colour and texture finishes, together with high acoustic / fire performance. It may allow for hidden joints and
- 25 modular installation options.

- Figures 1 and 2 show the system including first and second joint extrusions 1, 2. Figure 3 shows how the first and second joint extrusions 1, 2 cooperate to form a joint. These extrusions 1, 2 are for the purpose of joining the adjacent panels, similar
- 30 to a tongue and groove configuration. They may also be used to join pieces of

substrate if the required panel length exceeds the standard substrate length. The extrusions also provide rigidity to the panel.

Each of the first and second joint extrusions 1, 2 includes a channel 3, 4 arranged to
5 fit to an edge of a structural base layer, as will be discussed below.

The first joint extrusion 1 includes a base 5, which may be used for attachment of the first joint extrusion to an underlying support or structure, such as a stud, joist, suspended ceiling framing or other available structure.
10

The first joint extrusion 1 also includes a pair of projections 6, which together form a further channel 7, which receives a projection 8 formed on the second joint extrusion, as shown in Figure 3.

15 A lug 9 may be provided on the second joint extrusion 2, and may come to rest against the edge of the base 5, as shown in Figure 3.

As shown in Figure 3, the two joint extrusions 1, 2 form a recess 10 when joined.

20 The features of the two joint extrusions illustrated in Figures 1 to 3 extend along the lengths of the two extrusions, as shown in Figure 4. Different extrusions or features may be provided for lengthwise joins, ends or corners.

The extrusions may be formed from aluminium or any other suitable material,
25 including suitable engineering plastics. Alternatively portions may be made of different materials, such as the edge detail made from PVC and the remainder of the extrusion in aluminium.

Figure 5 shows a structural base layer 13 or substrate, which may be formed of any
30 suitably rigid materials. For example polyester acoustic board, such as thermally bonded polyester fibre, is an acoustically absorbent material with good fire

resistance. For example a two layer composite may be used with a front 5mm layer of needled and thermally bonded felt and a back 20mm layer of carded and thermally bonded polyester wadding. The front layer may provide rigidity and the back layer may provide increased acoustic performance. Recycled PET packaging may be used in the manufacture of the polyester fibre.

Alternatively, the base layer may be formed from a fibreglass material, or foam which also have acoustic properties. The Applicant's arrangement is particularly suited to materials that are not able to reliably form integral edge structures (such as tongue and groove).

Figure 5 also shows a decorative covering layer 14. For illustrative purposes the decorative layer is shown as covering only a portion of the base layer 13, but will in fact cover the base layer entirely in most embodiments. The decorative covering layer may be any suitable veneer (including reconstituted veneer), foil, fabric, leather or plastic (eg: PET, PVC, vinyl, faux leather etc) layer. Veneers may be fleec-backed veneers. The decorative covering layer may be perforated.

Figure 5 shows the position of the first joint extrusion 1 mounted on a first edge 15 of the panel 12. For illustrative purposes the joint extrusion is not shown extending the full length of the panel. However, in preferred embodiments the joint extrusion 1 will extend the full length of the first edge 15.

The finished panel may include the first and second joint extrusions 1, 2, the base layer 13 and the decorative covering layer 14.

Manufacturing process

A manufacturing process 1000 is shown in Figure 10. A substrate is formed and shaped 1002. The pair of extrusions are fitted 1004 to either side of the substrate. A decorative covering layer has a surface preparation applied 1006. Then the decorative covering layer is perforated 1008 and has an adhesive applied 1010. The

adherent decorative covering layer is then edge rolled 1012 to the substrate and extrusions.

Forming 1002 may be implemented by cutting a sheet of polyester fibre into a
5 nominated width. As shown rebates or rabbets 16 may be formed in the back face of
base layer for receiving the joint extrusion 1. Holes 17 may be formed in the base 5
of the first joint extrusion 1 for receiving fasteners, to attach the first joint extrusion 1
to an underlying support or structure. The extrusions may be formed by extruding
aluminium blanks through a mould piece. The front surfaces of the extrusions may be
10 powder coated depending on aesthetic requirements.

Fitting 1004 may be implemented by forcing the sides of the substrate into the
channel in each extrusion. It is also glued in place.

15 Finishing 1006 may involve applying a lacquer to the decorative covering layer prior
to perforation and application. This is so the lacquer, if applied to the finished
product, does not change the absorptive properties and affect the acoustic
performance by blocking or sealing the polyester/ decorative covering layer in the
location of the holes.

20 Perforation 1008 may be done by drilling or punching. If the design requires, a
decorative pattern may be employed with the perforations.

Then the decorative covering layer may be laminated to the base layer by any
25 suitable method, using suitable adhesives. The glue is to be applied 1010 to the
back of the finish layer only and not the polyester substrate. The main reason for this
is that if the glue is applied to the polyester, it would potentially block the absorptive
properties of the substrate. In addition to this, after the glue has been applied, the
perforations in the finish layer may need to be cleared by compressed air prior to
30 lamination. A polyurethane glue may be used for bonding the decorative covering

layer to aluminium and polyester, or other glues may be used depending on the material used for the decorative covering layer.

Application 1012 may be implemented by a profile wrapping machine. The decorative covering layer can include pre-finished veneers, pvc or similar foils, paper, fabric and also metal finishes such as copper, zinc or aluminium. If the decorative covering layer is in roll form, a continuous roll form process may be implemented, where the finishing, perforation and glue application all occur sequentially before the decorative covering layer is roll formed onto the substrate. The manufacturing plant may include rolls of various different surface finishes, which can be quickly interchanged to manufacture panels to order.

When the decorative covering layer is applied to the polyester substrate with the aluminium edge extrusions, it wraps over the face edge of the extrusion and down the sides to where the next panel meets. Accordingly the decorative covering layer should be sufficiently flexible to allow application to the face and edges of the base layer 13 by profile wrapping. Similarly the extrusion may have a rounded leading edge so the veneer or any other more fragile finish will not crack when wrapped down the side or be prone to damage by impact.

The second joint extrusion 2 may be mounted to a second edge opposite the first edge 15 in a similar manner.

As shown, the decorative covering 14 extends over the face of the base layer 13, over part of the first joint extrusion 1 and onto the protrusion 6 of the first joint extrusion 1.

Installation Process

Figure 6 shows a first panel 12 and a second like panel 12' arranged side by side. This cross-section shows the position of each base layer 13 received in the channel 3, 4 of the first or second joint extrusion 1, 2. This drawing also shows the

decorative covering layer 14 extending over part of each joint extrusion 1, 2. Figure 6 also shows a fastener 20 (e.g. a clout, nail, screw or the like) passing through the base 5 to attach the first joint extrusion 1 to an underlying support or structure (not shown), thereby attaching the first panel 12 to that support or structure.

5

During installation the first panel 12 will be attached to the underlying support or structure by fastener 20. The second panel can then be positioned by moving it in the direction shown by arrow 21 to bring the second joint extrusion 2 of the second panel 12' into engagement with the first joint extrusion 1 of the first panel 12. The second panel can then be affixed to the underlying support or structure using similar fasteners through the base of its own first joint extrusion 1.

10

Figure 7 shows the engaged configuration of the first and second joint extrusions 1, 2. As shown, the projection 8 of the second joint extrusion 2 is received in the channel 7 formed by the two protrusions 6 of the first joint extrusion 1. A recess 22 extends along the join between panels 12, 12'. The meeting 23 between the decorative covering 14 of the first panel 12 and the decorative covering 14' of the second panel 12' also extends along the join and is concealed in the bottom of the recess 22. This creates a clean, disguised join between the panels. In an installed covering system this will create the appearance of a uniform surface covering.

20

Figure 8 show a panels system installed on an underlying support in the form of studs 25. Each panel 12 is attached to the studs by fasteners 20 through the base of the first joint extrusion.

25

An outer panel may be engaged with a blank extrusion 27 (Figure 9). The blank extrusion 27 may be attached to the underlying structure by a suitable fastener 20.

Another advantage over any panelling systems is that in a ceiling type application, the extrusion along the opposing edges not only conceals the screwed fixing, but

30

also prevents the edges from sagging and not aligning with each other as well as giving the edge rigidity and protection.

Acoustic performance

- 5 In a preferred embodiment the base layer and covering layer of the panel 12 are formed for acoustic performance. The base layer may be formed from an acoustic material such as polyester fibre, or some other sound absorbing material. The covering layer may be perforated, which enhances the sound absorption and allows sound waves to penetrate to the base layer. In some embodiments the perforations
- 10 may be less than 2mm in diameter, preferably around 0.5 to 1mm in diameter. Circular or non-circular perforations may be used. The base layer may be dark, e.g. black, in colour, for visual appearance through the perforations. The applicant's expectation is that the panel will conform to AS354 2006 for acoustic properties.
- 15 The applicant also expects the panel to be classified in Group 1 for BCA Spec C1.10-4 for fire retardant properties.

The panel system may be very lightweight. This may be important in ceiling designs where weight of the panelling system is a constraint.

- 20 A second embodiment is shown in Figures 11 to 13. While the second embodiment is generally similar to the first embodiment, there are several additional features. The first extrusion 1102 and the second extrusion 1202 include inward facing lugs 1104,1204 on each of their base flanges. A channel 1106 is provided for a mating
- 25 projection 1206 to fit in the tongue and groove manner of the first embodiment.

The first extrusion 1102 may include a further protrusion 1108 to reduce the depth of the recess. This may allow the width of the decorative covering layer to be reduced and it may reduce the amount of powder coating required on the extrusion.

The base layer includes a thicker back layer of polyester fibre 1304 and a thinner front layer of felt 1302. The back layer 1304 includes slots 1308,1310 which mate with the lugs 1104,1204. The combination of the adhesive to the extrusion and the decorative covering layer, and the slots 1308,1310 and lugs 1104,1204 serves to hold the base layer in place. The extrusions also give a strong and rigid support to the corners as well as keeping the panels on the same plane.

In some applications it may be desirable to provide a slot in the top layer 1302 which mates with further lugs in the extrusions. However the top layer is primarily provided for rigidity, and a slot may affect the integrity of the top layer. Also it is desirable that the top of the extrusion is flush with the face of the top layer and the compression associated with a slot may interfere with that. Lastly the decorative covering layer wrapped over the front layer and down the sides of the extrusions will help the extrusion from pulling away from the front layer and may minimise the need for lugs at the front.

In most cases the substrate will be either black, grey or white. For this reason, in the case of perforated panels where the substrate is visible through the perforations, the extrusion can simply be painted/ coated to match the substrate. However, if another substrate colour is requested, the front layer can have another layer of fabric applied to the face and colour matched to the extrusion.

While the present invention has been illustrated by the description of the embodiments thereof, and while the embodiments have been described in detail, it is not the intention of the Applicant to restrict or in any way limit the scope of the appended claims to such detail. Further, the above embodiments may be implemented individually, or may be combined where compatible. Additional advantages and modifications, including combinations of the above embodiments, will readily appear to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details, representative apparatus and methods, and illustrative examples shown and described. Accordingly, departures may be

made from such details without departure from the spirit or scope of the Applicant's general inventive concept.

CLAIMS

1. A panel for a surface covering system of a plurality of like panels, the panel comprising:
 - 5 a base layer;
 - a first joint extrusion attached along a first edge of the base layer;
 - a second joint extrusion attached along a second edge of the base layer, opposite the first edge;
 - a covering layer covering at least part of the first joint extrusion and at least
 - 10 part of the second joint extrusion;
 - wherein the first extrusion is configured to join to a second extrusion of an adjacent like panel, and the covering layer substantially conceals the first extrusion and the second extrusion when installed.
- 15 2. A surface covering system comprising a plurality of the panels in claim 1
3. The system as claimed in claim 2, wherein when a first and second adjacent like panels are installed, the covering layers of the first and second panels are configured to locate within a recess extending along the join between the first
- 20 and second panels.
4. The system as claimed in claim 2 or 3 wherein the base layer is a plastic or fibreglass layer.
- 25 5. The system as claimed in any of claims 2 to 4 wherein the covering layer is a veneer, foil, fabric, leather or plastic layer.
6. The system as claimed in claim 5 wherein the covering layer is perforated.
- 30 7. The system as claimed in any of claims 2 to 6 wherein the base layer is formed from an acoustically absorbent material.

8. The system as claimed in any of claims 2 to 7 wherein the base layer is formed from polyester fibre.
9. The system as claimed in claim 8 wherein the base layer is formed from a
5 composite of polyester fibre and felt.
10. A system as claimed in claim 9 wherein the polyester fibre includes slots in its back face configured to mate with corresponding lugs in the first extrusion and the second extrusion.
- 10 11. An acoustic surface covering system including a plurality of like panels, each panel including an acoustically absorbent base layer and a perforated covering layer.
- 15 12. The system as claimed in claim 11 wherein each panel further comprising a rigid structure attached to the base layer.
13. The system as claimed in claim 12 wherein the rigid structure comprises a pair of
20 extrusions of each side, configured to mate adjacent panels.
14. A system as claimed in claim 12 wherein the covering layer is a perforated veneer, foil or plastic layer.
15. A system as claimed in claim 14 wherein the base layer is formed from polyester
25 fibre.
16. A method of forming a panel, including:
- a) providing a rigid base layer;
 - b) attaching a first joint extrusion along a first edge of the base layer;
 - 30 c) attaching a second joint extrusion along a second edge of the base layer, the second edge being opposite the first edge; and
 - d) attaching a covering layer onto a front surface of the base layer and onto at least part of at least one of the first and second joint extrusions.

17. The method as claimed in claim 16 wherein the covering layer is attached to the base layer by profile wrapping.

1/9

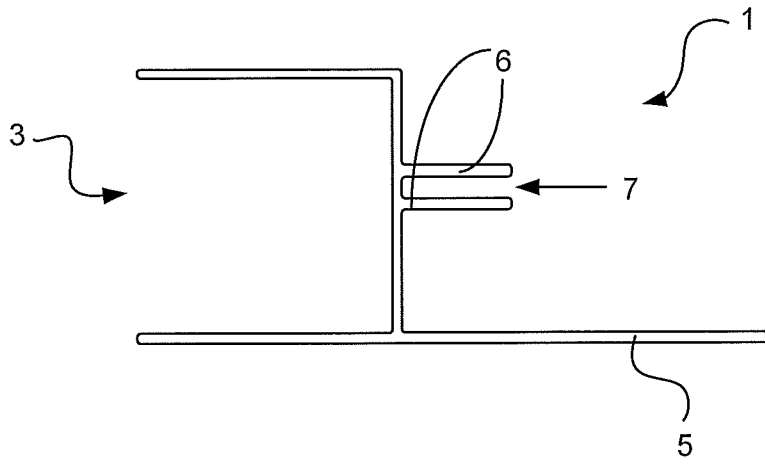


Figure 1

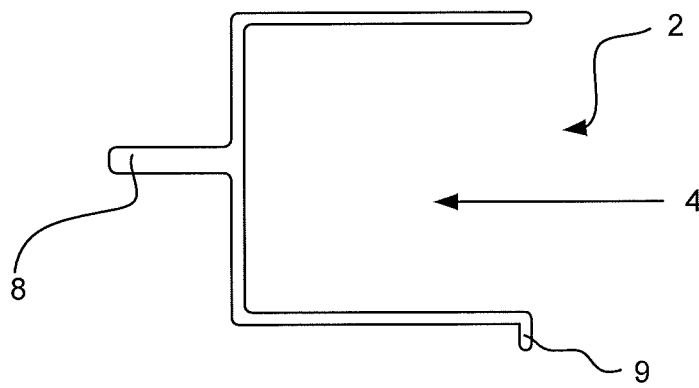


Figure 2

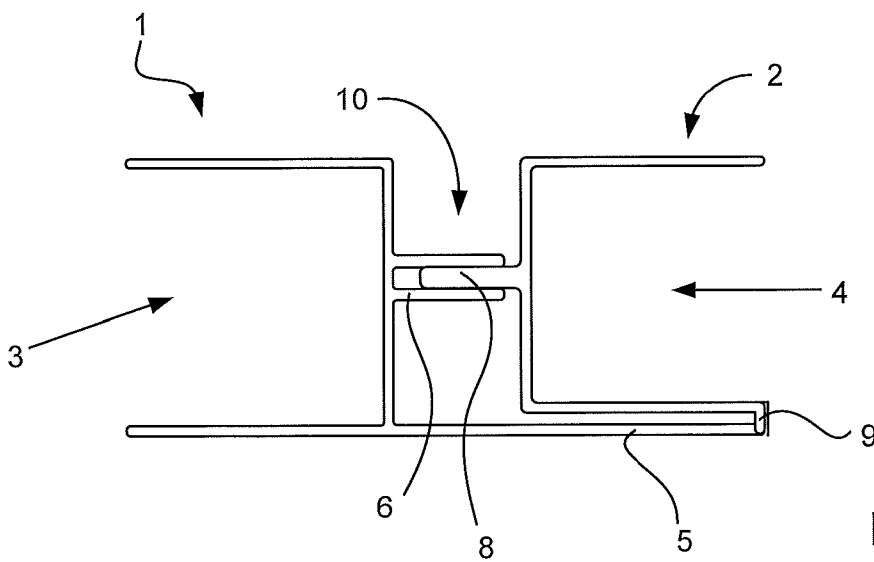


Figure 3

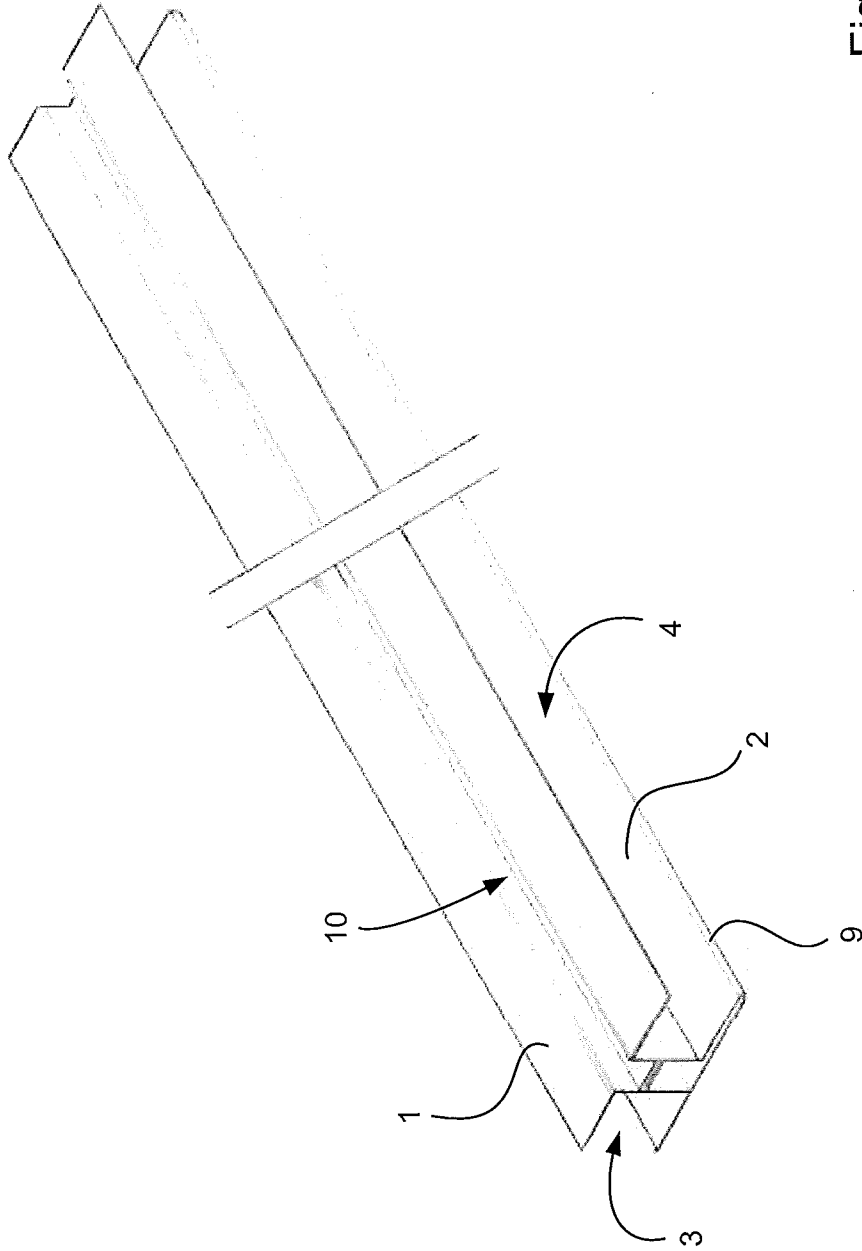


Figure 4

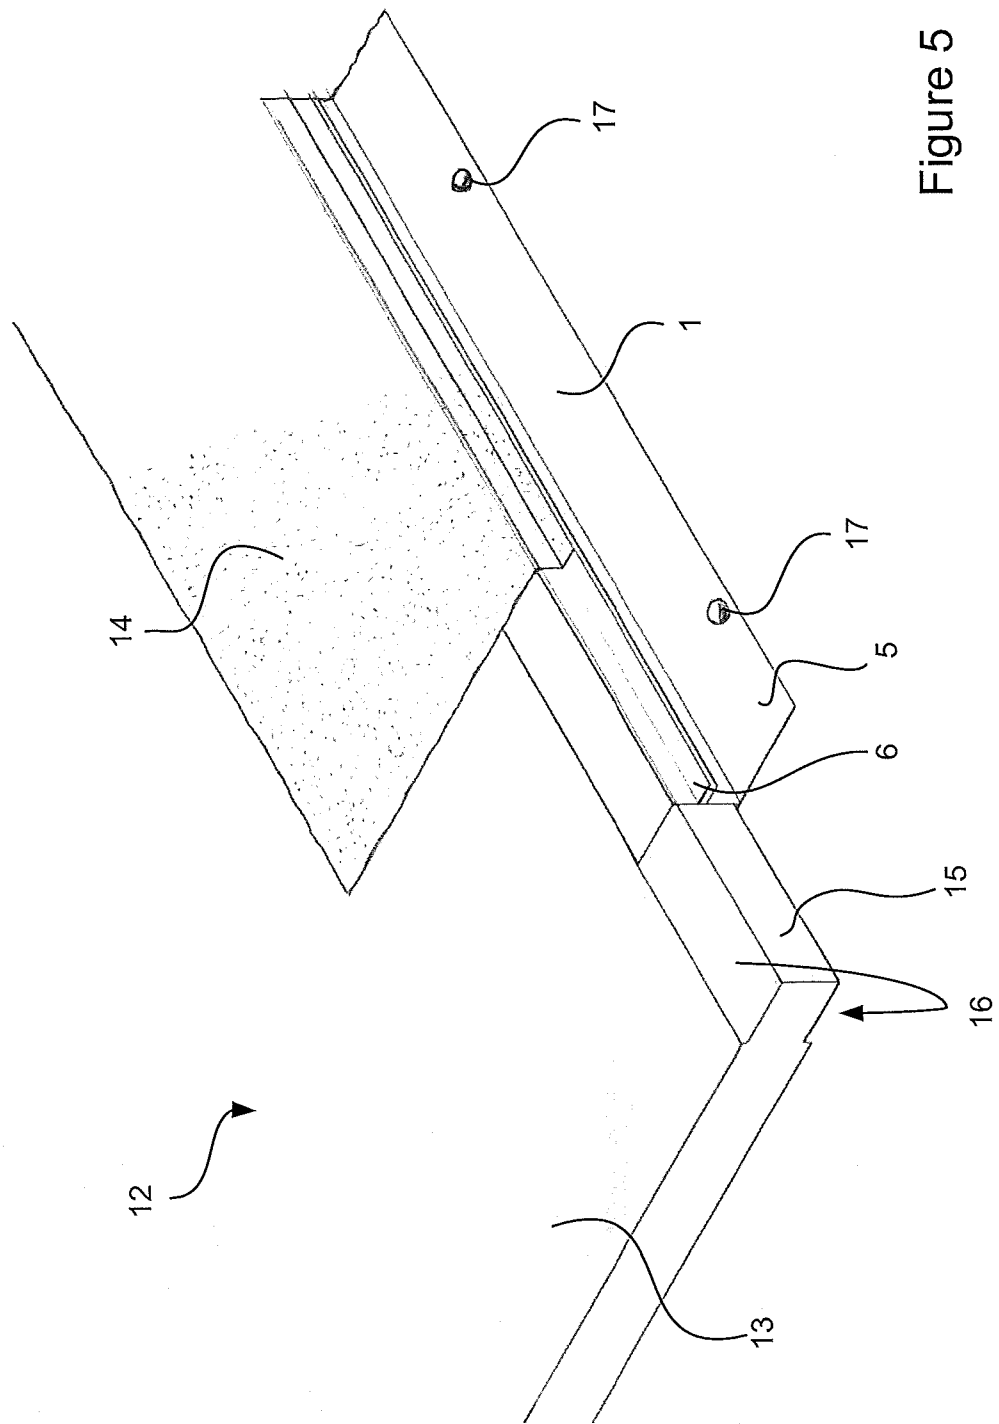
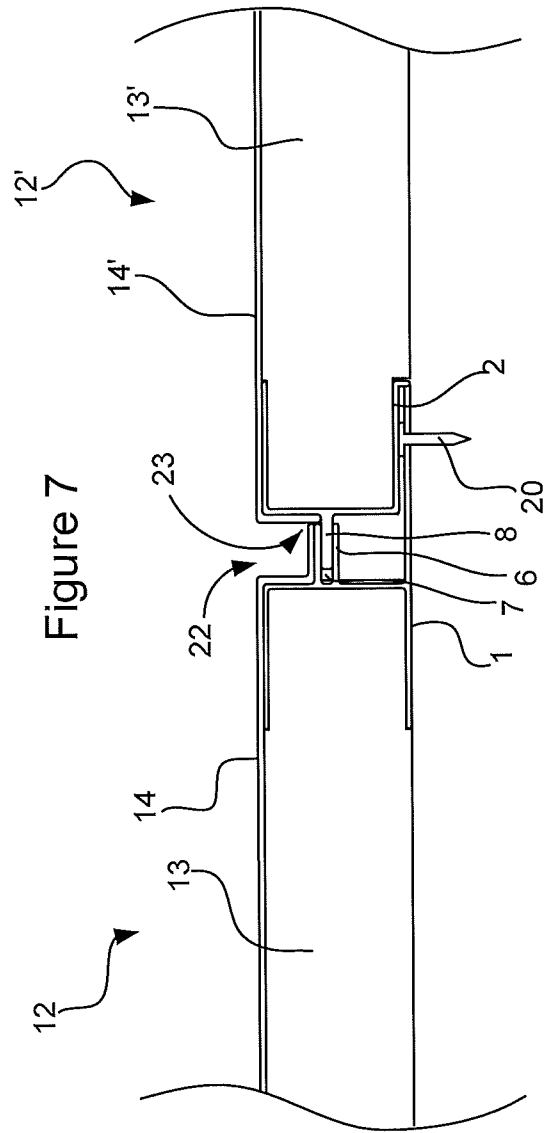
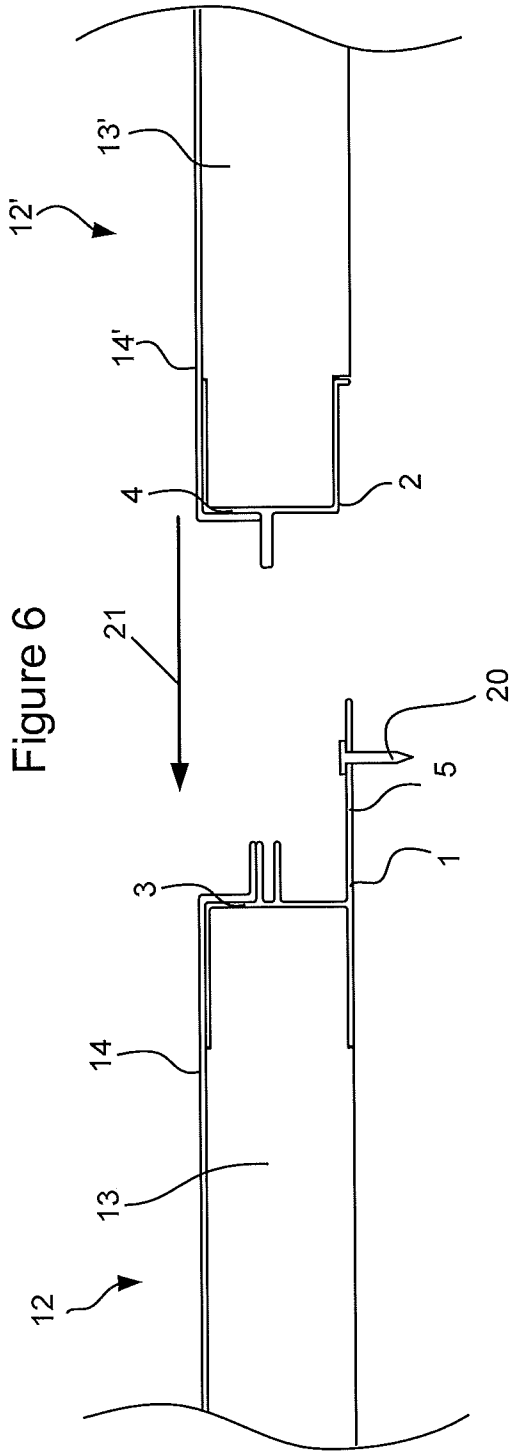


Figure 5



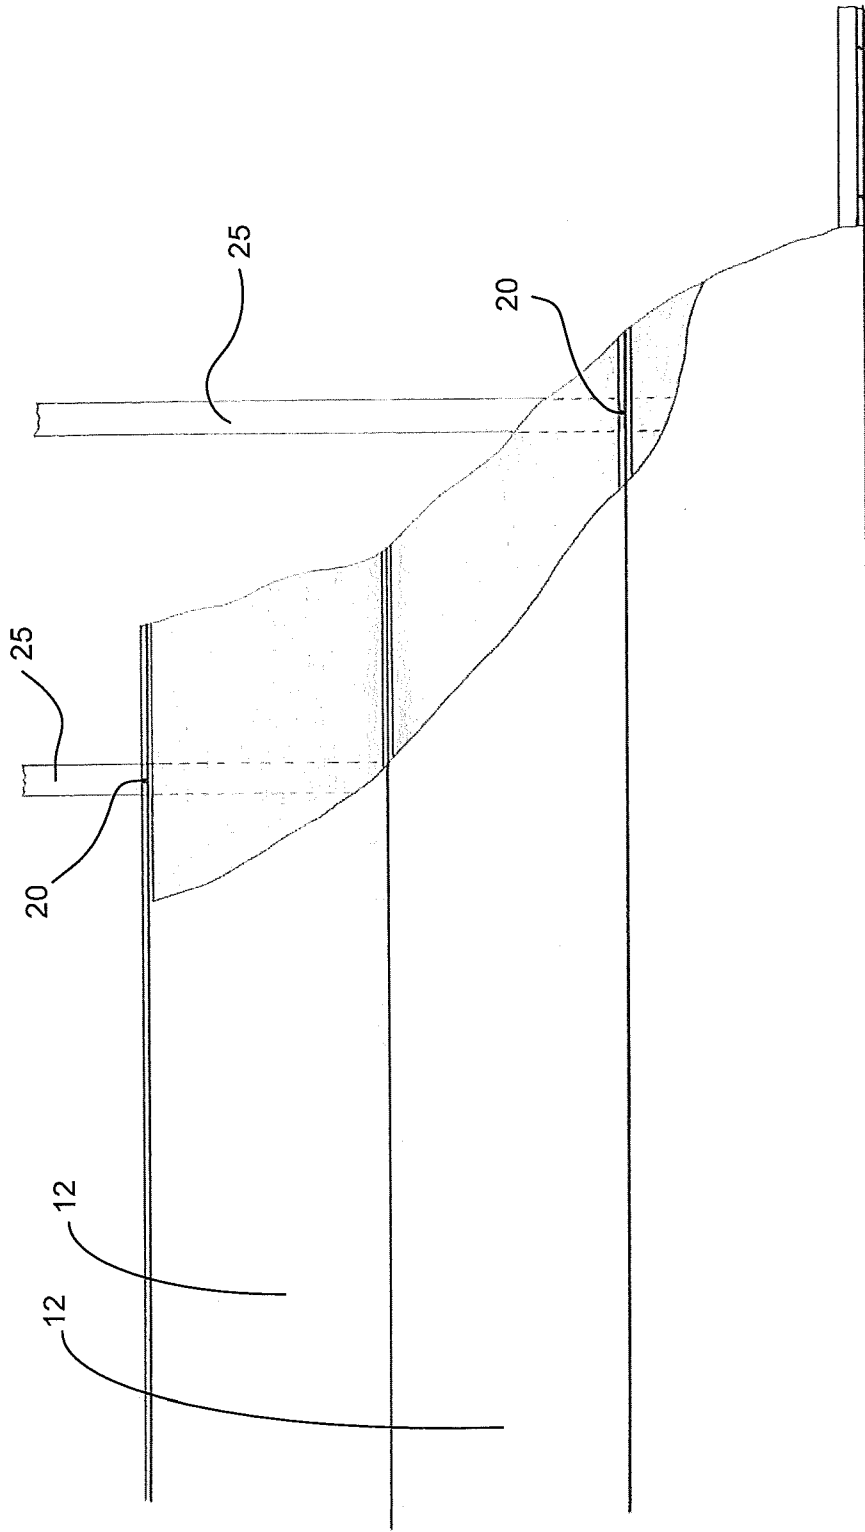


Figure 8

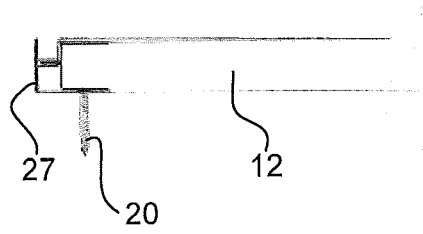


Figure 9

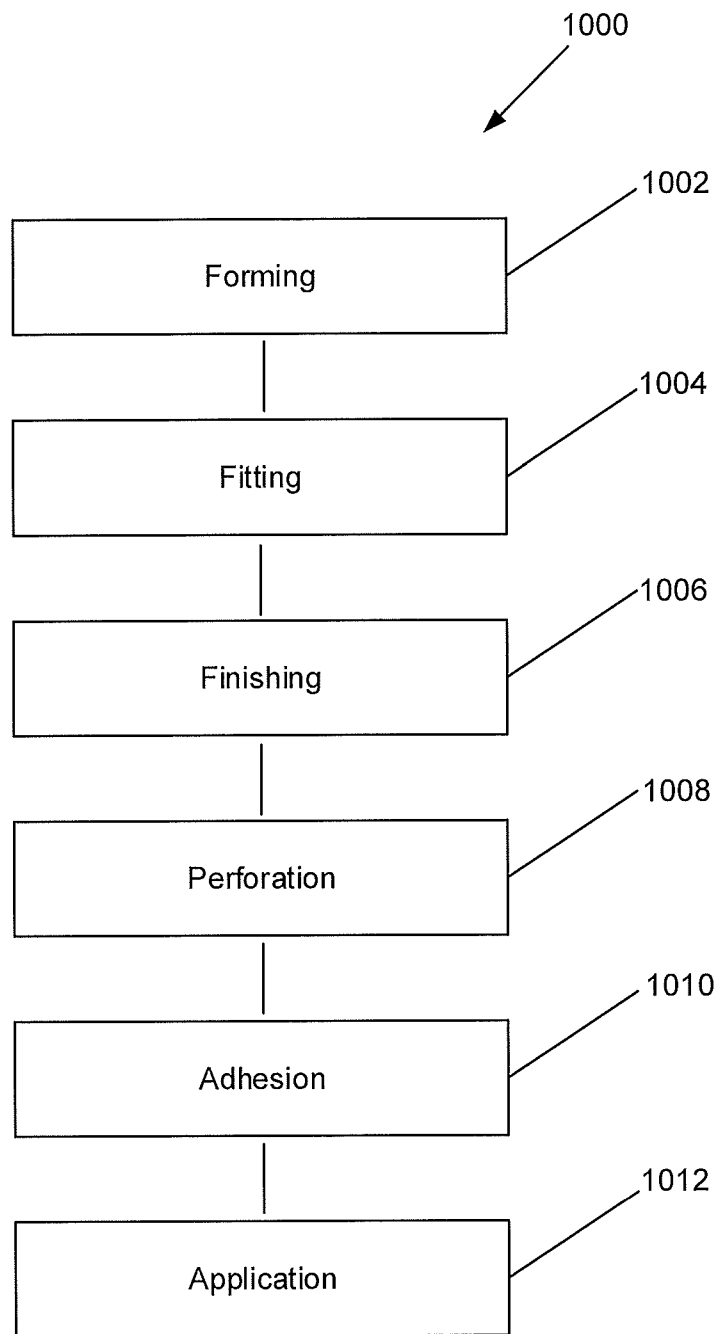


Figure 10

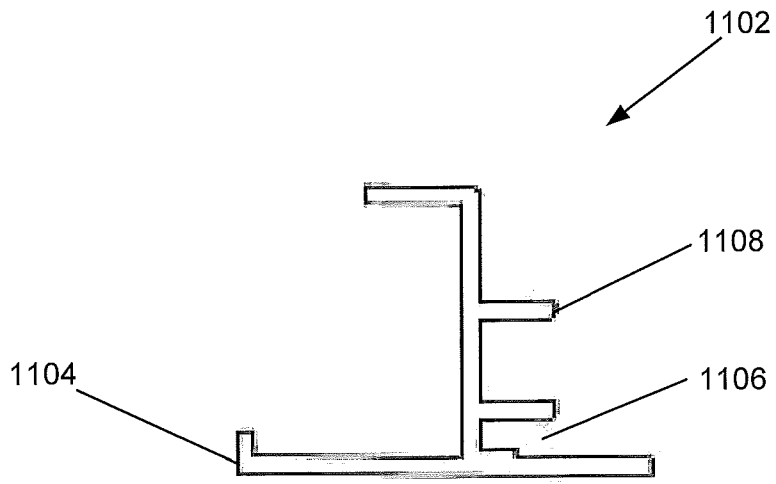


Figure 11

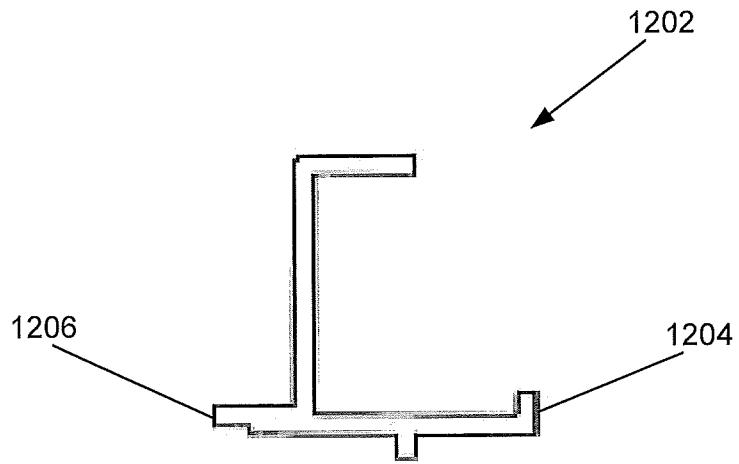


Figure 12

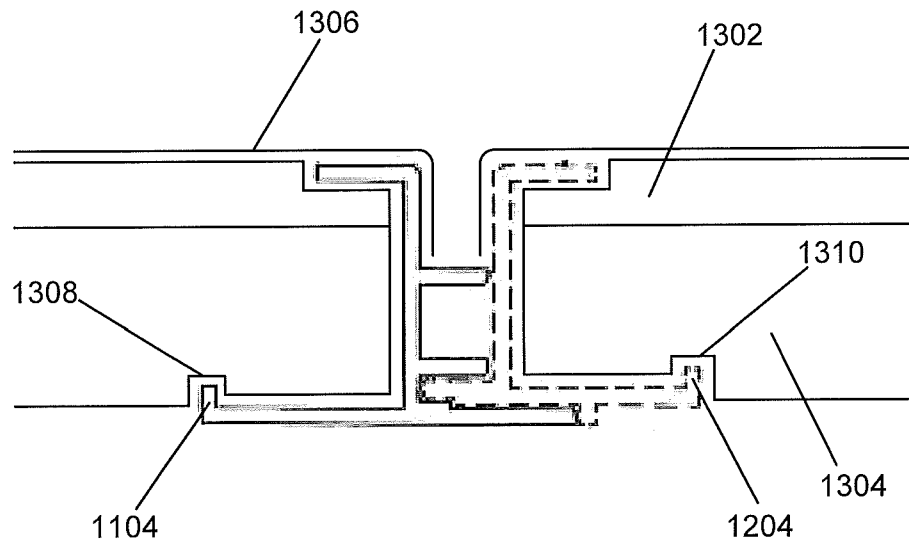


Figure 13

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU2015/050225

A. CLASSIFICATION OF SUBJECT MATTER		
E04F 13/07 (2006.01) E04B 1/74 (2006.01) E04C 2/284 (2006.01) F16S 1/02 (2006.01) F16S 1/10 (2006.01)		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPIAP, EPODOC, TXPEA, TXPEB, TXPEC, TXPEE, TXPEF, TXPEH, TXPEI, TXPEP, TXPES, TXPEPEA, TXPUSE0A, TXPUSE1A, TXPUSEA, TXPUSEB, TXPWOEA: IC & CPC (E04B 1/74/LOW, 1/99/LOW, 2/72/LOW, 2/74/LOW, 9/00, E04C 2/38/LOW, 2/284/LOW, E04F 13/LOW, 15/02/LOW, F16S 1/02/LOW, 1/10/LOW, 1/14/LOW) AND KEYWORDS (EXTRUSION, EDGE, SKIN, TONGUE, CONCEAL, JOINT, ACOUSTIC AND LIKE TERMS)		
WPIAP, EPODOC: IC & CPC (E04B 1/74/LOW, 1/99/LOW, 2/72/LOW, 2/74/LOW, 9/00, E04C 2/38/LOW, 2/284/LOW, E04F 13/LOW, 15/02/LOW, F16S 1/02/LOW, 1/10/LOW, 1/14/LOW) AND KEYWORDS (EXTRUSION, EDGE, SKIN, SHEET, TONGUE, CONCEAL, JOINT, ACOUSTIC AND LIKE TERMS)		
ESP@CENET & AUSPAT: APPLICANT AND INVENTOR NAME SEARCH		
ESP@CENET & GOOGLE PATENTS: KEYWORDS (EXTRU, TONGUE, SKIN, PANEL)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	
<input checked="" type="checkbox"/>	Further documents are listed in the continuation of Box C	<input checked="" type="checkbox"/> See patent family annex
* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search 24 August 2015	Date of mailing of the international search report 24 August 2015	
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA Email address: pct@ipaustrialia.gov.au	Authorised officer Parminder Singh AUSTRALIAN PATENT OFFICE (ISO 9001 Quality Certified Service) Telephone No. 0262256135	

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
the subject matter listed in Rule 39 on which, under Article 17(2)(a)(i), an international search is not required to be carried out, including
2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

See Supplemental Box for Details

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-10, 16 & 17

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

C (Continuation).

DOCUMENTS CONSIDERED TO BE RELEVANT

PCT/AU2015/050225

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3367076 A (O'BRIEN) 06 February 1968 See figures 1 & 2 and lines 16-20 of column 1 & lines 40-43 of column 4	1-10, 16 & 17
X	US 2013/0305648 A1 (SPEAR) 21 November 2013 See abstract, figures 1,2 & 5 and paragraphs [0024] & [0025]	1-10, 16 & 17

Supplemental Box**Continuation of: Box III**

This International Application does not comply with the requirements of unity of invention because it does not relate to one invention or to a group of inventions so linked as to form a single general inventive concept.

This Authority has found that there are different inventions based on the following features that separate the claims into distinct groups:

- Claims 1-10, 16 & 17 are directed to a panel or a method of forming a panel including a base layer, a first joint extrusion attached along a first edge of the base layer, a second joint extrusion attached along a second edge of the base layer, opposite the first edge and a covering layer covering at least part of the first joint extrusion and at least part of the second joint extrusion. The feature of a covering layer covering at least part of the first joint extrusion and at least part of the second joint extrusion is specific to this group of claims.
- Claims 11-15 are directed to an acoustic surface covering system including a plurality of like panels, each panel including an acoustically absorbent base layer and a perforated covering layer. The feature of panel including an acoustically absorbent base layer and a perforated covering layer is specific to this group of claims.

PCT Rule 13.2, first sentence, states that unity of invention is only fulfilled when there is a technical relationship among the claimed inventions involving one or more of the same or corresponding special technical features. PCT Rule 13.2, second sentence, defines a special technical feature as a feature which makes a contribution over the prior art.

When there is no special technical feature common to all the claimed inventions there is no unity of invention.

In the above groups of claims, the identified features may have the potential to make a contribution over the prior art but are not common to all the claimed inventions and therefore cannot provide the required technical relationship. Therefore there is no special technical feature common to all the claimed inventions and the requirements for unity of invention are consequently not satisfied *a priori*.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU2015/050225

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document/s Cited in Search Report**Patent Family Member/s****Publication Number****Publication Date****Publication Number****Publication Date**

US 3367076 A

06 February 1968

US 3367076 A

06 Feb 1968

US 2013/0305648 A1

21 November 2013

US 2013305648 A1

21 Nov 2013

US 8997436 B2

07 Apr 2015

US 2015204072 A1

23 Jul 2015

End of Annex

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

Form PCT/ISA/210 (Family Annex)(July 2009)