



HU000035341T2

(19) **HU**(11) Lajstromszám: **E 035 341**(13) **T2****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala**EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA(21) Magyar ügyszám: **E 12 769736**(51) Int. Cl.: **H01R 43/052** (2006.01)(22) A bejelentés napja: **2012. 08. 14.****H01R 43/28** (2006.01)

(96) Az európai bejelentés bejelentési száma:

(86) A nemzetközi (PCT) bejelentési szám:

EP 20120769736**PCT/IB 12/054137**

(97) Az európai bejelentés közzétételi adatai:

(87) A nemzetközi közzétételi szám:

EP 2774227 A1 **2013. 05. 10.****WO 13064916**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2774227 B1 **2017. 10. 25.**

(30) Elsőbbségi adatok:

201161554765 P **2011. 11. 02.** **US**
11187480 **2011. 11. 02.** **EP**

(73) Jogosult(ak):

Schleuniger Holding AG, 3608 Thun (CH)

(72) Feltalálók(k):

SCHÜTZ, Peter, 42719 Solingen (DE)

(74) Képviselő:

SBGK Szabadalmi Ügyvivői Iroda, Budapest

(54)

Huzal-pozicionáló eszköz

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmat az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.

(19)



(11)

EP 2 774 227 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
25.10.2017 Bulletin 2017/43

(21) Application number: **12769736.5**

(22) Date of filing: **14.08.2012**

(51) Int Cl.:
H01R 43/052 (2006.01) H01R 43/28 (2006.01)

(86) International application number:
PCT/IB2012/054137

(87) International publication number:
WO 2013/064916 (10.05.2013 Gazette 2013/19)

(54) **WIRE POSITIONING DEVICE**

DRAHTPOSITIONIERUNGSVORRICHTUNG

DISPOSITIF DE POSITIONNEMENT DE CABLE

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **02.11.2011 US 201161554765 P**
02.11.2011 EP 11187480

(43) Date of publication of application:
10.09.2014 Bulletin 2014/37

(73) Proprietor: **Schleuniger Holding AG**
3608 Thun (CH)

(72) Inventor: **SCHÜTZ, Peter**
42719 Solingen (DE)

(74) Representative: **Patentbüro Paul Rosenich AG**
BGZ
9497 Triesenberg (LI)

(56) References cited:
EP-A2- 0 813 271 EP-B1- 2 590 275
GB-A- 2 021 988 US-A- 3 918 330
US-A- 4 521 946

EP 2 774 227 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to a wire positioning device for positioning an wire in a processing device according to the preamble of claim 1. The invention further relates to a processing device, comprising a processing station and a wire positioning device of this type. The invention further relates to a method for lowering thin wires and for positioning them in an oscillation-damped manner.

[0002] A device of this type and a method for lowering and positioning wires in a processing station, formed as a crimping station, of a processing device is described in the prior art of WO 2009/017653 A1.

[0003] In the conventional prior art:

A pivoting gripper mounted movably on a carriage grasps the wire at the insulation close to a bared wire end and moves in front of the crimping station, where it positions the bared wire end, for example a conductive wire or a stranded wire, approximately 8 to 10 mm above the lower punch and above a contact element to be crimped. The crimping tool is then started. The plunger moves downward with momentum by a stroke of approximately 30 to 60 mm, contacts the upright gripper head in the manner of a hammer during the last 8 to 10 mm and presses downward the spring-loaded gripper with the wire. The wire is thus introduced into the crimping claw, without significant deflection, provided it has a sufficiently large wire cross-section, and the sheathed part of the wire and/or the bared part is/are crimped synchronously on the lower punch by the upper punch of the crimping tool via an insulation and/or strand claw. At the same time, the carrier strip is separated by a separating punch.

[0004] Once crimping is complete, the crimping tool moves back up into its upper dead centre and the gripper likewise springs back. The spring travel of conventional grippers is approximately 16 mm.

[0005] Conventional wires fitted in cars (0.35 to 6 mm²) are relatively easy to handle, even though they deflect slightly and vibrate slightly when pressed downward with momentum. However, no considerable difficulties are encountered during the crimping process

[0006] Very thin wires, for example measuring 0.13 mm² are being increasingly installed in cars, however. Even wires having a wire cross-section of 0.05 mm² are being considered. However, such thin wires can no longer be processed using conventional techniques.

[0007] Thin wires have additional insulation, which has high tensile strength because the insulation also has to withstand some of the tensile force. The thin conductive wire or the stranded wires of the thin wires continue to oscillate for a long time once introduced into the crimping claw when they are positioned using conventional grippers. The conductive wire or the stranded wire cannot be controlled and introduced reliably into the crimping claw of a contact element during the stroke motion of the crimping tool, and the conductive wire or stranded wire may become bent or buckled.

[0008] WO 2009/017653 A1 discloses a wire positioning device intended to overcome such a drawback. The wire positioning device is arranged on a base frame. The wire positioning device according to WO 2009/017653 A1 has a gripper and is mounted rotatably on a rotating plate. This moves the wire in the planes A, B and C. For vertical positioning, the gripper has cylindrical guide rods with teeth, which are connected to a gearwheel of a horizontally arranged driveshaft of a servomotor and convert the rotary motion into a vertical motion. The height and spacings can also be controlled, however, by a hydraulic or other drive means.

[0009] The crimping tool comprises a stationary anvil and movable crimp upper punch, which is moved vertically by a stroke of the crimping station. The servomotor of the wire positioning device moves the end of the wire, once it has been positioned above an electrical contact element arranged on the anvil, into the open insulation and/or strand claw of the contact element by lowering. The contact element is then crimped to the wire.

[0010] With a wire positioning device of this type, the wire can be lowered more slowly. However, synchronisation is extremely difficult because it cannot be easily controlled. In addition, an additional servomotor increases the cost of the wire positioning device considerably. A reduction in the lowering speed may then also have a negative effect on productivity.

[0011] To overcome these drawbacks, a device for lowering and positioning thin wires in a crimping station is known from WO 2011/004272 A1, said device having a press base frame having a drive, which moves a press carriage along a central axis with a speed variation similar to a sine curve from an upper dead centre to a lower dead centre and back, a central plunger which is arranged parallel to the central axis and is fixed at one end to a holder, via which the plunger is connected rigidly to the press carriage of the crimping station so that the press carriage and plunger move synchronously in a downward stroke, a separate gripper with a gripper head and at least one pair of gripper jaws, by means of which the gripper positions at least one wire end of a conductor in a crimping zone of a crimping tool arranged on the press carriage and having a crimping tool upper part and a crimping tool lower part in a defined pivot-in position for crimping with crimping claws of a contact element, wherein at least one leading lowering device, which actuates the gripper head in a leading position in relation to the downward stroke of the plunger and lowers it in a leading position with reduced speed and thus moves the wire end from the pivot-in position into a defined crimping position, is assigned to or coordinated

with the central plunger.

[0012] A drawback of the wire positioning device described in WO 2011/004272 is the high level of structural complexity and the associated high production costs.

[0013] GB 2 021 988 A, referred to hereinafter as D1, describes a processing device comprising a processing station and a wire positioning device, as shown in particular in figure 30 of D1. The processing station comprises a head 606, which is movable vertically in relation to the longitudinal axis of a wire and has a cutting knife 630 and a crimping element 631 *inter alia*. The wire positioning device comprises upper and lower positioning elements 408, 409 ("wire gathering heads"), which are movable vertically in relation to the longitudinal axis of the wire. The positioning elements 408, 409 can be transferred into an open position and into a closed position, as is shown in figures 30 and 31 of D1, wherein, in the closed position, the positioning elements 408, 409 engage in one another in such a way that they surround the wire so as to hold it in its position as it is cut and stripped (in particular see page 10, lines 55 to 124).

[0014] In contrast to the invention, the movable head 606 described in D1 and comprising the element 640 is part of the processing station. It is therefore not part of the wire positioning device, as is provided in the invention, since the movable head 606 has tools, such as the cutting knife 630 and the crimping element 631, which process the wire for further use. The wire positioning device of D1 is, by contrast, formed by the positioning elements 408, 409 *inter alia*, which are then also to be compared to the lowering device according to the invention. If the positioning elements 408, 409 are compared to the lowering device according to the invention, the difference between D1 and the invention lies in the fact that the positioning elements 408, 409 are not designed in the form of a press piece within the meaning of the invention and also do not have a spring element arranged in a tube. By contrast, the positioning elements 408, 409 of D1 are moved into a closed position and into an open position in an unsprung manner.

[0015] US 4 521 946 A - referred to hereinafter as D2 - describes a conveying system for wires 116 that have already been cut, wherein the cut wires 116 are transported between two mutually opposed belts 52, 54. In an embodiment of D2, as shown in figures 15, 16 and 17 of D2, the upper belt 52 is connected to a conveying means 112 and the lower belt 54 is connected to a separator 68. The wires 116 are split by means of the separator 68 and are forwarded to different processing stations (in particular see D2, column 6, lines 27 to 38). The separator 68 has a pneumatic cylinder 172 to move the separator 68 accordingly so that it can split the wires and separate them from one another (in particular see D2, column 6, lines 44 to 47).

[0016] By contrast, a wire positioning device according to an embodiment of the invention comprises a lowering device with a press piece and a spring element arranged in a tube. This is not disclosed in D2.

[0017] Figures 15, 16 and 17 of D2 do not describe a wire positioning device within the meaning of the invention. By contrast, a completely different object compared to that to be achieved by the present invention, namely the separation of wires so that the separated wires can be fed to different processing stations, is pursued with the conveying system described in D2, and therefore the disclosure of D2 is in no way comparable with the subject matter of the invention and in particular is not comparable with the characterising feature of claim 1 of this application.

[0018] EP 0 813 271 A2 - referred to hereinafter as D3 - describes a device for producing a cable harness, in which connection elements 13a, 13b are arranged in a clamping and shifting unit 14 at the two ends 8, 10 of a wire 1. The wire 1 is clamped in two clamps 24a, 24b for this purpose, said clamps being driven by piston cylinders 25a, 25b (in particular see D3, column 5, lines 18 to 32). A wire positioning device comprising an embodiment of the invention is also not disclosed in D3, since D3 does not disclose a press piece and a lowering device having a spring element arranged in a tube.

[0019] US 4713880 A discloses a wire positioning device with the features of the preamble of independent claim 13.

[0020] The object of the present invention is therefore to create a solution by means of which the structural complexity of a wire positioning device and therefore of a processing device for an electrical wire can be reduced and by means of which selective positioning of an electrical wire in a processing station of a processing device can also be achieved.

A further object of the invention is to create a method which can be carried out in a cost effective manner and which, in particular, is suitable for the positioning of thin electrical wires.

These objects are achieved by the features of the independent claims. Advantageous developments are illustrated in the figures and disclosed in the dependent claims.

In accordance with the invention, the wire positioning device is characterised in that the lowering device has a press piece, which is spring-loaded by at least one spring element and is provided so as to be contacted against the wire guide, the at least one spring element being arranged in a tube.

When a wire is supplied for the wire positioning device, the wire guide and the free end of the wire protruding from the wire guide are oscillated both in a direction horizontal to the longitudinal axis of the wire and in a direction vertical to the longitudinal axis of the wire due to the filigree structure of a thin wire and the resultant likewise relatively thin design of the wire guide, which may be embodied for example in the form of a thin guide tube, from which a free end of the wire, preferably a partially bared end of the wire, protrudes. This oscillatory movement of the wire guide together with the wire introduced therein can be interrupted by a lowering of the lowering device and by the resultant contact of the press piece of the lowering device against the wire guide. The press piece is applied directly to the wire guide as a result of a movement of the lowering device vertically in relation to the longitudinal axis of the wire received in the wire guide, in

such a way that the press piece comes to rest against an upper face of the wire guide.

5 [0021] The press piece preferably has a block or a plate, on which a flat contact surface is formed, by means of which the press piece is brought to rest against the wire guide when the lowering device is lowered. The press piece can also be formed as a hard rubber buffer, however, with a flat or slightly crowned contact surface. The press piece is mounted
10 in the lowering device in a spring-loaded manner via at least one spring element, which is preferably embodied in the form of one or more compression springs, in such a way that the press piece can carry out a vertical movement in relation to the longitudinal axis of the electrical wire, guided by the spring element. The press piece can be connected to the spring element either directly or via an intermediate element, such as a pin. The press piece is therefore guided movably within the lowering device via the spring element, which is arranged in a tube, whereby, when the wire guide is positioned
15 by contacting the press piece with the wire guide, the wire guide can initially be accelerated as smoothly as possible and, once a height of insertion desired for the processing, in the processing station, of the free end of the wire protruding from the wire guide has been reached, the oscillation of the wire guide and therefore of the free end, protruding from the wire guide, of the electrical wire received therein may be stopped. If the wire guide and the free end of the wire protruding from the wire guide is substantially free from oscillation, the free end of the wire is positioned in a highly accurate manner in the processing station, for example a crimping station, due to the fact that there is now no inherent movement of the free end of the wire. Due to the arrangement of the spring element in a tube, it is possible to position and guide the spring element within the lowering device in a precise manner. In particular, lateral tilting of the spring element, which is preferably embodied in the form of a spiral spring, is thus prevented. Due to the wire positioning device according to the invention, the wire may be positioned in a processing station of a processing device with a high level
20 of repetition accuracy. By means of the spring-loaded press piece, the oscillations of the wire guide of the free end of the wire protruding from the wire guide may be reduced within a short period of time, and therefore the overall processing time of an electrical wire in a processing station of a processing device can be reduced, whereby processing can be carried out more economically.

25 [0022] The spring-loaded press piece thus replaces the servomotor or central plunger, with the highly complex leading lowering device, known from the prior art and has a substantially simpler design than these. Due to the relatively simple structural design of the device according to the invention, the production costs of a wire positioning device can also be reduced considerably compared to conventional wire positioning devices.

30 [0023] In accordance with a preferred embodiment of the wire positioning device, a stop element is arranged opposite the press piece, the wire guide being mounted so it can be clamped in an oscillation-damped manner between the press piece and the stop element, either directly or indirectly via support elements. The stop element is preferably positioned below the wire guide when the electrical wire is introduced into the processing station of the processing device, whereas the press piece of the lowering device is positioned above the wire guide so that the press piece and the stop element are basically opposite one another. When the press piece rests on an upper face of the wire guide, the wire guide, which is still oscillating, can be pressed downward by means of the press piece in the direction of the stop element until the
35 wire guide lies directly or indirectly via its lower face on the stop element arranged below the press piece so that the wire guide is clamped between the press piece and the stop element in an oscillation-damped manner, whereby the oscillation of the wire guide and therefore also of the free end of the electrical wire protruding from the wire guide can be minimised or stopped particularly quickly and effectively. The repetition accuracy and the precision of the processing of the electrical wire received in the wire guide in the processing station of the processing device can thus be further improved.

40 [0024] Furthermore, the press piece of the lowering device arranged with a second longitudinal axis above the wire guide, and the stop element arranged with a third longitudinal axis below the wire guide, the press piece being arranged with the second longitudinal axis vertically in relation to the first longitudinal axis of the wire, and the stop element being arranged with the third longitudinal axis vertically in relation to the first longitudinal axis of the wire. It can thus be ensured
45 that the press piece and the stop element each lie with the contact surfaces against the wire guide in a flat or slightly crowned manner to damp the oscillation of the wire guide, whereby oscillation of the wire guide is damped particularly quickly and effectively.

[0025] It is further preferable for the second longitudinal axis of the press piece to be arranged offset in relation to the third longitudinal axis of the stop element along the first longitudinal axis of the wire.

50 [0026] In accordance with a further advantageous embodiment of the wire positioning device, the tube has an outer thread, which engages in a holding element having an inner thread. An outer thread can be formed on the outer peripheral surface of the tube, in which a holding element provided with an inner thread can engage. The tube in which the spring element is arranged can thus be positioned and fixed on the holding element. In addition, the tube and therefore the spring element can be easily fixed to the holding element by hand and adjusted at the same time via the outer thread
55 and the inner thread engaging therein, without the need for further tools for this purpose. The effort required to form the wire positioning device can thus be reduced further. For example, the holding element may have a flange and a sleeve, wherein the sleeve can be fixed at a through-opening formed in the flange, and an inner thread, in which the outer thread of the tube can engage, can be formed on the inner wall of the sleeve so that the tube can be guided through the sleeve

and the through-opening formed in the flange. The holding element can then be fixed via the flange to the processing station of the processing device.

5 [0027] Furthermore, the wire positioning device preferably has a pivotably mounted pivoting conveyor with a pitch axis provided, the wire guide being fixed to the pivotably mounted pivoting conveyor. The wire to be processed can be held and transported in the pivotably mounted pivoting conveyor for example, since the wire is clamped between conveyor belts or pressure rollers formed on the pivoting conveyor. Starting from the fixing of the electrical wire on the pivoting conveyor, the wire and in particular the free end of the wire can be guided through the wire guide, which is arranged on the pivoting conveyor. The pivoting conveyor enables lateral pivoting of the wire fixed in the pivoting conveyor and guided in the wire guide, in the direction of the processing station of the processing device in which the free end of the wire protruding from the wire guide is crimped for example.

10 [0028] Furthermore, the wire positioning device is associated with a crimping device and adapted for positioning a free end of a wire between an upper punch and a lower punch of a crimping tool of a crimping device, the wire positioning device comprising the at least one spring element, which is effective in the vertical direction, for pressing against the wire guide so as to lower it in the operating state with the wire so that the free end of the wire can be brought closer to the lower punch, a stop element being arranged opposite the press piece and stopping the lowering movement of the lowering device and of the wire guide and of the wire during a lowering operation, after a specific lowering path.

15 [0029] Furthermore, the wire positioning device is suitable for electrical wires.

[0030] Furthermore, the wire positioning device is associated with the crimping device, which has a movable carriage and the lowering device of the wire positioning device being arranged on the movable carriage.

20 [0031] Furthermore, the stop element of the wire positioning device is fixed to a rigidly positioned carrier element of the processing station.

[0032] Furthermore, the invention is characterised by a processing device, in particular a crimping device, for an electrical wire, said processing device having a processing station and a wire positioning device according to one of claims 1 to 10. A processing device which has a wire positioning device according to the invention is characterised by a high level of positioning accuracy of the wire to be processed in the processing station of the processing device, wherein this can be achieved with a low level of structural complexity of the overall processing device. For example, if the processing device is a crimping device, a free end of the wire to be processed can be positioned with as little oscillation as possible in the processing station in crimping claws of a contact part provided in a crimping tool. The quality of the processing operation, in particular of the crimping operation, of a wire can thus be improved considerably, wherein the wire can also be processed within a relatively short period of time so that the wire can be processed in a highly economical manner.

25 [0033] The processing station preferably has a movable carriage, the lowering device of the wire positioning device preferably being arranged on the movable carriage. The movable carriage is preferably used so that part of the processing station of the processing device can be moved back and forth in a vertical direction. If the lowering device of the wire positioning device is arranged on the movable carriage, the movement of the lowering device vertical to the longitudinal axis of the wire received in the wire guide may be ensured by the movable carriage, and therefore additional aids, such as an additional drive on the lowering device itself, are not required to move the lowering device. The structural complexity of the processing device may thus be reduced further.

30 [0034] Furthermore, the stop element of the wire positioning device is fixed to a rigidly positioned carrier element of the processing station. In this case, 'rigidly positioned' means that the carrier element is arranged in the processing station in a non-displaceable or immobile manner. The stop element is preferably likewise arranged rigidly on the carrier element so that there can preferably be no relative displacement between the carrier element and the stop element. The stop element can thus form a secure, fixedly positioned counter pressure element for the press piece when the wire guide is pushed against the stop element by means of the press piece. Alternatively it is also possible, however, for the stop element to be movable vertically to the longitudinal axis of the wire received in the wire guide, similarly to the lowering device, so that the press piece and the stop element can be moved toward one another.

35 [0035] In accordance with the invention, the method for lowering thin wires and for positioning them in an oscillation-damped manner is characterised in that a wire positioning device according to claims 1 to 10 and a processing device according to claims 11 to 13 are used.

40 [0036] In accordance with the method according to the invention, the lowering device is moved with the press piece from a first position into a second position. In the first position, the press piece is located above the upper face of the wire guide and distanced therefrom. The press piece has reached the second position as soon as it contacts the upper face of the wire guide, which leads to a first damping of the oscillation of the wire guide and of the wire. As the lowering device is lowered further, the press piece is moved vertically in the direction of the tube in accordance with the spring force of the spring element or of the individual spring elements, whilst the wire guide is moved with reduced acceleration by the press piece in the form of a pitch movement from the second position into a third position.

45 [0037] Furthermore, the third position is reached as soon as the vertical movement of the lowering device and the pitch movement of the wire guide are concluded by contact with the stop element.

[0038] Furthermore, for positioning a free end of a thin wire in an oscillation-damped manner between an upper and a lower crimping punch, a wire positioning device is used.

[0039] Further advantages, features and details of the invention will emerge from the following description, in which an exemplary embodiment of the invention is described with reference to the drawings. The features disclosed in the claims and in the description may be essential to the invention either individually or in any combination.

[0040] The list of reference signs forms part of the disclosure. The figures are described contiguously and comprehensively. Like reference signs denote like component parts, and reference signs having different indices denote functionally like or similar component parts.

[0041] In the figures:

Fig. 1 shows a schematic, partial sectional illustration of a processing device having a wire positioning device according to the invention in a first position,

Fig. 2 shows a schematic, partial sectional illustration of the processing device having a wire positioning device according to the invention in accordance with figure 1 in a second position,

Fig. 3 shows a schematic detailed illustration of the wire positioning device shown in figure 2 according to the invention in the second position, and

Fig. 4 shows a schematic detailed illustration of the wire positioning device according to the invention in a third position.

[0042] Figures 1 and 2 show a processing device according to the invention, said device having a processing station 3 and a wire positioning device 1 for positioning an electrical wire 2 in the processing station 3. Figure 3 shows a detailed illustration of the wire positioning device 1 according to figure 2 in a second position, and figure 4 shows a detailed illustration of the wire positioning device 1 in a further, third position.

[0043] The processing station 3 shown in this case is formed as a crimping station, and therefore the processing device shown in this case is also a crimping device. The crimping station shown in this case has a crimping tool with an upper punch unit 39 and a lower punch unit 40. The invention is not limited to a crimping device having a crimping station, however. For example, it can also be used for soldering or welding devices.

[0044] The wire positioning device 1 has a wire guide 4, in which the electrical wire 2 is received so as to be processed in the processing station 3. The wire guide 4 is embodied in this case in the form of a guide sleeve, through which the wire 2 is guided, wherein a free end 44 of the wire 2 protrudes from the wire guide 4.

[0045] The wire positioning device 1 further has a lowering device 5, which is arranged movably vertically in relation to a first longitudinal axis 45 of the electrical wire 3 received in the wire guide 4.

[0046] The lowering device 5 has a spring-mounted press piece 6 at one end, which, in a second position as shown in figures 2 and 3, comes to rest against an upper face 7 of the wire guide 4. The press piece 6 shown in this case is basically T-shaped and has a plate 8 and a shaft 9 arranged on the plate 8, in particular as shown in figures 3 and 4. The plate 8 is a hard rubber buffer with a flat or slightly crowned surface. An outer thread 10 is formed on the shaft 9, via which the press piece 6 can be fixed. The press piece 6 shown in this case is thus embodied basically in the form of a screw. The press piece 6 has a preferably circular contact surface 11 on the plate 8, with which the press piece 6 can be pressed in a planar manner against the wire guide 4, as shown in figures 2, 3 and 4. In the embodiment shown in this instance, the press piece 6 is screwed in at a first end portion 12 of a pin 13 via the outer thread 10 formed on the shaft 9 and is fixed to the pin 13.

[0047] The pin 13 is connected to a spring element 15 at a second end portion 14 of the pin 13 opposite the first end portion 12, in such a way that the press piece 6 is spring-loaded via the pin 13. The spring element 15 is embodied in this case in the form of a plurality of compression springs arranged in succession. Alternatively, the spring element 15 may also be formed from a single mechanical compression spring. A small, pressurised pneumatic cylinder is also conceivable, as is a design with a press plunger guided in the tube and, for example, two outer tension springs mounted between the press plunger head and the assembly flange. The spring element 15 and the second end portion 14 of the pin 13 are arranged in a tube 16, wherein the longitudinal axis of the tube 16 extends vertically in relation to the longitudinal axis of the electrical wire 2.

[0048] The tube 16 is closed via a first cap-shaped end piece 17 and via a second cap-shaped end piece 18, wherein a through-opening 19 is formed in the second cap-shaped end piece 18, the first end portion 12 of the pin 13 being guided through said through-opening.

[0049] An outer thread 20 is formed on the outer peripheral surface of the tube 16. The tube 16 is fixed to a holding element 21 via the outer thread 20. The holding element 21 has an L-shaped, curved flange 22 and a cylindrical sleeve 23, for example for adjusting the height of introduction of the wire, wherein an inner thread 24 is formed on an inner wall of the sleeve 23 and the outer thread 20 of the tube 16 engages in said inner thread. The tube 16 is guided through a

through-opening 25 formed in the flange 22. The sleeve 23, which can also be formed as a nut, is fitted on the flange 22 in the region of the through-opening 25 and is preferably fixed to the flange 22 so that the tube 16 is guided through the sleeve 23 and the through-opening 25 formed in the flange 22 and is screwed via its outer thread 20 into the inner thread 24 of the sleeve 23 so as to be fixed to the holding element 21.

The flange 22 and/or the holding element 21 preferably have at least two adjacent through-openings 25 so that the tube 16 can be installed at different locations.

[0050] The lowering device 5 is arranged via the flange 22 of the holding element 21 on a movable carriage 26 of the processing station 3 of the processing device and is fixed thereto via a screw 27. The movable carriage 26, which for example may be a press carriage, is movable in a direction 28 vertically in relation to the first longitudinal axis 45 of the wire 2 received in the wire guide 4. Since the lowering device 5 is fixed rigidly to the movable carriage 26, the lowering device 5 follows the movement of the movable carriage 26 so that the lowering device 5 is guided vertically by means of the movable carriage 26. It is therefore not necessary to provide separate drive means for the lowering device 5. The movable carriage 26 is moved via a crankshaft 29 arranged in the processing station 3 and via a crank pin 30 connecting the movable carriage 26 to the crankshaft 29.

[0051] A stop element 31 is arranged opposite the press piece 6, wherein the press piece 6 and the stop element 31 are arranged opposite one another in such a way that a second longitudinal axis 46 of the press piece 6 is oriented so as to be slightly offset in relation to a third longitudinal axis 47 of the stop element 31. The stop element 31 has a plate 32, which can be formed as a hard rubber buffer with a flat or slightly crowned surface, a dowel 33 screwed into the plate 32, and a flange 34, to which the dowel 33 is fixed by means of a fixing element 37. The stop element 31 has a planar contact surface 35 on its plate 32, the lower face 36 of the wire guide 4 coming to rest directly or indirectly against said contact surface when the wire guide 4 is pressed downward in the direction of the stop element 31 by means of the press piece 6, as shown in figures 2, 3 and 4. The lower face 36 of the wire guide 4 can be supported by a first support element 48, which is arranged on the pivoting conveyor 41. In addition, a second support element 49 may be arranged on the pivoting conveyor 41 between the first support element 48 and the stop element 31 so as to further improve the stability of the pivoting conveyor 41. The stop element 31 is connected rigidly via the flange 34 to a carrier element 38 positioned rigidly on the processing station 3. The stop element 31 may alternatively also be mounted on the fixing surface of the machine, to which the press is also fixed.

[0052] The wire guide 4 is also fixed to a horizontally pivotably mounted pivoting conveyor 41, via which the wire guide 4 is pivoted in the direction of the processing station 3, together with the wire 2 introduced into the wire guide 4, before the wire 2 is processed. The pivoting conveyor 41 has a pitch axis 42, about which the oscillation-damped pivoting conveyor 41 according to figure 3 introduces the wire 2 gently and in an oscillation-damped manner into an opened crimping claw of a contact element according to figure 4 mounted in a lower punch unit 40 of the processing station 3. Due to the reduced speed of the pivoting motion about the pitch axis 42 compared to the upper punch unit 39 as a result of the spring elements 15 and due to the spring assembly 43 arranged in the pivoting conveyor 41, an oscillation of the wire guide 4 and of the free end 44 of the wire 2 protruding from the wire guide 4 is damped much quicker both in a vertical direction and in a horizontal direction compared to wire positioning devices of the prior art not having a lowering device.

[0053] Once the wire guide 4 has been pivoted in the direction of the processing station 3 together with the wire 2, the wire positioning device 1 is located in a first position, as shown in figure 1. In this first position, the press piece 6 and the stop element 31 are spaced from the wire guide 4. The free end 44 of the wire 2 protruding from the wire guide 4 oscillates freely in all directions as a result of the vibrations. So as to minimise the oscillatory movements of the wire guide 4 and of the free end 44 of the wire 2 protruding from the wire guide 4, the lowering device 5 is then moved downward in the direction of the wire guide 4 by the carriage 25 of the processing station 3 until the stop surface 11 of the press piece 6 rests against the upper face 7 of the wire guide 4 in accordance with figures 2 and 3 and has reached a second position. In this second position, a first damping of the oscillation of the wire guide 4 and of the wire 2 occurs. Whilst the carriage 25 and the lowering device 5 connected to the carriage 25 is lowered further vertically, the press piece 6 resting against the wire guide 4 is also accelerated smoothly in the direction of the stop element 31 and is moved downward into a third position by means of a pitch movement. Due to the developing spring effect of the spring elements 15 arranged in the lowering device 5, the lowering speed of the press piece 6 is reduced considerably, however, compared to the lowering speed of the carriage 25. At the same time, the oscillatory movements are damped further, until the lower face 36 of the wire guide 4 or, indirectly as illustrated in figure 4, a lower face of the second support element 49, lies against the contact surface 35 of the stop element 31 once the height of introduction of the wire set for the crimping process has been reached and once the third position has thus been reached, so that the wire guide 4 is clamped between the press piece 6 and the stop element 31 in the third position. The oscillations of the wire guide 4 and of the free end 44 of the wire 2 protruding from the wire guide 4 are now stopped. Subsequent oscillation of the pivoting conveyor 41 is therefore no longer possible. Once the pitch movement of the pivoting conveyor 41 is concluded, the free end 44 of the wire 2 is located, in accordance with figure 4, in a positionally precise and oscillation-damped manner in the opened crimping claw of a contact element provided in the lower punch unit 40 for crimping by means of the upper

punch unit 39, in a manner known per se. The free end 44 of the wire 2 can be processed in a particularly precise and repetition-accurate manner due to the high level of positioning accuracy of the end 44 of the wire 2 in the processing station 3, said end of the wire now being substantially free from oscillation.

5

List of reference signs

10

15

20

25

30

35

1	wire positioning device	26	movable carriage
2	wire	27	screw
3	processing station	28	direction
4	wire guide	29	crankshaft
5	lowering device	30	crank pin
6	press piece	31	stop element
7	upper face	32	plate
8	plate	33	dowel
9	shaft	34	flange
10	outer thread	35	contact surface
11	contact surface	36	lower face
12	first end portion	37	fixing element
13	pin	38	carrier element
14	second end portion	39	upper punch unit
15	spring element	40	lower punch unit
16	tube	41	pivoting conveyor
17	first cap-shaped end piece	42	pitch axis
18	second cap-shaped end piece	43	spring assembly
19	through-opening	44	free end of the wire
20	outer thread	45	first longitudinal axis
21	holding element	46	second longitudinal axis
22	flange	47	third longitudinal axis
23	sleeve	48	first support element
24	inner thread	49	second support element
25	through-opening		

Claims

40

45

50

55

1. A wire positioning device (1) for positioning a wire (2) in a processing device, said wire positioning device comprising a wire guide (4) for receiving the wire (2) and a lowering device (5), which is movable vertically in relation to a first longitudinal axis (45) of the wire (2) received in the wire guide (4), **characterised in that** the lowering device (5) has a press piece (6), which is spring-loaded by at least one spring element (15) and is provided so as to be contacted against the wire guide (4), the at least one spring element (15) being arranged in a tube (16).
2. The wire positioning device (1) according to claim 1, **characterised in that** a stop element (31) is arranged opposite the press piece (6), the wire guide (4) being mounted so it can be clamped in an oscillation-damped manner between the press piece (6) and the stop element (31), either directly or indirectly via support elements (48, 49).
3. The wire positioning device (1) according to claim 2, **characterised in that** the press piece (6) of the lowering device (5) is arranged with a second longitudinal axis (46) above the wire guide (4), and the stop element (31) is arranged with a third longitudinal axis (47) below the wire guide (4), the press piece (6) being arranged with the second longitudinal axis (46) vertically in relation to the first longitudinal axis (45) of the wire (2), and the stop element (31) being arranged with the third longitudinal axis (47) vertically in relation to the first longitudinal axis (45) of the wire (2).
4. The wire positioning device (1) according to claim 3, **characterised in that** the second longitudinal axis (46) of the press piece (6) is arranged offset in relation to the third longitudinal axis (47) of the stop element (31) along the first longitudinal axis (45) of the wire (2).
5. The wire positioning device (1) according to one of claims 1 to 4, **characterised in that** the tube (16) has an outer

thread (20), which engages in a holding element (21) having an inner thread (24).

- 5
6. The wire positioning device (1) according to one of claims 1 to 5, **characterised in that** a pivotably mounted pivoting conveyor (41) with a pitch axis (42) is provided, the wire guide (4) being fixed to the pivotably mounted pivoting conveyor (41).
- 10
7. The wire positioning device (1) according to one of claims 1 to 6, **characterised in that** the wire positioning device (1) is associated with a crimping device and adapted for positioning a free end of a wire (2) between an upper punch and a lower punch of a crimping tool of a crimping device, the wire positioning device (1) comprising the at least one spring element (15), which is effective in the vertical direction, for pressing against the wire guide (4) so as to lower it in the operating state with the wire (2) so that the free end of the wire (2) can be brought closer to the lower punch, a stop element (31) being arranged opposite the press piece (6) and stopping the lowering movement of the lowering device (5) and of the wire guide (4) and of the wire (2) during a lowering operation, after a specific lowering path.
- 15
8. The wire positioning device (1) according to one of the preceding claims for electrical wires (2).
- 20
9. The wire positioning device (1) according to claim 7 or 8, **characterised in that** the crimping device has a movable carriage (26), the lowering device (5) of the wire positioning device (1) being arranged on the movable carriage (26).
- 25
10. The wire positioning device (1) according to claim 8 or 9, **characterised in that** the stop element (31) of the wire positioning device (1) is fixed to a rigidly positioned carrier element (38) of the processing station (3).
- 30
11. A processing device, in particular a crimping device, for an electrical wire (2), said device comprising a processing station (3) and a wire positioning device (1) according to one of claims 1 to 10.
- 35
12. The processing device according to claim 11, **characterised in that** the processing station (3) has a movable carriage (26), the lowering device (5) of the wire positioning device (1) being arranged on the movable carriage (26).
- 40
13. The processing device according to claim 11 or 12, **characterised in that** the stop element (31) of the wire positioning device (1) is fixed to a rigidly positioned carrier element (38) of the processing station (3).
- 45
14. A method for lowering thin wires (2) and for positioning them in an oscillation-damped manner, **characterised in that** a wire positioning device (1) according to claims 1 to 10 or a processing device according to claims 11 to 13 is used.
- 50
15. A method according to claim 14, **characterised in that** the lowering device (5) is moved with the press piece (6) from a first position into a second position, the press piece (6) having reached the second position as soon as it contacts the upper face (7) of the wire guide (4), which leads to a first damping of the oscillation of the wire guide (4) and of the wire (2), and **in that**, as the lowering device (5) is lowered further, the press piece (6) is moved vertically in the direction of the tube (16) in accordance with the spring force of the spring element or of the individual spring elements (15), whilst the wire guide (4) moves with reduced acceleration in the form of a pitch movement into a third position.
- 55
16. The method according to claim 15, **characterised in that** the third position is reached as soon as the vertical movement of the lowering device (5) and the pitch movement of the wire guide (4) are concluded by contact with the stop element (31).
17. A method according to one of the preceding claims **characterised in that** for positioning a free end of a thin wire in an oscillation-damped manner between an upper and a lower crimping punch, a wire positioning device (1) is used.

Patentansprüche

- 55
1. Drahtpositionierungsvorrichtung (1) zum Positionieren eines Drahtes (2) in einer Verarbeitungsvorrichtung, wobei die Drahtpositionierungsvorrichtung eine Drahtführung (4) zum Aufnehmen des Drahtes (2) und eine Senkvorrichtung (5), die vertikal bezüglich einer ersten Längsachse (45) des Drahtes (2), der in der Drahtführung (4) aufgenommen ist, beweglich ist, aufweist, **dadurch gekennzeichnet, dass** die Senkvorrichtung (5) ein Pressstück (6)

aufweist, das durch mindestens ein Federelement (15) federbelastet und derart vorgesehen ist, dass es mit der Drahtführung (4) in Berührung kommt, wobei das mindestens eine Federelement (15) in einem Rohr (16) angeordnet ist.

- 5 2. Drahtpositionierungsvorrichtung (1) nach Anspruch 1, **dadurch gekennzeichnet, dass** ein Anschlagelement (31) dem Pressstück (6) gegenüberliegend angeordnet ist, die Drahtführung (4) derart angebracht ist, dass sie auf eine schwingungsdämpfende Weise zwischen dem Pressstück (6) und dem Anschlagelement (31), entweder direkt oder indirekt über Stützelemente (48, 49), befestigt werden kann.
- 10 3. Drahtpositionierungsvorrichtung (1) nach Anspruch 2, **dadurch gekennzeichnet, dass** das Pressstück (6) der Senkvorrichtung (5) mit einer zweiten Längsachse (46) über der Drahtführung (4) angeordnet ist, und das Anschlagelement (31) mit einer dritten Längsachse (47) unter der Drahtführung (4) angeordnet ist, wobei das Pressstück (6) mit der zweiten Längsachse (46) vertikal bezüglich der ersten Längsachse (45) des Drahtes (2) angeordnet ist, und das Anschlagelement (31) mit der dritten Längsachse (47) vertikal bezüglich der ersten Längsachse (45) des Drahtes (2) angeordnet ist.
- 15 4. Drahtpositionierungsvorrichtung (1) nach Anspruch 3, **dadurch gekennzeichnet, dass** die zweite Längsachse (46) des Pressstücks (6) versetzt bezüglich der dritten Längsachse (47) des Anschlagelements (31) entlang der ersten Längsachse (45) des Drahtes (2) angeordnet ist.
- 20 5. Drahtpositionierungsvorrichtung (1) nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** das Rohr (16) ein Außengewinde (20), das in ein Halteelement (21) mit einem Innengewinde (24) eingreift, aufweist.
- 25 6. Drahtpositionierungsvorrichtung (1) nach einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** ein drehbar angebrachtes Schwenkband (41) mit einer Nickachse (42) vorgesehen ist, wobei die Drahtführung (4) an das drehbar angebrachte Schwenkband (41) fixiert ist.
- 30 7. Drahtpositionierungsvorrichtung (1) nach einem der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** die Drahtpositionierungsvorrichtung (1) einer Crimpvorrichtung zugeordnet und zum Positionieren eines freien Endes eines Drahtes (2) zwischen einem Oberstempel und einem Unterstempel der Crimpzange einer Crimpvorrichtung ausgelegt ist, wobei die Drahtpositionierungsvorrichtung (1) das mindestens eine Federelement (15) aufweist, das in der vertikalen Richtung wirksam ist, um derart gegen die Drahtführung (4) zu pressen, dass sie mit dem Draht in den Betriebszustand (2) gesenkt wird, derart dass das freie Ende des Drahtes (2) an den Unterstempel angenähert werden kann, wobei ein Anschlagelement (31) dem Pressstück (6) gegenüberliegend angeordnet ist und die Senkbewegung der Senkvorrichtung (5) und der Drahtführung (4) und des Drahtes (2) während eines Senkvorganges nach einem bestimmten Senkpfad stoppt.
- 35 8. Drahtpositionierungsvorrichtung (1) nach einem der vorhergehenden Ansprüche für Stromkabel (2).
- 40 9. Drahtpositionierungsvorrichtung (1) nach Anspruch 7 oder 8, **dadurch gekennzeichnet, dass** die Crimpvorrichtung einen beweglichen Schlitten (26) aufweist, wobei die Senkvorrichtung (5) der Drahtpositionierungsvorrichtung (1) auf dem beweglichen Schlitten (26) angeordnet ist.
- 45 10. Drahtpositionierungsvorrichtung (1) nach Anspruch 8 oder 9, **dadurch gekennzeichnet, dass** das Anschlagelement (31) der Drahtpositionierungsvorrichtung (1) an einem starr positionierten Schlittenelement (38) der Verarbeitungsstation (3) fixiert ist.
- 50 11. Verarbeitungsvorrichtung, insbesondere Crimpvorrichtung, für ein Stromkabel (2), wobei die Vorrichtung eine Verarbeitungsstation (3) und eine Drahtpositionierungsvorrichtung (1) nach einem der Ansprüche 1 bis 10 aufweist.
- 55 12. Verarbeitungsvorrichtung nach Anspruch 11, **dadurch gekennzeichnet, dass** die Verarbeitungsstation (3) einen beweglichen Schlitten (26) aufweist, wobei die Senkvorrichtung (5) der Drahtpositionierungsvorrichtung (1) auf dem beweglichen Schlitten (26) angeordnet ist.
13. Verarbeitungsvorrichtung nach Anspruch 11 oder 12, **dadurch gekennzeichnet, dass** das Anschlagelement (31) der Drahtpositionierungsvorrichtung (1) an einem starr positionierten Schlittenelement (38) der Verarbeitungsstation (3) fixiert ist.

EP 2 774 227 B1

14. Verfahren zum Senken von dünnen Drähten (2) und zum Positionieren dieser in einer schwingungsdämpfenden Weise, **dadurch gekennzeichnet, dass** eine Drahtpositionierungsvorrichtung (1) nach den Ansprüchen 1 bis 10 oder eine Verarbeitungsvorrichtung nach den Ansprüchen 11 bis 13 verwendet wird.
- 5 15. Verfahren nach Anspruch 14, **dadurch gekennzeichnet, dass** die Senkvorrichtung (5) mit dem Pressstück (6) von einer ersten Position in eine zweite Position bewegt wird, wobei das Pressstück (6) die zweite Position erreicht, sobald es die Oberseite (7) der Drahtführung (4) berührt, wobei dies zu einer ersten Schwingungsdämpfung der Drahtführung (4) und des Drahts (2) führt, und **dadurch gekennzeichnet, dass** bei weiterem Senken der Senkvorrichtung (5) das Pressstück (6) vertikal in Richtung des Rohrs (16) gemäß der Federkraft des Federelements bzw. der einzelnen Federelemente (15) bewegt wird, während sich die Drahtführung (4) mit reduzierter Beschleunigung in der Form einer Nickbewegung in eine dritte Position bewegt.
- 10 16. Verfahren nach Anspruch 15, **dadurch gekennzeichnet, dass** die dritte Position erreicht ist, sobald die vertikale Bewegung der Senkvorrichtung (5) und die Nickbewegung der Drahtführung (4) durch Berührung mit dem Anschlagelement (31) beendet sind.
- 15 17. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** eine Drahtpositionierungsvorrichtung (1) zum Positionieren eines freien Endes eines dünnen Drahtes auf eine schwingungsdämpfenden Weise zwischen einem Oberstempel und einem Unterstempel verwendet wird.
- 20

Revendications

- 25 1. Dispositif de positionnement de fil (1) pour le positionnement d'un fil (2) dans un dispositif de traitement, ledit dispositif de positionnement de fil comprenant un guide de fil (4) destiné à recevoir le fil (2) et un dispositif d'abaissement (5) déplaçable verticalement par rapport à un premier axe longitudinal (45) du fil (2) reçu dans le guide de fil (4), **caractérisé en ce que** le dispositif d'abaissement (5) comporte une pièce de pression (6) sollicitée par ressort par au moins un élément de ressort (15) et disposée de manière à s'appliquer contre le guide de fil (4), l'au moins un élément de ressort (15) étant disposé dans un tube (16).
- 30 2. Dispositif de positionnement de fil (1) selon la revendication 1, **caractérisé en ce qu'**un élément d'arrêt (31) est disposé à l'opposé de la pièce de pression (6), le guide de fil (4) étant monté de manière à pouvoir être serré d'une manière à ce qu'une oscillation soit amortie entre la pièce de pression (6) et l'élément d'arrêt (31), soit directement soit indirectement par le biais d'éléments de support (48, 49).
- 35 3. Dispositif de positionnement de fil (1) selon la revendication 2, **caractérisé en ce que** la pièce de pression (6) du dispositif d'abaissement (5) est disposée avec un deuxième axe longitudinal (46) au-dessus du guide de fil (4), et l'élément d'arrêt (31) est disposé avec un troisième axe longitudinal (47) en dessous du guide de fil (4), la pièce de pression (6) étant disposée avec le deuxième axe longitudinal (46) verticalement par rapport au premier axe longitudinal (45) du fil (2), et l'élément d'arrêt (31) étant disposé avec le troisième axe longitudinal (47) verticalement par rapport au premier axe longitudinal (45) du fil (2).
- 40 4. Dispositif de positionnement de fil (1) selon la revendication 3, **caractérisé en ce que** le deuxième axe longitudinal (46) de la pièce de pression (6) est disposé de façon décalée par rapport au troisième axe longitudinal (47) de l'élément d'arrêt (31) le long du premier axe longitudinal (45) du fil (2).
- 45 5. Dispositif de positionnement de fil (1) selon l'une des revendications 1 à 4, **caractérisé en ce que** le tube (16) présente un filet extérieur (20) s'engageant dans un élément de maintien (21) présentant un filet intérieur (24).
- 50 6. Dispositif de positionnement de fil (1) selon l'une quelconque des revendications 1 à 5, **caractérisé en ce qu'**il est prévu un dispositif de transport pivotant monté de façon pivotante (41) avec un axe de tangage (42), le guide de fil (4) étant fixé sur le dispositif de transport pivotant monté de façon pivotante (41).
- 55 7. Dispositif de positionnement de fil (1) selon l'une des revendications 1 à 6, **caractérisé en ce que** le dispositif de positionnement de fil (1) est associé à un dispositif de sertissage et adapté pour positionner une extrémité libre d'un fil (2) entre un poinçon supérieur et un poinçon inférieur d'un outil de sertissage d'un dispositif de sertissage, le dispositif de positionnement de fil (1) comprenant l'au moins un élément de ressort (15), lequel est actif dans la direction verticale, pour presser contre le guide de fil (4) de manière à abaisser celui-ci dans l'état opérationnel avec

EP 2 774 227 B1

le fil (2), de telle façon que l'extrémité libre du fil (2) peut être rapprochée du poinçon inférieur, un élément d'arrêt (31) étant disposé à l'opposé de la pièce de pression (6) et arrêtant le mouvement d'abaissement du dispositif d'abaissement (5) et du guide de fil (4) et du fil (2) pendant une opération d'abaissement, après un trajet d'abaissement spécifique.

- 5
8. Dispositif de positionnement de fil (1) selon l'une quelconque des revendications précédentes pour des fils électriques (2).
- 10
9. Dispositif de positionnement de fil (1) selon la revendication 7 ou 8, **caractérisé en ce que** le dispositif de sertissage comporte un chariot mobile (26), le dispositif d'abaissement (5) du dispositif de positionnement de fil (1) étant disposé sur le chariot mobile (26).
- 15
10. Dispositif de positionnement de fil (1) selon la revendication 8 ou 9, **caractérisé en ce que** l'élément d'arrêt (31) du dispositif de positionnement de fil (1) est fixé sur un élément de support (38) de la station de traitement (3), lequel est positionné de façon rigide.
- 20
11. Dispositif de traitement, en particulier un dispositif de sertissage, pour un fil électrique (2), ledit dispositif comprenant une station de traitement (3) et un dispositif de positionnement de fil (1) selon l'une des revendications 1 à 10.
- 25
12. Dispositif de traitement selon la revendication 11, **caractérisé en ce que** la station de traitement (3) possède un chariot mobile (26), le dispositif d'abaissement (5) du dispositif de positionnement de fil (1) étant disposé sur le chariot mobile (26).
- 30
13. Dispositif de traitement selon la revendication 11 ou 12, **caractérisé en ce que** l'élément d'arrêt (31) du dispositif de positionnement de fil (1) est fixé sur un élément de support (38) de la station de traitement (3), lequel est positionné de façon rigide.
- 35
14. Procédé pour l'abaissement de fils fins (2) et pour le positionnement de ceux-ci d'une manière permettant d'amortir les oscillations, **caractérisé en ce qu'**un dispositif de positionnement de fil (1) selon les revendications 1 à 10 ou un dispositif de traitement selon les revendications 11 à 13 est utilisé.
- 40
15. Procédé selon la revendication 14, **caractérisé en ce que** le dispositif d'abaissement (5) est déplacé avec la pièce de pression (6) d'une première position vers une deuxième position, la pièce de pression (6) ayant atteint la deuxième position dès qu'elle touche la surface supérieure (7) du guide de fil (4), ce qui entraîne un premier amortissement de l'oscillation du guide de fil (4) et du fil (2), et **en ce que**, lorsque le dispositif d'abaissement (5) est abaissé davantage, la pièce de pression (6) est déplacée verticalement dans la direction du tube (16) selon la force de ressort de l'élément de ressort ou des éléments de ressort individuels (15), tandis que le guide de fil (4) se déplace avec une accélération réduite sous la forme d'un mouvement de tangage vers une troisième position.
- 45
16. Procédé selon la revendication 15, **caractérisé en ce que** la troisième position est atteinte dès que le mouvement vertical du dispositif d'abaissement (5) et le mouvement de tangage du guide de fil (4) sont stoppés par le contact avec l'élément d'arrêt (31).
- 50
17. Procédé selon l'une des revendications précédentes, **caractérisé en ce qu'**un dispositif de positionnement de fil (1) est utilisé pour le positionnement d'une extrémité libre d'un fil fin entre un poinçon supérieur et un poinçon inférieur d'une manière permettant d'amortir les oscillations.
- 55

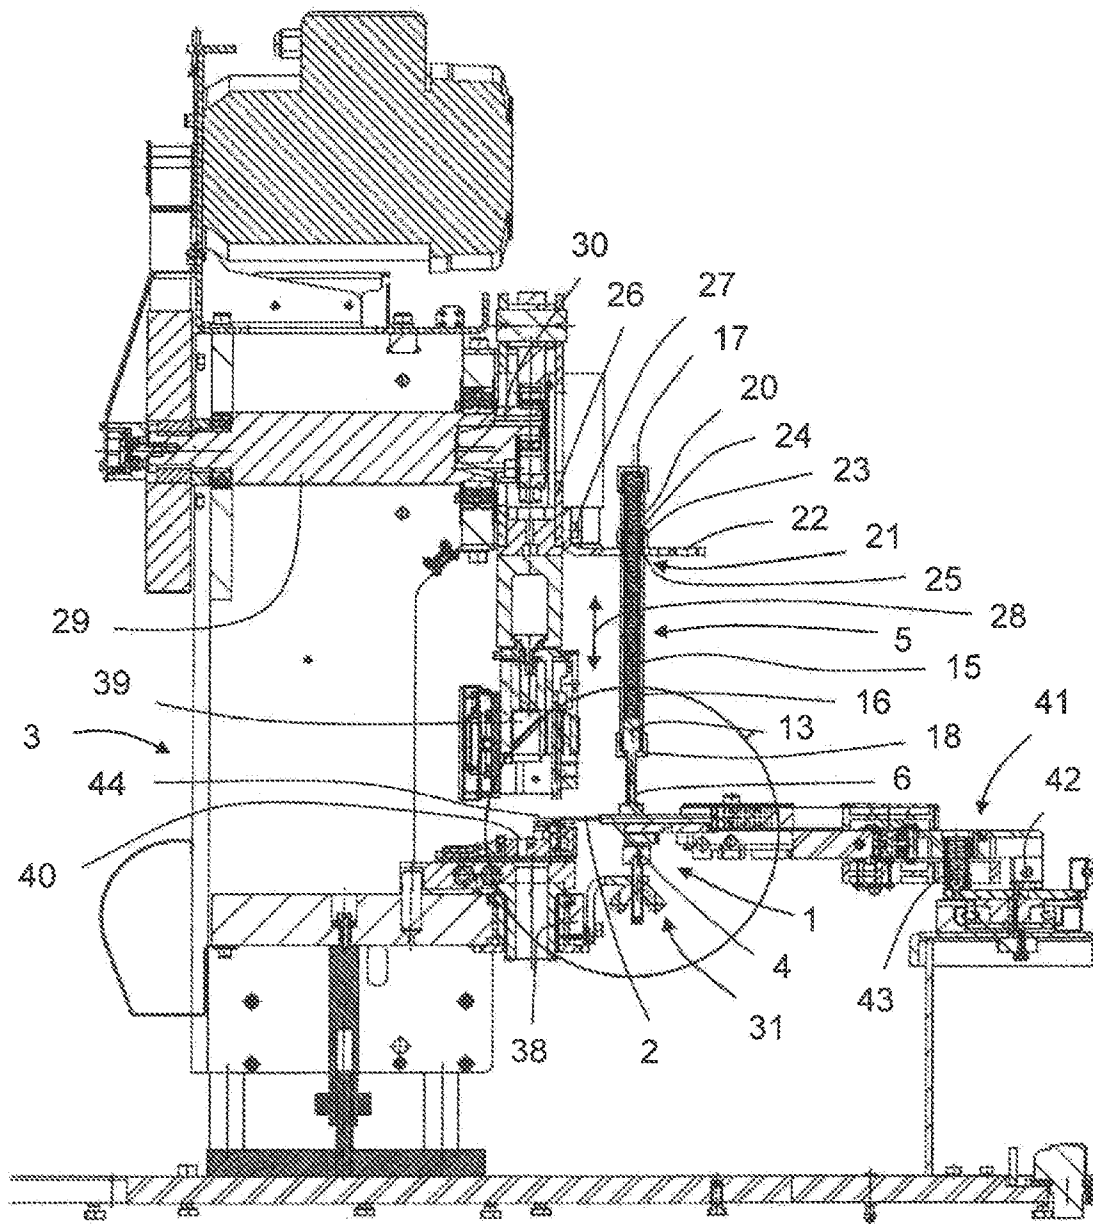


FIG 2

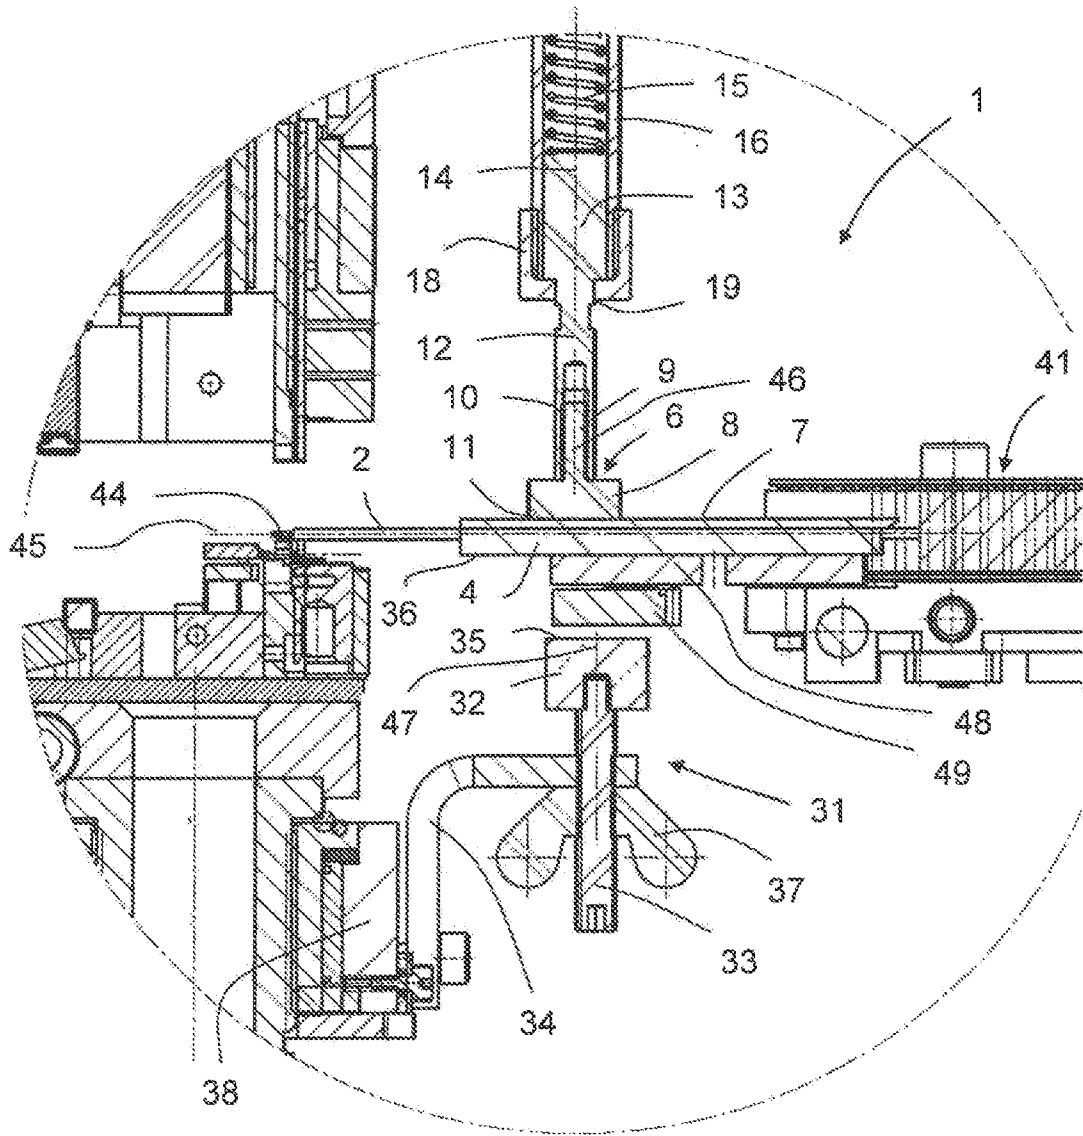


FIG 3

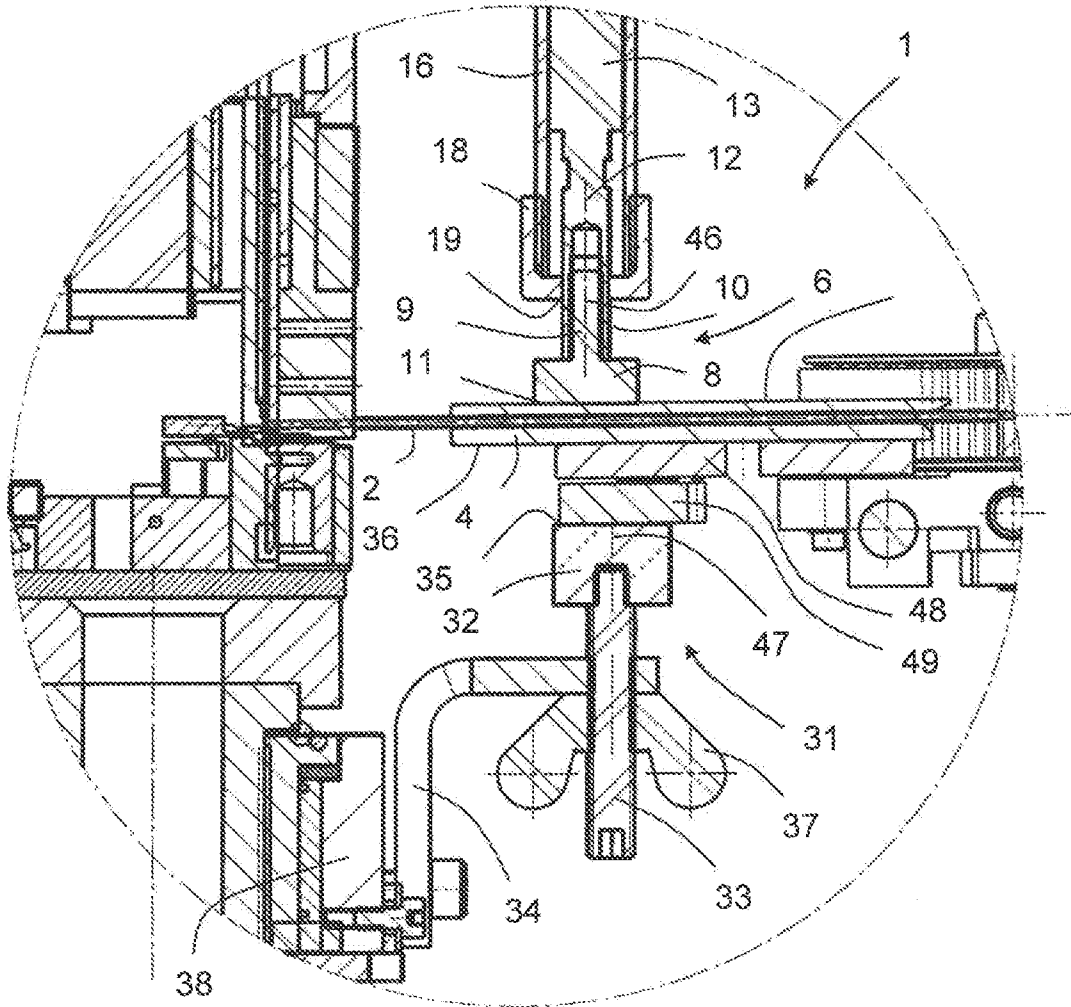


FIG 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2009017653 A1 [0002] [0008]
- WO 2011004272 A1 [0011]
- WO 2011004272 A [0012]
- GB 2021988 A [0013]
- US 4521946 A [0015]
- EP 0813271 A2 [0018]
- US 4713880 A [0019]

HUZAL-POZICIONÁLÓ ESZKÖZ

SZABADALMI IGÉNYPONTOK

1. Huzal-pozicionáló eszköz (1) huzal (2) pozicionálására egy megmunkáló eszközben, amely huzal-pozicionáló eszköz magában foglal egy huzalvezetőt (4) a huzal (2) befogadására, valamint egy leeresztő eszközt (5), amely egy, a huzalvezetőben (4) befogadott huzalhoz (2) tartozó első hossz tengelyhez (45) képest függőlegesen mozgatható, azzal jellemezve, hogy a leeresztő eszköznek (5) van egy nyomódarabja (6), amelyre rugóterhelést ad legalább egy rugóelem (15), és úgy áll rendelkezésre, hogy érintkezésbe kerüljön a huzalvezetővel (4), amely legalább egy rugóelem (15) egy csőben (16) van elhelyezve.

2. Az 1. igénypont szerinti huzal-pozicionáló eszköz (1), azzal jellemezve, hogy egy ütközőelem (31) van elhelyezve a nyomódarabbal (6) szemközt, a huzalvezető (4) úgy van beszerelve, hogy lengéscsillapítással lehessen befogni a nyomódarab (6) és az ütközőelem (31) között, támasztóelemeken (48, 49) keresztül akár közvetlenül, akár közvetve.

3. A 2. igénypont szerinti huzal-pozicionáló eszköz (1), azzal jellemezve, hogy a leeresztő eszköz (5) nyomódarabja (6) úgy van elhelyezve, hogy a hozzá tartozó második hossz tengely (46) a huzalvezető (4) felett van, és az ütközőelem (31) úgy van elhelyezve, hogy a hozzá tartozó harmadik hossz tengely (47) a huzalvezető (4) alatt van, a nyomódarab (6) úgy van elhelyezve, hogy a hozzá tartozó második hossz tengely (46) a huzalhoz (2) tartozó első hossz tengelyhez (45) képest függőleges, és az ütközőelem (31) úgy van elhelyezve, hogy a hozzá tartozó harmadik hossz tengely (47) a huzalhoz (2) tartozó első hossz tengelyhez (45) képest függőleges.

4. A 3. igénypont szerinti huzal-pozicionáló eszköz (1), azzal jellemezve, hogy a nyomódarabhoz (6) tartozó második hossz tengely (46) az ütközőelemhez (31) tartozó harmadik hossz tengelyhez (47) képest a huzalhoz (2) tartozó első hossz tengely (45) mentén eltoltan van elhelyezve.

5. Az 1-4. igénypontok egyike szerinti huzal-pozicionáló eszköz (1), azzal jellemezve, hogy a csőnek (16) van egy külső menete (20), amely bekapcsolódik egy tartóelembe (21), amelynek van egy belső menete (24).

6. Az 1-5. igénypontok egyike szerinti huzal-pozicionáló eszköz (1), azzal jellemezve, hogy rendelkezésre áll egy lengő mozgásra képesen beszerelt lengő szállítószalag (41) bólintótengellyel (42), amely lengő mozgásra képesen beszerelt lengő szállítószalaghoz (41) hozzá van rögzítve a huzalvezető (4).



7. Az 1-6. igénypontok egyike szerinti huzal-pozicionáló eszköz (1), azzal jellemezve, hogy a huzal-pozicionáló eszköz (1) kapcsolatban van egy préselő eszközzel, és alkalmas egy huzal (2) szabad végének egy préselő eszköz présszerszámának felső bélyege és alsó bélyege között való pozicionálására, a huzal-pozicionáló eszköz (1) magában foglalja a legalább egy, függőleges irányban hatásos rugóelemet (15), amely nekinyomódik a huzalvezetőnek (4), hogy az leereszkedjen a huzallal (2) a működési állapotba, úgyhogy a huzal (2) szabad végét közelebb lehet hozni az alsó bélyeghez, egy ütközőelem (31) van elhelyezve a nyomódarabbal (6) szemközt, és egy meghatározott ereszkedési út után megállítja a leeresztő eszközt (5), a huzalvezetőnek (4) és a huzalnak (2) egy leeresztő művelet alatt történő ereszkedő mozgását.

8. Az előző igénypontok egyike szerinti huzal-pozicionáló eszköz (1) elektromos huzalokhoz (2).

9. A 7. vagy a 8. igénypont szerinti huzal-pozicionáló eszköz (1), azzal jellemezve, hogy a préselő eszközt (5) van egy mozgatható szánja (26), amely mozgatható szánon (26) van elhelyezve a huzal-pozicionáló eszköz (1) leeresztő eszköze (5).

10. A 8. vagy a 9. igénypont szerinti huzal-pozicionáló eszköz (1), azzal jellemezve, hogy a huzal-pozicionáló eszköz (1) ütközőeleme (31) a megmunkáló állomás (3) egy mereven pozicionált hordozó eleméhez (38) van rögzítve.

11. Megmunkáló eszköz, különösen préselő eszköz, elektromos huzalhoz (2), amely eszköz magában foglal egy megmunkáló állomást (3) és egy, az 1-10. igénypontok egyike szerinti huzal-pozicionáló eszközt (1).

12. A 11. igénypont szerinti megmunkáló eszköz, azzal jellemezve, hogy a megmunkáló állomásnak (3) van egy mozgatható szánja (26), amely mozgatható szánon (26) van elhelyezve a huzal-pozicionáló eszköz (1) leeresztő eszköze (5).

13. A 11. vagy a 12. igénypont szerinti megmunkáló eszköz, azzal jellemezve, hogy a huzal-pozicionáló eszköz (1) ütközőeleme (31) a megmunkáló állomás (3) egy mereven pozicionált hordozó eleméhez (38) van rögzítve.

14. Eljárás vékony huzalok (2) leeresztésére és lengéscsillapítással való pozicionálására, azzal jellemezve, hogy egy, az 1-10. igénypontok szerinti huzal-pozicionáló eszközt (1) vagy egy, a 11-13. igénypontok szerinti megmunkáló eszközt használunk.

15. A 14. igénypont szerinti eljárás, azzal jellemezve, hogy a leeresztő eszközt (5) a nyomódarabbal (6) egy első pozícióból egy második pozícióba mozgadjuk, amely nyomódarab (6) akkor érte el a második pozíciót, amikor érintkezésbe kerül a huzalvezető (4) felső oldalával (7), ami előidéz a huzalvezető (4) és a huzal (2) lengésének első csillapítását, és azzal, hogy amikor a leeresztő eszköz (5) tovább ereszkedik, a nyomódarab (6) a cső (16) irányában függőlegesen mozog a rugóelem vagy az egyes rugóelemek (15) rugóerejének megfelelően, míg a huzalvezető (4)

csökkentett gyorsulással bólintó mozgás formájában egy harmadik pozícióba mozog.

16. A 15. igénypont szerinti eljárás, azzal jellemezve, hogy a harmadik pozíció elérése akkor következik be, amikor a leeresztő eszköz (5) függőleges mozgása és a huzalvezető (4) bólintó mozgása az ütközőelemmel (31) való érintkezéskor befejeződik.

17. Az előző igénypontok egyike szerinti eljárás, azzal jellemezve, hogy egy vékony huzal szabad végének egy felső és egy alsó présbélyeg között lengéscsillapítással való pozicionálásához huzal-pozicionáló eszközt (1) használunk.