



- (51) International Patent Classification:  
*C08K 3/00* (2006.01) *C08L 67/02* (2006.01)
- (21) International Application Number:  
PCT/US2012/032267
- (22) International Filing Date:  
5 April 2012 (05.04.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
13/086,805 14 April 2011 (14.04.2011) US
- (71) Applicant (for all designated States except US): **TICONA LLC** [US/US]; 8040 Dixie Highway, Florence, Kentucky 41042 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **LU, Bing** [US/US]; 8795 Richmond Road, Union, Kentucky 41091 (US).
- (74) Agent: **CASSIDY, Timothy, A.**; Dority & Manning, P.A., P.O. Box 1449, Greenville, South Carolina 29602-1449 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LI, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report (Art. 21(3))

(54) Title: REFLECTORS FOR LIGHT-EMITTING DIODE ASSEMBLIES CONTAINING A WHITE PIGMENT

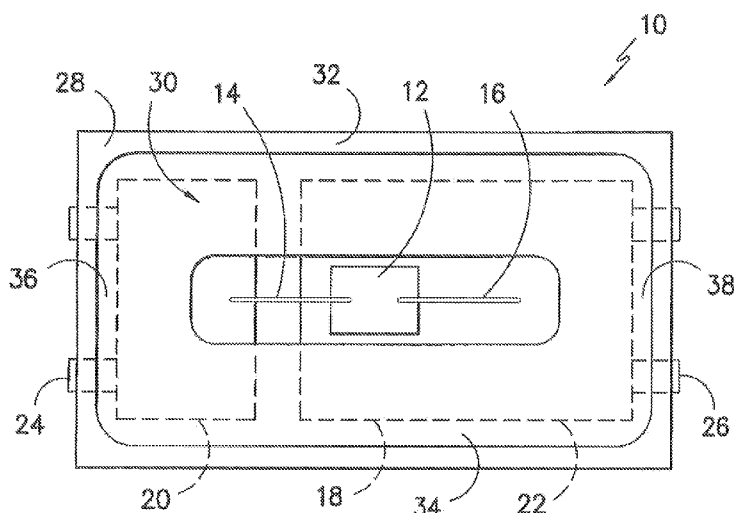

**FIG. -1-**

(57) Abstract: Polymer compositions are described containing a white pigment for increasing the reflectance properties of the resulting material. In this regard, the material is well suited for being used as a reflector, such as a reflector for light-emitting diode assemblies. In accordance with the present disclosure, the white pigment comprises chalk resistance particles. The particles can also display a basic pH when placed in distilled water.

REFLECTORS FOR LIGHT-EMITTING DIODE ASSEMBLIES  
CONTAINING A WHITE PIGMENT

BACKGROUND

[001] Light-emitting diodes, commonly called LEDs, continue to increase in popularity as a light source for use in many and diverse applications. The demand for LEDs has grown rapidly, especially in the last five years. LEDs are being used as light sources in numerous applications due to their many advantages over conventional light sources. LEDs generally consume significantly less power than incandescent and other light sources, require a low voltage to operate, are resistant to mechanical shock, require low maintenance, and generate minimal heat when operating. As a result, LEDs are displacing incandescent and other light sources in many uses and have found applications, for instance, as traffic signals, large area displays, interior and exterior lighting, cellular telephone displays, digital clock displays, displays for consumer appliances, flashlights, and the like.

[002] LEDs generally include a light-emitting diode mounted on a substrate that is electrically connected to a lead frame. The lead frame typically includes two terminals for connecting the LED to a power source. The light-emitting diode is a semiconductor device fabricated similar to the manner in which integrated circuits are produced. For instance, the light-emitting diode can be made from several layers of material that are sequentially deposited on a semiconductor substrate. The light-emitting diode within the semiconductor material includes an n-type material separated from a p-type material by an active layer. When a voltage is applied to the diode, positive charges or "holes" from the p-type material move towards the active layer while the negative charges or electrons from the n-type material also move towards the active layer in an opposite direction which produces light. In particular, the moving electrons release energy in the form of photons. Thus, one significant advantage of LEDs is that the devices produce light without a filament that will burn out over time. Thus, LEDs last a relatively long time, can be made to be very compact, and are very durable. Further, since a filament is not heated in order to produce light, LEDs are also very energy efficient.

[003] After a light-emitting diode is fabricated, the semiconductor chip can be mounted adjacent to a reflector and connected to a lead frame. The lead frame

can include an anode terminal and a cathode terminal for applying power to the assembly. In certain embodiments, the LED element located within the reflector can be sealed by a translucent or transparent resin. The transparent or translucent resin may serve as a lens for further enhancing the light that is emitted.

[004] The reflector for the LED can also serve as the housing for the LED and is typically made from a molded polymeric resin. For example, the polymeric resin can be injection molded to form the housing and reflector. In one embodiment, the polymeric resin is injection molded over a lead frame for integrating the lead frame into the LED assembly.

[005] The molded polymer resin used to form the reflector preferably possesses a particular combination of characteristics and properties. For instance, the polymer resin should be well suited to reflecting light at the wavelength at which the LED operates. Many LEDs, for instance, are designed to emit a white light. Thus, the polymer resin used to form the reflector should reflect a significant amount of light in the visible light region and particularly should reflect a significant percentage of light in the blue light wavelength range. Reflecting light in the blue wavelength range, for instance, has been found to significantly enhance the brightness of the LED, since LEDs that emit a white light emit a significant amount of light in the blue wavelength range. Increasing the reflectance of the reflector as high as possible minimizes loss of light when the LED is being operated.

[006] The polymer resin used to form the reflector should also possess a high whiteness index. The whiteness index of the reflector indicates how well the reflector can reflect light over the entire visible light wavelength range (from about 400 nm to about 700 nm). In general, the higher the whiteness index of the material, the higher the reflectance of the material. A material possessing a white index value of 100, for instance, is considered a substantially perfect reflecting diffuser.

[007] In addition to having excellent reflectance properties, the polymer resin used to form the reflector should also have good melt flow properties during injection molding of the parts. For instance, many LED structures are relatively small having dimensions that at times can be less than 1 millimeter. Reflectors can also have relatively complex shapes depending upon the particular application and the geometries of the lead plate in the LED. Thus, when the polymer resin is

heated, the polymer should have sufficient flow properties in order to uniformly and repeatedly fill the interstices of the mold. The polymer resin should also have a stable viscosity that does not fluctuate during processing.

**[008]** In addition to the above, the polymer resin used to form the reflector should have sufficient heat resistance including long term aging stability when either being soldered onto an adjacent part or when exposed to the operating temperatures of the LED. Many LED assemblies, for instance, are attached to circuit boards and other substrates using reflow oven welding processes that operate at temperatures up to about 260°C. The polymer resin should have good heat resistance properties to the reflow process and should not blister or otherwise deteriorate when subjected to the welding conditions.

**[009]** During use, the LED also generates heat which is absorbed by the reflector. In the past few years, the amount of heat generated by the LED has increased as the LED element power has increased. When subjected to heat during welding and/or heat during use, the reflectance properties of the polymer resin should not deteriorate. In the past, for instance, exposure to high temperatures and/or repeated heating and cooling during use have caused polymer resins to yellow. Yellowing causes the whiteness index of the resin to lower. Yellowing is especially a problem for LEDs that emit blue light since yellow surfaces have a tendency to absorb light in the blue wavelength range.

**[0010]** In addition to the above, the reflector is generally a thin small part and requires satisfactory mechanical strength. Thus, reflectors should also have sufficient impact strength to avoid breakage during assembly of the LED and during use of the LED.

**[0011]** In U.S. Patent Publication No. 2007/0213458 entitled "Light-Emitting Diode Assembly Housing Comprising Poly(cyclohexanedimethanol terephthalate) Compositions", a reflector for an LED is disclosed that is made from a poly(cyclohexanedimethanol terephthalate) (hereinafter "PCT") composition. The '458 application, which is incorporated herein by reference, has made great advances in design and function of LEDs. The present disclosure, however, is directed to further improvements. In particular, the present disclosure is generally directed to a reflector for an LED made from a PCT polymer composition that has improved reflectance characteristics.

### SUMMARY

**[0012]** In general, the present disclosure is directed to a polymer composition and to molded articles made from the composition. The polymer composition of the present disclosure can be formulated to have excellent reflectance properties. In addition, the composition can be formulated so as to have excellent melt flow characteristics. For instance, the composition can have a relatively low melt viscosity at higher temperatures. Although numerous articles can be made from the composition, in one embodiment, the composition can be used to produce a molded reflector for a light source, such as a light-emitting diode.

**[0013]** More particularly, the present disclosure is directed to incorporating a particular type of white pigment into a polymer composition in order to improve the reflectance properties of the composition. For instance, in one embodiment, the white pigment comprises Type II chalk resistance particles according to ASTM D476 classifications. For example, the Type II chalk resistance particles may comprise titanium dioxide particles. Of particular advantage, it was discovered that the above particles increase the reflectance properties while minimizing melt viscosity increases. Other white pigments, for instance, have a tendency to increase melt viscosity when added to the polymer composition and/or do not provide the desired reflectance properties. Minimizing increases in melt viscosity is particularly important when molding small parts with three-dimensional features, such as reflectors for light-emitting diode assemblies.

**[0014]** In one embodiment, for instance, the present disclosure is directed to a molded reflector surrounding a light-emitting source. The reflector is molded from a polymeric material. The polymeric material may comprise any suitable thermoplastic polymer or a blend of polymers that have properties suitable for use as a reflector. Polymeric materials that may be used include polyester polymers, liquid crystal polymers, and blends thereof. In one embodiment, for instance, the polymeric material is comprised of poly(1,4-cyclohexanedimethanol terephthalate).

**[0015]** In accordance with the present disclosure, the polymeric material is blended with a white pigment. The white pigment can comprise Type II chalk resistance particles as classified according to ASTM Test D476. In one embodiment, for instance, the white pigment may comprise titanium dioxide particles having the above chalk resistance characteristics. The titanium dioxide

particles may have a neutral tint or a blue tint. In one embodiment, the titanium dioxide particles exhibit a pH of greater than about 7, such as greater than about 7.5.

**[0016]** In order to produce titanium dioxide particles having the chalk resistance characteristics, in one embodiment, the particles may include a surface treatment. The surface treatment may comprise an alumina alone or in combination with other components. For instance, in one embodiment, the surface treatment may comprise alumina in combination with a polysiloxane.

**[0017]** Once the white pigment as described above is combined with the polymeric material, the resulting polymer composition may be used to form the molded reflector and can have an initial reflectance at 460 nm of greater than about 86%, such as greater than about 90%, such as greater than about 93%, such as greater than about 95%. The initial reflectance at 460 nm is generally less than 100%, such as less than about 98%. The polymer composition can also have an initial whiteness index of greater than about 86, such as greater than about 92, such as greater than about 95. The initial whiteness index is generally less than 103, such as less than about 100. The polymer composition can also have a whiteness index after aging at 200°C for four hours of still greater than about 50, such as greater than about 60, such as greater than about 62, such as greater than about 65, such as greater than about 68, such as even greater than about 70. In general, the whiteness index after aging at 200°C is less than the initial whiteness index of the material and is generally less than about 95, such as less than about 85.

**[0018]** As described above, the white pigment improves the reflectance properties of the polymer while minimizing increases in melt viscosity. In one embodiment, for instance, a polymeric material formulated in accordance with the present disclosure has a melt viscosity at a shear rate of 1000/sec and at 305°C of less than about 300 Pa.s, such as less than about 250 Pa.s, such as less than about 200 Pa.s, such as less than about 150 Pa.s, such as less than about 100 Pa.s when measured using a capillary rheometer. In general, the melt viscosity at the above conditions can be greater than about 30 Pa.s, such as greater than about 50 Pa.s.

**[0019]** In addition to a polymer resin and a white pigment, the polymeric material can also contain various other ingredients and components in various amounts. In one embodiment, for instance, the polymeric material can further contain an inorganic filler. In one particular embodiment, the polymeric material contains from about 20% to about 60% by weight of a PCT polymer, from about 1% to about 40% by weight of the inorganic filler, and from about 15% to about 50% by weight of the white pigment.

**[0020]** In addition to the above components, in one embodiment, the polymeric material may contain a component that reacts with the polymer resin, such as an epoxy resin, a phenoxy resin, or combinations thereof. The reactive component may be present in an amount of from about 0.2% to about 8% by weight.

**[0021]** In one embodiment, the polymeric material can further contain a polytetrafluoroethylene polymer. The polytetrafluoroethylene polymer can be present in the polymeric material in an amount from about 1% to about 10% by weight.

**[0022]** The polymeric material may also include one or more impact modifiers. The impact modifiers may be reactive or non-reactive. For instance, in one embodiment, the polymeric material contains a terpolymer of ethylene, methyl acrylate and glycidyl (meth) acrylate.

**[0023]** In another embodiment, the polymeric material contains an ethylene-(methyl)acrylate copolymer. In still another embodiment, the polymeric material may include a combination of the terpolymer of ethylene, methyl acrylate and glycidyl (meth) acrylate and an ethylene-(methyl)acrylate copolymer.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

**[0024]** A full and enabling disclosure of the present invention, including the best mode thereof to one skilled in the art, is set forth more particularly in the remainder of the specification, including reference to the accompanying figures, in which:

Figure 1 is a perspective view of one embodiment of an LED assembly made in accordance with the present disclosure;

Figure 2 is a plan view of the LED assembly illustrated in Figure 1;

Figure 3 is a perspective view of another embodiment of an LED assembly made in accordance with the present disclosure; and

Figure 4 is a perspective view of one-half of a mold used for measuring spiral flow length.

[0025] Repeat use of reference characters in the present specification and drawings is intended to represent the same or analogous features or elements of the present invention.

#### DETAILED DESCRIPTION

[0026] It is to be understood by one of ordinary skill in the art that the present discussion is a description of exemplary embodiments only, and is not intended as limiting the broader aspects of the present disclosure.

[0027] In general, the present disclosure is directed to a polymer composition and to articles made from the composition that can exhibit various properties that relate to reflectance, whiteness, flow properties during melt processing and/or mechanical properties such as impact strength. The composition of the present disclosure can be used in numerous and different end use applications. For instance, the composition can be used as a reflector for light. For example, the polymer composition may be used to produce a reflector for LED assemblies, may be used as a component in a sign, such as a lighted sign, may be used as a label, or in any other suitable application where high light reflectance properties are desired.

[0028] In one embodiment, as described above, the polymer composition is well suited to producing a reflector for a light-emitting diode. The present disclosure is also directed to a polymer composition that is well suited for use in producing light-emitting diode assemblies.

[0029] The polymer composition of the present disclosure generally contains a polymer resin in combination with a white pigment. Optionally the composition can also contain a reinforcing agent, such as a filler or reinforcing fibers.

[0030] In accordance with the present disclosure, the white pigment comprises Type II chalk resistance particles as classified according to ASTM Test D476. For example, in one embodiment, the white pigment comprises particles that include a surface treatment that produces the chalk resistance properties. The present inventors discovered that the above white pigment particles maximize the increase in initial reflectance of the resulting polymeric material while minimizing the impact the particles have on the melt viscosity of the material.



**[0031]** In general, any suitable particles may be used that have Type II chalk resistance as described above. In one embodiment, for instance, the particles may comprise titanium dioxide particles. The titanium dioxide particles may comprise, for instance, rutile titanium dioxide. Various other white pigments that may be used if found to have suitable properties include other metal oxide particles. Such particles may include calcium carbonate particles, magnesium oxide particles, zinc oxide particles, white lead, aluminum oxide particles, barium sulfate particles, and the like.

**[0032]** In one embodiment, a surface treatment may be applied to the particles. The surface treatment on the white pigment can vary as long as the particles have the required chalk resistance characteristics. In one embodiment, for instance, the white pigment comprises titanium dioxide particles that include a surface treatment containing alumina. The surface treatment may comprise alumina alone or in combination with other components. For instance, in one embodiment, the surface treatment comprises a combination of alumina and a polysiloxane.

**[0033]** The white pigment may, overall, have a neutral tint or have a blue tint. In one embodiment, the particles are slightly basic when combined with distilled water and measured for pH. For example, the white pigment particles may exhibit a pH of greater than about 7, such as greater than about 7.5. The pH of the particles is generally less than about 9, such as less than about 8.5.

**[0034]** In order to obtain the necessary reflectance characteristics, the white pigment particles are present in the polymeric material in an amount greater than about 10% by weight, such as in an amount greater than about 15% by weight, such as in an amount greater than about 16% by weight, such as in an amount greater than about 17% by weight, such as in an amount greater than about 18% by weight. The white pigment particles are generally present in an amount less than about 50% by weight, such as in an amount less than about 40% by weight. In one embodiment, for instance, the particles are present in the polymeric material in an amount from about 15% to about 50% by weight, such as in an amount from about 18% to about 40% by weight.

**[0035]** The size of the white pigment particles can vary depending upon the particular application. In general, the particles can have an average diameter of

from about 10 nm to about 20,000 nm, such as from about 150 nm to about 500 nm.

**[0036]** Of particular advantage, the white pigment particles having the chalk resistance characteristics described above have been found to have a minimal effect on the melt viscosity of the polymeric material during melt processing. For example, when present in the amounts described above, the particles increase melt viscosity in an amount less than about 15% by weight when present in amounts up to 25% by weight.

**[0037]** Of particular advantage, polymer compositions can be formulated in accordance with the present disclosure having the desired reflectance characteristics while having a melt viscosity at a shear rate of 1000/sec and at 305°C (ASTM Test D3835-08) of less than about 250 Pa.s, such as less than about 225 Pa.s, such as less than about 200 Pa.s. The melt viscosity of the above conditions is generally greater than about 30 Pa.s, such as greater than about 40 Pa.s, such as greater than about 50 Pa.s.

**[0038]** Maintaining lower melt viscosities during melt processing provides various advantages and benefits. For instance, reflectors for light-emitting diodes generally have dimensions that are measured in millimeters and can include a three-dimensional configuration. For instance, such reflectors typically include cavities that are configured to surround the light-emitting diode and that have a depth greater than the light-emitting diode. Maintaining a low melt viscosity allows the polymer composition to flow evenly within the small molds and to fill the interstices of the molds in a uniform manner.

**[0039]** With respect to the melt flow properties, for instance, in one embodiment, the polymer composition can have a spiral flow length of at least five inches, such as at least six inches, such as even at least seven inches. In general, the spiral flow length is less than about fifteen inches, such as less than about twelve inches. As used herein, the spiral flow length is determined at a temperature of 305°C and at a mold temperature of 120°C. Spiral flow length is measured by injecting the polymer composition into a mold as shown in Fig. 4 (one-half of mold shown). The mold cavity is 1/32 inches thick or high and 1/2 inches wide. The polymer composition is injected into the mold using a 32 mm extruder at an injection speed of 4 inches per second and a shot size of 1.8 inches.

Spiral flow length generally indicates the flow characteristics of the polymer composition when being melt processed. Higher spiral flow lengths indicate the ability of the material to uniformly and evenly flow into a mold, which also indicates the ability of the material to fill any interstices of the mold that may exist. For example, a higher spiral flow length is particularly preferred when molding small parts that may have complex three-dimensional configurations, such as reflectors and housings for LED assemblies.

**[0040]** The polymer composition of the present disclosure also has a relatively high initial reflectance. For instance, once molded into an article, the polymer material of the present disclosure can have an initial reflectance at 460 nm of greater than about 90%, such as greater than about 93%, such as greater than about 95%. Reflectance is measured according to ASTM Test Method 1331 using a spectracolorimeter. During testing, a CIE D65 daylight illuminant is used at an angle of 10°.

**[0041]** In addition to initial reflectance, polymer articles made according to the present disclosure can also have a relatively high initial whiteness index. Whiteness index can be measured according to WI E313. Articles made according to the present disclosure can have an initial whiteness index of greater than about 80, such as greater than about 81, such as greater than about 84, such as greater than about 90.

**[0042]** In addition to the above properties, the polymer composition of the present disclosure also has good reflow resistance properties at relatively high temperatures, such as at temperatures around 260°C. The polymer material has good silicone adhesion properties, which may be important in applications where an adhesive is used to either attach components in the LED assembly to the reflector or to attach the reflector to a substrate. Articles made according to the present disclosure also have good mechanical properties, such as good impact resistance. The material of the present disclosure also displays low moisture absorption.

**[0043]** Referring to Figs. 1 and 2, one embodiment of an LED assembly 10 that may be made in accordance with the present disclosure is shown. In the embodiment illustrated in Figs. 1 and 2, the LED assembly 10 is considered a side view LED. As shown, the LED assembly 10 includes a light-emitting diode 12 that

is configured to emit light when a current is fed through the device. The light-emitting diode 12, for instance, may be comprised of a semiconductor chip including multiple layers of materials. The LED 12 generally includes an n-type material layer and a p-type material layer, which form a p-n junction that can be connected to a voltage source. In one embodiment, for instance, the p-type layer may comprise doped gallium aluminum arsenide, while the n-type layer may comprise doped gallium arsenide.

**[0044]** The LED 12 is connected to a first bonding wire 14 and to a second bonding wire 16. The bonding wires 14 and 16 are connected to a lead frame 18. The lead frame 18 includes a first lead frame portion 20 and a second lead frame portion 22. The lead frame 18 may include or be connected to an anode 24 and a cathode 26 which may also be considered a first terminal 24 and a second terminal 26.

**[0045]** In accordance with the present disclosure, the LED assembly 10 further includes a reflector 28 which can also serve as the housing for the LED assembly. The reflector 28, in accordance with the present disclosure, is made from a polymer composition having excellent reflectance properties.

**[0046]** As shown in Figs. 1 and 2, the reflector 28 defines a cavity 30 in which the LED 12 is located. The walls of the cavity 30 generally surround the LED 12 and, in the embodiment illustrated, have a depth sufficient for the LED 12 to be recessed within the cavity.

**[0047]** The cavity 30 of the reflector 28 surrounds the LED 12 and serves to reflect light being emitted by the LED in an outward direction. The cavity 30 may have any suitable shape. For instance, the cavity 30 may be cylindrical, conical, parabolic, or any other suitable curved form. Alternatively, the walls of the cavity 30 may be parallel, substantially parallel, or tapered with respect to the diode 12. In the embodiment illustrated in Fig. 1, for instance, the cavity 30 has a smooth surface and is comprised of side walls 32 and 34 and end walls 36 and 38. The side walls 32 and 34 taper in an outward direction from the LED 12. The end walls 36 and 38, on the other hand, can be substantially parallel or may also taper outwardly from the LED source.

**[0048]** If desired, the cavity 30 of the reflector 28 may be filled with a clear material, such as a transparent material or a translucent material. For instance,

the cavity 30 may be filled with an epoxy or a silicone material. In one embodiment, the material used to fill the cavity 30 may act as a lens for the light being emitted by the LED 12.

**[0049]** Referring to Fig. 3, another embodiment of an LED assembly 50 that may be made in accordance with the present disclosure is shown. In the embodiment illustrated in Fig. 3, a top view LED assembly is shown. The top view LED assembly 50 is similar in construction to the side view LED assembly 10 illustrated in Figs. 1 and 2.


**[0050]** For instance, the top view LED assembly 50 includes an LED 52 that is positioned towards the bottom of a cavity 54 of a reflector 56. The LED 52 is also connected to a lead frame 58. In the embodiment illustrated in Fig. 3, the cavity 54 of the reflector 56 is filled with a clear material 60.

**[0051]** LED assemblies as shown in Figs. 1-3 generally have relatively small dimensions. For example, the LED assemblies typically have a greatest dimension (such as height, width, depth or diameter) that is generally less than about 10 mm, such as typically less than about 8 mm. The LED assemblies typically include at least one dimension, such as depth, that is less than 5 mm, such as less than 2 mm, such as even less than 1 mm. As will be described below, the polymer composition of the present disclosure is capable of forming reflectors for LED assemblies using melt flow processing techniques. For instance, in one embodiment, the polymer composition of the present disclosure is blow molded in forming the reflectors. Of particular advantage, the composition of the present disclosure is formulated so as to have melt flow properties capable of forming hundreds of reflectors simultaneously.


**[0052]** As described above, the polymer composition of the present disclosure contains one or more polymer resins. The polymer resin may comprise, for instance, a polyester polymer, a liquid crystal aromatic polyester polymer, a polycarbonate polymer, or mixtures thereof. Particular polymer resins that may be used include polyethylene terephthalate, polypropylene terephthalate, polybutylene terephthalate, polyethylene naphthalate, polybutylene naphthalate, aliphatic polyesters such as polyester glutarate, and the like. Other thermoplastic polymers that may be used include polyamide polymers, particularly high temperature polyamide polymers. Such polymers may include nylon 66, nylon 3, nylon 4, nylon

5, nylon 46, and the like. Other thermoplastic polymers include polytrimethylene terephthalate, ethylene-carbon monoxide polymer, styrene acrylonitrile polymer, styrene maleic anhydride polymer, and fluorinated polymers such as polytetrafluoroethylene and fluorinated ethylene polymers.

**[0053]** In one particular embodiment, the polymer resin comprises a poly(1,4-cyclohexanedimethanol terephthalate) polymer, which is typically referred to as a "PCT" polymer. Poly(1,4-cyclohexanedimethanol terephthalate) is a polyester that contains repeat units from a dicarboxylic acid component and a glycol component. At least about 80 mol percent, more preferably at least about 90 mol percent, and especially preferably all of the diol repeat units are derived from 1,4-cyclohexanedimethanol and are of formula (I).



**[0054]** At least about 80 mol percent, more preferably at least about 90 mol percent, and especially preferably all of the dicarboxylic acid repeat units are derived from terephthalic acid and are of formula (II).



**[0055]** In one embodiment, the PCT polymer contains 100 mol percent of terephthalic acid or diesters. The glycol component, on the other hand, can contain a total of 100 mol percent 1,4-cyclohexanedimethanol.

**[0056]** In various embodiments, however, the dicarboxylic acid component may contain up to 10 mol percent of other aromatic, aliphatic, or alicyclic dicarboxylic acids such as isophthalic acid, naphthalenedicarboxylic acid, cyclohexanedicarboxylic acid, succinic acid, suberic acid, adipic acid, glutaric acid, azelaic acid, and the like.

**[0057]** The glycol component may also contain up to about 10 mol percent of other aliphatic or alicyclic glycols, such as diethylene glycol, triethylene glycol, ethylene glycol, propanediol, butanediol, pentanediol, hexanediol, and the like.

**[0058]** The PCT polymer can have an inherent viscosity (I.V.) of from about 0.3 to about 1.5 and a melting point of at least 260°C.

**[0059]** In one embodiment, the PCT polymer can comprise a blend of two or more different grades of PCT polymers. For instance, in one embodiment, a blend, such as a 1:1 blend, of high I.V. PCT polymer with a low I.V. PCT polymer may be used. In an alternative embodiment, a blend, such as a 2:1 blend, may be used that includes a PCT polymer wherein the dicarboxylic acid component is 100 mol percent terephthalic acid and a PCT polymer in which the dicarboxylic acid component is 90 mol percent terephthalic acid and 10 mol percent isophthalic acid.

**[0060]** In general, the polymer resin is present in the composition in an amount of at least about 20% by weight, such as in an amount of at least 30% by weight, such as in an amount of at least 40% by weight, such as in an amount of at least about 50% by weight, such as in an amount of at least about 60% by weight. The polymer resin is generally present in an amount less than about 80% by weight, such as in an amount less than about 70% by weight. In one embodiment, a PCT polymer is present in an amount from about 20% by weight to about 60% by weight.

**[0061]** The polymer composition of the present disclosure can also optionally contain one or more reinforcing agents, such as fillers and fibers. Such materials can include, for instance, glass fibers, wollastonite, potassium titanate, calcium carbonate, talc, mica, silica, kaolin, and the like. Such inorganic fillers may be present in the composition in an amount from about 1% to about 40% by weight, such as in an amount from about 10% to about 30% by weight.

**[0062]** The composition may further contain one or more reactive components that may function as viscosity stabilizers. A reactive component comprises a material capable of not only reacting with end groups on the polymer resin, such as on a PCT polymer, but also may optionally be capable of stabilizing the viscosity of the polymer resin in a manner that prevents the viscosity from fluctuating during melt processing. The reactive components can also serve to compatibilize the composition.

[0063] In one embodiment, the reactive component comprises a material that can react with carboxyl or hydroxyl end groups on the PCT polymer. In this manner, the reactive component may act as a chain extender.

[0064] Reactive components that may be used in accordance with the present disclosure generally include phenoxy resins and/or non-aromatic epoxy resins. In one embodiment, for instance, the reactive viscosity stabilizer comprises a modified phenoxy resin that is capable of reacting with the PCT polymer. The phenoxy resin, for instance, may include hydroxyl functionality. The phenoxy resin, for instance, may have a glass transition temperature of less than about 120°C, such as less than about 110°C, such as less than about 100°C. The phenoxy resin may have a viscosity when tested in cyclohexanone at 25% NV of less than about 2500 cP, such as less than about 2300 cP.

[0065] Non-aromatic epoxy resins that may be used as the reactive component include 3,4-epoxycyclohexenylmethyl-3',4'-epoxycyclohexene carboxylate, 1,4-cyclohexane dimethanoldiglycidyl ether, hydrogenated bis-phenol-A type epoxy resin and/or tris(2,3-epoxypropyl) isocyanurate. In general, any suitable alicyclic epoxy resin may be used.

[0066] In addition to the above reactive components or instead of the above reactive components, the composition may contain an epoxy-functional copolymer as the reactive component. Exemplary copolymers having multiple epoxy pendant groups include the reaction products of one or more ethylenically unsaturated monomers (e.g. styrene, ethylene, and the like) with an epoxy-containing ethylenically unsaturated monomer (e.g. glycidyl C1-4 (alkyl) acrylate, ally glycidyl ethacrylate, and glycidyl itaconate). For example, in one embodiment the epoxy-functional copolymer is a styrene-acrylic copolymer (including an oligomer) containing glycidyl groups incorporated as side chains.

[0067] As described above, the reactive compound incorporated into the composition may comprise any material that can react with carboxyl or hydroxyl end groups on the thermoplastic polymer without causing yellowing, especially after thermal aging. In one embodiment, the reactive compound may comprise an anhydride. Examples may include pyromellitic dianhydride, trimellitic anhydride, 3-(triethoxysilyl) propylsuccinic anhydride, and the like. Other reactive additives can



include various oxazolines and/or silanes. Such reactive additives can include phenylenebisoxazoline and 3-aminopropyltriethoxysilane.

**[0068]** In general, the reactive components are present in the composition in an amount from about 0.2% to about 8% by weight, such as from about 0.5% to about 5% by weight.

**[0069]** Of particular advantage, reactive components are used that do not significantly increase yellowing of the composition over time. In this regard, the polymer composition can be formulated so as to be substantially or completely free of various aromatic epoxy resins. In one embodiment, for instance, the composition is free of any epoxy novolac resins, such as an epoxy cresol novolac resin.

**[0070]** The polymer composition of the present disclosure can further contain one or more impact modifiers. The impact modifiers can be reactive with the polymer resin or non-reactive. In one embodiment, for instance, the composition contains at least one reactive impact modifier and at least one non-reactive impact modifier.

**[0071]** Reactive impact modifiers that may be used include ethylene-maleic anhydride copolymers, ethylene-alkyl (meth)acrylate-maleic anhydride copolymers, ethylene-alkyl (meth)acrylate-glycidyl (meth)acrylate copolymers, and the like. In one embodiment, for instance, a reactive impact modifier is used that comprises a random terpolymer of ethylene, methylacrylate, and glycidyl methacrylate. The terpolymer can have a glycidyl methacrylate content of from about 5% to about 20%, such as from about 6% to about 10%. The terpolymer may have a methylacrylate content of from about 20% to about 30%, such as about 24%.

**[0072]** Of particular advantage, the present inventors have discovered that the combination of a reactive impact modifier with another reactive component may, in some embodiments, further improve the whiteness index of articles made according to the present disclosure after heat aging.

**[0073]** In general, a reactive impact modifier may be present in the composition in an amount from about 0.05% to about 10% by weight, such as in an amount from about 0.1% to about 5% by weight.

**[0074]** Non-reactive impact modifiers that may be blended into the polymer composition of the present disclosure generally include various rubber materials,

such as acrylic rubbers, ASA rubbers, diene rubbers, organosiloxane rubbers, EPDM rubbers, SBS or SEBS rubbers, ABS rubbers, NBS rubbers, and the like. In one embodiment, an ethylene acrylic rubber is present such as an ethylene acrylic ester copolymer. Particular examples of non-reactive impact modifiers include ethylene butylacrylate, ethylene (methyl)acrylate, or 2 ethyl hexyl acrylate copolymers. In one particular embodiment, an ethylene (methyl)acrylate copolymer is present in the composition that contains (methyl)acrylate in an amount of from about 20% to about 30% by weight, such as in an amount of about 24% by weight.

**[0075]** In one particular embodiment, the composition of the present disclosure includes a combination of an ethylene (methyl)acrylate copolymer combined with a terpolymer of ethylene, methylacrylate and glycidyl methacrylate.

**[0076]** When present in the composition, non-reactive impact modifiers can be included in amounts of from about 0.05% to about 15% by weight, such as in an amount from about 0.1% to about 8% by weight.

**[0077]** Another additive that may be present in the polymer composition is a polytetrafluoroethylene polymer. Inclusion of a polytetrafluoroethylene polymer may enhance the reflectance and the whiteness index of articles made from the polymer composition. The polytetrafluoroethylene polymer may be added to the composition in the form of a fine powder having an average particle size of less than about 50 microns, such as less than about 10 microns. In one embodiment, for instance, the polytetrafluoroethylene powder may have an average particle size of from about 1 micron to about 8 microns. The polytetrafluoroethylene polymer may be present in the composition in an amount from about 0.05% to about 10% by weight, such as from about 0.1% to about 6% by weight.

**[0078]** In one embodiment, the polymer composition can also include a lubricant. The lubricant may comprise, for instance, a polyethylene wax, an amide wax, a montanic ester wax, a polyol ester, or the like. A lubricant, in certain embodiments, for instance, may comprise a polyethylene glycol-dilaurate and/or a neopentyl glycol dibenzoate. In one particular embodiment, the lubricant may comprise an oxidized polyethylene wax. The polyethylene wax may have a density of from about 0.94 g/cm<sup>3</sup> to about 0.96 g/cm<sup>3</sup>. When present, the lubricant

may be included in the composition in an amount from about 0.05% to about 6% by weight, such as from about 0.1% to about 4% by weight.

**[0079]** In addition to the above, the polymer composition may contain various other additives and ingredients. For instance, the composition may contain various thermal and oxidative stabilizers, ultraviolet light stabilizers, brighteners, and the like. Examples of various other ingredients include sterically hindered phenolic antioxidants, phosphite antioxidants and the like.

**[0080]** In one embodiment, the polymer composition may contain a sterically hindered amine light stabilizer. When present in the composition, hindered amine light stabilizers have been found to provide various advantages and benefits. For instance, sterically hindered amine light stabilizers have been found to further improve the reflectance properties of the material, especially after long term aging. Light stabilizers may be present in the composition in an amount from about 0.05% to about 3% by weight, such as in an amount from about 0.05% to about 1% by weight. In one particular embodiment, a hindered amine light stabilizer may be used in conjunction with a hindered phenolic antioxidant and a phosphite stabilizer.

**[0081]** In order to produce articles in accordance with the present disclosure, the polymer composition, in one embodiment, can comprise a melt-mixed blend, wherein all of the polymeric components are well-dispersed within each other and all of the non-polymeric ingredients are well-dispersed in and bound by the polymer matrix, such that the blend forms a unified whole.

**[0082]** Any melt-mixing method may be used to combine the polymeric components and non-polymeric ingredients. For example, in one embodiment, the polymeric components and the non-polymeric components may be added to a melt mixer, such as for example a single or twin-screw extruder, a blender, a kneader, or a Banbury mixer, either all at once through a single step addition, or in a stepwise fashion and then melt-mixed.

**[0083]** The blended composition can then be molded into any desired shape through any suitable molding process. For instance, in one embodiment, articles are formed through injection molding. During injection molding, the temperature of the composition may be from about 280°C to about 350°C. The temperature of the molds, on the other hand, may be in a range of from about 80°C to about 150°C.

**[0084]** As described above, the polymer composition of the present disclosure is particularly well suited for producing reflectors for LED assemblies. The reflectance properties of the polymer are particularly well suited for use with white LEDs. The LED reflector may be in the form of a single piece or may be formed from two or more subparts. In one embodiment, the polymer composition is injection molded over the lead frame as shown in Figs. 1 and 2. In this manner, the lead frame and the reflector become integrated together. The semiconductor light-emitting diode chip can then be mounted within the cavity of the reflector and connected to the lead frame. The LED can be bonded to the lead frame using the bonding wires. The entire assembly can be encased or the cavity defined by the reflector can be filled with a core material such as a solid epoxy that can form a lens for focusing the light in a single direction.

**[0085]** LED assemblies made in accordance with the present disclosure can be used in numerous and different applications. For instance, the LED assemblies can be used in traffic signal lights, LCD displays, backlights, cellular telephones, automotive display lights, automotive headlamps, flashlights, interior lighting, streetlights, and in exterior lighting applications.

**[0086]** In addition to being used in LED assemblies, the polymer composition of the present disclosure can also be used to make various other articles. For instance, the polymer composition can be used to produce any article where good light reflectance properties are desired. For instance, molded articles made according to the present disclosure can be used in signs and labels in order to improve the visual appearance of the item. In one embodiment, for instance, a molded article made in accordance with the present disclosure may be used in a lighted sign, such as an exit sign.

**[0087]** Other applications of the polymer composition include use as a roofing material or used as a component in a solar cell. The polymer composition may also be used to produce trim pieces and bezels for consumer products, such as consumer appliances. In other embodiments, the polymer composition may be used to mold interior trim pieces for vehicles, such as automobiles.

**[0088]** The present disclosure may be better understood with reference to the following examples.

EXAMPLE NO. 1

[0089] The following examples are presented below by way of illustration and not by way of limitation.

[0090] Table 1 below lists various compositions that were prepared by melt compounding the components shown in the table using a 32 mm twin-extruder operating at 300°C, using a screw speed of about 350 rpm and a melt temperature of from about 320°C to about 330°C. Upon exiting the extruder, the compositions were cooled and pelletized.

[0091] The compositions were molded into ISO tensile bars according to ISO Method 527-1/2 using a mold temperature of about 120°C. Tensile properties of the samples were determined using the test method above. Charpy impact strengths and Notched Charpy impact strengths were determined following ISO Test 179.

[0092] Melt viscosity was measured using a capillary rheometer at a temperature of 305°C and at a shear rate of 1000/sec.

[0093] As shown below, each of the formulated compositions included different titanium dioxide particles. Example 1 below contained Type II chalk resistance particles in accordance with the present disclosure. The particles included an alumina surface treatment and had a pH of greater than 7 to 8.3.

[0094] The titanium dioxide particles contained in Example 2 had a surface treatment of alumina and a phosphate. The titanium dioxide particles in Example 2 have medium chalk resistance and are the same particles disclosed in U.S. Patent Application Publication No. 2007/0213458 in Example Nos. 1, 2, 4, 5 and Comparative Example No. 1.

[0095] The titanium dioxide particles contained in Example 3 had a hydrophobic surface treatment of alumina/silica. The particles are believed to have Type V chalk resistance.

| <u>Components</u>    | <u>Example 1</u> | <u>Example 2</u> | <u>Example 3</u> |
|----------------------|------------------|------------------|------------------|
| PCT polymer          | 46.4             | 46.4             | 46.4             |
| Chopped Glass Fibers | 20               | 20               | 20               |

|                                                                    |        |        |        |
|--------------------------------------------------------------------|--------|--------|--------|
| TiO <sub>2</sub> (Type II chalk resistance)                        | 20     |        |        |
| TiO <sub>2</sub> (RCL-4 supplied by Millenium Inorganic Chemicals) |        | 20     |        |
| TiO <sub>2</sub> (Type V chalk resistance)                         |        |        | 20     |
| N,N'ethylene bisstearamide                                         | 0.5    | 0.5    | 0.5    |
| Oxidized polyethylene wax                                          | 0.5    | 0.5    | 0.5    |
| Tetrakis-(methylene-(3,5-di-(tert)-butyl-4-hydrocinnamate))methane | 0.2    | 0.2    | 0.2    |
| Bis(2,4-di-t-butylphenyl)pentaerythritol diphosphite               | 0.3    | 0.3    | 0.3    |
| Benzoxazole,2,2'-(1,2-ethenediyl-di-4,1-phenylene)bis              | 0.1    | 0.1    | 0.1    |
| Ethylene, methyl acrylate, glycidyl methacrylate terpolymer        | 0.5    | 0.5    | 0.5    |
| Phenoxy resin                                                      | 3      | 3      | 3      |
| Ethylene-methylacrylate copolymer                                  | 2.5    | 2.5    | 2.5    |
| Talc nucleant                                                      | 2      | 2      | 2      |
| Polybutylene terephthalate                                         | 4      | 4      | 4      |
| Total                                                              | 100    | 100    | 100    |
| <b>Properties</b>                                                  |        |        |        |
| Melt Viscosity @ 400 (1/s Pa.s)                                    | 373.6  | 391.3  | 515.8  |
| Melt Viscosity @ 1000 (1/s Pa.s)                                   | 241.9  | 252.6  | 317    |
| Tensile Strength (Mpa)                                             | 69.97  | 70.23  | 74.19  |
| Elongation at Break (%)                                            | 1.60   | 1.61   | 1.62   |
| Notched Charpy Impact (KJ/m <sup>2</sup> )                         | 3.73   | 3.78   | 3.8    |
| Unnotched Charpy Impact (KJ/m <sup>2</sup> )                       | 34.19  | 33.84  | 30.91  |
| Whiteness Index before aging                                       | 101.57 | 102.51 | 101.10 |

[0096] As shown above, the composition containing the Type II titanium dioxide particle exhibited a lower melt viscosity.

#### EXAMPLE NO. 2

[0097] Table 2 below lists various compositions that were prepared by melt compounding the components similar to the description given in Example No. 1. All of the following compositions contained a titanium dioxide having Type II chalk resistance characteristics.

[0098] Initial reflectance at 460 nm was determined for each composition using ASTM Test Method E1331 using a CIE D65 daylight illuminant at 10° by a spectracolormeter DataColor 600. Measurements were done on the tensile bars. A higher reflectance number indicates less absorption or loss of light.

[0099] The initial whiteness index and the whiteness index after aging were determined using the same reflectance scan based on WI E313. Higher whiteness index numbers indicate better whiteness.

[0100] The following results were obtained:

| Composition (wt%)                                           | Example 4 | Example 5 | Example 6 | Example 7 | Example 8 | Example 9 | Example 10 | Example 11 | Example 12 |
|-------------------------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|------------|
| PCT polymer                                                 | 54.5      | 47.4      | 51.9      | 46.9      | 49.9      | 47.9      | 47.8       | 40.8       | 43         |
| Chopped Glass Fiber                                         | 20        | 16        | 16        | 16        | 16        | 16        | 18         | 18         | 16         |
| Titanium Dioxide                                            | 25        | 25        | 20        | 25        | 20        | 20        | 20         | 20         | 20         |
| Oxidized polyethylene wax                                   |           | 0.5       | 0.5       | 0.5       | 0.5       | 0.5       | 0.4        | 0.4        | 0.5        |
| Phenolic antioxidant                                        | 0.2       | 0.25      | 0.25      | 0.25      | 0.25      | 0.25      | 0.03       | 0.03       | 0.3        |
| Phosphite stabilizer                                        | 0.3       | 0.3       | 0.3       | 0.3       | 0.3       | 0.3       | 0.03       | 0.03       |            |
| Hindered amine light stabilizer                             |           |           |           |           |           |           | 0.44       | 0.44       | 0.15       |
| Epoxy cresol novolac resin                                  |           | 0.5       |           |           |           |           |            |            |            |
| Benzoxazole, 2,2'-(1,2-ethenediyl-di-4,1-phenylene)bis      |           | 0.05      | 0.05      | 0.05      | 0.05      | 0.05      | 0.1        | 0.1        | 0.05       |
| Ethylene, methyl acrylate, glycidyl methacrylate terpolymer |           | 1         |           | 1         |           | 2         | 0.5        | 0.5        | 0.5        |
| Phenoxy resin                                               |           |           | 2         | 1         | 2         | 2         | 1          | 1          | 1          |
| Polytetrafluoroethylene powder                              |           |           |           |           | 2         | 4         | 3          |            |            |
| Ethylene-methylacrylate copolymer                           |           | 3         | 3         | 3         | 3         | 3         | 3          | 3          | 1.5        |
| Talc                                                        |           | 2         | 2         | 2         | 2         | 2         | 2          | 2          | 2          |
| N,N' ethylene bisstearamide                                 |           |           |           |           |           |           | 0.7        | 0.7        | 1          |
| Polybutylene terephthalate                                  |           | 4         | 4         | 4         | 4         | 4         | 3          | 3          | 8          |
| Liquid Crystal Polymer                                      |           |           |           |           |           |           |            | 10         | 6          |
| Total (wt%)                                                 | 100       | 100       | 100       | 100       | 100       | 100       | 100        | 100        | 100        |
| Properties                                                  |           |           |           |           |           |           |            |            |            |
| Tensile Strength (Mpa)                                      | 61        | 73        | 84        | 76        | 83        | 86        | 69         | 86         | 74         |
| Elongation at Break (%)                                     | 0.9       | 1.9       | 1.8       | 1.9       | 1.8       | 1.7       | 2.0        | 1.7        | 1.6        |
| Notched Charpy Impact (KJ/m <sup>2</sup> )                  | 2.5       | 4.8       | 3.9       | 4.1       | 3.9       | 3.9       | 3.6        | 3.6        | 3.2        |



|                                                         |       |       |       |      |       |       |       |       |      |
|---------------------------------------------------------|-------|-------|-------|------|-------|-------|-------|-------|------|
| Unnotched Charpy Impact<br>(KJ/m <sup>2</sup> )         | 19    | 38    | 32    | 36   | 34    | 33    | 35    | 25    | 25   |
| R% at 460nm                                             | 90    | 91    | 96    | 95   | 96    | 97    | 97    | 93    | 92   |
| Initial Whiteness Index                                 | 81    | 84    | 97    | 93   | 96    | 96    | 99    | 90    | 87   |
| Whiteness Index after aging at<br>200°C for 4 hr        | 37    | 26    | 72    | 78   | 70    | 75    | 62    | 65    | 66   |
| WI Retention after aging (%)                            | 45.7  | 31.0  | 74.2  | 83.9 | 72.9  | 78.1  | 62.6  | 72.2  | 75.9 |
| Melt Viscosity @ 100 sec <sup>-1</sup> /305°C<br>(Pa.s) | 107.5 | 210.9 | 152.3 | 188  | 138.6 | 170.2 | 170.4 | 139.4 | 120  |

[0101] As shown above, compositions made with a titanium dioxide having Type II chalk resistance characteristics displayed excellent initial reflectance.

[0102] These and other modifications and variations to the present invention may be practiced by those of ordinary skill in the art, without departing from the spirit and scope of the present invention, which is more particularly set forth in the appended claims. In addition, it should be understood that aspects of the various embodiments may be interchanged both in whole or in part. Furthermore, those of ordinary skill in the art will appreciate that the foregoing description is by way of example only, and is not intended to limit the invention so further described in such appended claims.

What Is Claimed:

1. A composition for producing molded parts comprising:  
from about 20% to about 60% by weight of a polymer resin a white pigment comprising Type II chalk resistance particles according to ASTM D476 classifications; and  
wherein the composition has an initial reflectance at 460 nm of greater than about 90% and has an initial whiteness index of greater than about 80.
2. A composition as defined in claim 1, wherein the polymer resin comprises poly(1,4-cyclohexanedimethanol terephthalate).
3. A composition as defined in claim 2, wherein the Type II chalk resistance particles comprise titanium dioxide particles.
4. A composition as defined in claim 3, wherein the titanium dioxide particles include a surface treatment.
5. A composition as defined in claim 2, wherein the composition further comprises a polybutylene terephthalate, a liquid crystal polymer, a polytetrafluoroethylene polymer or mixtures thereof.
6. A composition as defined in claim 1, wherein the composition further contains an ethylene-methylacrylate copolymer.
7. A composition as defined in claim 1, wherein the composition has a melt viscosity at a shear rate of 1000/sec and at 305°C of from about 50 Pa.s to about 200 Pa.s.
8. A composition as defined in claim 1, wherein the composition further contains an epoxy-functional resin.
9. A molded article made from the composition defined in claim 1.
10. A molded article as defined in claim 9, wherein the molded article comprises a component in a sign.
11. A molded article as defined in claim 9, wherein the molded article comprises a reflector.
12. A molded article as defined in claim 9, wherein the molded article comprises a trim piece for a consumer appliance.
13. A molded article as defined in claim 9, wherein the molded article comprises a trim piece for an interior of an automobile.

14. A molded reflector, the reflector being molded from a polymeric material, the polymeric material being comprised of a polymer resin, and a white pigment, the polymeric material having an initial reflectance at 460 nm of greater than about 90%, and having an initial whiteness index of greater than about 80, and wherein the white pigment comprises Type II chalk resistance particles according to ASTM D476 classifications.

15. A molded reflector as defined in claim 14, wherein the polymer resin comprises a poly(1,4-cyclohexanedimethanol terephthalate).

16. A molded reflector as defined in claim 14, wherein the Type II chalk resistance particles comprise titanium dioxide particles that include a surface treatment.

17. A molded reflector as defined in claim 16, wherein the titanium dioxide particles comprise a rutile titanium dioxide.

18. A molded reflector as defined in claim 14, wherein the polymeric material has a melt viscosity at a shear rate of 1000/sec and at 305°C of from about 30 Pa.s to about 200 Pa.s.

19. A molded reflector as defined in claim 14, wherein the polymeric material further contains an inorganic filler.

20. A molded reflector as defined in claim 15, wherein the polymeric material contains from about 20% to about 60% of the poly(1,4-cyclohexanedimethanol terephthalate), from about 1 to about 40% by weight of an inorganic filler, and from about 15% to about 50% by weight of the white pigment.

21. A molded reflector as defined in claim 14, wherein the Type II chalk resistance particles have a neutral tint.

22. A molded reflector as defined in claim 14, wherein the Type II chalk resistance particles have a blue tint.

23. A molded reflector as defined in claim 14, wherein the Type II chalk resistance particles exhibit a pH of greater than about 7.

24. A molded reflector as defined in claim 14, wherein the Type II chalk resistance particles exhibit a pH of greater than about 7.5.

25. A molded reflector as defined in claim 16, wherein the surface treatment on the titanium dioxide particles comprises a polysiloxane.

26. A molded reflector as defined in claim 15, wherein the polymeric material further comprises at least one more thermoplastic polymer, the thermoplastic polymer comprising a polybutylene terephthalate, a liquid crystal polymer, or mixtures thereof, the at least one thermoplastic polymer being present in the polymeric material in an amount from about 1% to about 15% by weight.

27. A molded reflector as defined in claim 15, wherein the polymeric material further contains a polytetrafluoroethylene polymer, the polytetrafluoroethylene polymer being present in the polymeric material in an amount from about 1% to about 10% by weight.

28. A molded reflector as defined in claim 14, wherein the polymeric material further contains an ethylene-methylacrylate copolymer.

29. A molded reflector as defined in claim 14, wherein the polymeric material exhibits a spiral flow of greater than 5 inches.


30. A molded reflector as defined in claim 14, wherein the polymeric material further contains a glycidyl methacrylate terpolymer.

31. A molded reflector as defined in claim 14, wherein the polymeric material includes at least one impact modifier.


32. A molded reflector as defined in claim 15, wherein the polymeric material further comprises at least one more thermoplastic polymer, the thermoplastic polymer comprising a polybutylene terephthalate, a liquid crystal polymer, or mixtures thereof, the at least one thermoplastic polymer being present in the polymeric material in an amount from about 1% to about 15% by weight, and wherein the polymeric material further contains a polytetrafluoroethylene polymer, the polytetrafluoroethylene polymer being present in the polymeric material in an amount from about 1% to about 10% by weight.

33. A molded reflector as defined in claim 14, wherein the polymeric material exhibits a notched impact strength of from about 3 to about 5 KJ/m<sup>2</sup>.


1/2

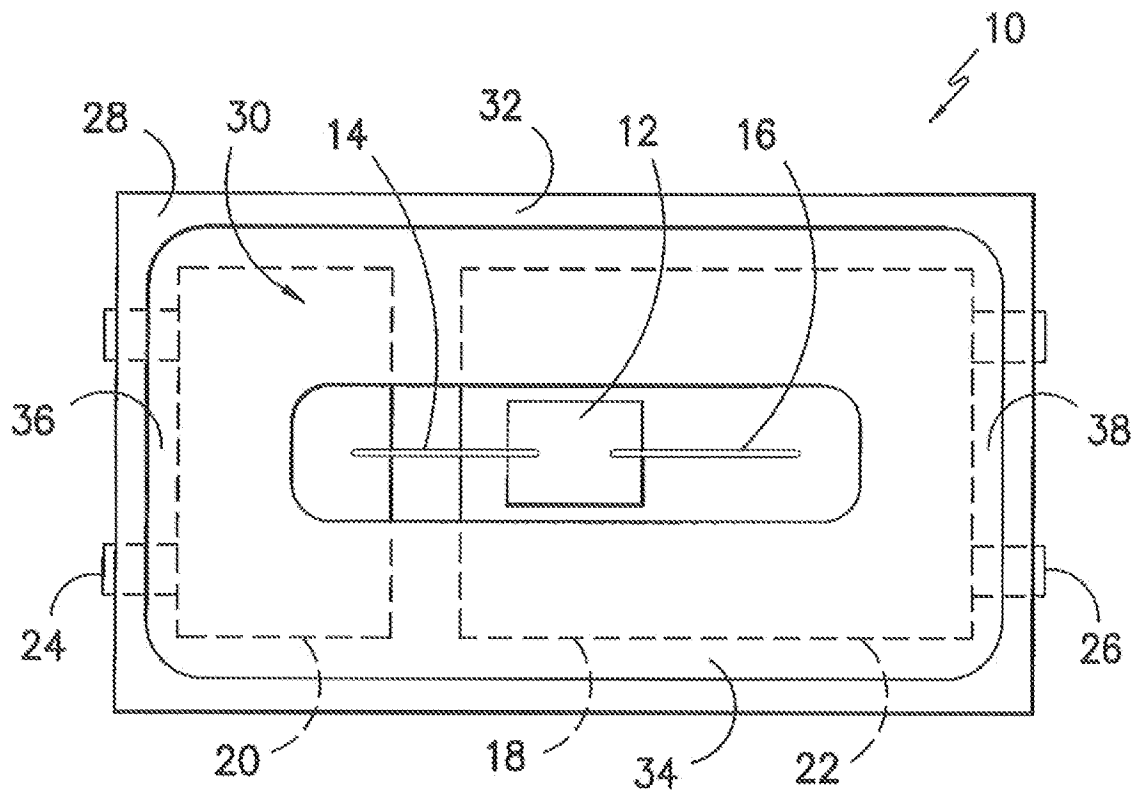


*FIG. -1-*

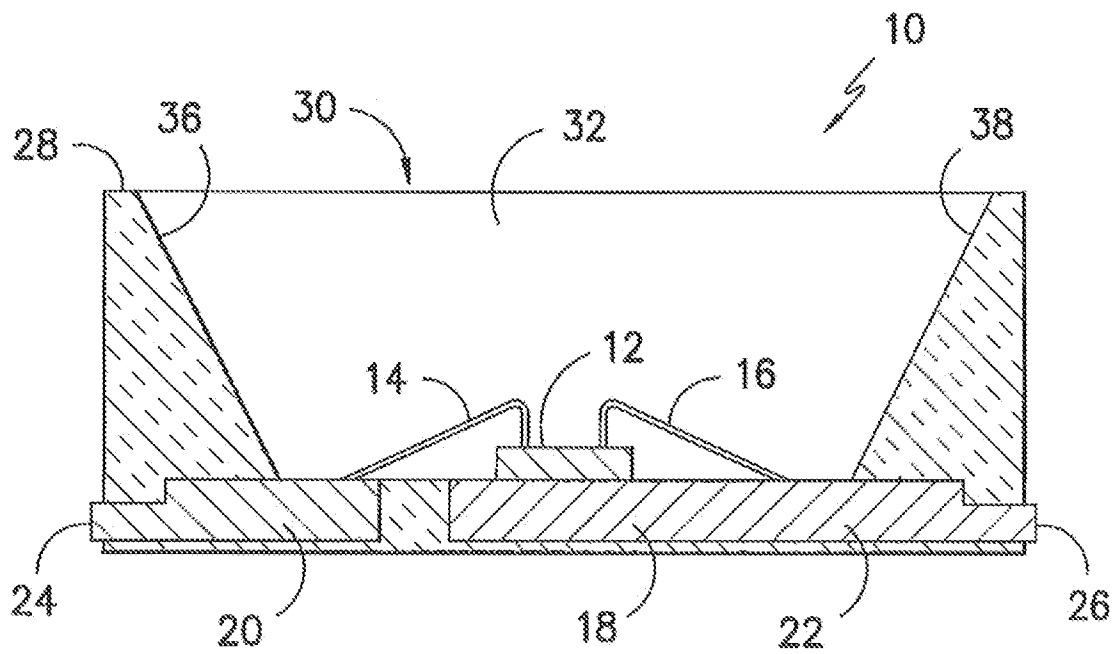

*FIG. -2-*

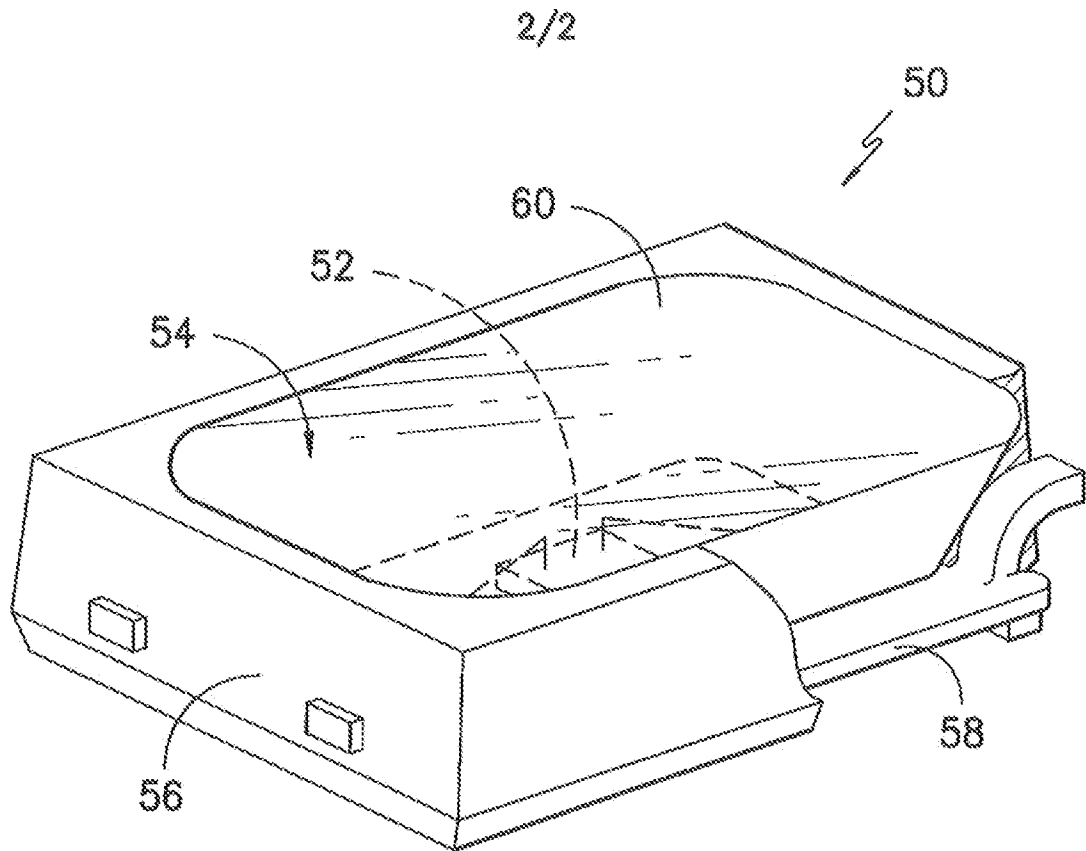

*FIG. -3-*

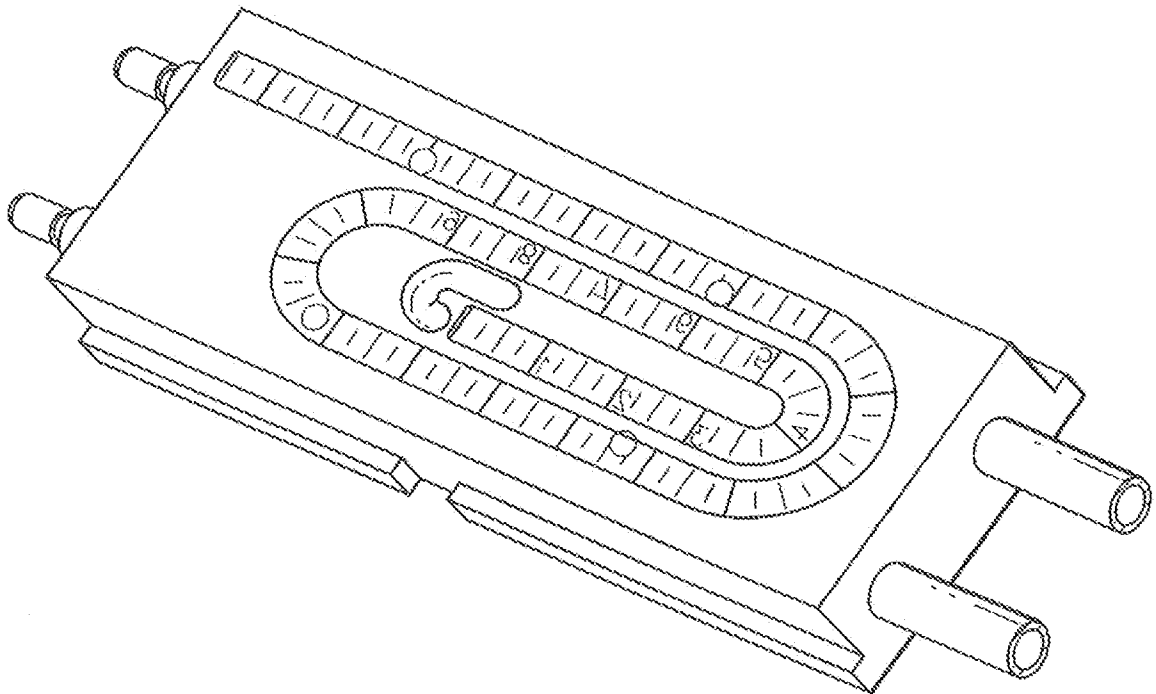

*FIG. -4-*

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2012/032267

A. CLASSIFICATION OF SUBJECT MATTER  
INV. C08K3/00 C08L67/02  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
C08K C08L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                                                                                 | Relevant to claim No. |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| X         | US 2007/213458 A1 (TOPOULOS GEORGIOS [CH])<br>13 September 2007 (2007-09-13)<br>paragraph [0017] - paragraph [0024]<br>examples 1-5; tables 1,3<br>claims<br>-----                                                                                 | 1-33                  |
| X         | DATABASE WPI<br>Week 199120<br>Thomson Scientific, London, GB;<br>AN 1991-146214<br>XP002677438,<br>-& JP 3 084060 A (UNITIKA LTD)<br>9 April 1991 (1991-04-09)<br>abstract<br>example 1<br>examples 2,4; table 2<br>examples 5,6<br>-----<br>-/-- | 1-33                  |



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 June 2012

Date of mailing of the international search report

26/06/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Russell, Graham



## INTERNATIONAL SEARCH REPORT

International application No

PCT/US2012/032267

| C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                       |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Category*                                            | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Relevant to claim No. |
| X                                                    | JP 4 142362 A (GE PLASTICS JAPAN LTD)<br>15 May 1992 (1992-05-15)<br>examples 2-5; table 2<br>-----                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1-33                  |
| X                                                    | US 2009/141505 A1 (USHIKI SHIGERU [JP] ET AL)<br>4 June 2009 (2009-06-04)<br>examples 1,4; table 1<br>paragraph [0056] - paragraph [0057]<br>claims 1-3,7-9<br>-----                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 1-33                  |
| X                                                    | EP 1 798 268 A1 (DUPONT POWDER COATINGS FRANCE [FR])<br>20 June 2007 (2007-06-20)<br>paragraph [0056]<br>-----                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1,3,4,8,9             |
| X                                                    | US 2003/065106 A1 (AMBROSE RONALD R [US] ET AL)<br>3 April 2003 (2003-04-03)<br>paragraph [0116]; examples<br>-----                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1,3,4,8,9             |
| A                                                    | DuPont: "DuPont(TM) Ti-Pure(R) titanium dioxide TITANIUM DIOXIDE FOR COATINGS",<br>,<br>June 2007 (2007-06), pages 1-28,<br>XP55029898,<br>Retrieved from the Internet:<br>URL: <a href="http://www2.dupont.com/Titanium_Technologies/en_US/tech_info/literature/Coatings/CO_B_H_65969_Coatings_Brochure.pdf">http://www2.dupont.com/Titanium_Technologies/en_US/tech_info/literature/Coatings/CO_B_H_65969_Coatings_Brochure.pdf</a><br>[retrieved on 2012-06-14]<br>page 18; table 4<br>-----                                                                                                                                                                                                                                                    | 1                     |
| T                                                    | IARC Working Group on the Evaluation of Carcinogenic Risks to Humans: "" TITANIUM DIOXIDE" in IARC Monographs on the Evaluation of Carcinogenic Risks to Humans "Carbon Black, Titanium Dioxide, and Talc"",<br>This publication represents the views and expert opinions of an IARC Working Group on the Evaluation of Carcinogenic Risks to Humans, which met in Lyon,7-14 February 2006<br>IARC MONOGRAPHS,<br>vol. 93<br>2010, pages 193-214, XP55030094,<br>Lyon (FR)<br>ISBN: 978 92 832 1293 5<br>Retrieved from the Internet:<br>URL: <a href="http://monographs.iarc.fr/ENG/Monographs/vol93/mono93-7A.pdf">http://monographs.iarc.fr/ENG/Monographs/vol93/mono93-7A.pdf</a><br>[retrieved on 2012-06-15]<br>page 195 - page 196<br>----- | 1                     |

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/032267

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
| US 2007213458 A1                          | 13-09-2007          | EP 1925038 A2              | 28-05-2008          |
|                                           |                     | EP 2472603 A1              | 04-07-2012          |
|                                           |                     | JP 2009507990 A            | 26-02-2009          |
|                                           |                     | US 2007213458 A1           | 13-09-2007          |
|                                           |                     | US 2011310622 A1           | 22-12-2011          |
|                                           |                     | WO 2007033129 A2           | 22-03-2007          |
| JP 3084060 A                              | 09-04-1991          | JP 2859314 B2              | 17-02-1999          |
|                                           |                     | JP 3084060 A               | 09-04-1991          |
| JP 4142362 A                              | 15-05-1992          | NONE                       |                     |
| US 2009141505 A1                          | 04-06-2009          | CN 101445645 A             | 03-06-2009          |
|                                           |                     | JP 2009149879 A            | 09-07-2009          |
|                                           |                     | JP 2010275561 A            | 09-12-2010          |
|                                           |                     | TW 200938582 A             | 16-09-2009          |
|                                           |                     | US 2009141505 A1           | 04-06-2009          |
| EP 1798268 A1                             | 20-06-2007          | AT 461254 T                | 15-04-2010          |
|                                           |                     | AU 2006326451 A1           | 21-06-2007          |
|                                           |                     | CA 2630837 A1              | 21-06-2007          |
|                                           |                     | CN 101432376 A             | 13-05-2009          |
|                                           |                     | EP 1798268 A1              | 20-06-2007          |
|                                           |                     | EP 1971653 A1              | 24-09-2008          |
|                                           |                     | ES 2349081 T3              | 27-12-2010          |
|                                           |                     | KR 20080105031 A           | 03-12-2008          |
|                                           |                     | US 2007142570 A1           | 21-06-2007          |
|                                           |                     | WO 2007070608 A1           | 21-06-2007          |
| US 2003065106 A1                          | 03-04-2003          | AU 9071501 A               | 02-04-2002          |
|                                           |                     | AU 2001290715 B2           | 30-09-2004          |
|                                           |                     | BR 0114215 A               | 21-10-2003          |
|                                           |                     | CA 2420246 A1              | 28-03-2002          |
|                                           |                     | CN 1462295 A               | 17-12-2003          |
|                                           |                     | DE 60104871 D1             | 16-09-2004          |
|                                           |                     | DE 60104871 T2             | 18-08-2005          |
|                                           |                     | EP 1322708 A1              | 02-07-2003          |
|                                           |                     | ES 2225607 T3              | 16-03-2005          |
|                                           |                     | JP 3757206 B2              | 22-03-2006          |
|                                           |                     | JP 2004510007 A            | 02-04-2004          |
|                                           |                     | US 6451928 B1              | 17-09-2002          |
|                                           |                     | US 2003065106 A1           | 03-04-2003          |
|                                           |                     | WO 0224809 A1              | 28-03-2002          |