

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number  
**WO 2013/081850 A1**

(43) International Publication Date  
**6 June 2013 (06.06.2013)**

W I P O | P C T

(51) International Patent Classification:  
**G01N 29/02** (2006.01)      **G01N 29/14** (2006.01)

(21) International Application Number:  
**PCT/US20 12/0654 11**

(22) International Filing Date:  
**16 November 2012 (16.11.2012)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
**13/306,211 29 November 2011 (29.11.2011) US**

(71) Applicant: **NALCO COMPANY [US/US]**; 1601 W Diehl Road, Naperville, Illinois 60563-1198 (US).

(72) Inventors; and

(71) Applicants (for US only): **BRADLEY, Michael E.** [US/US]; 21446 Wynstone Drive, Shorewood, Illinois 60404 (US). **MURCIA, Michael J** [US/US]; 446 Rutland Road, DeKalb, Illinois 60115 (US). **SCHWARZ, Daniel E.** [US/US]; 3540 Sweet Maggie Lane, Naperville, Illinois 60564 (US). **CHATTORAJ, Mita** [US/US]; 29W073 Oak Lane, Warrneville, Illinois 60555 (US).

(74) Agents: **YONTER, Edward O** et al; 1601 W Diehl Road, Naperville, Illinois 60563 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report (Art. 21(3))

(54) Title: FOULING REDUCTION DEVICE AND METHOD

FIG. 1

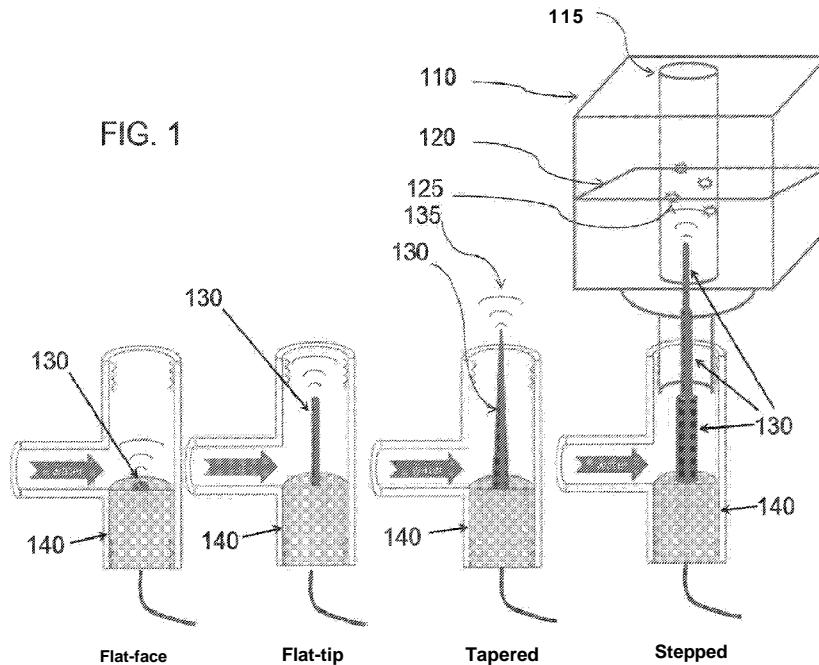

(57) **Abstract:** A device and method for reducing and/or preventing fouling of a sensor is disclosed. The method comprises operating ultrasound technology that is submerged or partially submerged into a liquid medium that is responsible for the fouling. The device comprises the ultrasound technology itself. The ultrasound technology may be operated intermittently at high intensity to advantageously provide cavitation of the liquid medium, while avoiding the disadvantages typical of continuously operating ultrasound technology at high intensity. Additionally, the method may be carried out by taking advantage of the piezoelectric property of quartz.

## FOULING REDUCTION DEVICE AND METHOD

## FIELD OF THE INVENTION

5 The invention is related to a device and method of reducing or preventing fouling in a sensor. More specifically, the invention is related to a device and method of reducing or preventing fouling by emitting ultrasonic waves into a liquid medium that passes through or past a sensor.

10

## BACKGROUND

Sensors, such as the Nalco 3D fluorometer, are useful instruments for measuring water quality and controlling industrial water treatment systems. Fouling of the sensor due to contaminants in water, however, is a well-known problem. When the fouling potential of the 15 water is great enough, sensors foul so quickly and often that they can become practically useless. An example of a type of water with great fouling potential is wastewater. Depending on the configuration of the sensor, different mechanical approaches have been used to reduce and/or eliminate fouling on critical areas of the sensor.

A variety of sensor designs employing mechanical fouling prevention techniques are 20 known in the art. For example, "probe" style sensors where the measuring system is exposed to the water at one flat end of the probe are often equipped with a rubber wiper designed to wipe away foulants from the face of the probe. Examples of such devices are illustrated in U.S. Patent Nos. 5,416,581 and 7,341,695. The wiper operates intermittently and must be replaced on occasion. In addition, the motor inside the probe that drives the wiper may fail from time to 25 time, and the seal separating the electronics from the liquid medium can also be a point of failure. Even during normal operation, the presence of a wiper mechanism on an otherwise flat faced probe can provide an attachment point for foulants to begin depositing on the probe.

As illustrated in U.S. Patent No. 6,678,045, probe-style sensors have also been equipped 30 with ultrasonic transducers designed to vibrate the optical sensor at a certain frequency, or over a range of frequencies. Similar approaches employing ultrasound have been applied to vibrate an instrument with a glass cuvette for optical measurements of a flowing water stream (e.g., U.S. Patent No. 7,808,642), an optical flow cell (e.g., U.S. Patent No. 6,452,672), an ultraviolet disinfection system (e.g., U.S. Patent No. 7,763,177), a steam generator (e.g., U.S. Patent No. 6,572,709), and fluid filled tubes with closed ends (e.g., U.S. Patent No. 5,529,635). In these

examples, the devices that transmit ultrasound make contact with a solid surface of the sensor and are constantly powered. To prevent breakage of the sensor, these applications employ low power and low intensity ultrasound, which has been found ineffective for preventing or removing fouling of sensors. Further, ultrasound has been applied to clean interior surfaces (see U.S.

5 Patent Nos. 7,799,146; 5,889,209; 6,977,015).

Other mechanical devices for preventing or removing foulants on sensors exist. For example, pressurized air or water (e.g., U.S. Patent No. 7,250,302), or pressurized process fluids (e.g., U.S. Patent Nos. 7,803,323 and 4,385,936) in the form of a jet are intermittently sprayed at the critical area of the sensor surface to remove foulants.

10 Accordingly, there is a need for a device and/or method for preventing removing fouling of sensors. Desirably, the device and/or method would be effective for use in even the most contaminated fluid. More desirably, the device and/or method would employ high intensity ultrasonic technology without the need for operator intervention.

15

## SUMMARY OF THE INVENTION

The invention is directed toward a method of reducing and/or preventing fouling of an sensor that is operably attached to an apparatus. The sensor measures at least one parameter within a liquid medium of the apparatus. The method comprises the steps of providing an 20 ultrasound technology comprising a transducer and a probe, wherein the probe and the transducer are operably connected to each other so that the transducer receives a signal from a source, translates the signal to mechanical energy, and transfers the mechanical energy to the probe; submerging at least a portion of the probe into the liquid medium; and operating the ultrasound technology by sending the signal to the transducer so that the probe transfers cyclic sound 25 pressure waves into the liquid medium causing cavitation within the liquid medium, the cavitation sufficient to at least reduce fouling of the sensor.

Alternately, the invention is directed toward a method of reducing and/or preventing fouling of an optical sensor. The optical sensor is comprised of a quartz flow cell. The method comprises the steps of providing the optical sensor that measures at least one parameter within a liquid medium; operably equipping the optical sensor with an electrical source; and applying the current to the quartz flow cell with opposing polarity, the current causing the quartz flow cell to resonate, the resonance causing cavitation within the liquid medium, the cavitation sufficient to at least reduce fouling of the quartz flow cell.

These and other features and advantages of the present invention will be apparent from the following detailed description, in conjunction with the appended claims.

#### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

5

The benefits and advantages of the present invention will become more readily apparent to those of ordinary skill in the relevant art after reviewing the following detailed description and accompanying drawings, wherein:

FIG. 1 illustrates several embodiments of the invention and one application illustrating 10 the invention in operation;

FIG. 2 illustrates a schematic of a typical embodiment of the invention.

#### DETAILED DESCRIPTION OF THE INVENTION

15 While the present invention is susceptible of embodiment in various forms, there is shown in the drawings and will hereinafter be described a presently preferred embodiment with the understanding that the present disclosure is to be considered an exemplification of the invention and is not intended to limit the invention to the specific embodiment illustrated.

It should be further understood that the title of this section of this specification, namely, 20 "Detailed Description of the Invention," relates to a requirement of the United States Patent Office, and does not imply, nor should be inferred to limit the subject matter disclosed herein.

25 A new system and method to reduce and/or prevent fouling, and/or clean fouled sensors, such as a Nalco 3D fluorometer, is disclosed. The invention incorporates the use of ultrasonic technology over prior cleaning devices. The invention provides a mechanical solution that at least reduces the occurrence of sensor fouling.

30 In a presently preferred embodiment, ultrasonic waves are emitted into a liquid medium that flows through or past the sensor. The term "sensor" should be broadly construed to include an optical sensor and also transparent or translucent sensor housings and such. In particular, the term "sensor" includes, but is not limited to, a fluorometer, an infrared sensor, an ultraviolet sensor, a flow cell, a pH sensor, an ORP sensor, a temperature sensor, and any similar technology.

An important advantage of applying ultrasonic waves to the liquid phase instead of the solid phase is the phenomenon of cavitation, or the creation of small imploding "bubbles" in the

liquid phase due to the oscillating ultrasonic sound waves. The imploding bubbles produce high energy forces of heat and flow that are sufficient to clean the surrounding surfaces. Intense cavitation can be accomplished through the use of ultrasonic transducers and probes that are designed to be immersed, either completely or partially, into a liquid medium.

5 Several examples of embodiments of the invention are shown in FIG. 1, where the height and form of the ultrasonic probe are varied. Note that, in addition to the bottom mount configuration shown in FIG. 1, top mounting is also anticipated.

Another advantage of the present invention is that the invention can be easily retro-fitted onto existing instruments with little effort. Since the entire ultrasound device is functionally and 10 physically separate from the sensor, an instrument that is already installed in the field can be retro-fitted with the ultrasonic technology. However, a sensor or an apparatus could be initially manufactured to be equipped with ultrasonic technology as disclosed.

Another improvement relates to the operation of the ultrasonic technology. Whereas 15 previous designs have operated continuously at low intensity, the present invention is designed to operate intermittently at relatively high intensity. While high intensity ultrasonic technology is most effective at cleaning, such operation has disadvantages. For example, high intensity ultrasonic technology can create disturbances in the liquid medium that interfere with the sensor measurements. Additionally, the ultrasonic technology device can erode over time. The term "high intensity" should be construed to include intensities greater than one watt per square 20 millimeter at the tip of the ultrasonic probe. The power intensity applied to the ultrasonic probe is directly related to the amplitude of movement at the tip of the probe, with greater amplitudes producing greater amounts of cavitation.

In order to minimize the disadvantages while preserving the benefits of high intensity 25 ultrasound, the exact timing, frequency, and power applied by the ultrasonic technology can be varied to meet the demands of the particular application. Further the ultrasonic technology can be triggered to turn on when the sensor readings indicate that a lower limit of fouling has occurred on a critical area of the sensor.

As a result of the intermittent operation, measurements can operate without interference 30 from the effects of the ultrasound during the periods when the ultrasonic technology is not operating. In addition, the use of high intensity ultrasound for short periods can provide more intensive cleaning action on the sensor. In a typical application, the ultrasonic technology may be operated for no more than 5% of the time of operation of the sensor.

To maximize the cleaning efficiency of the instant invention, the ultrasound technology should be submerged into the liquid medium in a manner such that the emitted sound waves are

not opposing the direction in which the liquid medium may be flowing. Acceptable orientations include those in which the sound waves and liquid flow vectors are parallel (but not opposing), perpendicular, or any angle other than 180 degrees. In addition, it may be beneficial to combine the ultrasound technology with turbulent flow in the vicinity of the probe tip to increase the 5 effectiveness of the cavitation. Such turbulent flow can be introduced through the use of baffles, static mixers, or other devices known to those skilled in the art,

It may also be beneficial to combine the ultrasound technology with chemical cleaners when ultrasound or chemical cleaning alone is insufficient. Such chemical cleaners can be metered into the liquid medium at a time corresponding to the intermittent operation of the 10 ultrasound technology.

In the embodiments illustrated in FIG. 1, a transducer (140) is connected to a probe (130) that is at least partially submerged into a liquid medium flowing through a quartz flow cell (115) inside an apparatus (110). The apparatus (110) may be a fluorometer housing. Ultrasonic waves (135) are produced inside the liquid media that is within the quartz flow cell (115) by the 15 transducer (140) and transmitted to the probe (130), passing into the liquid media within the quartz flow cell (115). The ultrasonic waves (135) should be sufficient to induce cavitation (125), either constantly or intermittently, within the liquid medium. The plane of measurement (120) is demonstrated for a typical embodiment. For this and all embodiments, a signal is sent to the transducer (140) from a source (not shown) via a conducting wire (shown but not numbered) 20 or any appropriate conducting means.

The cavitation (125) reduces and/or prevents the deposition of foulants and/or removes foulants that were already deposited. The transducer (140) can be any design known to those skilled in the art of ultrasonic technology, such as those described in U.S. Patent No. 7,763,177 to Rozenberg et al. Preferably, the transducer should be a composite material that exhibits 25 piezoelectric effect and outputs in a range of 20 to 200 kHz. More preferably, the output is in the range of about 40 to about 80 kHz, and most preferably the output is 40 kHz. A preferred composite material is lead zirconate.

The invention may be equipped with one or more nozzles for spraying compressed air, water, process fluid, or chemical cleaners onto critical areas of the sensor. The invention may 30 additionally or alternately be equipped with a retractable brush or wiper for scraping debris from the interior walls of the flow cell. These non-ultrasonic devices can be either separate from the optical sensor or designed for incorporation at the time the sensor is manufactured.

FIG. 2 illustrates a typical embodiment of ultrasound technology (4) mounted in a process. An apparatus (12) is mounted (16) so that a liquid medium (11) passes through an inlet

(15), through a flow cell (13), and through an outlet (17). The apparatus (12) comprises at least one sensor (14). The liquid medium (11) in the process stream passes into a tee (9) and through and adaptor (10), which allows the ultrasound technology (4) to be mounted to the apparatus (12) so that the probe (6) penetrates into the liquid medium (11).

5 The ultrasound technology (4) comprises a transducer (3), a horn (5), and a probe (6). The probe (6) is comprised of at least one nodal point (8), and the probe (6) should be mounted to the apparatus (12) at the at least one nodal point (8) via a compression fitting (7). The ultrasound technology (4) may be connected to a source (1) by a communicating cable (2), or any other means of sending a signal from a source to a transducer (3). The source (1) may be an ultrasonic power supply that sends the signal to the transducer (3). The ultrasonic power supply may automatically control the amplitude and/or frequency of the signal, which in turn may control the amplitude and/or frequency of the emitted ultrasonic waves.

10 In an embodiment, the probe comprises a titanium alloy.

15 In another embodiment, the natural piezoelectric properties of quartz are used to produce vibrations without the use of a separate transducer. In this embodiment, electric current is applied with opposing polarity to a quartz flow cell. Preferably, the current is driven by an ultrasonic circuit board designed to output the current while sweeping through a range of frequencies. The action of sweeping through the range of frequencies reduces and/or prevents the formation of standing waves that can damage the contacted surfaces. The current may be 20 applied intermittently.

All patents referred to herein, are hereby incorporated herein by reference, whether or not specifically done so within the text of this disclosure.

25 In the present disclosure, the words "a" or "an" are to be taken to include both the singular and the plural. Conversely, any reference to plural items shall, where appropriate, include the singular.

30 From the foregoing it will be observed that numerous modifications and variations can be effectuated without departing from the true spirit and scope of the novel concepts of the present invention. It is to be understood that no limitation with respect to the illustrated specific embodiments or examples is intended or should be inferred. The disclosure is intended to cover by the appended claims all such modifications as fall within the scope of the claims.

## CLAIMS

We claim:

1. A method of reducing and/or preventing fouling of a sensor operably attached to an apparatus, the sensor measuring at least one parameter within a liquid medium of the apparatus, the method comprising the following steps:
  - providing an ultrasound technology comprising a transducer and a probe, wherein the probe and the transducer are operably connected to each other so that the transducer receives a signal from a source, translates the signal to mechanical energy, and transfers the mechanical energy to the probe;
  - submerging at least a portion of the probe into the liquid medium; and
  - operating the ultrasound technology by sending the signal to the transducer so that the probe ultrasonically vibrates causing cavitation in the liquid medium.
2. The method of claim 1, wherein the operating step is performed intermittently.
3. The method of claim 1, wherein the ultrasound technology is operated for no more than 5% of the time of operation of the sensor.
4. The method of claim 1, wherein the ultrasound technology is operated at a frequency greater than 20 kHz.
5. The method of claim 1, wherein the ultrasound technology is operated at a frequency having a range of 20 kHz to 200 kHz.
6. The method of claim 1, wherein the ultrasound technology is operated at a frequency of about 40 kHz.
7. The method of claim 1, wherein the sensor comprises a quartz flow cell.
8. The method of claim 1, wherein the transducer comprises a composite material.
9. The method of claim 8, wherein the composite material comprises lead zirconate.

10. The method of claim 9, wherein the probe comprises at least one nodal point, the probe operably mounted to the apparatus at the at least one nodal point.
11. The method of claim 10, wherein the probe comprises a titanium alloy.
12. The method of claim 1, wherein the ultrasound technology comprises an ultrasonic power supply, the ultrasonic power supply sending the signal to the transducer and automatically controlling the amplitude and/or frequency of the signal, which in turn controls the amplitude and/or frequency of the emitted ultrasonic waves.
13. A method of reducing and/or preventing fouling of an optical sensor, the optical sensor comprised of a quartz flow cell, the method comprising the following steps:
  - providing the optical sensor, the optical sensor measuring at least one parameter within a liquid medium;
  - operably equipping the optical sensor with an electrical source; and
  - applying the current to the quartz flow cell with opposing polarity, the current causing the quartz flow cell to resonate, the resonance causing ultrasonic cavitation within the liquid medium, the ultrasonic cavitation sufficient to at least reduce fouling of the quartz flow cell.
14. The method of claim 13, wherein the applying the current is performed intermittently.
15. The method of claim 13, wherein the current is driven by an ultrasonic circuit board

1/2


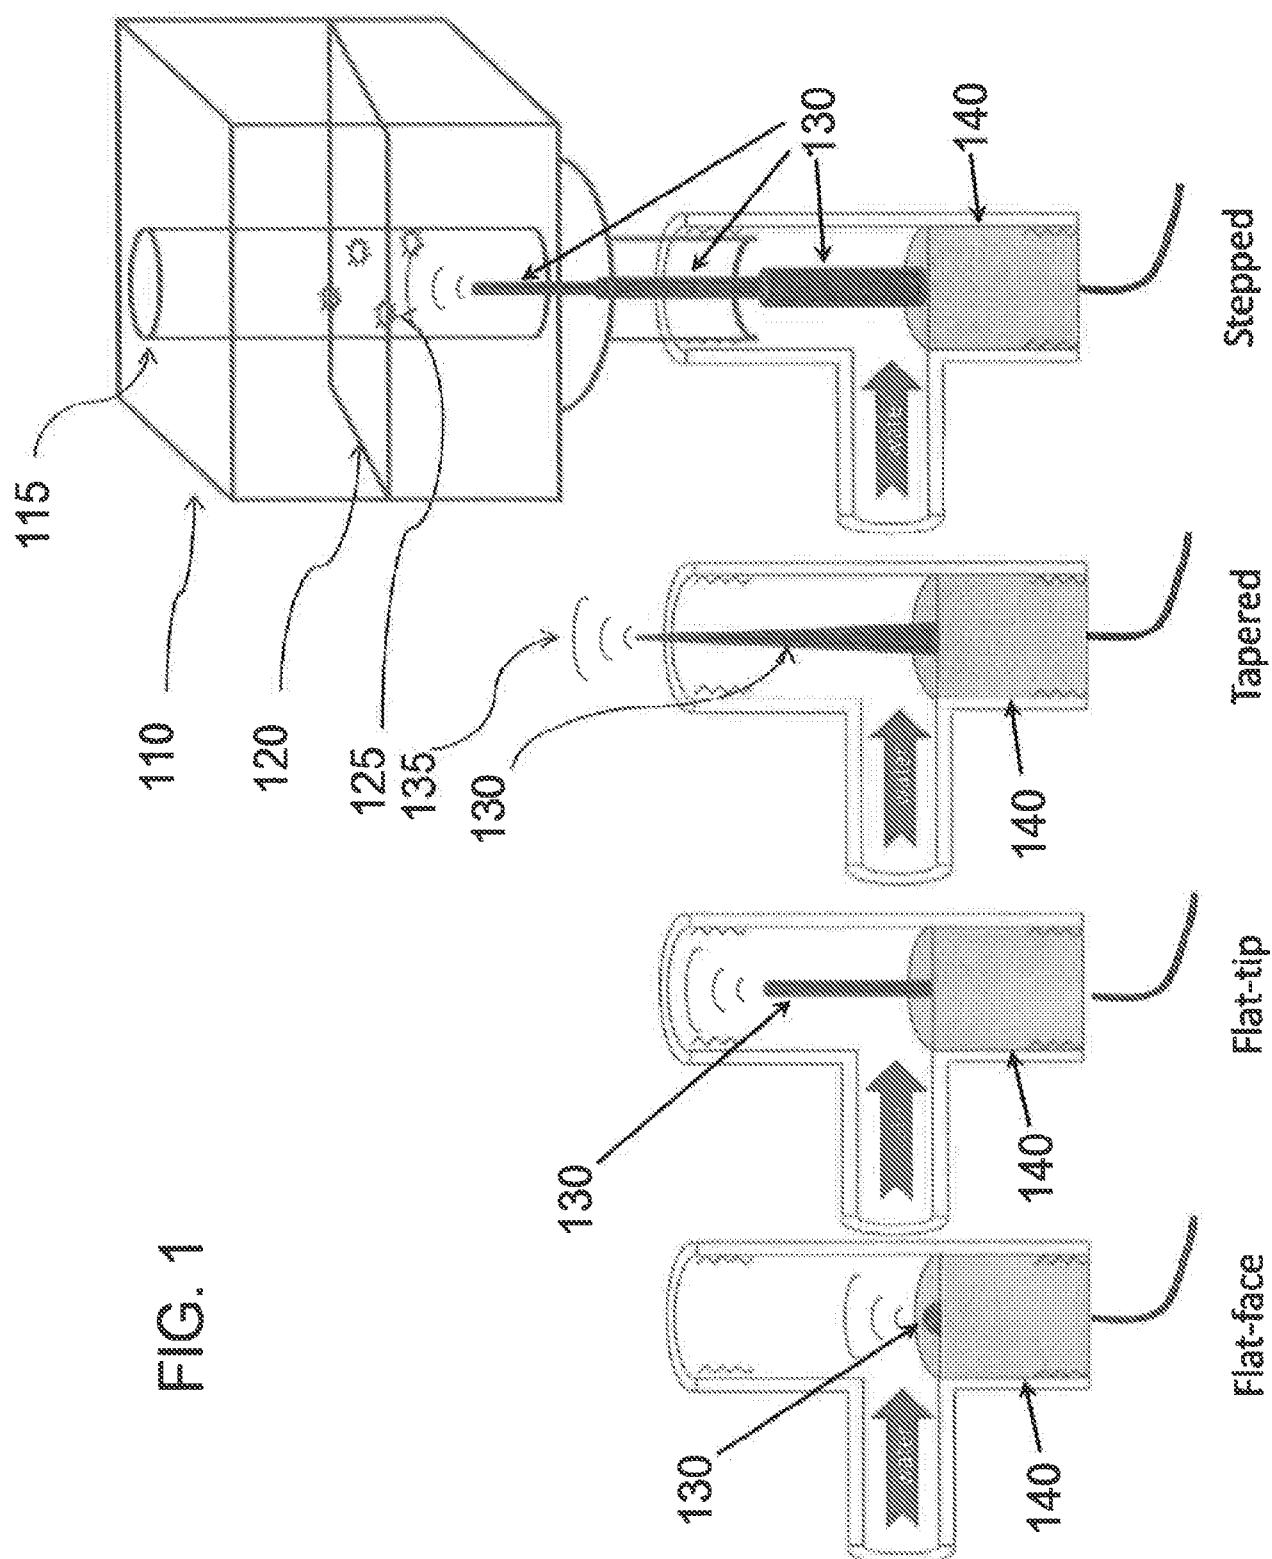


FIG. 2

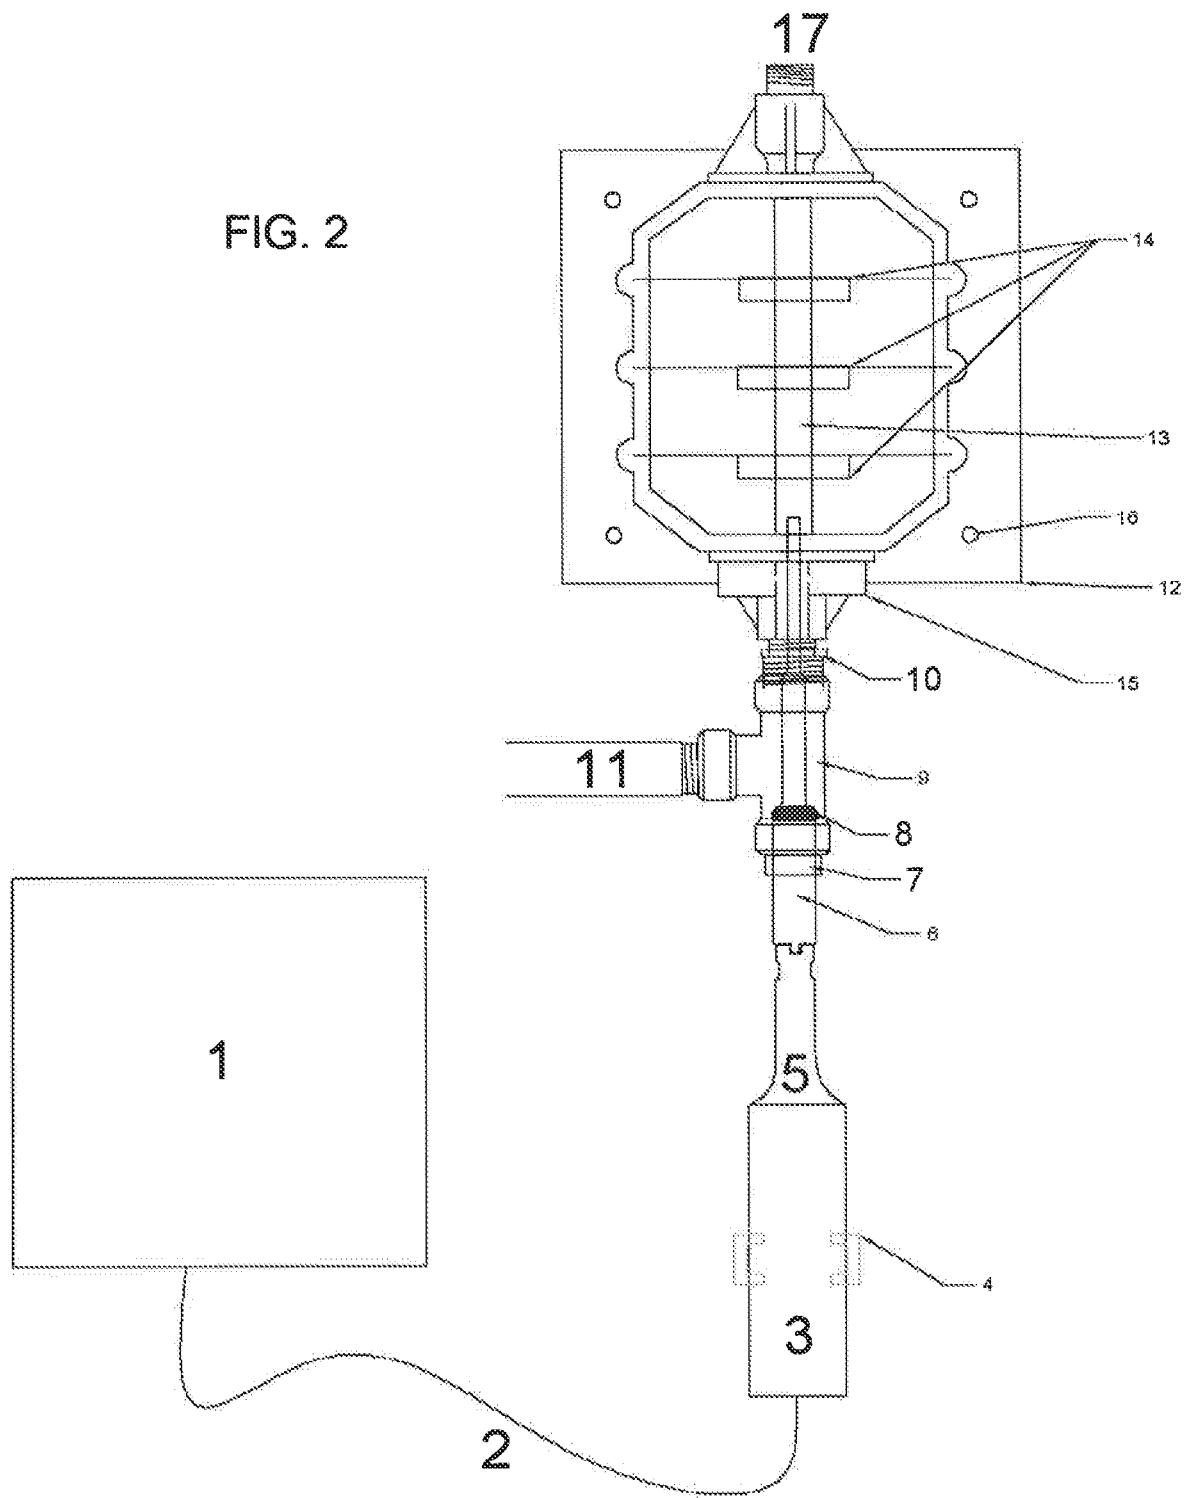

## INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/US2012/065411****A. CLASSIFICATION OF SUBJECT MATTER****G01N 29/02(2006.01)i, G01N 29/14(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

G01N 29/02; B08B 7/02; A61H 1/00; G01N 21/00; B08B 3/12; G01N 29/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
Korean utility models and applications for utility models  
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
eKOMPASS(KIPO internal) & keywords: foul, clean, reduction, quartz, PZT, ultrasound, submerge and cavitation**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6572709 B1 (KANEDA et al.) 3 June 2003	1-6, 10, 12
Y	See abstract ; column 5, line 39 - column 8, line 20; claim 1 and figures J, 2.	7-9, 11
A		13-15
Y	US 2006-0084891 A1 (BARTHE et al.) 20 April 2006 See abstract ; paragraphs [0020] -[0029] ; claims 1, 2 and figures 1-6.	7-9, 11
X	US 7808642 B2 (CONNELLY et al.) 5 October 2010 See abstract ; claims 1,5 and figures 1-7.	13-15
A	US 2005-0210983 A1 (KLEIN et al.) 29 September 2005 See abstract ; claims 1-18 and figures 1-8.	1-15
A	US 5529635 A (ODELL, D. MACKENZIE C.) 25 June 1996 See abstract ; column 6, lines 6-65 ; claims 1-8 and figures 1, 2.	1-15

 Further documents are listed in the continuation of Box C. See patent family annex.

- \* Special categories of cited documents:
- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search  
18 MARCH 2013 (18.03.2013)

Date of mailing of the international search report

**19 MARCH 2013 (19.03.2013)**

Name and mailing address of the ISA/KR



Facsimile No. 82-42-472-7140

Authorized officer

AHN, Jae Yul

Telephone No. 82-42-481-8525



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2012/065411**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6572709 B1	03.06.2003	None	
US 2006-0084891 A1	20.04.2006	US 2010-0241035 A1 US 7758524 B2	23.09.2010 20.07.2010
US 7808642 B2	05.10.2010	US 2006-0042671 A1 US 2009-0009770 A1 WO 2006-047226 A2 WO 2006-047226 A3	02.03.2006 08.01.2009 04.05.2006 19.10.2006
US 2005-0210983 A1	29.09.2005	US 7117741 B2 WO 2006-038910 A2 WO 2006-038910 A3	10.10.2006 13.04.2006 04.05.2006
US 05529635 A	25.06.1996	US 05289838 A US 05529635 A	01.03.1994 25.06.1996