

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2014/105421 A1

(43) International Publication Date

3 July 2014 (03.07.2014)

(51) International Patent Classification:

A62B 18/02 (2006.01) A62B 9/00 (2006.01)
A62B 18/08 (2006.01)

(21) International Application Number:

PCT/US2013/074243

(22) International Filing Date:

11 December 2013 (11.12.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/728,008 27 December 2012 (27.12.2012) US

(71) Applicant: 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(72) Inventor: DUFFY, Dean R.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(74) Agents: HANSON, Karl G., et al.; 3M Center Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: FILTERING FACE-PIECE RESPIRATOR HAVING ROUNDED PERIMETER

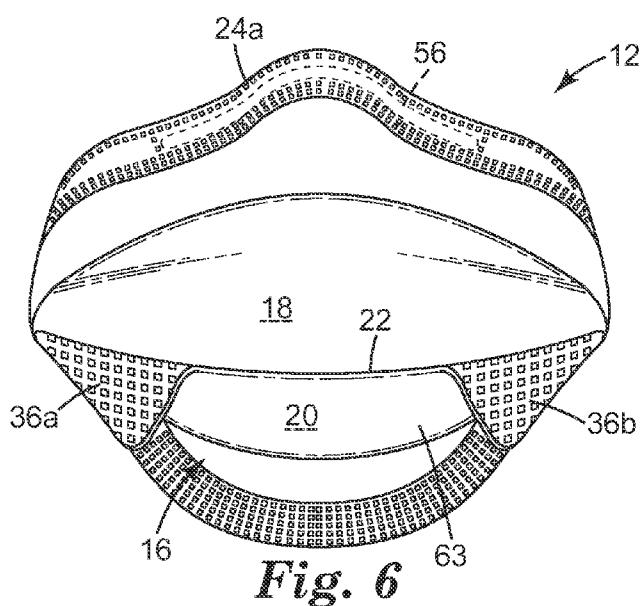

(57) Abstract: A filtering face-piece respirator 10 that includes a harness 14 and a mask body 12. First and second bond lines 30a, 30b are located on opposing sides of the mask body 12 and join a top portion 18 of the mask body 12 to the bottom portion 20. The first and second bond lines 30a, 30b extend from the frontal line of demarcation 22 to upper and lower perimeter segments 24a, 24b. The upper and lower perimeter segments 24a, 24b have an upper linear segment 32a and a lower linear segment 32b, respectively, located between first and second curved portions 34a, 34b. The first and second curved portions 34a, 34b each extend from the respective upper or lower linear segment 32a, 32b to the first and second bond lines 30a, 30b. The invention provides a more rounded finish to the mask body perimeter, which enables the mask body to exhibit a more comfortable fit.

FILTERING FACE-PIECE RESPIRATOR HAVING ROUNDED PERIMETER

[0001] The present invention pertains to a filtering face-piece respirator that has a curved perimeter where top and bottom portion of the mask body meet.

BACKGROUND

[0002] Respirators are commonly worn over a person's breathing passages for at least one of two common purposes: (1) to prevent impurities or contaminants from entering the wearer's respiratory system; and (2) to protect other persons or things from being exposed to pathogens and other contaminants exhaled by the wearer. In the first situation, the respirator is worn in an environment where the air contains particles that are harmful to the wearer, for example, in an auto body shop. In the second situation, the respirator is worn in an environment where there is risk of contamination to other persons or things, for example, in an operating room or clean room.

[0003] A variety of respirators have been designed to meet either (or both) of these purposes. Some respirators have been categorized as being "filtering face-pieces" because the mask body itself functions as the filtering mechanism. Unlike respirators that use rubber or elastomeric mask bodies in conjunction with attachable filter cartridges (see, e.g., U.S. Patent RE39,493 to Yuschk et al.) or insert-molded filter elements (see, e.g., U.S. Patent 4,790,306 to Braun), filtering face-piece respirators are designed to have the filter media cover much of the whole mask body so that there is no need for installing or replacing a filter cartridge. These filtering face-piece respirators commonly come in one of two configurations: molded respirators and flat-fold respirators.

[0004] Molded filtering face piece respirators have regularly comprised non-woven webs of thermally-bonding fibers or open-work plastic meshes to furnish the mask body with its cup-shaped configuration. Molded respirators tend to maintain the same shape during both use and storage. These respirators therefore cannot be folded flat for storage and shipping. Examples of patents that disclose molded, filtering, face-piece respirators include U.S. Patents 7,131,442 to Kronzer et al, 6,923,182, 6,041,782 to Angadjivand et al., 4,807,619 to Dyrud et al., and 4,536,440 to Berg.

[0005] Flat-fold respirators — as their name implies — can be folded flat for shipping and storage. They also can be opened into a cup-shaped configuration for use. Examples of flat-fold respirators are shown in U.S. Patents 6,568,392 and 6,484,722 to Bostock et al., and 6,394,090 to Chen.

[0006] Although flat-fold respirators are convenient in that they can be folded flat for shipping and storage, these respirators, when folded horizontally, tend to define a sharp or defined point where an upper portion of the mask body perimeter meets the lower portion. This point may pinch the wearer's cheek when the respirator is being worn for extended time periods. The present invention, described below, addresses this discomfort by providing a horizontally foldable respirator that has a new perimeter which eliminates the more sharply defined region where the top portion of the mask body perimeter meets the lower portion.

SUMMARY OF THE INVENTION

[0007] The present invention pertains to a filtering face-piece respirator that comprises a harness and a mask body. The mask body comprises a filtering structure that has a top portion, a bottom portion, an upper perimeter segment, a lower perimeter segment, a frontal line of demarcation, and first and second bond lines. The first and second bond lines are located on opposing sides of the mask body and join the top portion of the mask body to the bottom portion. The first and second bond lines extend from the frontal line of demarcation to the upper and lower perimeter segments. The upper and lower perimeter segments, when the mask body is laid flat, comprise an upper linear segment and a lower linear segment, respectively, located between first and second curved portions located at opposing ends of the upper and lower linear segments. The first and second curved portions in each of the upper and lower perimeter segments each extend from the respective upper or lower linear segment to the first and second bond lines.

[0008] The provision of the first and second curved portions provides a more rounded finish to the mask body perimeter when in the in-use configuration, which enables the mask body to exhibit a more comfortable fit. From an aesthetics standpoint, the mask body also has a more appealing look from view from the side in that the perimeter has a more continuous look.

Glossary

[0009] The terms set forth below will have the meanings as defined:

[0010] "comprises (or comprising)" means its definition as is standard in patent terminology, being an open-ended term that is generally synonymous with "includes", "having", or "containing". Although "comprises", "includes", "having", and "containing" and variations thereof are commonly-used, open-ended terms, this invention also may be suitably described using narrower terms such as "consists essentially of", which is semi open-ended term in that it excludes only those things or elements that would have a deleterious effect on the performance of the inventive respirator in serving its intended function;

[0011] "clean air" means a volume of atmospheric ambient air that has been filtered to remove contaminants;

[0012] "contaminants" means particles (including dusts, mists, and fumes) and/or other substances that generally may not be considered to be particles (e.g., organic vapors, et cetera) but which may be suspended in air;

[0013] "crosswise dimension" is the dimension that extends laterally across the respirator, from side-to-side when the respirator is viewed from the front;

[0014] "cup-shaped configuration" means any vessel-type shape that is capable of adequately covering the nose and mouth of a person;

[0015] "curved" means not extending in a straight line;

[0016] "exterior gas space" means the ambient atmospheric gas space into which exhaled gas enters after passing through and beyond the mask body and/or exhalation valve;

- [0017] "filtering face-piece" means that the mask body itself is designed to filter air that passes through it; there are no separately identifiable filter cartridges or insert-molded filter elements attached to or molded into the mask body to achieve this purpose;
- [0018] "filter" or "filtration layer" means one or more layers of air-permeable material, which layer(s) is adapted for the primary purpose of removing contaminants (such as particles) from an air stream that passes through it;
- [0019] "filter media" means an air-permeable structure that is designed to remove contaminants from air that passes through it;
- [0020] "filtering structure" means a generally air-permeable construction that filters air;
- [0021] "first side" means an area of the mask body that is located on one side of a plane that bisects the mask body normal to the cross-wise dimension;
- [0022] "flange" means a protruding part that imparts structural integrity or strength to the body from which it protrudes;
- [0023] "folded inwardly" means being bent back towards the part from which extends;
- [0024] "frontally" or "frontal" means located in a direction extending away from a person's face when the respirator is being worn;
- [0025] "harness" means a structure or combination of parts that assists in supporting the mask body on a wearer's face;
- [0026] "integral" means being manufactured together at the same time; that is, being made together as one part and not two separately manufactured parts that are subsequently joined together;
- [0027] "interior gas space" means the space between a mask body and a person's face;
- [0028] "leading edge" an unattached edge;
- [0029] "line of demarcation" means a fold, seam, weld line, bond line, stitch line, hinge line, and/or any combination thereof;
- [0030] "linear" means extending in a generally straight line;
- [0031] "major portion" means the filtering portion of the mask body;
- [0032] "mask body" means an air-permeable structure that is designed to fit over the nose and mouth of a person and that helps define an interior gas space separated from an exterior gas space (including the seams and bonds that join layers and parts thereof together);
- [0033] "nose clip" means a mechanical device (other than a nose foam), which device is adapted for use on a mask body to improve the seal at least around a wearer's nose;
- [0034] "perimeter" means the outer edge of the mask body, which outer edge would be disposed generally proximate to a wearer's face when the respirator is being donned by a person;
- [0035] "pleat" means a portion that is designed to be or is folded back upon itself;
- [0036] "polymeric" and "plastic" each mean a material that mainly includes one or more polymers and that may contain other ingredients as well;
- [0037] "plurality" means two or more;

- [0038] "radiused" means having a generally constant curvature;
- [0039] "respirator" means an air filtration device that is worn by a person to provide the wearer with clean air to breathe;
- [0040] "second side" means an area of the mask body that is located on one side of a plane that bisects the mask body normal to the cross-wise dimension (the second side being opposite the first side);
- [0041] "snug fit" or "fit snugly" means that an essentially air-tight (or substantially leak-free) fit is provided (between the mask body and the wearer's face); and
- [0042] "transversely extending" means extending generally in the crosswise dimension.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0043] FIG. 1 is a front perspective view of a flat-fold filtering face-piece respirator **10**, in accordance with the present invention, being worn on a person's face;
- [0044] FIG. 2 is a top view of the respirator **10** shown in FIG. 1 in a non-opened configuration;
- [0045] FIG. 3 is a bottom view of the respirator **10** shown in FIG. 1 in a non-opened configuration;
- [0046] FIG. 4 is a cross-sectional view of the mask body **12** taken along lines 3-3 of FIG. 2;
- [0047] FIG. 5 is a cross-sectional view of the filtering structure **16** taken along lines 4-4 of FIG. 3;
- [0048] FIG. 6 is a front view of the mask body **12**, which may be used in connection with the present invention; and
- [0049] FIG. 7 is a left side view of the mask body **12** in accordance with the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

- [0050] In practicing the present invention, a filtering face-piece respirator is provided that has first and second curved segments on opposing ends of the mask body perimeter segments. These curved segments enable a rounded perimeter to be achieved in the region where the upper portion of the mask body meets the lower portion. The rounded perimeter allows a more comfortable fit to be achieved.
- [0051] FIG. 1 shows an example of a filtering face-piece respirator **10** that may be used in connection with the present invention to provide clean air for the wearer to breathe. The filtering face-piece respirator **10** includes a mask body **12** and a harness **14**. The mask body **12** has a filtering structure **16** through which inhaled air must pass before entering the wearer's respiratory system. The filtering structure **16** removes contaminants from the ambient environment so that the wearer breathes clean air. The mask body **12** includes a top portion **18** and a bottom portion **20**. The top portion **18** and the bottom portion **20** are separated by a line of demarcation **22**. In this particular embodiment, the line of demarcation **22** is a frontal fold at a bond line that extends transversely across the central portion of the mask body from side-to-side. The mask body **12** also includes a perimeter **24** that includes an upper segment **24a** and a lower segment **24b**. The harness **14** has a first, upper strap **26** that is secured to the top portion **18** of mask body **12** by a staple **29** adjacent to the perimeter **24a**. The harness **14** also has a second, lower strap **27** that is secured by a staple **29** to a flange **30a**.

[0052] FIG. 2 shows the respirator **10** in a horizontal flat-folded configuration. The top portion **18** of the respirator mask body **12** has an upper perimeter segment **24a**, a frontal line of demarcation **22**, and first and second bond lines **30a**, **30b**. The first and second bond lines **30a**, **30b** are located on opposing sides **31a**, **31b** of the mask body **12** and join the top portion **18** of the mask body **12** to the bottom portion **20** (FIG. 1). The first and second bond lines **30a**, **30b** extend from the frontal fold **22** to the upper perimeter segment **24a**. The upper perimeter segment **24a**, when the mask body **12** is laid flat, has an upper linear segment **32a** located between first and second curved portions **34a** and **34b** located at opposing ends of the upper linear segment **32a**. The first and second curved portions **34a**, **34b** in the upper perimeter segment **24a** extend from the respective upper linear segment **32a** to the first and second bond lines **30a**, **30b**. The mask body **12** also may have flanges **36a** and **36b** located on opposing sides **31a** and **31b**, respectively, of the mask body **12**. A plane **38** bisects the mask body **12** to define the first and second sides **31a**, **31b**. The flanges **36a** and **36b** can be folded inwardly towards the filtering structure **16** in contact therewith. Each flange typically occupies a surface area of about 1 to 15 square centimeters, more typically about 2 to 12 square centimeters, and still more typically about 5 to 10 square centimeters. An integral flange can have welds or bonds **35** provided thereon to increase flange stiffness. Alternatively, an adhesive layer may be used to increase flange stiffness. The flanges may have a flexural modulus of at least 10 Mega Pascals (MPa), more typically at least 20 MPa when bent along a major surface of the flange. At the upper end, the flexural modulus is typically less than 100 MPa, more typically less than 60 MPa. The flanges **36a**, **36b** also typically extend away from a bond line **30a**, **30b** on the mask body **12** at least 2 millimeters (mm), more typically at least 5 mm, and still more typically at least 1 to 2 centimeters (cm). The flanges **36a**, **36b** may be integrally or non-integrally connected to the major portion of the mask body **12** and may comprise one or more or all of the various layers that comprise the mask body filtering structure **16**. Unlike the filtering structure **16**, the layers that comprise the flanges **36a**, **36b** may be compressed, rendering them nearly fluid impermeable. The flanges **36a**, **36b** may be an extension of the material used to make the mask body filtering structure **16**, or they may be made from a separate material such as a rigid or semi-rigid plastic. The mask body perimeter segment **24a** also may have a series of bonds or welds **37** to join the various layers of the mask body **12** together. This perimeter segment **24a** therefore may not be very fluid permeable. The top portion **18** may include one or more pleat lines that extend from the first bond line **30a** to the second bond line **30b** transversely.

[0053] FIG. 3 shows that the lower perimeter segment **24b** also may have a series of bonds or welds **37** to join the various layers. The remainder of the filtering structure **16** – inwardly from the perimeter – may be fully fluid permeable over much of its extended surface, with the possible exception of areas where there are bonds, welds, or fold lines. The bottom portion **20** of the mask body **12** has a lower perimeter segment **24b** between first and second bond lines **30a**, **30b**. The lower perimeter segment **24b**, when the mask body **12** is laid flat, has a lower linear segment **32b** located between first and second curved portions **34a** and **34b** located at opposing ends of the lower linear segment **32b**. The first and second curved portions **34a**, **34b** in the lower perimeter segment **24b** extend from the respective lower

linear segment **32b** to the first and second bond lines **30a**, **30b**, respectively. The curved portions **34a**, **34b** may be curves that have a varying radius or a generally constant radius. The constant radius may be about 10 to 70 millimeters (mm), more typically 20 to 60 mm, and still more typically 30 to 50 mm. The radiused segments may be cut from a mask body blank and are provided along the perimeter segments **24a** and **24b** (FIG. 1) where the top portion **18** of mask body **12** meets the lower portion **20** at the bond lines **30a**, **30b**. The upper and lower segments **24a**, **24b** may be about 10 to 20 cm long, more typically 13 to 19 cm long, and still more typically 15 to 18 cm in length. A smooth radius curve may improve facial contact when the respirator is donned. The radiused cut also may enable the leading edge **39** to match the perimeter along at least a substantial portion thereof. The curved portions **34a**, **34b** on each of the upper and lower perimeter segments **24a**, **24b** allow the perimeter segments **24a** and **24b** to be folded away from each other in a butterfly fashion as shown in FIG. 2. The first and second flanges **36a**, **36b** are joined to the mask body **12** at the bond lines **30a**, **30b** and may be rotated or folded about an axis generally parallel to these lines, respectively. The leading edges **39** of the flanges **36a**, **36b** begin in a location where the bond lines **30a**, **30b** meet the perimeter **24**. The leading edge **39** can be configured to match the perimeter **24** moving in a direction towards the plane **38** that bisects the mask body **12**. The leading edge **39** substantially matches the perimeter **24** for approximately 10 to 50% of its total length. The first and second bond lines **30a**, **30b** are off-set at an angle α from a plane **38** that extends perpendicular to the perimeter **24** of the mask body **12** when viewing the mask body from a top or bottom view in a folded condition. The angle α may be from zero to about 60 degrees, more typically about 30 to 45 degrees. The bottom portion **20** also may include one or more pleat lines that extend from the first bond line **30a** to the second bond line **30b** transversely.

[0054] FIG. 4 illustrates an example of a pleated configuration of a mask body **12** in accordance with the present invention. As shown, the upper portion or panel **18** of the mask body **12** also may include pleats **40** and **41** and half of the frontal line of demarcation **22**. The lower portion or panel **20** of the mask body **12** may include pleats **42** and **44** and half line of demarcation **22**. The line of demarcation **22** may be a fold and/or bond line that separates the upper and lower portions **18** and **20** of mask body **12**. The lower portion **20** of the mask body **12** may include the same, more, or less filter media surface area than the upper portion **18**. The mask body **12** also may include a perimeter web that is secured to the mask body along its perimeter. The perimeter web may be folded over the mask body at the perimeter **24**. The perimeter web also may be an extension of the inner cover web folded and secured around the edge of segments **24a** and **24b**. A nose clip **56** (FIGs. 1, 2, 6 and 7) may be disposed on the upper portion **18** of the mask body centrally adjacent to the perimeter segment **24a** between the filtering structure **16** and the perimeter web. The nose clip may be made from a pliable metal or plastic that is capable of being manually adapted by the wearer to fit the contour of the wearer's nose.

[0055] FIG. 5 shows that the filtering structure **16** may include one or more layers such as an inner cover web **58**, an outer cover web **60**, and a filtration layer **62**. The inner and outer cover webs **58** and **60** may be provided to protect the filtration layer **62** and to preclude fibers from the filtration layer **62** from

coming loose and entering the mask interior. During respirator use, air passes sequentially through layers **60**, **62**, and **58** before entering the mask interior. The air that is disposed within the interior gas space of the mask body may then be inhaled by the wearer. When a wearer exhales, the air passes in the opposite direction sequentially through layers **58**, **62**, and **60**. Alternatively, an exhalation valve (not shown) may be provided on the mask body to allow exhaled air to be rapidly purged from the interior gas space to enter the exterior gas space without passing through filtering structure **16**. Typically, the cover webs **58** and **60** are made from a selection of nonwoven materials that provide a comfortable feel, particularly on the side of the filtering structure that makes contact with the wearer's face. The construction of various filter layers and cover webs that may be used in conjunction with the support structure of the present invention are described below in more detail. The filtering structure also may have a structural netting or mesh juxtaposed against at least one or more of the layers **58**, **60**, or **62**, typically against the outer surface of the outer cover web **60**. The use of such a mesh is described in U.S. Patent Application Publication No. 2010/0154806A1, entitled *Expandable Face Mask with Reinforcing Netting*. To improve wearer fit and comfort, an elastomeric face seal can be secured to the perimeter of the filtering structure **16**. Such a face seal may extend radially inward to contact the wearer's face when the respirator is being donned. Examples of face seals are described in U.S. Patents 6,568,392 to Bostock et al., 5,617,849 to Springett et al., and 4,600,002 to Maryyanek et al., and in Canadian Patent 1,296,487 to Yard. The mask body perimeter **24** also may be folded upon itself in the nose region to achieve a snug fit — see U.S. Patent Application Publication 2011/0315144A1.

[0056] FIG. 6 shows the mask body **12** in an in-use configuration. During use, the flanges **36a**, **36b** are disposed in contact with the first and second sides of the major portion **63** of mask body **12**. The flanges **36a**, **36b** may be folded inwardly towards the mask body. When the flange is pulled in towards the major portion **63** of the mask body **12**, the respirator behaves as a molded respirator rather than a flat-fold respirator. That is, the respirator takes on a structural cup-shaped configuration better capable of better maintaining that shape during use. Thus, a respirator of the invention, having the flanges **36a**, **36b** pulled in towards the major portion **63** of the mask body **12** is, in a sense, a hybrid between a molded respirator and a flat-fold respirator.

[0057] FIG. 7 too shows the mask body **12** in an in-use configuration. The mask body **12** is shown to have a rounded configuration in the perimeter region **64** where the upper and lower segments **24a**, **24b** of the mask body meet. The rounded configuration prevents the mask body **12** from pinching the wearer's cheek or otherwise causing discomfort when the respirator **10** is being donned.

The Filtering Structure

[0058] The filtering structure that is used in connection with the present invention may take on a variety of different shapes and configurations. The filtering structure typically is adapted so that it properly fits against or within the support structure. Generally the shape and configuration of the filtering structure corresponds to the general shape of the mask body. Although a filtering structure has been illustrated with multiple layers that include a filtration layer and two cover webs, the filtering structure

may simply comprise a filtration layer or a combination of filtration layers. For example, a pre-filter may be disposed upstream to a more refined and selective downstream filtration layer. Additionally, sorptive materials such as activated carbon may be disposed between the fibers and/or various layers that comprise the filtering structure. Further, separate particulate filtration layers may be used in conjunction with sorptive layers to provide filtration for both particulates and vapors. The filtering structure may include one or more stiffening layers that assist in providing a cup-shaped configuration. The filtering structure also could have one or more horizontal and/or vertical lines of demarcation that contribute to its structural integrity. The first and second flanges when used in accordance with the present invention, however, may make unnecessary the need for such stiffening layers and lines of demarcation.

[0059] The filtering structure that is used in a mask body of the invention can be of a particle capture or gas and vapor type filter. The filtering structure also may be a barrier layer that prevents the transfer of liquid from one side of the filter layer to another to prevent, for instance, liquid aerosols or liquid splashes (e.g. blood) from penetrating the filter layer. Multiple layers of similar or dissimilar filter media may be used to construct the filtering structure of the invention as the application requires. Filters that may be beneficially employed in a layered mask body of the invention are generally low in pressure drop (for example, less than about 195 to 295 Pascals at a face velocity of 13.8 centimeters per second) to minimize the breathing work of the mask wearer. Filtration layers additionally may be flexible and may have sufficient shear strength so that they generally retain their structure under the expected use conditions. Examples of particle capture filters include one or more webs of fine inorganic fibers (such as fiberglass) or polymeric synthetic fibers. Synthetic fiber webs may include electret-charged, polymeric microfibers that are produced from processes such as meltblowing. Polyolefin microfibers formed from polypropylene that has been electrically-charged provide particular utility for particulate capture applications. An alternate filter layer may comprise a sorbent component for removing hazardous or odorous gases from the breathing air. Sorbents may include powders or granules that are bound in a filter layer by adhesives, binders, or fibrous structures — see U.S. Patents 6,334,671 to Springett et al. and 3,971,373 to Braun. A sorbent layer can be formed by coating a substrate, such as fibrous or reticulated foam, to form a thin coherent layer. Sorbent materials may include activated carbons that are chemically treated or not, porous alumna-silica catalyst substrates, and alumna particles. An example of a sorptive filtration structure that may be conformed into various configurations is described in U.S. Patent 6,391,429 to Senkus et al.

[0060] The filtration layer is typically chosen to achieve a desired filtering effect. The filtration layer generally will remove a high percentage of particles and/or other contaminants from the gaseous stream that passes through it. For fibrous filter layers, the fibers selected depend upon the kind of substance to be filtered and, typically, are chosen so that they do not become bonded together during the molding operation. As indicated, the filtration layer may come in a variety of shapes and forms and typically has a thickness of about 0.2 millimeters (mm) to 1 centimeter (cm), more typically about 0.3 mm to 0.5 cm, and it could be a generally planar web or it could be corrugated to provide an expanded surface area — see, for example, U.S. Patents 5,804,295 and 5,656,368 to Braun et al. The filtration layer

also may include multiple filtration layers joined together by an adhesive or any other means. Essentially any suitable material that is known (or later developed) for forming a filtering layer may be used as the filtering material. Webs of melt-blown fibers, such as those taught in Wente, Van A., *Superfine Thermoplastic Fibers*, 48 Indus. Engn. Chem., 1342 et seq. (1956), especially when in a persistent electrically charged (electret) form are especially useful (see, for example, U.S. Pat. No. 4,215,682 to Kubik et al.). These melt-blown fibers may be microfibers that have an effective fiber diameter less than about 20 micrometers (μm) (referred to as BMF for "blown microfiber"), typically about 1 to 12 μm . Effective fiber diameter may be determined according to Davies, C. N., *The Separation Of Airborne Dust Particles*, Institution Of Mechanical Engineers, London, Proceedings 1B, 1952. Particularly preferred are BMF webs that contain fibers formed from polypropylene, poly(4-methyl-1-pentene), and combinations thereof. Electrically charged fibrillated-film fibers as taught in van Turnhout, U.S. Patent Re. 31,285, also may be suitable, as well as rosin-wool fibrous webs and webs of glass fibers or solution-blown, or electrostatically sprayed fibers, especially in microfilm form. Electric charge can be imparted to the fibers by contacting the fibers with water as disclosed in U.S. Patents 6,824,718 to Eitzman et al., 6,783,574 to Angadjivand et al., 6,743,464 to Insley et al., 6,454,986 and 6,406,657 to Eitzman et al., and 6,375,886 and 5,496,507 to Angadjivand et al. Electric charge also may be imparted to the fibers by corona charging as disclosed in U.S. Patent 4,588,537 to Klasse et al. or by tribocharging as disclosed in U.S. Patent 4,798,850 to Brown. Also, additives can be included in the fibers to enhance the filtration performance of webs produced through the hydro-charging process (see U.S. Patent 5,908,598 to Rousseau et al.). Fluorine atoms, in particular, can be disposed at the surface of the fibers in the filter layer to improve filtration performance in an oily mist environment — see U.S. Patents 6,398,847 B1, 6,397,458 B1, and 6,409,806 B1 to Jones et al. Typical basis weights for electret BMF filtration layers are about 10 to 100 grams per square meter. When electrically charged according to techniques described in, for example, the '507 Angadjivand et al. patent, and when including fluorine atoms as mentioned in the Jones et al. patents, the basis weight may be about 20 to 40 g/m^2 and about 10 to 30 g/m^2 , respectively.

[0061] An inner cover web can be used to provide a smooth surface for contacting the wearer's face, and an outer cover web can be used to entrap loose fibers in the mask body or for aesthetic reasons. The cover web typically does not provide any substantial filtering benefits to the filtering structure, although it can act as a pre-filter when disposed on the exterior (or upstream to) the filtration layer. To obtain a suitable degree of comfort, an inner cover web preferably has a comparatively low basis weight and is formed from comparatively fine fibers. More particularly, the cover web may be fashioned to have a basis weight of about 5 to 50 g/m^2 (typically 10 to 30 g/m^2), and the fibers may be less than 3.5 denier (typically less than 2 denier, and more typically less than 1 denier but greater than 0.1). Fibers used in the cover web often have an average fiber diameter of about 5 to 24 micrometers, typically of about 7 to 18 micrometers, and more typically of about 8 to 12 micrometers. The cover web material may have a

degree of elasticity (typically, but not necessarily, 100 to 200% at break) and may be plastically deformable.

[0062] Suitable materials for the cover web may be blown microfiber (BMF) materials, particularly polyolefin BMF materials, for example polypropylene BMF materials (including polypropylene blends and also blends of polypropylene and polyethylene). A suitable process for producing BMF materials for a cover web is described in U.S. Patent 4,013,816 to Sabee et al. The web may be formed by collecting the fibers on a smooth surface, typically a smooth-surfaced drum or a rotating collector — see U.S. Patent 6,492,286 to Berrigan et al. Spun-bond fibers also may be used.

[0063] A typical cover web may be made from polypropylene or a polypropylene/polyolefin blend that contains 50 weight percent or more polypropylene. These materials have been found to offer high degrees of softness and comfort to the wearer and also, when the filter material is a polypropylene BMF material, to remain secured to the filter material without requiring an adhesive between the layers. Polyolefin materials that are suitable for use in a cover web may include, for example, a single polypropylene, blends of two polypropylenes, and blends of polypropylene and polyethylene, blends of polypropylene and poly(4-methyl-1-pentene), and/or blends of polypropylene and polybutylene. One example of a fiber for the cover web is a polypropylene BMF made from the polypropylene resin "Escorene 3505G" from Exxon Corporation, providing a basis weight of about 25 g/m² and having a fiber denier in the range 0.2 to 3.1 (with an average, measured over 100 fibers of about 0.8). Another suitable fiber is a polypropylene/polyethylene BMF (produced from a mixture comprising 85 percent of the resin "Escorene 3505G" and 15 percent of the ethylene/alpha-olefin copolymer "Exact 4023" also from Exxon Corporation) providing a basis weight of about 25 g/m² and having an average fiber denier of about 0.8. Suitable spunbond materials are available, under the trade designations "Corosoft Plus 20", "Corosoft Classic 20" and "Corovin PP-S-14", from Corovin GmbH of Peine, Germany, and a carded polypropylene/viscose material available, under the trade designation "370/15", from J.W. Suominen OY of Nakila, Finland.

[0064] Cover webs that are used in the invention preferably have very few fibers protruding from the web surface after processing and therefore have a smooth outer surface. Examples of cover webs that may be used in the present invention are disclosed, for example, in U.S. Patent 6,041,782 to Angadjivand, U.S. Patent 6,123,077 to Bostock et al., and WO 96/28216A to Bostock et al.

Respirator Components

[0065] The strap(s) that are used in the harness may be made from a variety of materials, such as thermoset rubbers, thermoplastic elastomers, braided or knitted yarn/rubber combinations, inelastic braided components, and the like. The strap(s) may be made from an elastic material such as an elastic braided material. The strap preferably can be expanded to greater than twice its total length and be returned to its relaxed state. The strap also could possibly be increased to three or four times its relaxed state length and can be returned to its original condition without any damage thereto when the tensile forces are removed. The elastic limit thus is preferably not less than two, three, or four times the length

of the strap when in its relaxed state. Typically, the strap(s) are about 20 to 30 cm long, 3 to 10 mm wide, and about 0.9 to 1.5 mm thick. The strap(s) may extend from the first tab to the second tab as a continuous strap or the strap may have a plurality of parts, which can be joined together by further fasteners or buckles. For example, the strap may have first and second parts that are joined together by a fastener that can be quickly uncoupled by the wearer when removing the mask body from the face. Alternatively, the strap may form a loop that is placed around the wearer's ears — see e.g., U.S. Patent 6,394,090 to Chen et al. An example of a strap that may be used in connection with the present invention is shown in U.S. Patent 6,332,465 to Xue et al. Examples of fastening or clasping mechanism that may be used to joint one or more parts of the strap together is shown, for example, in the following U.S. Patents 6,062,221 to Brostrom et al., 5,237,986 to Seppala, and EP1,495,785A1 to Chien. The harness also may be in the form of a reusable carriage or an adhesive layer that is provided on the internal surface of the perimeter.

[0066] As indicated, an exhalation valve may be attached to the mask body to facilitate purging exhaled air from the interior gas space. The use of an exhalation valve may improve wearer comfort by rapidly removing the warm moist exhaled air from the mask interior. See, for example, U.S. Patents 7,188,622, 7,028,689, and 7,013,895 to Martin et al.; 7,428,903, 7,311,104, 7,117,868, 6,854,463, 6,843,248, and 5,325,892 to Japuntich et al.; 6,883,518 to Mittelstadt et al.; and RE37,974 to Bowers. Essentially any exhalation valve that provides a suitable pressure drop and that can be properly secured to the mask body may be used in connection with the present invention to rapidly deliver exhaled air from the interior gas space to the exterior gas space.

[0067] A nose clip that is used in the present invention may be essentially any additional part that assists in improving the fit over the wearer's nose. Because the wearer's face exhibits in the nose region, a nose clip may be used to better assist in achieving the appropriate fit in this location. The nose clip may comprise, for example, a pliable dead soft band of metal such as aluminum, which can be shaped to hold the mask in a desired fitting relationship over the nose of the wearer and where the nose meets the cheek. An example of a suitable nose clip is shown in U.S. Patent 5,558,089 and Des. 412,573 to Castiglione. Other nose clips are described in U.S. Patent Application 12/238,737 (filed September 26, 2008); U.S. Publications 2007-0044803A1 (filed August 25, 2005); and 2007-0068529A1 (filed September 27, 2005).

[0068] This invention may take on various modifications and alterations without departing from its spirit and scope. Accordingly, this invention is not limited to the above-described but is to be controlled by the limitations set forth in the following claims and any equivalents thereof.

[0069] This invention also may be suitably practiced in the absence of any element not specifically disclosed herein.

[0070] All patents and patent applications cited above, including those in the Background section, are incorporated by reference into this document in total. To the extent there is a conflict or discrepancy

between the disclosure in such incorporated document and the above specification, the above specification will control.

What is claimed is:

1. A filtering face-piece respirator that comprises:
 - (a) a harness; and
 - (b) a mask body that comprises a filtering structure that has a top portion, a bottom portion, an upper perimeter segment, a lower perimeter segment, a frontal line of demarcation, and first and second bond lines, the first and second bond lines being located on opposing sides of the mask body and joining the top portion of the mask body to the bottom portion, the first and second bond lines extending from the frontal line of demarcation to the upper and lower perimeter segments, the upper and lower perimeter segments, when the mask body is laid flat, comprising an upper linear segment and a lower linear segment, respectively, located between first and second curved portions located at opposing ends of the upper and lower linear segments, the first and second curved portions in each of the upper and lower perimeter segments each extending from the respective upper or lower linear segment to the first and second bond lines.
2. The filtering face-piece respirator of claim 1, wherein the first and second curved portions have a generally constant curvature.
3. The filtering face-piece respirator of claim 2, wherein the first and second curved portions have a radius of about 10 to 70 millimeters.
4. The filtering face-piece respirator of claim 3, wherein the first and second curved portions have a radius of about 20 to 60 millimeters.
5. The filtering face-piece respirator of claim 1, wherein the first and second curved portions have a radius of about 30 to 50 millimeters.
6. The filtering face-piece respirator of claim 1, wherein the upper and lower perimeter segments can be folded away from each other in butterfly fashion.
7. The filtering face-piece respirator of claim 1, being a horizontal flat-fold respirator.
8. The filtering face-piece respirator of claim 1, wherein the upper and lower segments are each 10 to 20 cm long.
9. The filtering face-piece respirator of claim 1, wherein the upper and lower segments are each 13 to 19 cm long

10. The filtering face-piece respirator of claim 1, wherein the upper and lower segments are each 15 to 18 cm in length.

11. The filtering face-piece respirator of claim 1, wherein the first and second curved portions have a varying radius.

12. A filtering face-piece respirator that comprises:

(a) a harness; and

(b) a mask body that comprises a horizontally foldable filtering structure that has a top portion, a bottom portion, an upper perimeter segment, a lower perimeter segment, a frontal line of demarcation, and first and second bond lines, the first and second bond lines being located on opposing sides of the mask body and joining the top portion of the mask body to the bottom portion, the first and second bond lines extending from the frontal line of demarcation to the upper and lower perimeter segments, the upper and lower perimeter segments, when the mask body is laid flat, comprising an upper linear segment and a lower linear segment, respectively, located between first and second curved portions located at opposing ends of the upper and lower linear segments, the upper and lower linear segments being about 13 to 19 cm in length, the first and second curved portions in each of the upper and lower perimeter segments each having a radius of curvature 10 to 70 millimeters and extending from the respective upper or lower linear segment to the first and second bond lines, wherein the upper and lower perimeter segments can be folded away from each other in butterfly fashion when the respirator is placed in a flat folded condition.

13. The filtering face-piece respirator of claim 12, wherein the first and second curved portions have a radius of about 20 to 60 millimeters, and wherein the upper and lower segments are each 15 to 18 cm in length.

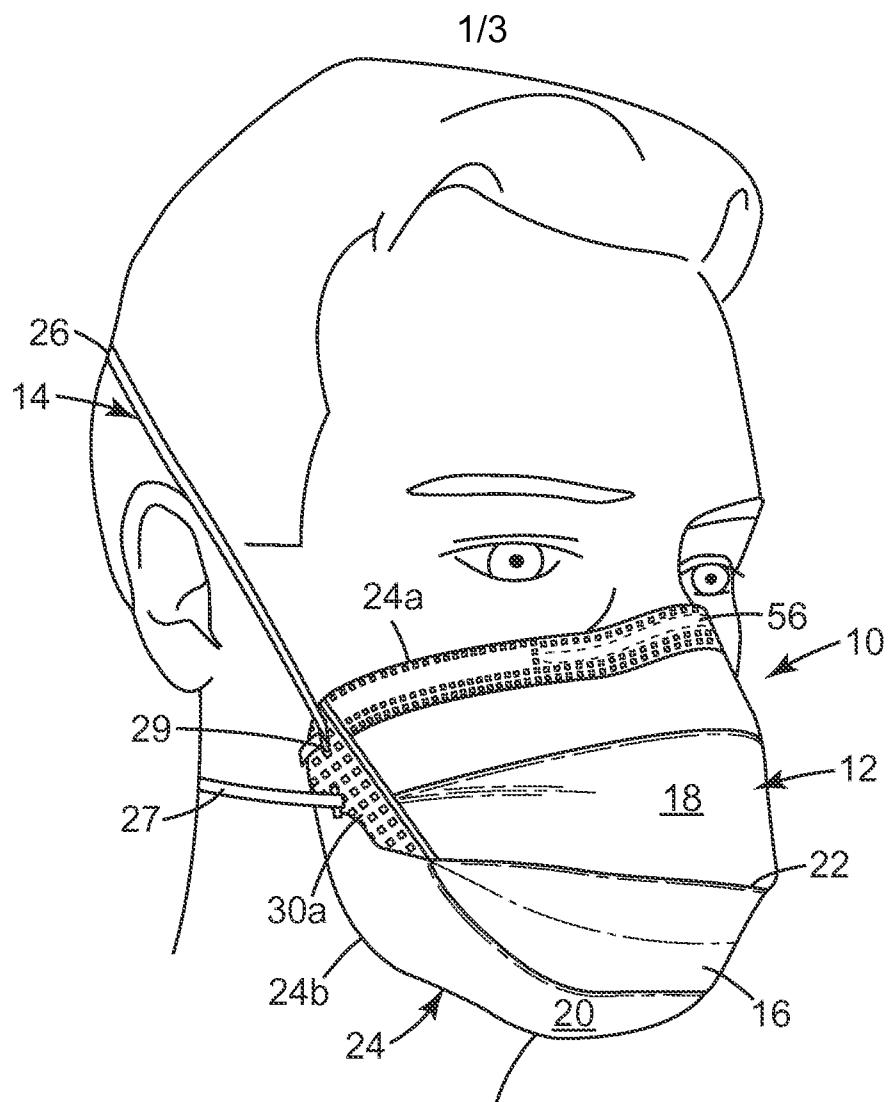


Fig. 1

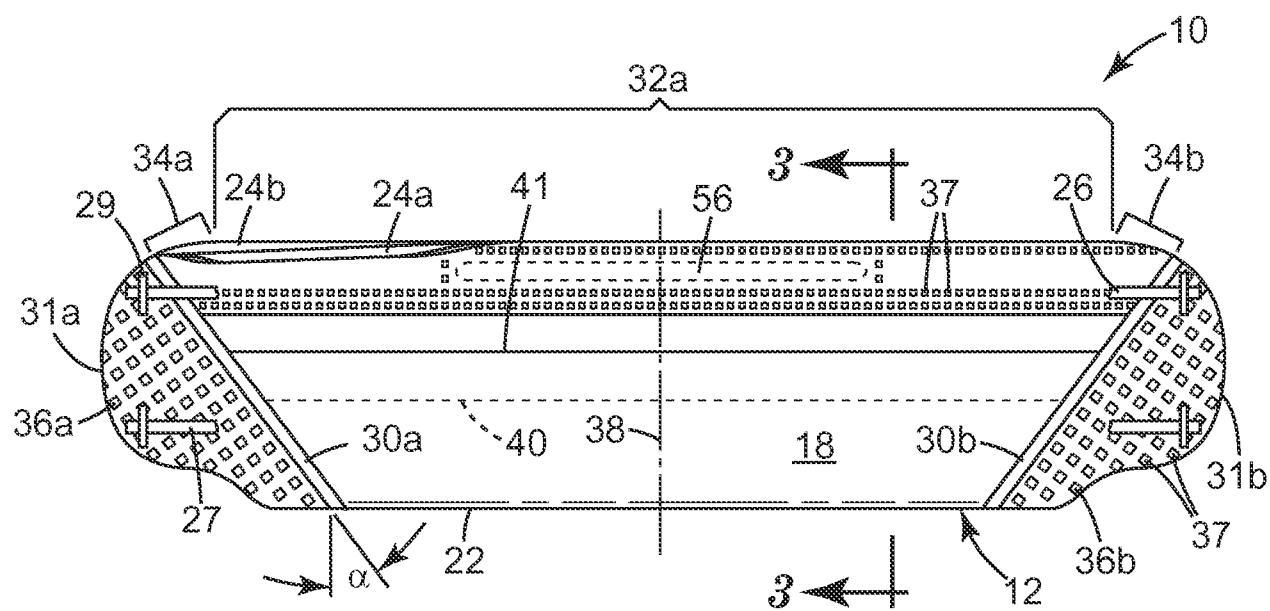


Fig. 2

2/3

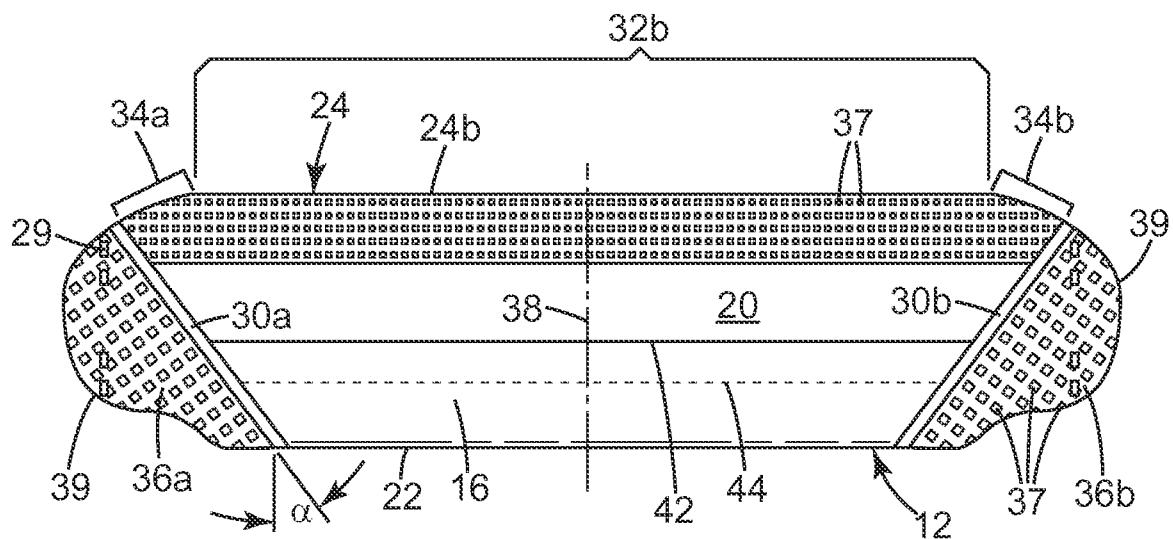


Fig. 3

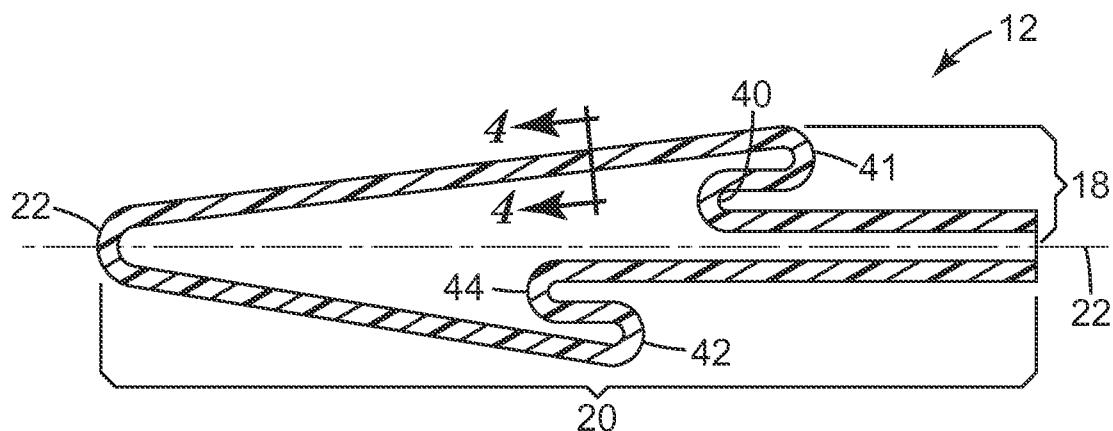


Fig. 4



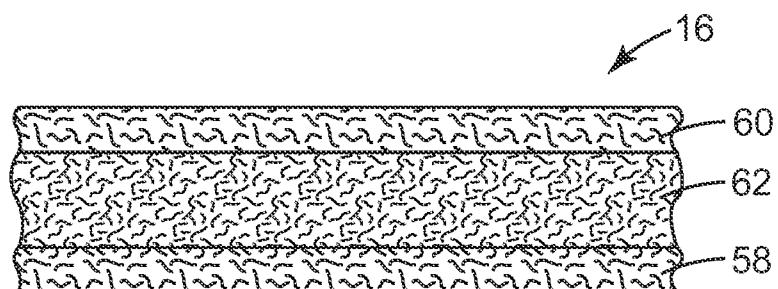


Fig. 5

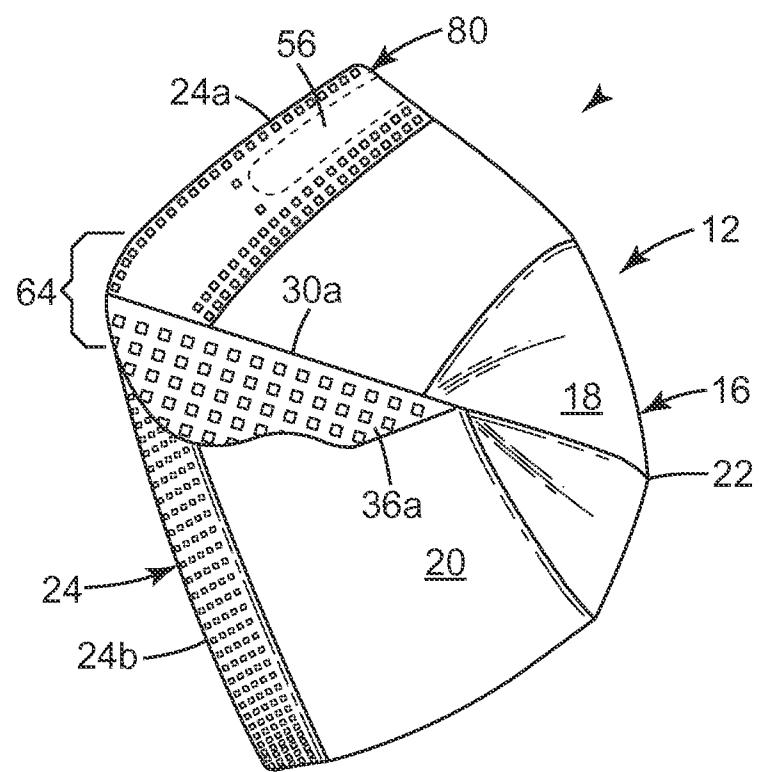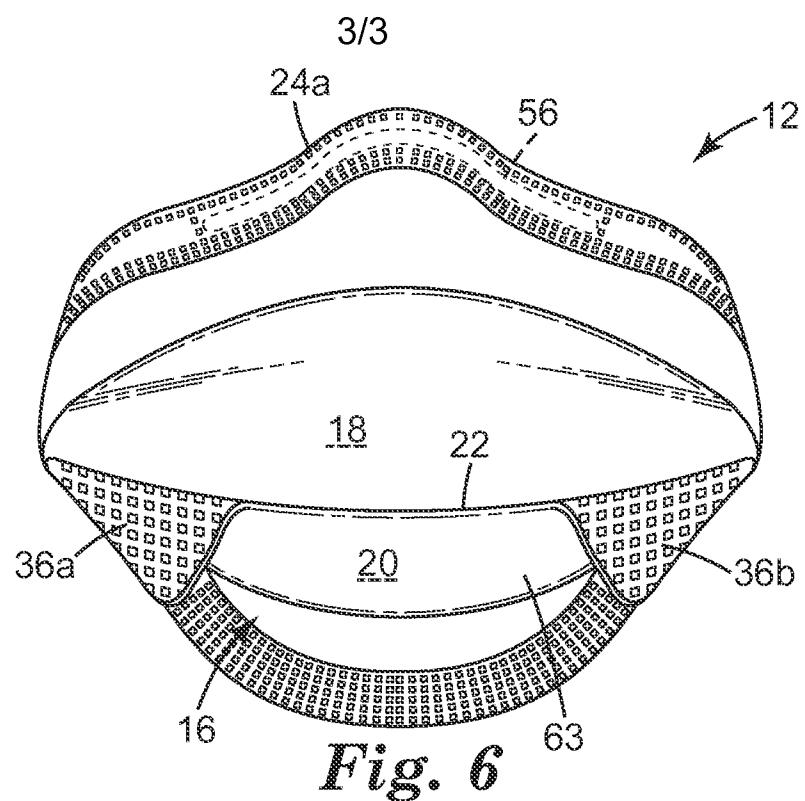

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/074243

A. CLASSIFICATION OF SUBJECT MATTER

A62B 18/02(2006.01)i, A62B 18/08(2006.01)i, A62B 9/00(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A62B 18/02; A62B 7/00; A62B 23/02; A62B 18/08; A62B 9/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: facepiece, respirator, perimeter, filter, round, curve

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010-0154805 A1 (DUFFY et al.) 24 June 2010 See paragraphs [0048]-[0050]; and figures 1, 2.	1-13
A	KR 10-0996678 B1 (LEE SANG HO et al.) 25 November 2010 See paragraphs [0020]-[0026]; and figures 1-3.	1-13
A	US 2011-0315144 A1 (EITZMAN et al.) 29 December 2011 See claims 1-15; and figures 1, 3.	1-13
A	US 2008-0011303 A1 (ANGADJIVAND et al.) 17 January 2008 See paragraph [0062]; and figure 6.	1-13
A	KR 10-2010-0121724 A (FINETECH COR.) 19 November 2010 See claims 1-5; and figure 1.	1-13

Further documents are listed in the continuation of Box C.

See patent family annex.

- * Special categories of cited documents:
- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed


- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search
08 April 2014 (08.04.2014)

Date of mailing of the international search report
09 April 2014 (09.04.2014)

Name and mailing address of the ISA/KR
International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea
Facsimile No. +82-42-472-7140

Authorized officer
CHANG, Bong Ho
Telephone No. +82-42-481-3353



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/074243

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010-0154805 A1	24/06/2010	AU 2009-313668 A1 AU 2009-313668 B2 CN 101909697 A CN 101909697 B EP 2358445 A1 JP 2012-512699 A KR 10-2011-0102138 A MX 2010006174 A RU 2460556 C2 WO 2010-080201 A1	08/07/2010 22/09/2011 08/12/2010 04/07/2012 24/08/2011 07/06/2012 16/09/2011 13/08/2010 10/09/2012 15/07/2010
KR 10-0996678 B1	25/11/2010	KR 10-0966272 B1	28/06/2010
US 2011-0315144 A1	29/12/2011	CN 102958570 A EP 2585177 A2 JP 2013-533024 A KR 10-2013-0122718 A WO 2011-163002 A2 WO 2011-163002 A3	06/03/2013 01/05/2013 22/08/2013 08/11/2013 29/12/2011 24/05/2012
US 2008-0011303 A1	17/01/2008	AU 2007-281395 A1 AU 2007-281395 B2 AU 2007-342320 A1 AU 2007-342320 B2 AU 2007-342321 A1 AU 2007-342321 B2 AU 2007-342322 A1 AU 2007-342322 B2 CA 2659356 A1 CN 101495187 A CN 101495187 B CN 101495188 A CN 101495188 B CN 101495189 A CN 101495189 B CN 101495208 A CN 101495208 B CN 101495209 A CN 101495209 B CN 101495690 A CN 101495690 B CN 101495691 A CN 101495691 B CN 101495693 A CN 101495693 B EP 2046457 A2 EP 2046457 B1 EP 2046458 A2 EP 2046458 B1	07/02/2008 27/01/2011 17/07/2008 22/12/2011 17/07/2008 26/08/2010 17/07/2008 29/07/2010 07/02/2008 29/07/2009 30/05/2012 29/07/2009 04/07/2012 29/07/2009 18/09/2013 29/07/2009 12/12/2012 29/07/2009 12/12/2012 29/07/2009 27/03/2013 29/07/2009 14/12/2011 29/07/2009 05/10/2011 15/04/2009 11/07/2012 15/04/2009 19/06/2013

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/074243

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 2047021 A1	15/04/2009
		EP 2047021 B1	27/11/2013
		EP 2047022 A1	15/04/2009
		EP 2049203 A2	22/04/2009
		EP 2049203 B1	13/03/2013
		EP 2049226 A1	22/04/2009
		EP 2049226 B1	12/09/2012
		EP 2049720 A2	22/04/2009
		EP 2049720 B1	04/09/2013
		EP 2054136 A1	06/05/2009
		EP 2054136 B1	02/01/2013
		JP 04994453 B2	08/08/2012
		JP 05021740 B2	12/09/2012
		JP 05074495 B2	14/11/2012
		JP 05362561 B2	11/12/2013
		JP 2009-545388 A	24/12/2009
		JP 2009-545389 A	24/12/2009
		JP 2009-545390 A	24/12/2009
		JP 2009-545440 A	24/12/2009
		JP 2009-545680 A	24/12/2009
		JP 2009-545681 A	24/12/2009
		JP 2009-545682 A	24/12/2009
		JP 2010-511488 A	15/04/2010
		KR 10-2009-0035560 A	09/04/2009
		KR 10-2009-0035561 A	09/04/2009
		KR 10-2009-0037441 A	15/04/2009
		KR 10-2009-0038440 A	20/04/2009
		KR 10-2009-0038442 A	20/04/2009
		KR 10-2009-0040308 A	23/04/2009
		KR 10-2009-0040890 A	27/04/2009
		KR 10-2009-0040891 A	27/04/2009
		US 2008-0022643 A1	31/01/2008
		US 2008-0026172 A1	31/01/2008
		US 2008-0026173 A1	31/01/2008
		US 2008-0026659 A1	31/01/2008
		US 2008-0026661 A1	31/01/2008
		US 2008-0038976 A1	14/02/2008
		US 2009-0315224 A1	24/12/2009
		US 2010-0201041 A1	12/08/2010
		US 2010-0229516 A1	16/09/2010
		US 2010-0258967 A1	14/10/2010
		US 2011-0074060 A1	31/03/2011
		US 2011-0132374 A1	09/06/2011
		US 2011-266718 A1	03/11/2011
		US 7754041 B2	13/07/2010
		US 7807591 B2	05/10/2010
		US 7858163 B2	28/12/2010
		US 7902096 B2	08/03/2011
		US 7905973 B2	15/03/2011
		US 8029723 B2	04/10/2011

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/074243

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 8372175 B2	12/02/2013
		US 8506871 B2	13/08/2013
		US 8512434 B2	20/08/2013
		US 8580182 B2	12/11/2013
		US 8591683 B2	26/11/2013
		WO 2008-016770 A1	07/02/2008
		WO 2008-016771 A1	07/02/2008
		WO 2008-016782 A1	07/02/2008
		WO 2008-016790 A1	07/02/2008
		WO 2008-076472 A2	26/06/2008
		WO 2008-076472 A3	23/10/2008
		WO 2008-085544 A2	17/07/2008
		WO 2008-085544 A3	30/10/2008
		WO 2008-085545 A2	17/07/2008
		WO 2008-085545 A3	09/10/2008
		WO 2008-085546 A2	17/07/2008
		WO 2008-085546 A3	11/12/2008
KR 10-2010-0121724 A	19/11/2010	None	