



(51) International Patent Classification:

B65B 21/18 (2006.01) B65B 59/00 (2006.01)

B65B 21/20 (2006.01) B65G 47/32 (2006.01)

B65B 35/36 (2006.01)

(21) International Application Number:

PCT/EP2020/071497

(22) International Filing Date:

30 July 2020 (30.07.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

19189041.7 30 July 2019 (30.07.2019) EP

19219856.2 27 December 2019 (27.12.2019) EP

(71) Applicant: ANHEUSER-BUSCH INBEV S.A. [BE/BE];

Grand'Place 1, 1000 Brussels (BE).

(72) Inventors: DUPERRAY, Philippe; 42 Rue de l'Indre,

3600 Châteauroux (FR). DEKOCKER, Wim; Brouwerij-
plein 1, 3000 Leuven (BE).

(74) Agent: BIIP CVBA; Lambroekstraat 5A, 1831 Diegem

(BE).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PACKAGING APPARATUS

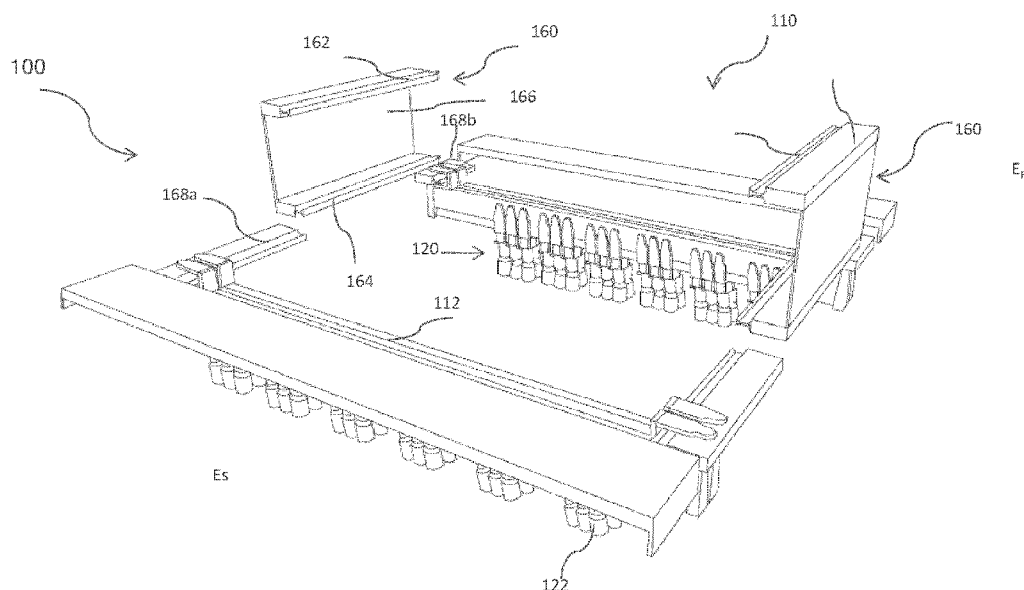


Fig. 1

(57) Abstract: The present invention provides a packaging apparatus for picking up a set of articles from a first conveying line and releasing into a package at a second conveying line, simultaneously.



Packaging Apparatus

TECHNICAL FIELD

5 [001] The present invention generally relates to a packaging apparatus and more particularly relates to a packaging apparatus for packaging items, objects or articles.

BACKGROUND

10 [002] In the recent years, there has been a many-fold increase in the trend of grouping large number of items such as e.g. food items, including liquid foods, home essentials, stationary items, beverage containers, and the like, in (secondary) packages, for various purposes such as to enable bulk selling, easy transportation, handling, and the like.

15 [003] Generally, the packaging of articles such as e.g. beverage containers inside so called secondary packages involves multiple steps including receiving incoming beverage containers from one or more in-feeds, picking up, releasing and dropping the beverage containers within the packages and then closing the packages.

20 [004] Accordingly, numerous attempts have been made to develop improved systems for picking up articles such as beverage containers from a conveyor system and depositing them within a secondary package, such as e.g. a corrugated cardboard box, with high speed and accuracy.

25 [005] Conventionally, this task of moving articles from an article feed conveyor into open receptacles, such as for example cardboard boxes, is achieved by means of effectors and/or manipulators, which may also take the form of robots or automatons. One such robotic arm is disclosed in US Patent No. 5,060,455 ("Robotic Case Packaging System and Method"), the contents of which are hereby incorporated by reference. Further, some high-speed robotic arms as one disclosed in US Patent No. 4,976,582 are also utilized.

30 [006] However, such conventional robotic transfer mechanisms are often not able to accommodate high speed handling because of the use of multiple feed lines: one supplying the e.g. beverage containers and another supplying open packages.

[007] Furthermore, transfer mechanisms must be adjusted to manage a "pitch" between individual articles, article groupings and/or packages. Pitch is generally defined as a central distance between two consecutive articles or items, whatever the items are. Currently, this pitch is set and monitored by using multi-axes robots capable of line-tracking the articles, items or (box-shaped) packages. The loading follows a pre-determined grouping of articles to be packed, corresponding to a certain number of units of articles or products per packages (e.g. box). Further, some variable-pitch pick and place devices have been developed, such as the device disclosed in US Patent No. 5,290,134, to provide the capability of simultaneous pick-up and deposit even where the pitch of one feed may differ from that of another feed. However, such in-line tracking and variable pick-up mechanisms adjustment requires a lot of calculations and analysis, and within a constant changing environment, it is a considerable challenge.

[008] Additionally, the currently known systems are accommodated to transfer a predetermined group of articles having a predetermined fixed shape, configuration, size, or number in a fixed size package. If however, there is a need to switch to a different configuration, package size or other, these robotic arms and other currently known machines require a manual adjustment. During this manual change over period, which can be thirty minutes or more, a machine cannot be used (known as "down time"), which is an expensive delay in any plant.

[009] Accordingly, as can be understood from the foregoing discussion, none of the existing solutions completely provide the flexibility of using a same packaging machine to handle varying configurations, shapes and pitches during an intermittent or continuous packaging operation of articles in a (secondary) package. Thus, in the context of the above, an improved packaging apparatus is desired which, while being cost effective and easy to implement, allows to carry out packaging even with varying pitches, shapes, sizes, arrangements, and the like without needing interchanging elements and components.

SUMMARY

In one aspect of the invention, a packaging apparatus is provided for picking up a set of articles, such as e.g. beverage containers, from a first conveying line and releasing the articles into a package at a second conveying line, simultaneously. The packaging apparatus includes a central packaging frame extending between a first conveying line at a first end and a second conveying line at a second end. The central packaging frame includes a pair of transversally directed spaced apart generally parallel central tracks, namely a first central track and a second central track. Each of the central tracks includes a top rail connected to a bottom rail through a central body portion. The central packaging frame further includes a plurality of pairs of outer rails, one configured at each end of each of the pair of central tracks. Each of the outer rails is adapted to move up and down so as to optionally connect to one of the top rails and/or the bottom rails of the central track and define respectively a top path and a bottom path there through. The packaging apparatus further includes a plurality of support means extending longitudinally between the spaced apart central tracks. Each of the support means includes one or more gripper sets having a plurality of gripping heads arranged in a predetermined configuration, movingly supported thereon. Furthermore, the packaging apparatus includes a vertical movement mechanism for enabling a vertically upward and/or a downward movement of each of the outer rails independently between a top position and a bottom position. The packaging apparatus additionally includes a horizontal movement mechanism for moving each of the support means along at least one of the top and/or bottom path between the first end and the second end. In operation the upward and/or the downward movement of each of the outer rails and the horizontal movement of each of the support means is synchronized in such a way that the gripper sets on at least one of the support means is adapted to pick up a set of articles, such as e.g. beverage containers, from the first conveying line at the first end, and the gripper sets on at least one other support means is adapted to release already picked up beverage containers into a secondary package at the second conveying line at the second end, simultaneously.

[0010] Potentially, the support means include one or more support rails extending longitudinally and generally perpendicularly between the first central track and the second central track and is configured to carry one or more gripper sets thereupon.

[0011] Further potentially, the horizontal movement mechanism includes one or more pairs of support movers engaging each of the support means at its opposite ends and movingly configured onto the pair of central tracks and the corresponding connected outer rails.

5 **[0012]** Furthermore potentially, each of the support rails include a combination of one or more parallel rails, each adapted to hold a row of gripper heads of the one or more gripper sets.

[0013] Yet further potentially, the packaging apparatus includes a gripper moving mechanism for longitudinally moving the one or more gripper sets and/or gripper heads towards and/or away from each other, onto the
10 corresponding support rails.

[0014] Possibly, the gripper moving mechanism includes a plurality of gripping movers movingly configured onto the support means, each of the gripping movers adapted to movingly engage one of the gripping head
15 therewith.

[0015] Generally, the vertical movement mechanism includes a rail moving slot at each end of the pair of central tracks throughout its central body portion such that the corresponding outer rail is slidably movable there through between its top position and the bottom position.

20 **[0016]** In an embodiment, as illustrated in FIG 7, the vertical movement mechanism may comprise a vertical transportation unit 701, for example a belt, at each end of the pair of central tracks, onto which one or preferably more corresponding outer rails 268 are fixed. The vertical movement of these vertical transportation units results in a vertical movement of the one or more
25 corresponding outer rails. Preferably, the vertical transportation units are closed loop units, for example a rotary belt, enabling a continuous vertical rotary movement of the one or more corresponding outer rails at each end of the pair of central tracks, and thereby enabling continuous motion of the support means 212.

30 **[0017]** Optionally, each of the plurality of support rails is movable in a widthwise direction and each of the gripping heads is movable within a length wise direction such that the gripper set having a desired configuration of the gripping heads may be achieved.

[0018] Further optionally, each gripper-set of the plurality of gripper sets has a varying pitch adjustable on the basis of one or more factors selected from, but not limited to, difference in speed of conveying lines, difference between pitch of packages, arrangement of articles, and the like.

5 **[0019]** Possibly, in the case of the articles being beverage containers, the gripping head may include a gripper body extending towards a downwardly protruding beverage container head adapted to selectively perform an operation selected from pick up and/or release operation. In such case, the gripping head may be an electric tulip gripper, optionally equipped with built-in
10 sensors such as for example a closure sensor and/or a container presence sensor.

[0020] Optionally, in the case of the articles being beverage containers (Cans or Bottles), each of the gripping heads may include a container
15 orienting mechanism adapted to orient the beverage container in a desired orientation and possibly being capable of spinning the container through > 360°.

[0021] Further optionally, in the case of the articles being beverage containers, the container orienting mechanism may be selected from one or
20 more of, but not limited to, any suitable conventional rotating mechanism such as a rotational servo, stepper or permanent magnet motor. The motor may further more be integrated into the body of the gripping mover such that a compact, light weight assembly is realized.

[0022] In a preferred embodiment, article rotation to spin or otherwise
25 rotate the article may be realized via a motor mounted within and fully integrated with the body of the gripping mover, preferably with angular position sensing encoder. Further more, spin or rotation is powered and controlled by wireless, contactless inductive power supply/s and controlled also by the wireless machine automation. The system including
30 appropriate wireless feedback sensing likewise via a two-way wireless machine automation and control system, powered by a slide power supply or contactless, wireless inductive power supply system/s, all of which enable untethered freedom of far ranging yet controlled motion and operation. The motor may be a stepper, permanent magnet, servo motor

or the like suitably powerful and controllable for the duty and small enough to fit.

[0023] In a preferred embodiment, the gripping head is an electrically activated tulip optionally complete with container presence and container closure presence sensing along with optional solenoid activation sensing. The electric tulip is realized via the said wireless machine control and either the slide power supply or contactless, wireless power supply, all of which enable untethered freedom of far ranging yet controlled motion and operation.

[0024] Generally, the first conveying line may be an output line of an article manufacturing unit having one or more means for grouping and/or arranging the articles in a predetermined configuration.

[0025] Further, the second conveying line may be an output line of a package forming unit.

[0026] Possibly, the package is an already formed top open box having one or more side flaps for facilitating a closure thereof.

[0027] Further possibly, the package is formed of a foldable blank of a material selected from one or more of, but not limited to, carton paper board, corrugated paper board, thermoplastic, hybrid material, laminated board and the like.

[0028] The packaging apparatus of the present invention may be provided with a guiding unit for facilitating the release of the articles in the package such that closure of the package is prevented during the release operation. The guiding unit includes an overhead frame formed of at least two spaced apart generally parallel longitudinal tracks and at least two spaced apart generally parallel transverse tracks. Each of the longitudinal tracks is horizontally movable towards and away from each other using a track movement mechanism. The guiding unit further includes one or more pairs of generally opposite movable guiding means configured onto the parallel longitudinal tracks. Each of the guiding means is of predetermined shape adapted to conform to at least an inner side wall or corner of the package such that when in contact with the side-wall, a closure of a side-flap extending there-through is prevented. In operation, when the gripper set is performing the release operation, an upward and/or downward movement of

the overhead frame in the vertical direction and the movement of each of the guiding unit in horizontal direction is optimized in such a way that the each of the pair of guiding means is adapted to receive one of the gripper set there through within the package. Further, the pair of guiding means conforms to the inner sidewalls of package thereby keeping the package in an opened state during the release operation.

[0029] Potentially, the guiding unit includes a plurality of guiding movers movingly configured onto the longitudinal tracks, each of the guiding movers adapted to movingly engage one of the guiding means on the longitudinal rails.

[0030] Possibly, the packaging apparatus further includes a control unit for optimizing the movement of the outer rails and/or support means and/or gripper sets and operation of other components and elements of the apparatus.

[0031] Further possibly, the control unit includes one or more sensors, one or more input units, a processor unit and an output unit.

[0032] Possibly, the track movement mechanism includes one of more pairs of engaging members, each pair of the engaging members adapted to engage one of the longitudinal tracks at its opposite ends.

[0033] Further possibly, the track movement mechanism includes a plurality of track movers movingly configured onto the transversal tracks, each of the track movers adapted to movingly engage one of the engaging members thereupon, thereby enabling a horizontal movement of the longitudinal rails along the transverse rails.

[0034] Possibly, the packaging apparatus includes a first powering means for enabling a vertical movement of the one or more outer rails, wherein the said first powering means is selected from one or more of, but not limited to, linear motors, servo motors and synchronic and/or asynchronous motor drives.

[0035] Further possibly, the packaging apparatus includes a second powering means for powering the plurality of movers including gripping movers, support movers, guiding movers, and the track movers wherein the second powering means is selected from one or more of, but not limited to, linear motors, servo motors and synchronic and/or asynchronous motor drives.

[0036] Generally, the first powering means may be same as the second powering means and is selected as a linear motor or any other type of independent motion controlled driving means. In the case of the linear motor using the sliders as rotors and the corresponding tracks as stator thereof.

5 **[0037]** In a particular embodiment of the present invention, as illustrated in FIG. 7, with regards to the horizontal movement mechanism of the support means, the second powering mechanism may comprise motors 702, preferably geared motors. These motors may be preferably configured onto the support means 212 and wirelessly powered, and more preferably
10 wirelessly controlled as well, in order to enable a continuous independent movement of each support means driven by respective motors configured at its opposite ends.

[0038] Alternatively, the horizontal movement mechanism of the support means may be powered by a pushing or pulling driving mechanism engaging
15 onto the support means enabling pulling or pushing the support means horizontally from an outer rail over a central rail towards another outer rail. Such pulling or pushing driving mechanism may be for example a motion controlled integrated linear thrusters based mechanism, a rack and pinion mechanism or a drive roller/s and position sensing mechanism.

20 **[0039]** In an embodiment of the present invention, the gripper sets and/or the gripping heads may be wirelessly powered, for example via sliding contacts on the gripping movers, or preferably contactless powered, for example by providing inductive power to the gripping movers. Further, the gripper sets and/or the gripping heads may be wirelessly controlled, including
25 but not limited to short range wireless, such as Bluetooth, Infrared, Microwave, or narrow through broad band telecommunication, WLAN, protocols and the like, preferably in combination with wirelessly powering. Wireless automation and control and wireless power supplies to realize synchronized, highly flexible, large range picking and dropping operations,
30 even while the articles are in transit.

[0040] In yet another aspect of the invention, a method of packaging a plurality of articles from a first conveying line in a package at a second conveying line, is disclosed. The method includes receiving a continuous or intermittent supply of articles, such as e.g. already filled beverage containers,

at a first conveying line. The method further includes grouping the articles at the first conveying line in a predetermined configuration and/or arrangement. Furthermore, the method includes receiving a continuous supply of packages at a second conveying line. The method further includes optimizing a vertical movement of each of the outer rails and the horizontal movement of each of the support means through the top and/or the bottom path such that the gripper sets on the at least one of the support means is adapted to pick up a set of articles from the first conveying line, while the gripper set on at least one other support means is adapted to release the already picked up beverage containers into one of the packages at the second conveying line, simultaneously.

[0041] Further, the method includes an optional step of optimizing the movement of guiding means so as to keep the package open during the article release operation.

[0042] Possibly, the optimization of the movement of the outer rails, the support means, the gripper sets and the guiding means is performed by a control unit on the basis of an input from a user and/or input from one or more sensors.

[0043] Other aspects, features and advantages of the subject matter disclosed herein will be apparent from the description, the drawings, and the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0044] FIG. 1 illustrates schematic diagram representing a packaging apparatus, in accordance with a preferred embodiment of the present invention;

[0045] FIG. 2a illustrates a front view diagram representing a packaging apparatus configured between a first conveying line and a second conveying line, in accordance with an embodiment of the present invention;

[0046] FIG. 2b illustrates a schematic diagram representing a packaging apparatus, in accordance with an embodiment of the present invention;

[0047] FIG. 3 illustrates an exemplary gripper set, in accordance with a preferred embodiment of the present invention;

[0048] FIG. 4a illustrates an exemplary support means, in accordance with an embodiment of the present invention;

5 [0049] FIG. 4b illustrates an exemplary support means, in accordance with another embodiment of the present invention;

[0050] FIG. 5a, 5b, 5c, 5d illustrates an exemplary guiding unit, in accordance with a preferred embodiment of the present invention;

10 [0051] FIG. 6a, 6b, 6c illustrates an exemplary packaging of a supply of beverage containers using the apparatus of the present invention.

[0052] Fig. 7 represents a packaging apparatus, in accordance with a preferred embodiment of the present invention.

DETAILED DESCRIPTION

15 [0053] Specific structural and functional details disclosed herein are not to be interpreted as limiting, but merely as a basis for the claims and as a representative basis for teaching one skilled in the art to variously employ the present invention in virtually any appropriately detailed structure. It is to be understood that each specific portion includes all technical equivalents that operate in a similar manner to accomplish a similar purpose.

20 [0054] The present application discloses a packaging apparatus, for packaging a supply of articles such as e.g. already filled beverage containers (PET, HDPE, Aluminum Glass: Cans and Bottles) enclosing liquids such as cold drinks, beer, wines, mineral water etc., received statically or dynamically at one or more generally parallel first conveying line/s, dynamically into a
25 supply of secondary packages received statically or dynamically at a second conveying line. The packaging apparatus while being efficient, is able to accommodate speed differences between the first and second conveying lines, while releasing a variable or predetermined configuration of articles at

the first conveying line in a range of format groupings (rows & columns) of the packages at the second conveying line, without requiring any changes in the functional elements of the packaging apparatus. While the (secondary) package within the current disclosure is generally described in the context of holding beverage bottles, it should be understood that the embodiments of the present invention may be applied in combination with various types of packaged goods irrespective of size, shape and materials. It must also be noted that, as used in this specification and the appended claims, the singular forms “a,” “an” and “the” include plural referents unless the context clearly dictates otherwise. Thus, for example, the term “an opening” is intended to mean a single opening or a combination of openings, “a sidewall” is intended to mean one or more sidewalls, or a combination thereof.

[0055] . As illustrated in FIG. 1, the present invention provides a packaging apparatus **100** for packaging a supply of articles such as beverage containers (not shown) statically or dynamically received at one or more, generally parallel first conveying line/s, within a supply of secondary packages (not shown) received at a second conveying line. The packaging apparatus **100** includes a central packaging frame **110** extending between the one or more first conveying line/s at a first end **E_F** and the second conveying line at a second end **E_S**. The central packaging frame **110** includes a pair of transversally directed spaced apart generally parallel central tracks **160**. Each of the central tracks **160** include a transversally directed top rail **162** extending vertically away from a transversally directed bottom rail **164** through a central body portion **166**. The central packaging frame **110** further includes a pair of outer rails **168a**, **168b**, positioned besides each of the pair of central tracks **160**. A first outer rail **168a** is positioned towards a first end **E_F** and the second outer rail **168b** is positioned towards a second end **E_S**, and adapted to move vertically upwards and downward so as to optionally connect to one of the top rails **162** and/or the bottom rails **164** of each of the central tracks **160** and as such define respectively a top path and a bottom path. The packaging apparatus **100** further includes one or more support means **112**, generally perpendicular to the central tracks **160**, and extending longitudinally there between. The one or more support means **112** are adapted to move

horizontally onto the packaging frame **110** between the first end **E_F** at the first conveying line and the second end **E_S** towards the second conveying line. The packaging apparatus **100** further includes a plurality of gripper sets **120** movingly supported onto the support means **112** such that at least one of the gripper sets **120** is supported onto each of the support means **112**. The gripper sets **120** include a plurality of individual gripping heads **122** arranged in a predetermined configuration and movingly supported onto the support means **112**. The packaging apparatus **100** further includes a vertical movement mechanism (not shown) for moving the outer rails **168** in a vertically upward and/or downward direction, and a horizontal movement mechanism (not shown) for horizontally moving the support means **112** between the first end **E_F** and the second end **E_S**. Further, each of the gripper sets **120** is adapted to perform an operation selected from static or dynamic (while the articles are in transit) pickup operation for picking up the articles from the one or more first conveying line/s and/or static or dynamic (while the packages are in transit) release operation for releasing the already picked up articles within one of the secondary packages at the second conveying line. In operation, the vertical movement of the outer rails **168**, and the horizontal movement of the plurality of the support means **112**, and therefore the gripper sets **120** between the first end **E_F** and the second end **E_S**, is synchronized in such a way that the gripper sets **120** on at least one of the support means **112** is adapted to pick up a set of articles from the first one or more conveying line/s and another gripper set **120** on at least one other support means **112** is adapted to release an already picked up set of articles into one of the packages at the second conveying line, simultaneously.

[0056] Figs. 2a and 2b illustrate an exemplary packaging apparatus **200** adapted to dynamically pick up beverage containers **290** of a given or random pitch from one or more first conveying line/s **202** and dynamically releasing in a package **250** in the required collation of rows and columns forming the format, at a second conveying line **204** carrying a feed of already formed top and/or side opened packages **250**. In another embodiment, the plurality of beverage containers **290** at the first conveying line **202** includes a grouping means (not shown) for grouping the beverage containers **290** in a

predetermined arrangement. The grouping means may include any conventional grouping mechanism suitable for grouping and arranging the beverage containers at an out-feed of a conveying line. Alternatively, the beverage containers (or articles) may be randomly supplied in pressureless single file via one or more generally parallel infeed conveyors and upon being dynamically picked up are re-pitched and collated into the desired package formats (rows & columns) and the so grouped formats further re-pitched and dynamically delivered into/onto the secondary packaging at the second conveying line.

[0057] As disclosed earlier and with reference to Fig. 2a, the packaging apparatus **200** includes a central packaging frame **210** extending between the first conveying line **202** at a first end **E_F** and a second conveying line **204** at a second end **E_S**. The central packaging frame **210** includes a pair of transversally directed spaced apart generally parallel central tracks **260**, including a first central track **260a** and a second central track **260b**. Each of the central tracks **260a**, **260b** include a transversally directed top rail **262a**, **262b** respectively extending vertically away from a corresponding transversally directed bottom rail **264a**, **264b** through a central body portion **266a**, **266b** respectively.

[0058] The central packaging frame **210** further includes a plurality of pairs of outer rails **268**, each positioned along with each of the pair of central tracks **260a**, **260b**. The pair of outer rails **268** includes a first outer rail **268a** positioned towards the first end **E_F** and a second outer rail **268b** positioned towards the second end **E_S**, each adapted to move vertically upwards and downward so as to optionally connect to one of the top rails **262a**, **262b** of the pair of central tracks **260a**, **260b** respectively, and/or to the bottom rails **264a**, **264b** of the central tracks **260a**, **260b** respectively, and defines a top path **T** and a bottom path **B** there through.

[0059] In preferred embodiments, the vertically upward and/or downward movement of the each of the plurality of outer rails **268** is obtained by utilizing a vertical movement mechanism. In some instances, the vertical movement

mechanism includes a rail receiving slot **282a** and **282b** at each the pair of central tracks **260** throughout its corresponding body portion **266**. The receiving slots **282a**, **282b** are configured to receive the corresponding outer rails **268a**, **268b** and adapted to move up and down between a top position **O_T** and a bottom position **O_B** such that when engaged with the top rail **262**, the top path **T** is formed and when engaged with the bottom rail **264**, the bottom path **B** is formed. In other embodiments, of the present invention, any suitable and conventionally known vertical movement mechanism may be utilized for the selective movement of each of the outer rails **268** between the top position **O_T** and the bottom position **O_B**.

[0060] The packaging apparatus **200** further includes a pair of generally longitudinal outer support platforms **285**, including a first support platform **285a** at the first end **E_F** and a second support platform **285b** at the second end **E_S** configured generally perpendicularly to the central packaging frame **210**. Each of the outer support platforms **285a**, **285b** is a support body positioned at a height **H** from a ground level sufficient to perform the pickup and/or the release operation. Further, each of the outer support platforms **285a**, **285b** is adapted to support the corresponding outer rails **268** at its bottom position **O_B** such that while performing pickup and/or release operation, the outer rail **268** does not go beyond its bottom position **O_B** due to inertia of the downward movement and is kept at a desired distance away from the corresponding conveying lines **202**, **204**.

[0061] The packaging apparatus **200** further includes one or more support means **212**, extending longitudinally between the pair of central tracks **260a**, and **260b**. The one or more support means **212** are adapted to move horizontally between the first end **E_F** at the first conveying line **202** and the second end **E_S** towards the second conveying line **204** through the top path **T** and/or the bottom path **B** formed at the central packaging frame **210** due to vertically upward and/or downward movement of the outer rails **268**.

[0062] In an embodiment of the present invention as illustrated in Fig. 4a, the support means **212** may be in form of a support rail **212**, comprising a

generally linear rail adapted to be movingly connected to the central packaging frame **210** at each of the parallel central tracks **260a**, **260b**.

[0063] The packaging apparatus **200** further includes a horizontal movement mechanism **275** (Fig. 2b) for horizontally moving each of the support means **212** along the central packaging frame **210** between the first end **E_F** and the second end **E_S**. In a preferred embodiment, the horizontal movement mechanism **275** includes a pair of support movers **214** (Fig. 2b), each configured at an opposite end of the supporting rail **212**. Further, each of the support movers **214** is movingly connected to one of the central tracks **260** such that movement of the pair of support movers **214** allow the possibility of moving the corresponding support rail **212** horizontally across the central packaging frame **210** between the first end **E_F** and the second end **E_S**.

[0064] Further, each of the supporting rails **214** is movable towards and away from each other in a widthwise direction **W_D** along the central packaging frame **210** using the horizontal movement mechanism **275**.

[0065] The packaging apparatus **200** further includes a plurality of gripper sets **220** movingly supported onto the support means **212** such that at least one of the gripper sets **220** is supported onto each of the support means **212**, adapted to perform a pickup and/or release operations for the articles, e.g. beverage containers (Cans, Bottles) **290**, during the packaging thereof.

[0066] The gripper sets **220** include a plurality of individual gripping heads **222** movingly supported and individually controlled onto the support means **212**. In the case of the articles being a beverage bottle, the gripping head **222** is generally a bottle picker and/or releasing component. In a preferred embodiment, as illustrated in Fig. 3, the gripper head **222** includes a gripper body **224** extending towards a downwardly protruding beverage container head **226** adapted to selectively perform an operation selected from pick up and release operation. The beverage head **226** is of a shape and/or size and/or dimension complementary to the shape, size, and dimension of the beverage container **290** and/or a contact portion thereof

so as to enable the possibility of performing the pick-up and/or release operation.

[0067] In some instances, the gripping head **222** includes one or more expandable membranes (not shown) configured onto an inner portion thereof, and adapted to be either pneumatically or electrically activated to be in contact with the beverage container such that when membrane is expanded by the said activation influence, the neck portion of the beverage container **290** gets locked within the beverage container head **226** thereby facilitating a picking thereof. Further, when the membrane is contracted back, the beverage head **226** releases the already picked up beverage container(s) **290** into the package **250**.

[0068] Further in some instances, the gripping head **222** includes an integrated container orienting mechanism **223** adapted to rotate the bottles or containers, picked up, in a desired orientation before dropping these onto the second conveying line **204**,. The mechanism may optionally spin the containers at controlled angular velocity while in transit. The container orienting mechanism **223** may be selected from one or more of, but not limited to, any suitable conventional rotating mechanism such as a rotational servo, stepper, permanent magnet, dc or ac motor, and the like and incorporate an encoder or other angular position sensing device.

[0069] In other embodiments, the gripping head may be selected from any conventionally mechanism known in the art and suitable for picking and/or releasing articles such as the beverage containers **290**.

[0070] In some preferred embodiments as illustrated in Fig. 4b, the support means **212** includes a combination of one or more parallel rails **212a**, **212b**, each adapted to hold a row of gripper heads **222** of the one or more gripper sets **220** such that each of the gripping heads **222** is individually movable along the corresponding support rail **212a**, **212b**, using one or more gripper movement mechanism. In some instances, the gripper movement mechanism includes a plurality of gripping movers **274** movingly configured onto each of the support rails **212a**, **212b** such that

each of the gripping movers **274** is adapted to movingly engage one of the gripping head **222** therewith, and powered by a powering means selected from one or more of but not limited to a linear motor, serve motor, gear based transmission, and the like. In a preferred embodiment, the powering means is a linear motor. In such an embodiment, the linear motor is a generally moving magnet type of motor conventionally known in the art. In one such instance, the linear motor utilizes the corresponding support rail **212** as a stator and each of the corresponding gripping mover **274** as a rotor thereof. Further in such embodiments, the predetermined arrangement of the gripping heads **222** within each of the gripper sets **220** may be changed dynamically in accordance with a desired arrangement of gripping heads **220**. Moreover, in such an embodiment, the rails **212** may be moved widthwise, and the gripping heads **222** may be moved in a lengthwise direction such that number of gripping heads **222** within one or more of the gripper sets **220** may be changed dynamically.

[0071] Alternatively, in some embodiments, each of the gripping heads **222** is stationary to the corresponding gripper set **220**, which in turn is itself movable along a single support rail **212** using the one or more gripper moving mechanism. In such instances, the gripper moving mechanism includes a plurality of gripping movers **274** movingly configured onto the support rails **212** such that each of the gripping movers **274** is adapted to movingly engage one of the gripper set **220** therewith, and powered by a powering means selected from one or more of but not limited to a linear motor, serve motor, gear based transmission, and the like. The working of the linear motor is same as discussed already. Further in such embodiments, the predetermined arrangement of the gripping heads **222** within each of the gripper sets **220** may be changed dynamically only in a widthwise direction by moving the support rails **212** widthwise.

[0072] In an embodiment of the present invention, as illustrated in Figs. 5a, 5b, 5c, the packaging apparatus **200** further includes a guiding unit **300** for facilitating the release of the already picked beverage containers **290** within the package **250** such that a closure of the package **250** is avoided during the release operation. Further, such a guiding unit **300** is adapted to guide the operation of the releasing the containers **290** within the package

250 with a funnel effect, so as to avoid any contact between the containers **290** and sidewalls **252** of the package **250** such that any damage or scratch to the package **250** and/or beverage containers **290** during the release operation is avoided. The guiding unit **300** includes an overhead frame **310** formed of at least two spaced apart generally parallel longitudinal rails **312** including a first longitudinal rail **312a**, and a second longitudinal rail **312b** connecting and extending between two or more spaced apart generally parallel transverse rails **314** including a first transverse rail **314a**, and a second transverse rail **314b**. Each of the longitudinal rails **312a**, and **312b** is movable in a horizontal direction towards and away from each other using one or more guiding rail movement mechanism **320** (Fig. 5b).

[0073] The guiding rail movement mechanism **320** is generally a mechanism allowing the possibility of movement of longitudinal rails **312** of the overhead frame **310** along the transverse rails **314**. In a preferred embodiment, the guiding rail movement mechanism **320** includes one or more pairs of engaging members **322** comprising a first engaging member **322a**, and a second engaging member **322b**, each pair of the engaging members **322** adapted to engage one of the longitudinal rails **312** at its opposite ends.

[0074] Further, the guiding rail movement mechanism **320** includes a plurality of engaging movers **324** (Fig. 5b) movingly connected to the transverse rails **314**. Each of the engaging movers **324** is adapted to movingly engage one of the engaging member **322** such that a horizontal movement of each of the pair of engaging member **322** along the corresponding transverse rails **314** is made possible thereby enabling a movement of longitudinal rails **312** in a direction towards and away from each other.

[0075] The guiding rail movement mechanism **320** furthermore includes a powering means (not shown) for powering the horizontal movement of each of the plurality of engaging movers **324**. In a preferred embodiment, the powering means is a linear servo motor that utilizes the transverse rails **314** as stator and each of the guiding movers **324** as a rotor thereof.

[0076] The guiding unit **300** further includes one or more pair of parallel guiding means **330** (Fig. 5b), including a first guiding means **330a**, and a second guiding means **330b** movably connected to the parallel longitudinal rails **312a** and **312b** through a plurality of guiding movers **334**. Each of the opposite pair of guiding means **330** is adapted to be received within the package **350** such that each of the guiding means **330a**, **330b** conforms to at least one an inner side wall / corner of the package **250** such that when in contact with the side-wall it avoids a closure of a side-flap extending there-through, the package **250** to be shaped there-between the longitudinal rails **312**. The guiding unit **300** further includes one or more powering means (not shown) for powering the movement of each of the plurality of guiding movers **334** and therefore the independently movable guiding means **330** across the longitudinal rails **312**.

[0077] The packaging apparatus **200** further includes a first powering means (not shown) for enabling a vertical movement of the one or more pair of outer rails **268**, including the central tracks **260**, and various sub-components thereof. In a preferred embodiment, the first powering means is a linear servo motor adapted to move each of the outer rails **268** at a first predetermined pitch for facilitating a continuous operation of each of the component of the packaging apparatus **200** such that the support means **212** is continuously movable between the first end **E_F** and the second end **E_S** through one of the top path **T** and/or bottom path **B**. However, in other embodiments, the first powering means is a linear servo motor adapted to move each of the outer rails **268** at a dynamically adjustable variable pitch for facilitating an intermittent or continuous operation of each of the components of the packaging apparatus **200**.

[0078] Further, the packaging apparatus **200** includes a second powering means (not shown) for enabling a movement of each of the movers including, the support movers **214**, the gripping movers **274**, the engaging movers **324**, the guiding movers **334**, independently along the corresponding central packaging frame **210**, the support rails **212**, the transverse rails **314**, and the longitudinal rails **312** respectively. In a preferred embodiment, the first powering means is linear servo motor. In

such an embodiment, the linear motor is a generally moving magnet type of motor conventionally known in the art.

[0079] In other embodiments, the movers **214, 274, 324, 334** are utilized as stator whereas the rails are utilized as the rotors. In such an embodiment, each of the movers **214, 274, 324, 334** includes built in coils and each of the corresponding tracks include a plurality of magnets configured thereon in a longitudinal direction such that the movers **214, 274, 324, 334** are able to come into an electromagnetic interaction thereby enabling a movement thereof.

[0080] The packaging apparatus **200** may further include one or more control units (not shown) for managing the operations thereof, and particularly for managing the working of each of the outer rails **268**, the first powering means and/or the second powering means to optimize the movement of the support rails **214**, gripping heads **222**, guiding unit **320** and all other components of the packaging apparatus **200**. The optimized set of movement sequence is determined by the control unit in accordance to the factors such as including but not limiting to pitch of gripper sets **220**, pitch difference between the conveying lines **202, 204**, speed of each of the conveying lines **202, 204**, predetermined arrangement of the gripping heads **222** within the gripper set **220**, and the like.

[0081] In some embodiments, the control unit may include a input unit for receiving the predetermined arrangement of beverage containers **290** to be formed and received within the secondary package **250**. Further, the control unit may include a plurality of sensors for tracking the parameters such as for example, position of the package arrangement of beverage containers **290** and the like. The control unit may further include a processor unit for processing the data captured by the input unit on the basis of predetermined logics and/or rules for facilitating the movement of the plurality of movers **214, 274, 324, 334** of the packaging apparatus **200**. The control unit may further include an instruction unit that delivers the instructions to various components such as various powering means, linear motors, motors, driving units, or the like, to facilitate a desired and smooth operation.

[0082] In some embodiments, the control unit may be provided as a computer program product, such as may include a computer-readable storage medium or a non-transitory machine-readable medium maintaining instructions interpretable by a computer or other electronic device, such as to perform one or more processes.

[0083] FIG. 2 schematically shows the arrangement of the basic components of the packaging apparatus **200** of the present invention. However, in the construction of commercial functional units, secondary components such as couplers, connectors, support structures and other functional components known to one of skill in the field of packaging apparatuses, may be incorporated within the packaging apparatus **200**. Accordingly, it is to be contemplated that the packaging apparatus **200** may be configured to be used for any kind of (secondary) package of any possible shape as deems possible without deviating from the scope of the current invention.

[0084] In a preferred embodiment, the package generally represented by the numeral **250**, may be formed from a recyclable material selected from one or more of but not limited to any desired material such as including all kind of papers, fiberboard, corrugated board, laminated board, hybrid material, or any combinations thereof. Further, the shape and size, including the diameter and height of the package **250** may be varied depending on the design constraints and requirements for its application. For example, within the instances when the **250** is adapted to house twelve containers in one layer in a 3×4 arrangement the carton is dimension accordingly. Further, in other instances, the carton may be sized and shaped to hold containers of a different or same quantity in a single layer, more than one layer, and/or in different row/column arrangements (e.g., 1×6, 3×6, 2×6, 4×6, 2×3×4, 2×6×2, 2×9, 3×5, 3×5×2, etc.). Further, in yet other instances, the packages **250** may be formed in various possible symmetrical as well as asymmetrical shapes.

[0085] In some embodiments, the packaging apparatus **200** is positioned onto an overlying manipulator adapted to move upward and/or downward between the first and second conveying lines **202**, **204**. In yet other embodiments, the

packaging apparatus **200** may be positioned within in any possible direction generally perpendicularly in the instances where the first conveying line **202** is generally parallel to the second conveying line **204**, or otherwise generally in a direction of flow of the process of packaging in the instances where a point of pick-up of beverage containers **290** is generally in line with a point of drop-down within the secondary packages **250** at the second conveying line **204**. In yet other embodiments, the packaging apparatus **200** may be positioned in any possible configuration in accordance with the design constraints of the conveying lines **202**, **204**.

[0086] In a preferred embodiment of the present invention as illustrated in Fig. 5d, one pairs of guiding means **234**, each having a generally L shaped adapted to support two adjacent walls of the secondary package **250**. However, in other embodiments, any number of pair of guiding means **234**, may be used in accordance to the shape of the package **250**.

[0087] While as may be understood from the above method, transfer of support means **212** through the top path **T** and/or the bottom path **B** is possible in many ways due to vertical movement of outer rails **268** in different permutation and combinations, an exemplary method flow is disclosed with Figs. 6a, 6b and 6c for performing the packaging operation using the packaging apparatus **200** of the current disclosure having a first support rails **212** and a second support rail **212**. As can be seen in Fig. 6a, at an initial stage, gripper set **220** of the first support rail **212** is adapted to pick-up the beverage containers **290** from the first conveying line **202** and the gripper set **220** of the second support rail **212** is adapted to release already picked-up beverage containers **290** at the second conveying line **204**. In such a position, both pair of outer rails, **268a**, and **268b** of each of the central tracks **260a**, **260b** is at its bottom most position **O_B**. At the next step as illustrated in Fig. 6b, the outer rails **268a** moves to its top position **O_T** where they connects to the top rail **262** of each of the central tracks **260**, and moves towards the first end **E_F** from the top path **T** as illustrated in Fig. 6c. Further, the outer rails **268b** moves to its bottom position **O_B** as illustrated in Fig. 6b where they connects to the bottom rail **264** of each of the central tracks **260**, and moves

towards the second end **E_S** from the bottom path **B** as illustrated in Fig. 6c. Once reach the opposite ends, each of the first support rail **212**, and the second support rail **212** repeats the operations as described above. Similarly, in other embodiments, the order of movement of outer rails **268** may be changed to provide a different flow of the movement of each of the support rails **212**, **212** between the first end **E_F** and the second end **E_S**. Such a movement of the outer rails **268**, and therefore, the support means **212**, **212** and the corresponding gripper sets **220** for performing the pickup and/or the release operations, may be performed either continuously, or otherwise intermittently, as desired.

INDUSTRIAL APPLICABILITY

[0088] The packaging apparatus **200** includes a plurality of support rails **212** comprising gripping sets **220**, and movable simultaneously along the central packaging frame **210**, for performing a pick up and/or release operation into packages **250**. The predetermined arrangement may be changed dynamically by moving the gripping heads **222** and the support rails **214** so as to form a desired arrangement and therefore packaging of any size, shape, structure of (secondary) packages **250** can be realized without the need of changing any component and is well suitable to process packages of different sizes with ease and efficiency.

[0089] Particularly advantageously, the packaging apparatus **200** due to formation of two different paths, the top path **T** and the bottom path **B**, allows using a lesser number of support rails **212** for transferring a large number of gripper sets **220**, each taking a different route to travel between the first end **E_F** and the second end **E_S**. Further, due to lesser number of support rails **212**, the packaging apparatus **200** is cheaper and smaller in overall size, while being quicker, having higher throughput and flexibility, than any other conventional packaging means.

[0090] Moreover, the packaging apparatus **200** brings together the individual operations of dynamic picking, collating, grouping, orientation, pitching and dynamic dropping of the articles **290** into a package **250**, in a single common apparatus and therefore, enhancing overall performance.

[0091] As may be well recognized by a person skilled in the art, the package apparatus **200**, articles **290** and packages **250** of the current disclosure may be implemented in various industries such as food industry, transport industry, house hold appliance industry in transportation of any kind of product or groups of products, of any shape, size or any variety of configurations, without limiting it to the beverage industry.

5

Claims

1. A packaging apparatus for articles comprising:

- a central packaging frame extending between a first end and a second end, the frame comprising:

5 - a pair of spaced apart generally parallel transversal central tracks, each track having a top rail vertically spaced apart and connected to a bottom rail through a central body portion; and

 - a plurality of outer rails, at least one outer rail configured at each end of the pair of central tracks, the outer rails adapted to move up and down so
10 as to optionally connect to one of the top rails and/or the bottom rails of the central track and define respectively a top path and a bottom path there through;

 - one or more support means, each extending generally longitudinally between the pair of central tracks, and adapted to support one of more gripper sets;
15 each of the gripper sets comprising a plurality of individual gripping heads arranged in a predetermined configuration;

 - a vertical moving mechanism for enabling a vertically upward and/or downward movement of each of the outer rails independently between its top and bottom position;

20 - a horizontal moving mechanism for moving the one or more support means through at least one of the top and/or bottom path;

wherein

the upward and/or the downward movement of each of the outer rail between its top and bottom position and the horizontal movement of each of the support
25 means is synchronized in such a way that the gripper sets on at least one of the support means is adapted to pick up a set of articles from a first conveying line at the first end and the gripper sets on at least one other support means is adapted to release already picked up articles into a package at a second conveying line at the second end, simultaneously.

30

2. The apparatus of claim 1, wherein the plurality of support means comprising a plurality of support rails configured to carry the gripper sets.

3. The packaging apparatus of claim 1, wherein the horizontal movement mechanism comprising one of more pair of support movers, each pair of the support movers adapted to engage one of the support rails at its opposite ends and movingly configured onto one of the pair of central tracks and the
5 corresponding connected outer rails, thereby enabling a horizontal movement of the support rails along the corresponding top path and/or bottom path between the first end and the second end.
4. The apparatus of claim 1, wherein the vertical movement mechanism comprising
10 a rail moving slot at each end of the pair of central tracks throughout its central body portion such that the corresponding outer rail is slidably movable there through between its top position and the bottom position.
5. The apparatus of 1, wherein the frame further comprising a pair of outer support
15 platforms, each configured generally perpendicularly and between the central tracks, and adapted to support each of the outer rails and corresponding support means to go beyond its bottom position such that each of the gripper set is at a height sufficient to perform the pickup and/or the release operation.
- 20 6. The apparatus of claim 1, further comprising a gripper moving mechanism for longitudinally moving the one or more gripper sets towards and/or away from each other, onto the corresponding support means.
7. The apparatus of claim 6, wherein the gripper moving mechanism comprising a
25 plurality of gripping movers movingly configured onto the support means, each of the movers adapted to movingly engage one of the gripping head therewith.
8. The apparatus of claim 2, wherein each of the one or more support rails are movable in a widthwise direction and each of the gripper head is movable within
30 a length wise direction such that such that the gripper set having a desired configuration of the gripper heads may be achieved.

9. The apparatus of claim 1, wherein each of the gripper-set of the plurality of gripper sets has a varying adjustable pitch there between.

10. The apparatus of claim 1, wherein the gripper head comprises a gripper body extended towards a downwardly protruding head, adapted to selectively perform a pick up and release operation of beverage containers.

11. The apparatus of claim 1, wherein first conveying line comprising an output of beverage container manufacturing unit having one or more means for grouping and / arranging the beverage containers in the predetermined configuration.

12. The apparatus of claim 1, wherein the second conveying line comprising an output of a carton forming unit.

13. The apparatus of claim 1 further comprising a guiding unit adapted to keep the package at the second conveying line opened during the release of already picked up beverage containers therein.

14. The apparatus according to any of aforementioned claims, wherein the vertical movement mechanism of the one or more outer rails comprises a vertical closed loop transportation unit, and wherein the horizontal movement mechanism comprises motors configured onto the support means.

15. The apparatus according to any of the aforementioned claims, wherein the gripper sets and/or the gripping heads are wirelessly powered and/or wirelessly controlled.

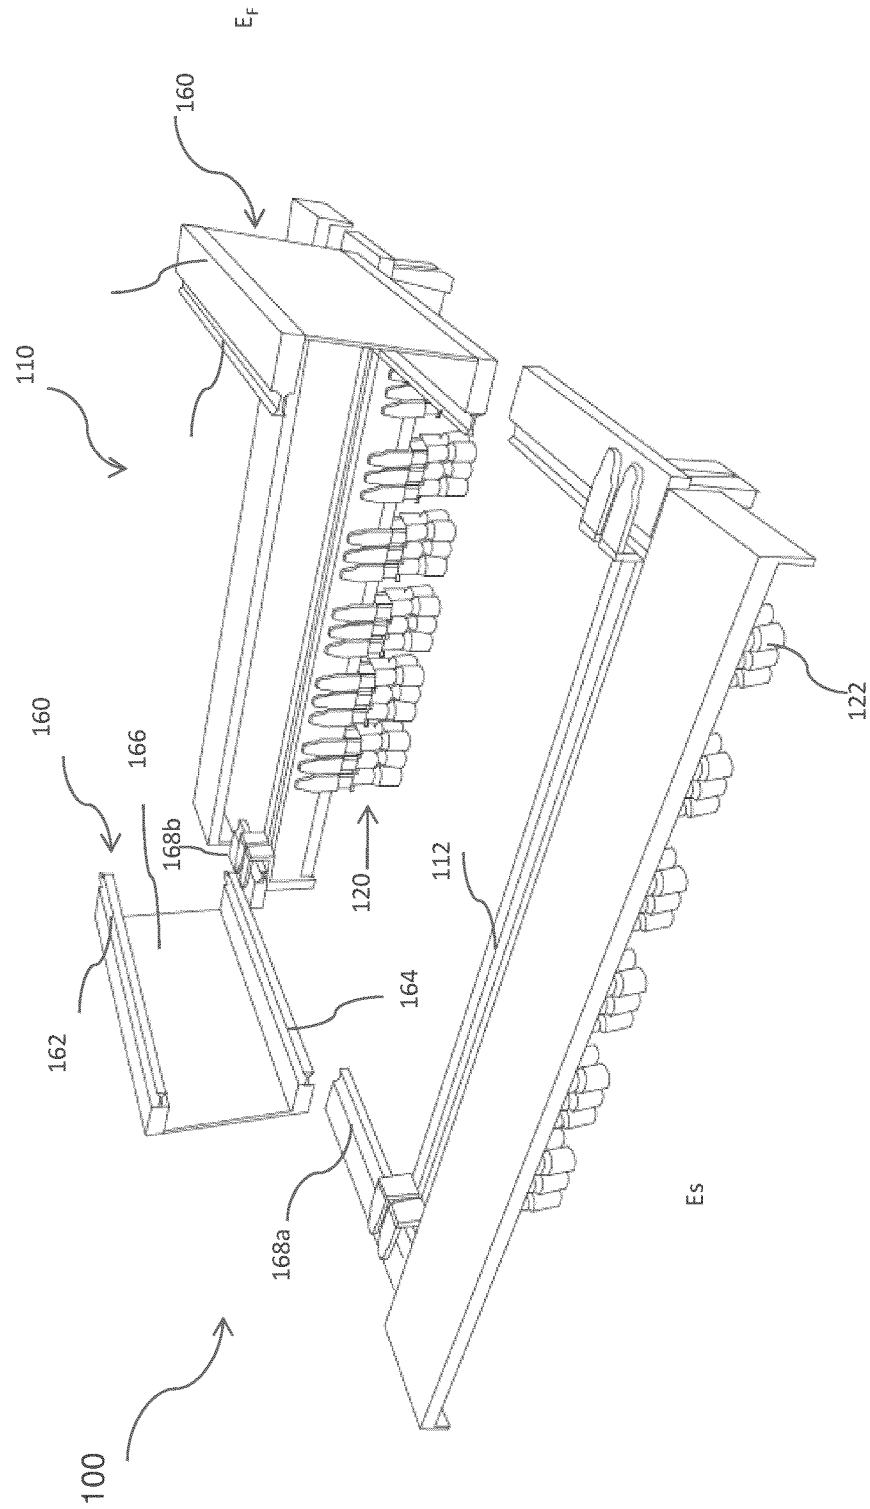
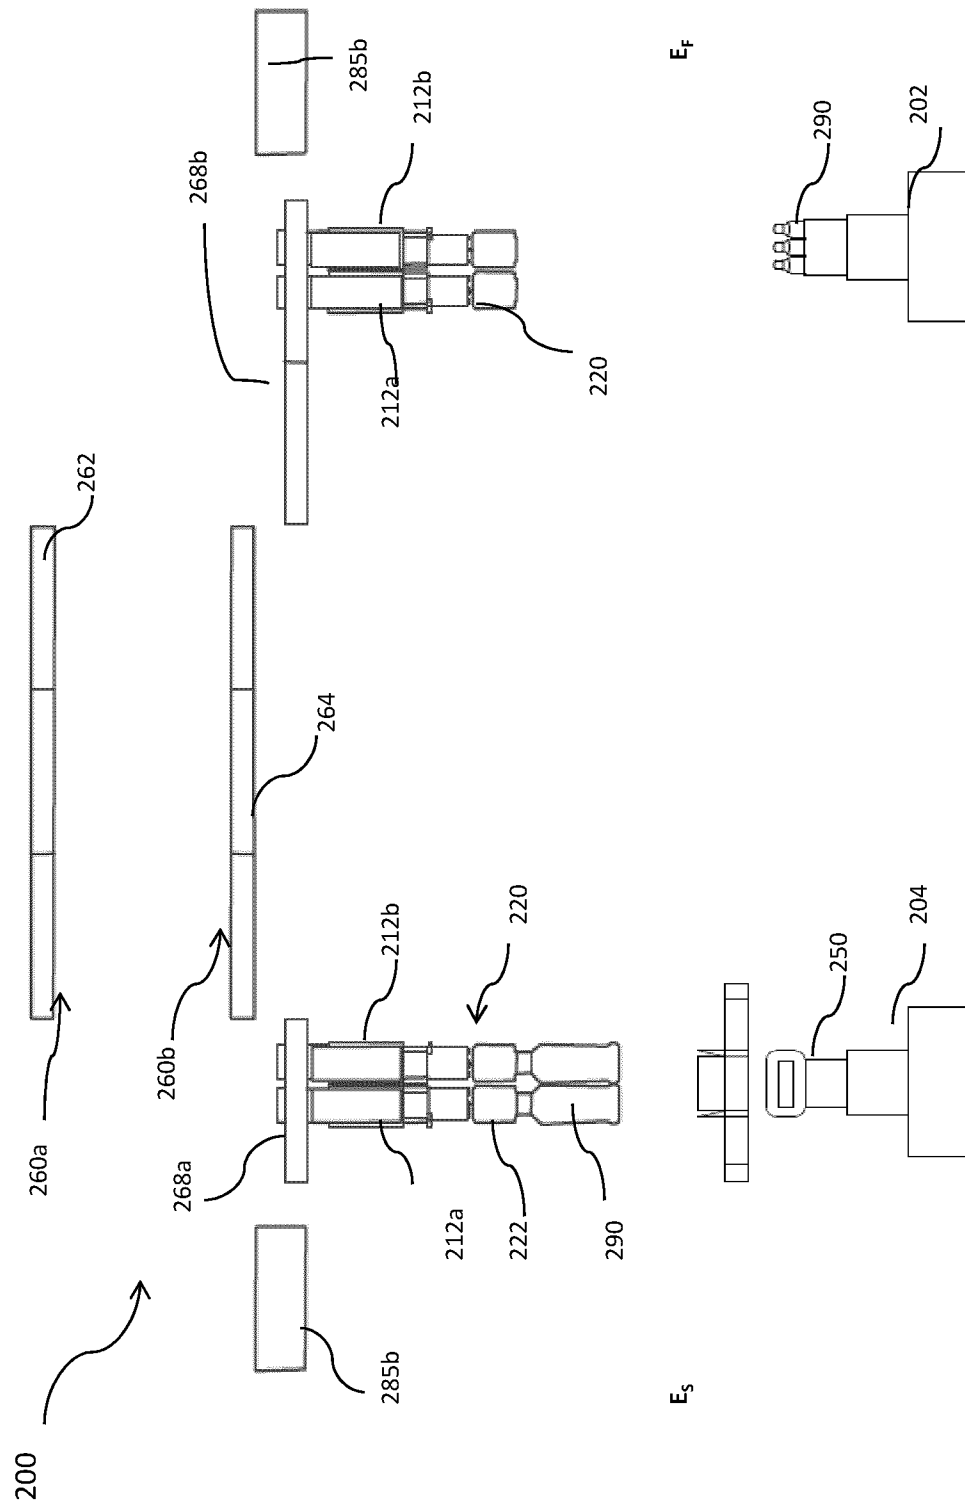


Fig. 1



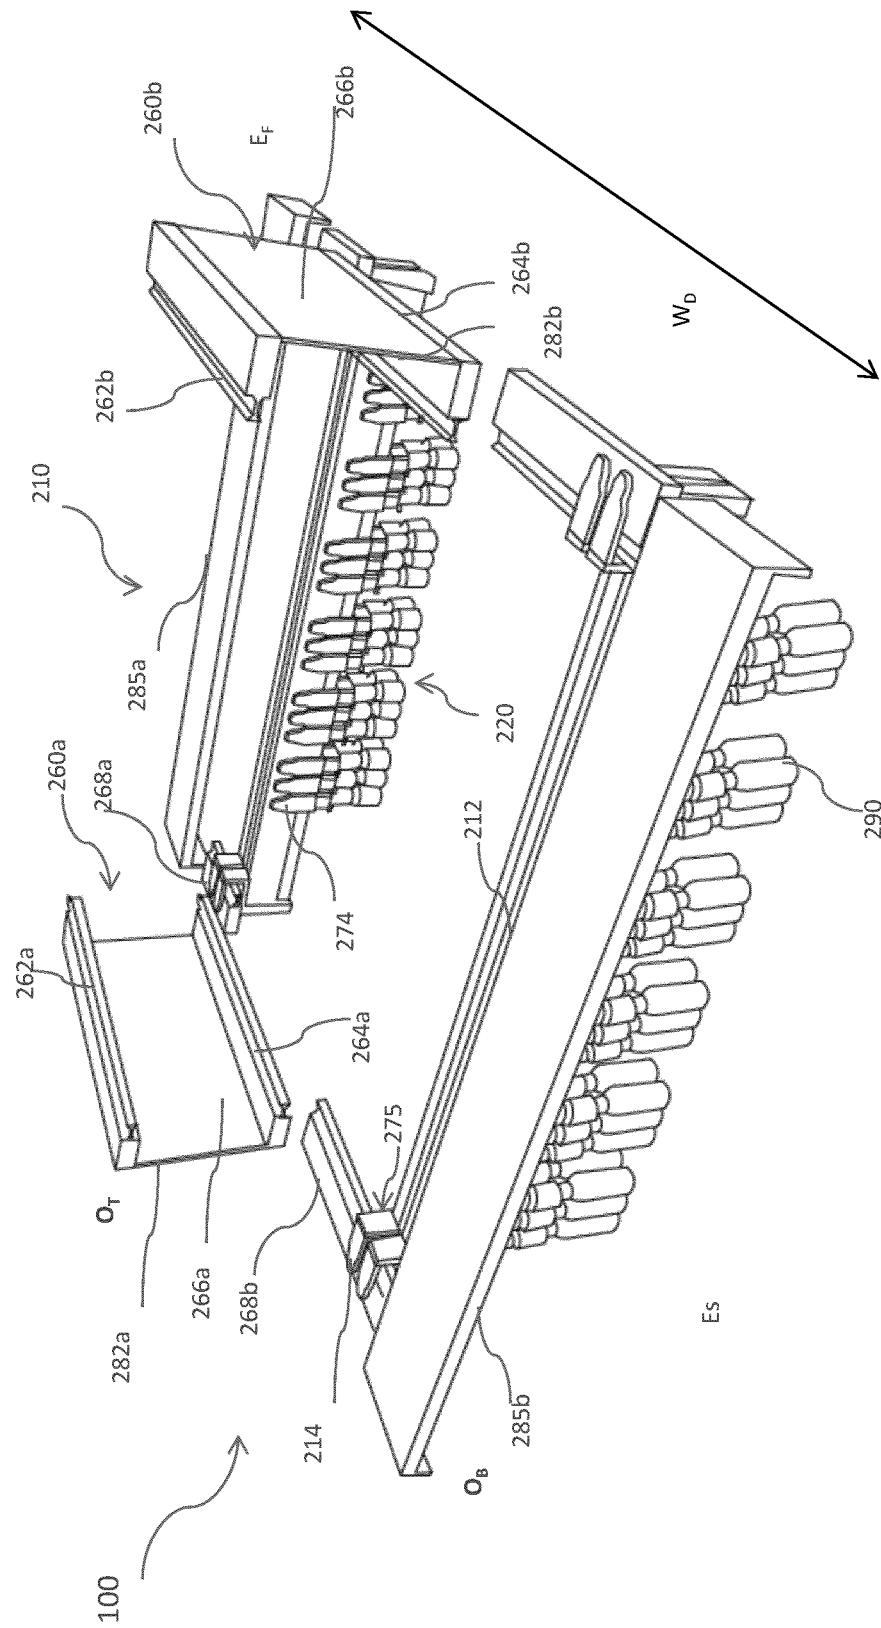


Fig. 2b

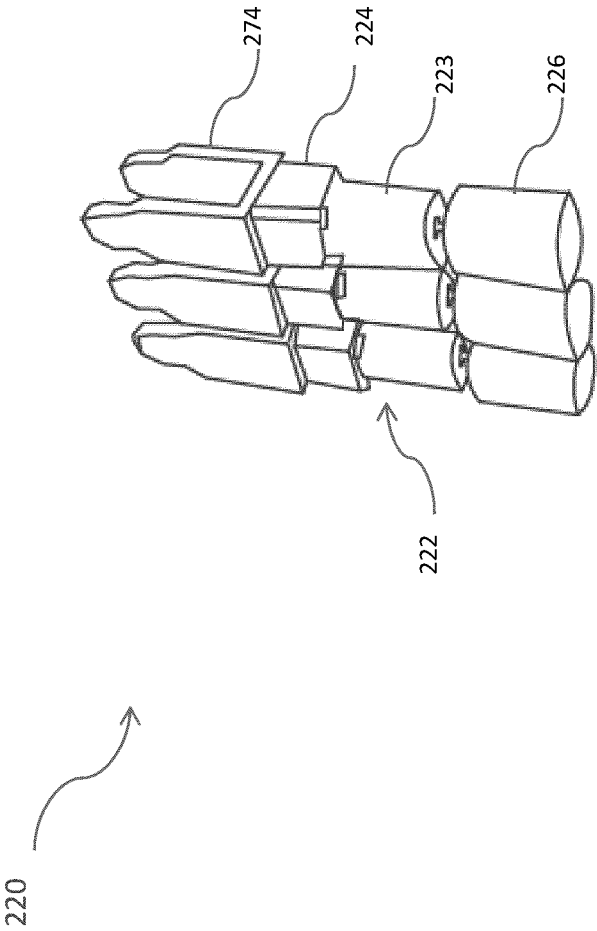


Fig. 3

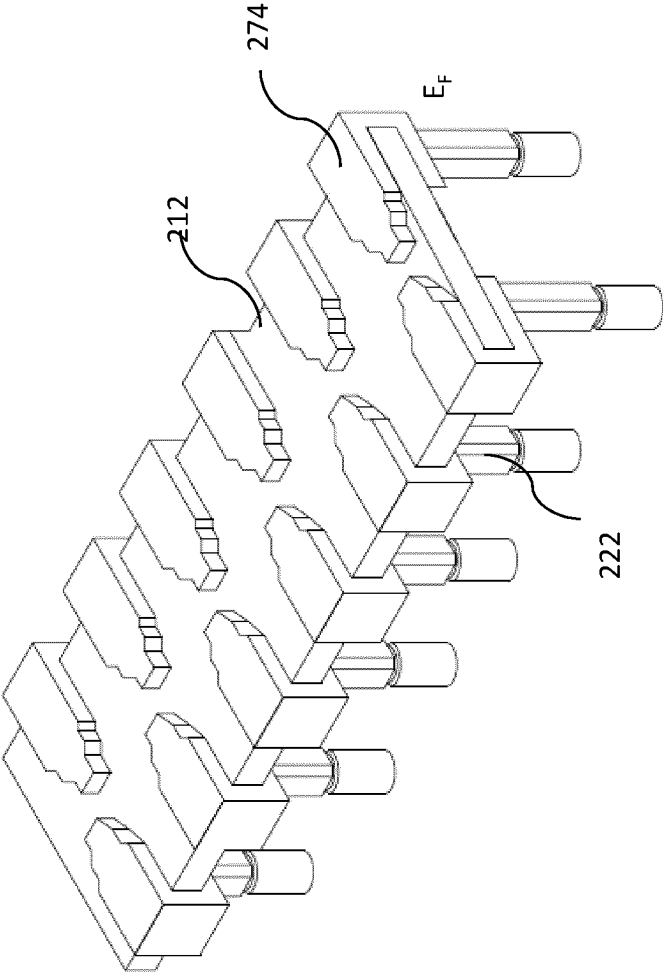


Fig. 4a

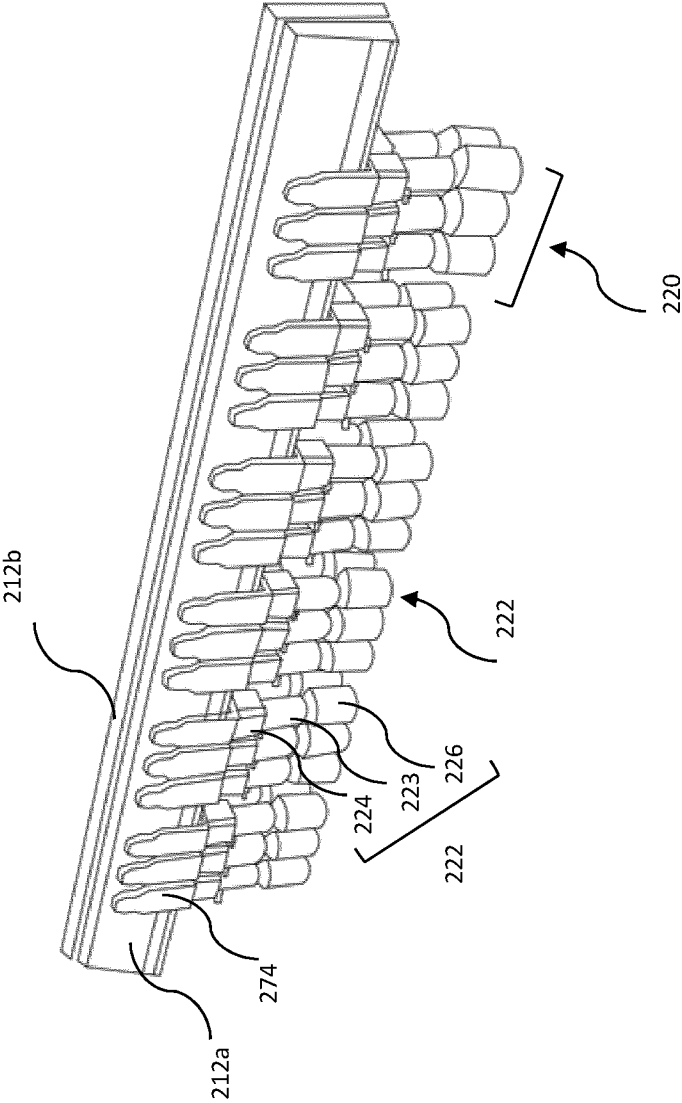


Fig. 4b

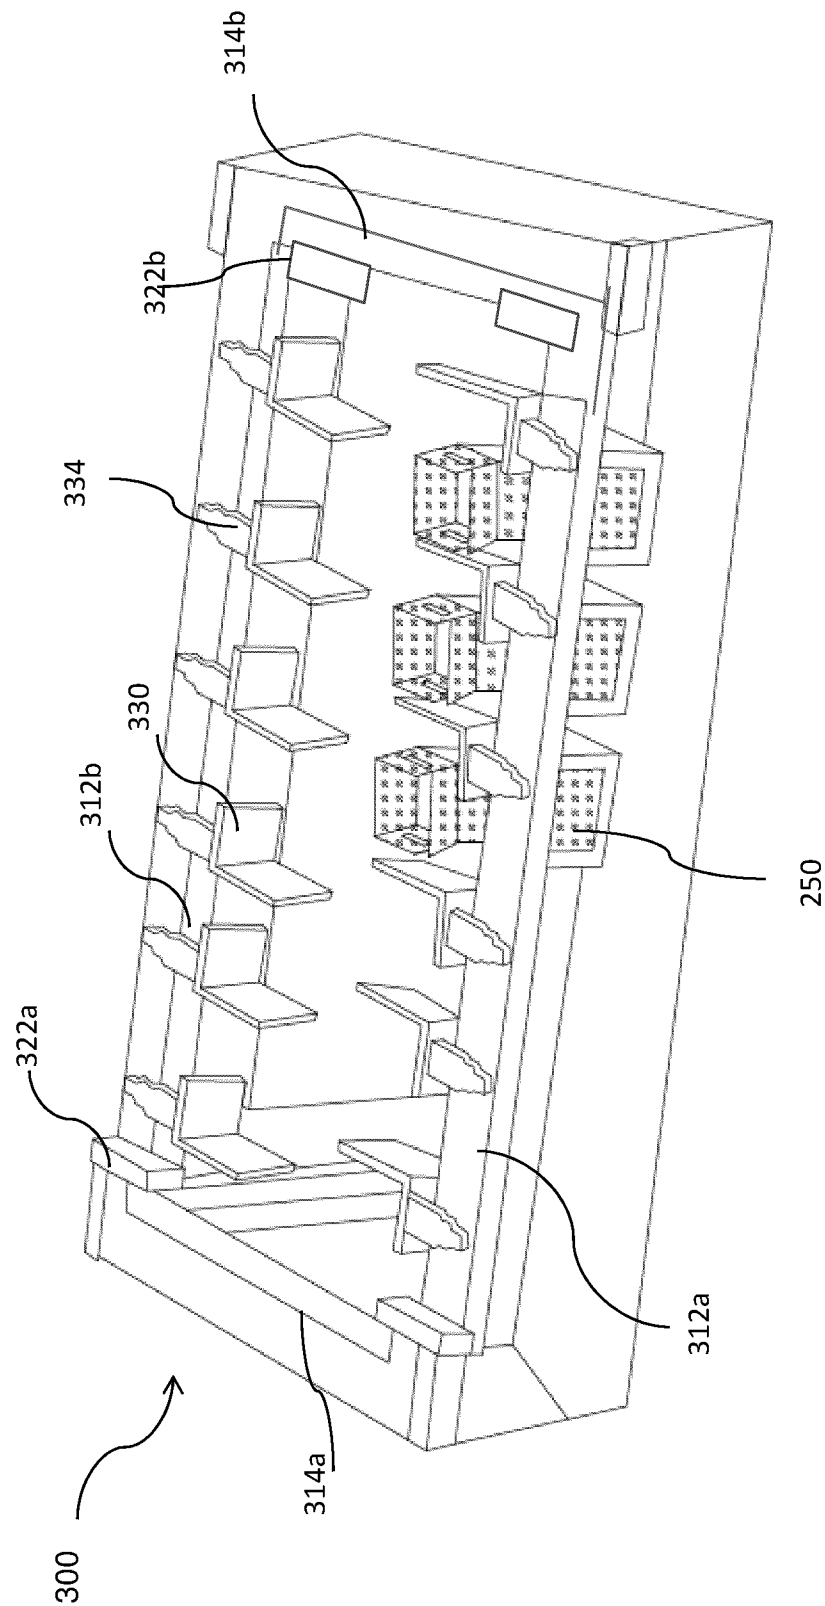


Fig. 5a

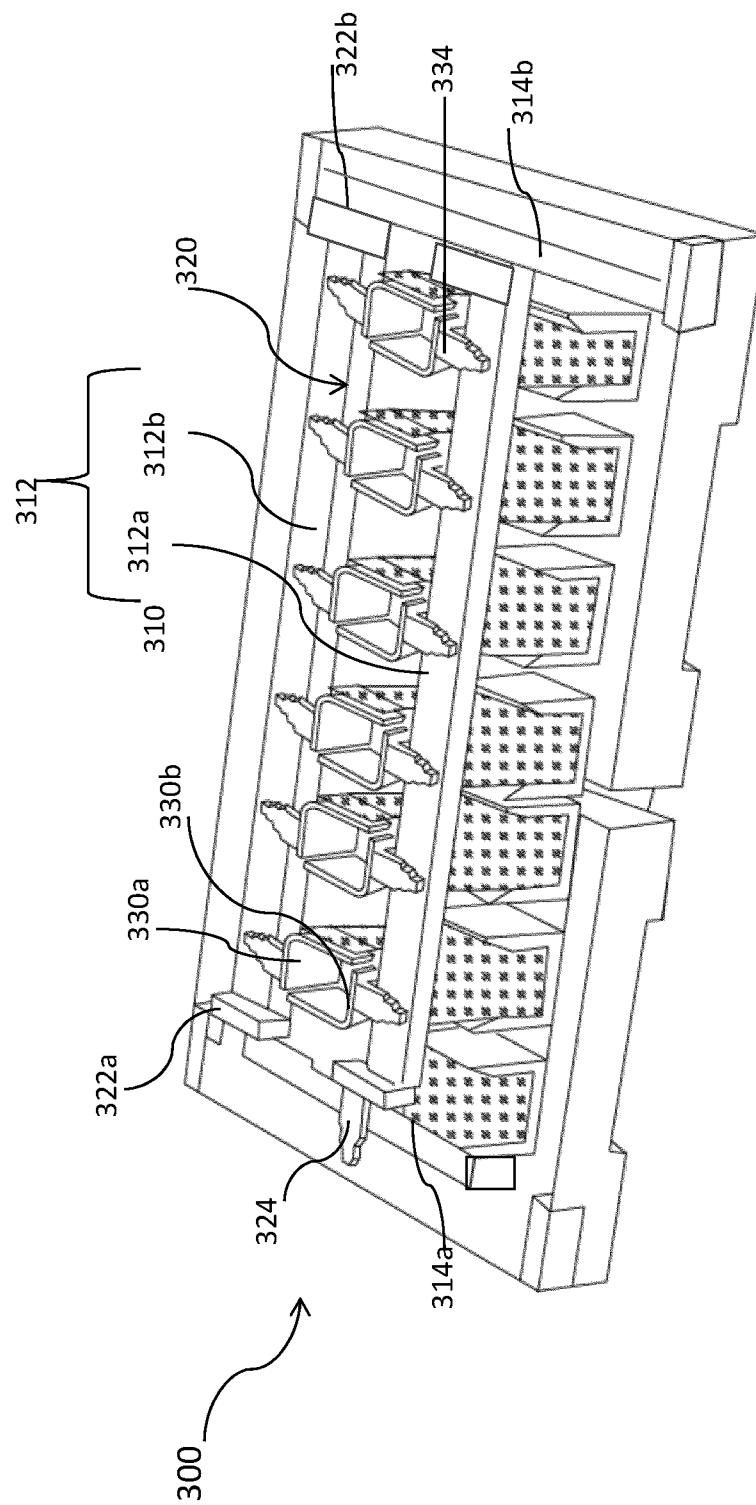


Fig. 5b

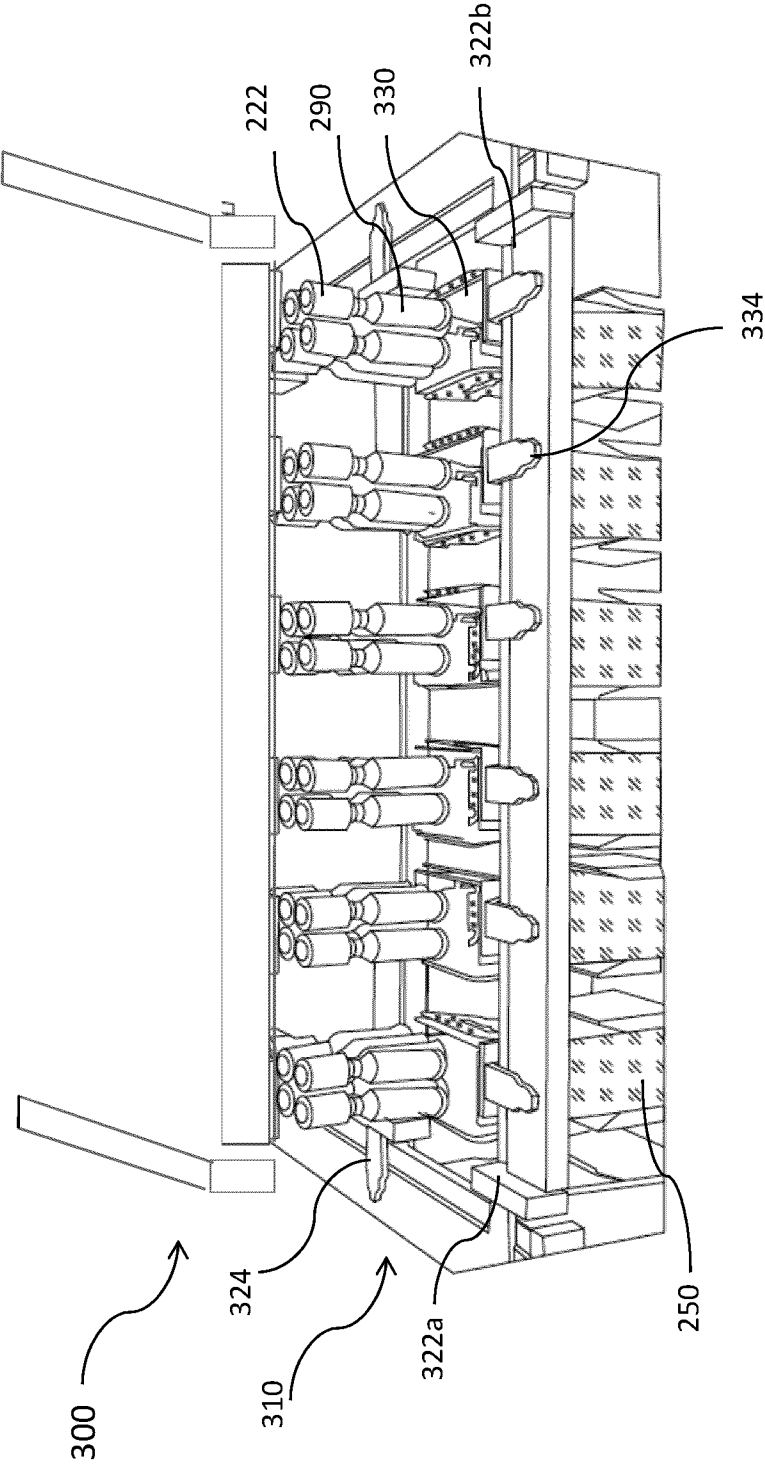


Fig. 5c

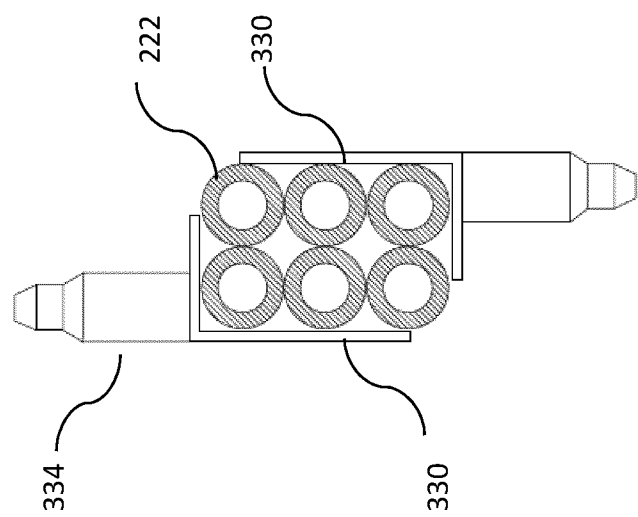


Fig. 5d

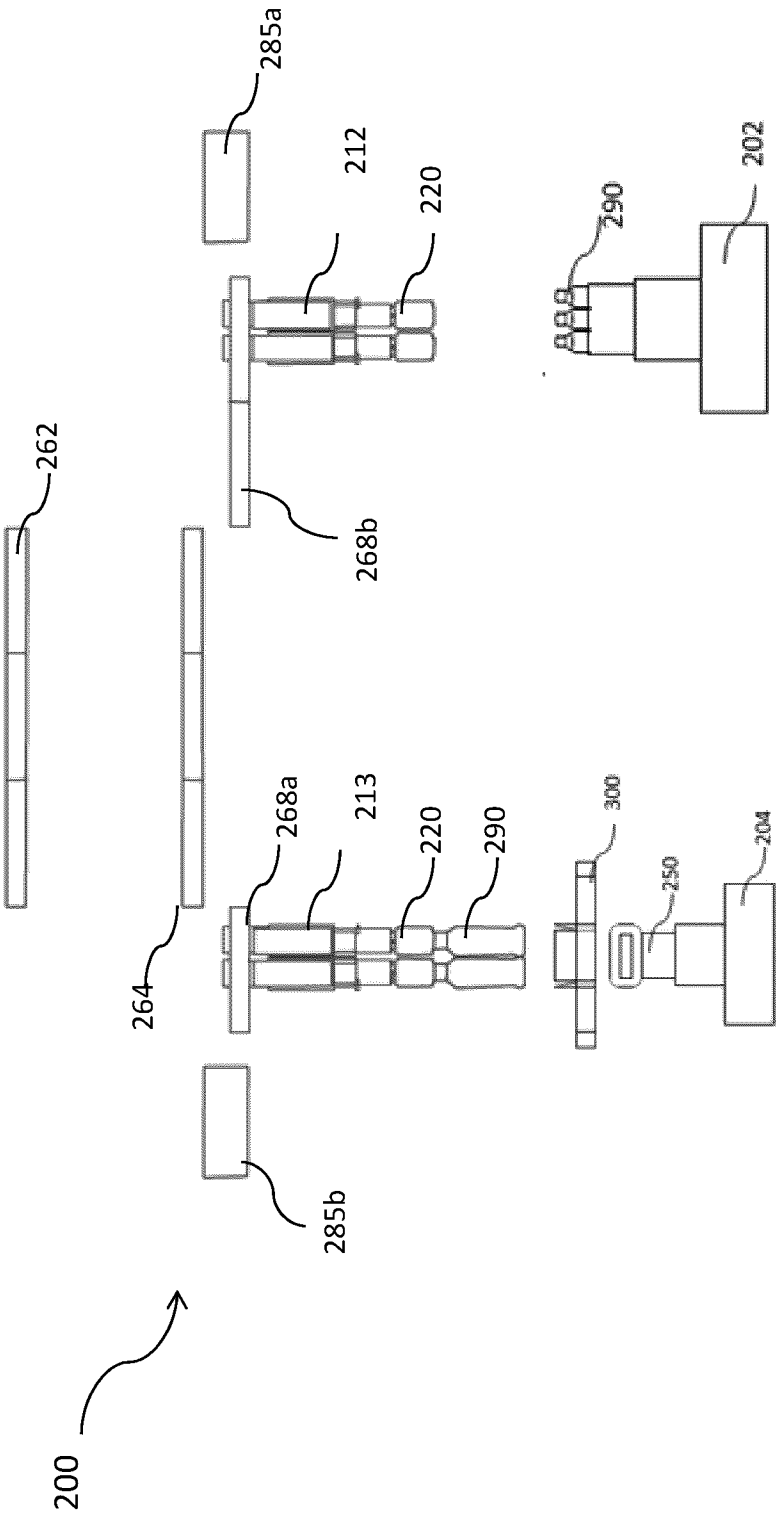


Fig. 6a

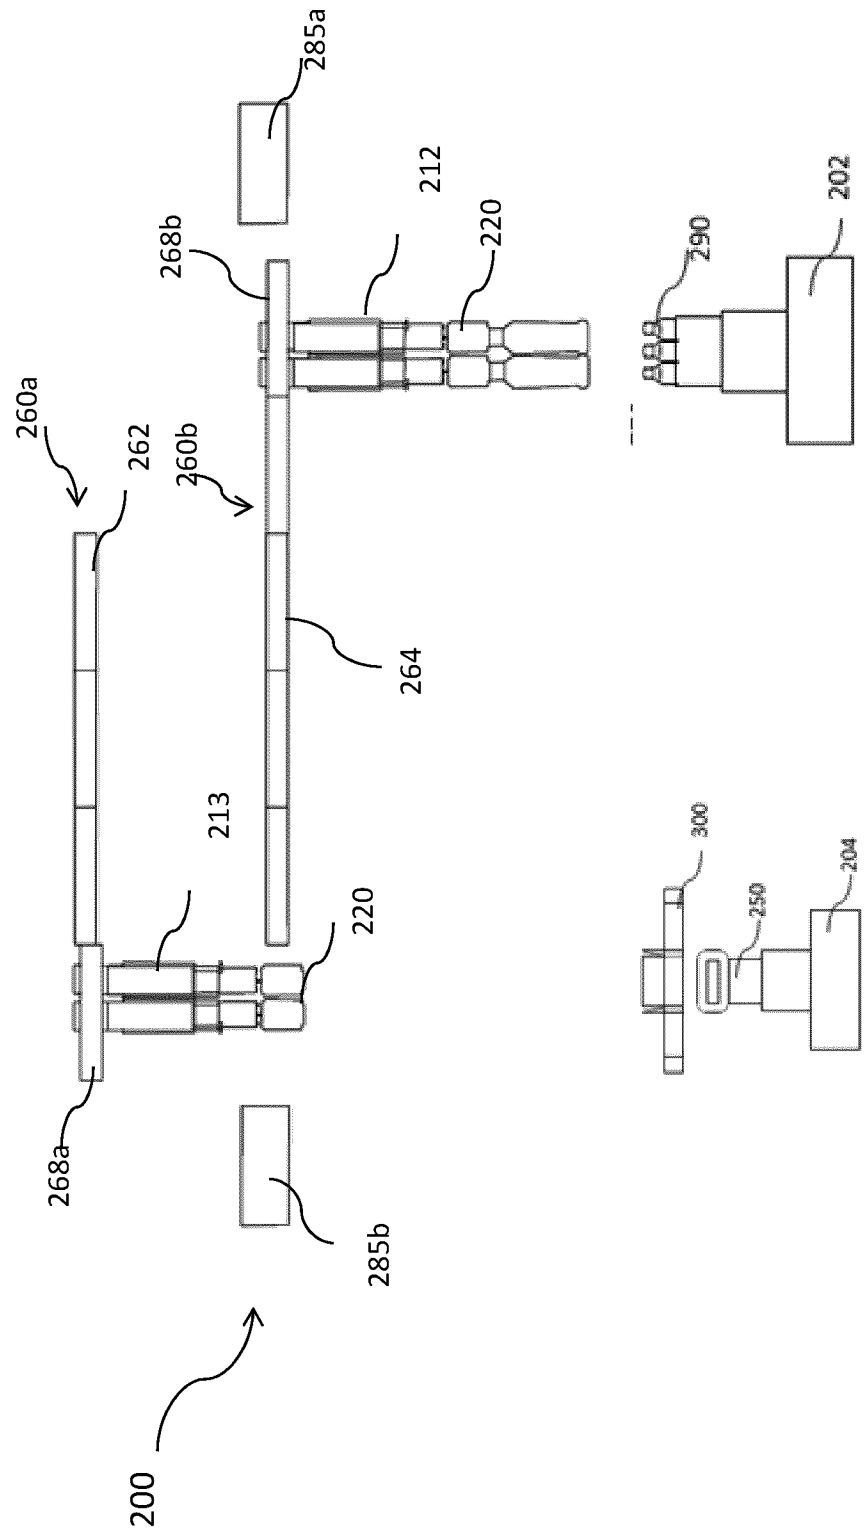


Fig. 6b

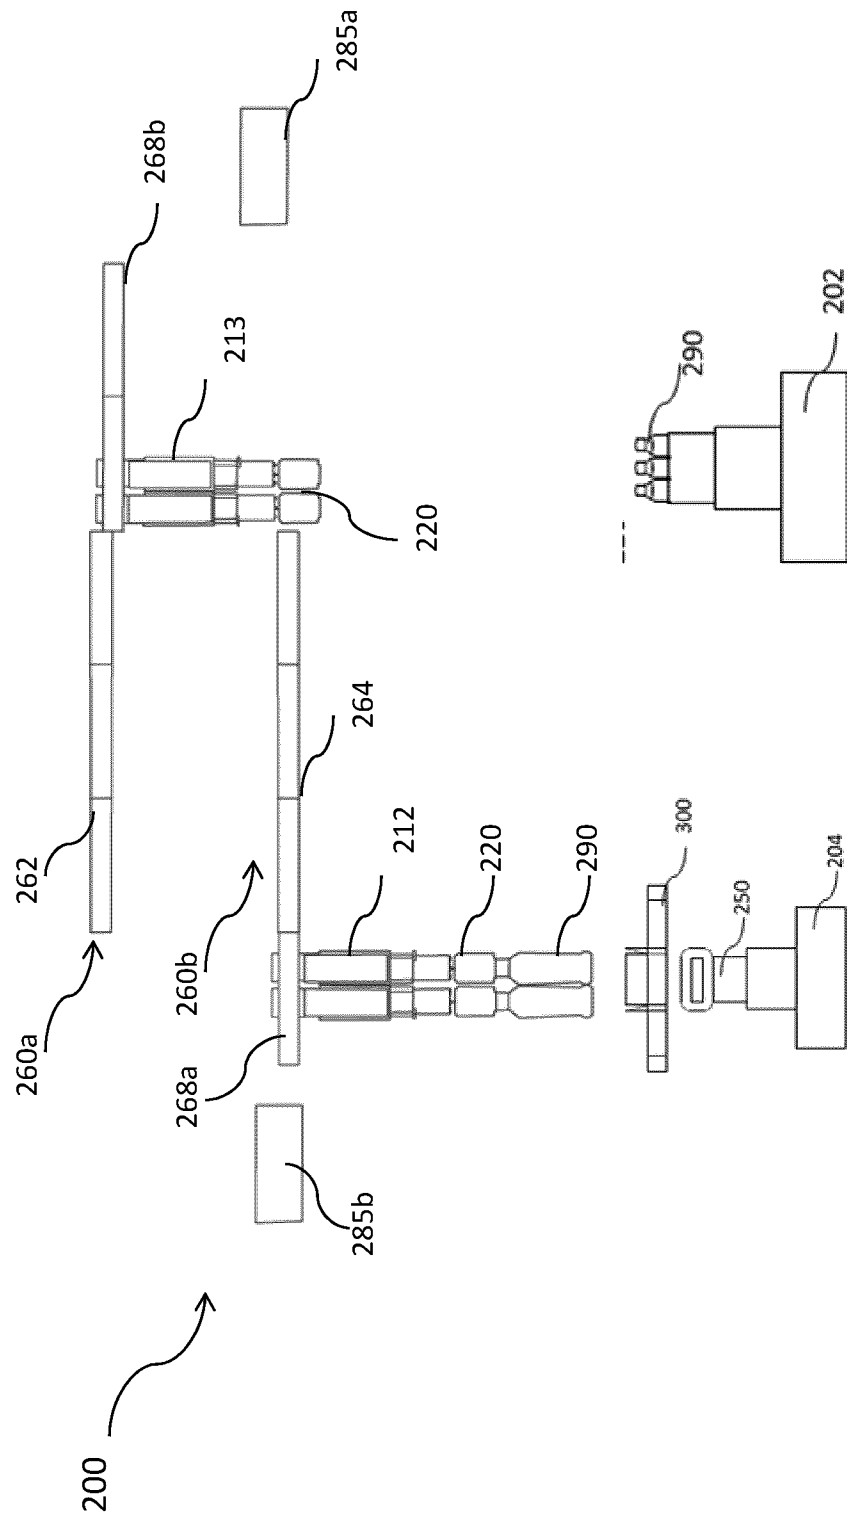


Fig. 6c

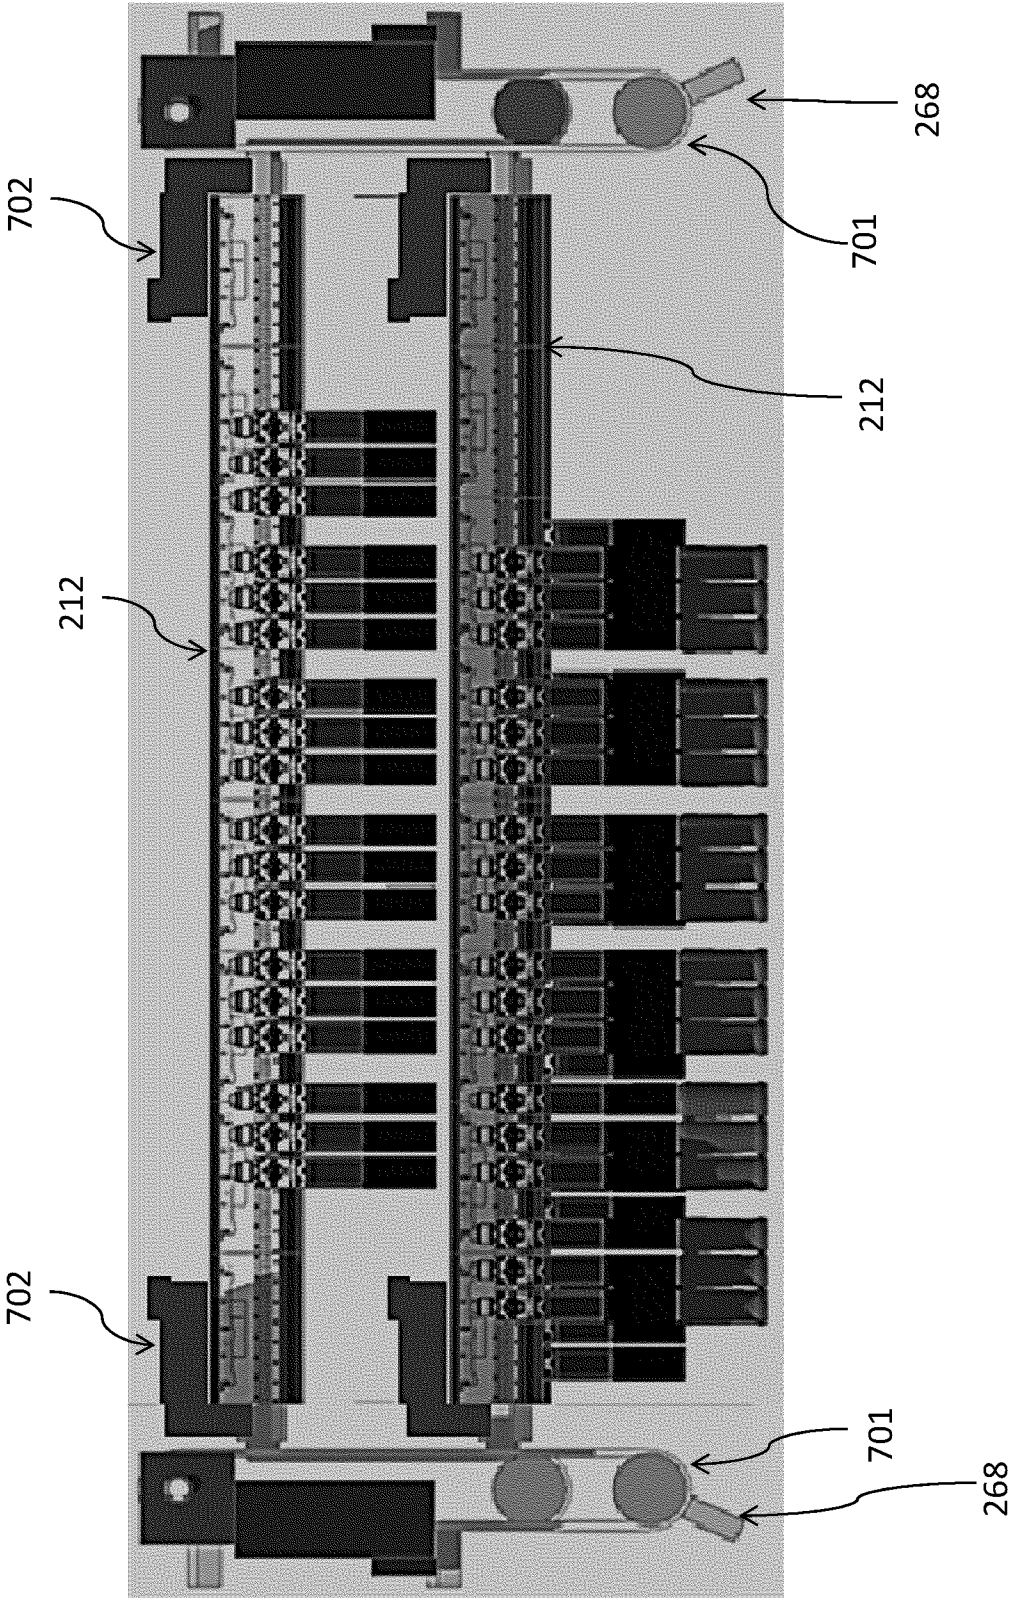


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2020/071497

A. CLASSIFICATION OF SUBJECT MATTER INV. B65B21/18 B65B21/20 B65B35/36 B65B59/00 B65G47/32 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) B65B B25J B65G		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2016/200753 A1 (PROCTER & GAMBLE [US]) 15 December 2016 (2016-12-15)	1-14
Y	page 8, line 13 - page 54, line 4 -----	15
A	US 4 191 003 A (TALARICO LAWRENCE J [US]) 4 March 1980 (1980-03-04) the whole document -----	1-14
Y	US 2010/140052 A1 (MARTINI PASCAL [FR]) 10 June 2010 (2010-06-10) paragraph [0053] -----	15
A	WO 2019/129968 A1 (GEBO PACKAGING SOLUTIONS FRANCE [FR]) 4 July 2019 (2019-07-04) page 6, line 35 - page 17, line 34 -----	1-14
<div style="display: flex; justify-content: space-between;"> <div> <input type="checkbox"/> Further documents are listed in the continuation of Box C. </div> <div> <input checked="" type="checkbox"/> See patent family annex. </div> </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search	Date of mailing of the international search report	
27 October 2020	05/11/2020	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Yazici, Baris	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2020/071497

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2016200753 A1	15-12-2016	CA 2986700 A1	15-12-2016
		EP 3307630 A1	18-04-2018
		US 2016362208 A1	15-12-2016
		WO 2016200753 A1	15-12-2016

US 4191003 A	04-03-1980	NONE	

US 2010140052 A1	10-06-2010	AT 494246 T	15-01-2011
		EP 2057089 A2	13-05-2009
		US 2010140052 A1	10-06-2010
		WO 2008022296 A2	21-02-2008

WO 2019129968 A1	04-07-2019	FR 3075768 A1	28-06-2019
		WO 2019129968 A1	04-07-2019
