




(86) Date de dépôt PCT/PCT Filing Date: 2006/06/30
(87) Date publication PCT/PCT Publication Date: 2007/02/08
(45) Date de délivrance/Issue Date: 2013/12/10
(85) Entrée phase nationale/National Entry: 2008/01/28
(86) N° demande PCT/PCT Application No.: SE 2006/050236
(87) N° publication PCT/PCT Publication No.: 2007/015671
(30) Priorité/Priority: 2005/08/04 (SE0501780-1)

(51) Cl.Int./Int.Cl. *B21D 26/02* (2011.01)
(72) Inventeur/Inventor:
ERICSON, JAN, SE
(73) Propriétaire/Owner:
HYDROFORMING DESIGN LIGHT AB, SE
(74) Agent: ROBIC

(54) Titre : DISPOSITIF ET PROCEDE POUR TENIR ENSEMBLE DES PARTIES D'OUTIL LORS D'UN PROCESSUS D'HYDROFORMAGE
(54) Title: A DEVICE AND A METHOD FOR HOLDING TOGETHER TOOL PARTS DURING A HYDROFORMING PROCESS

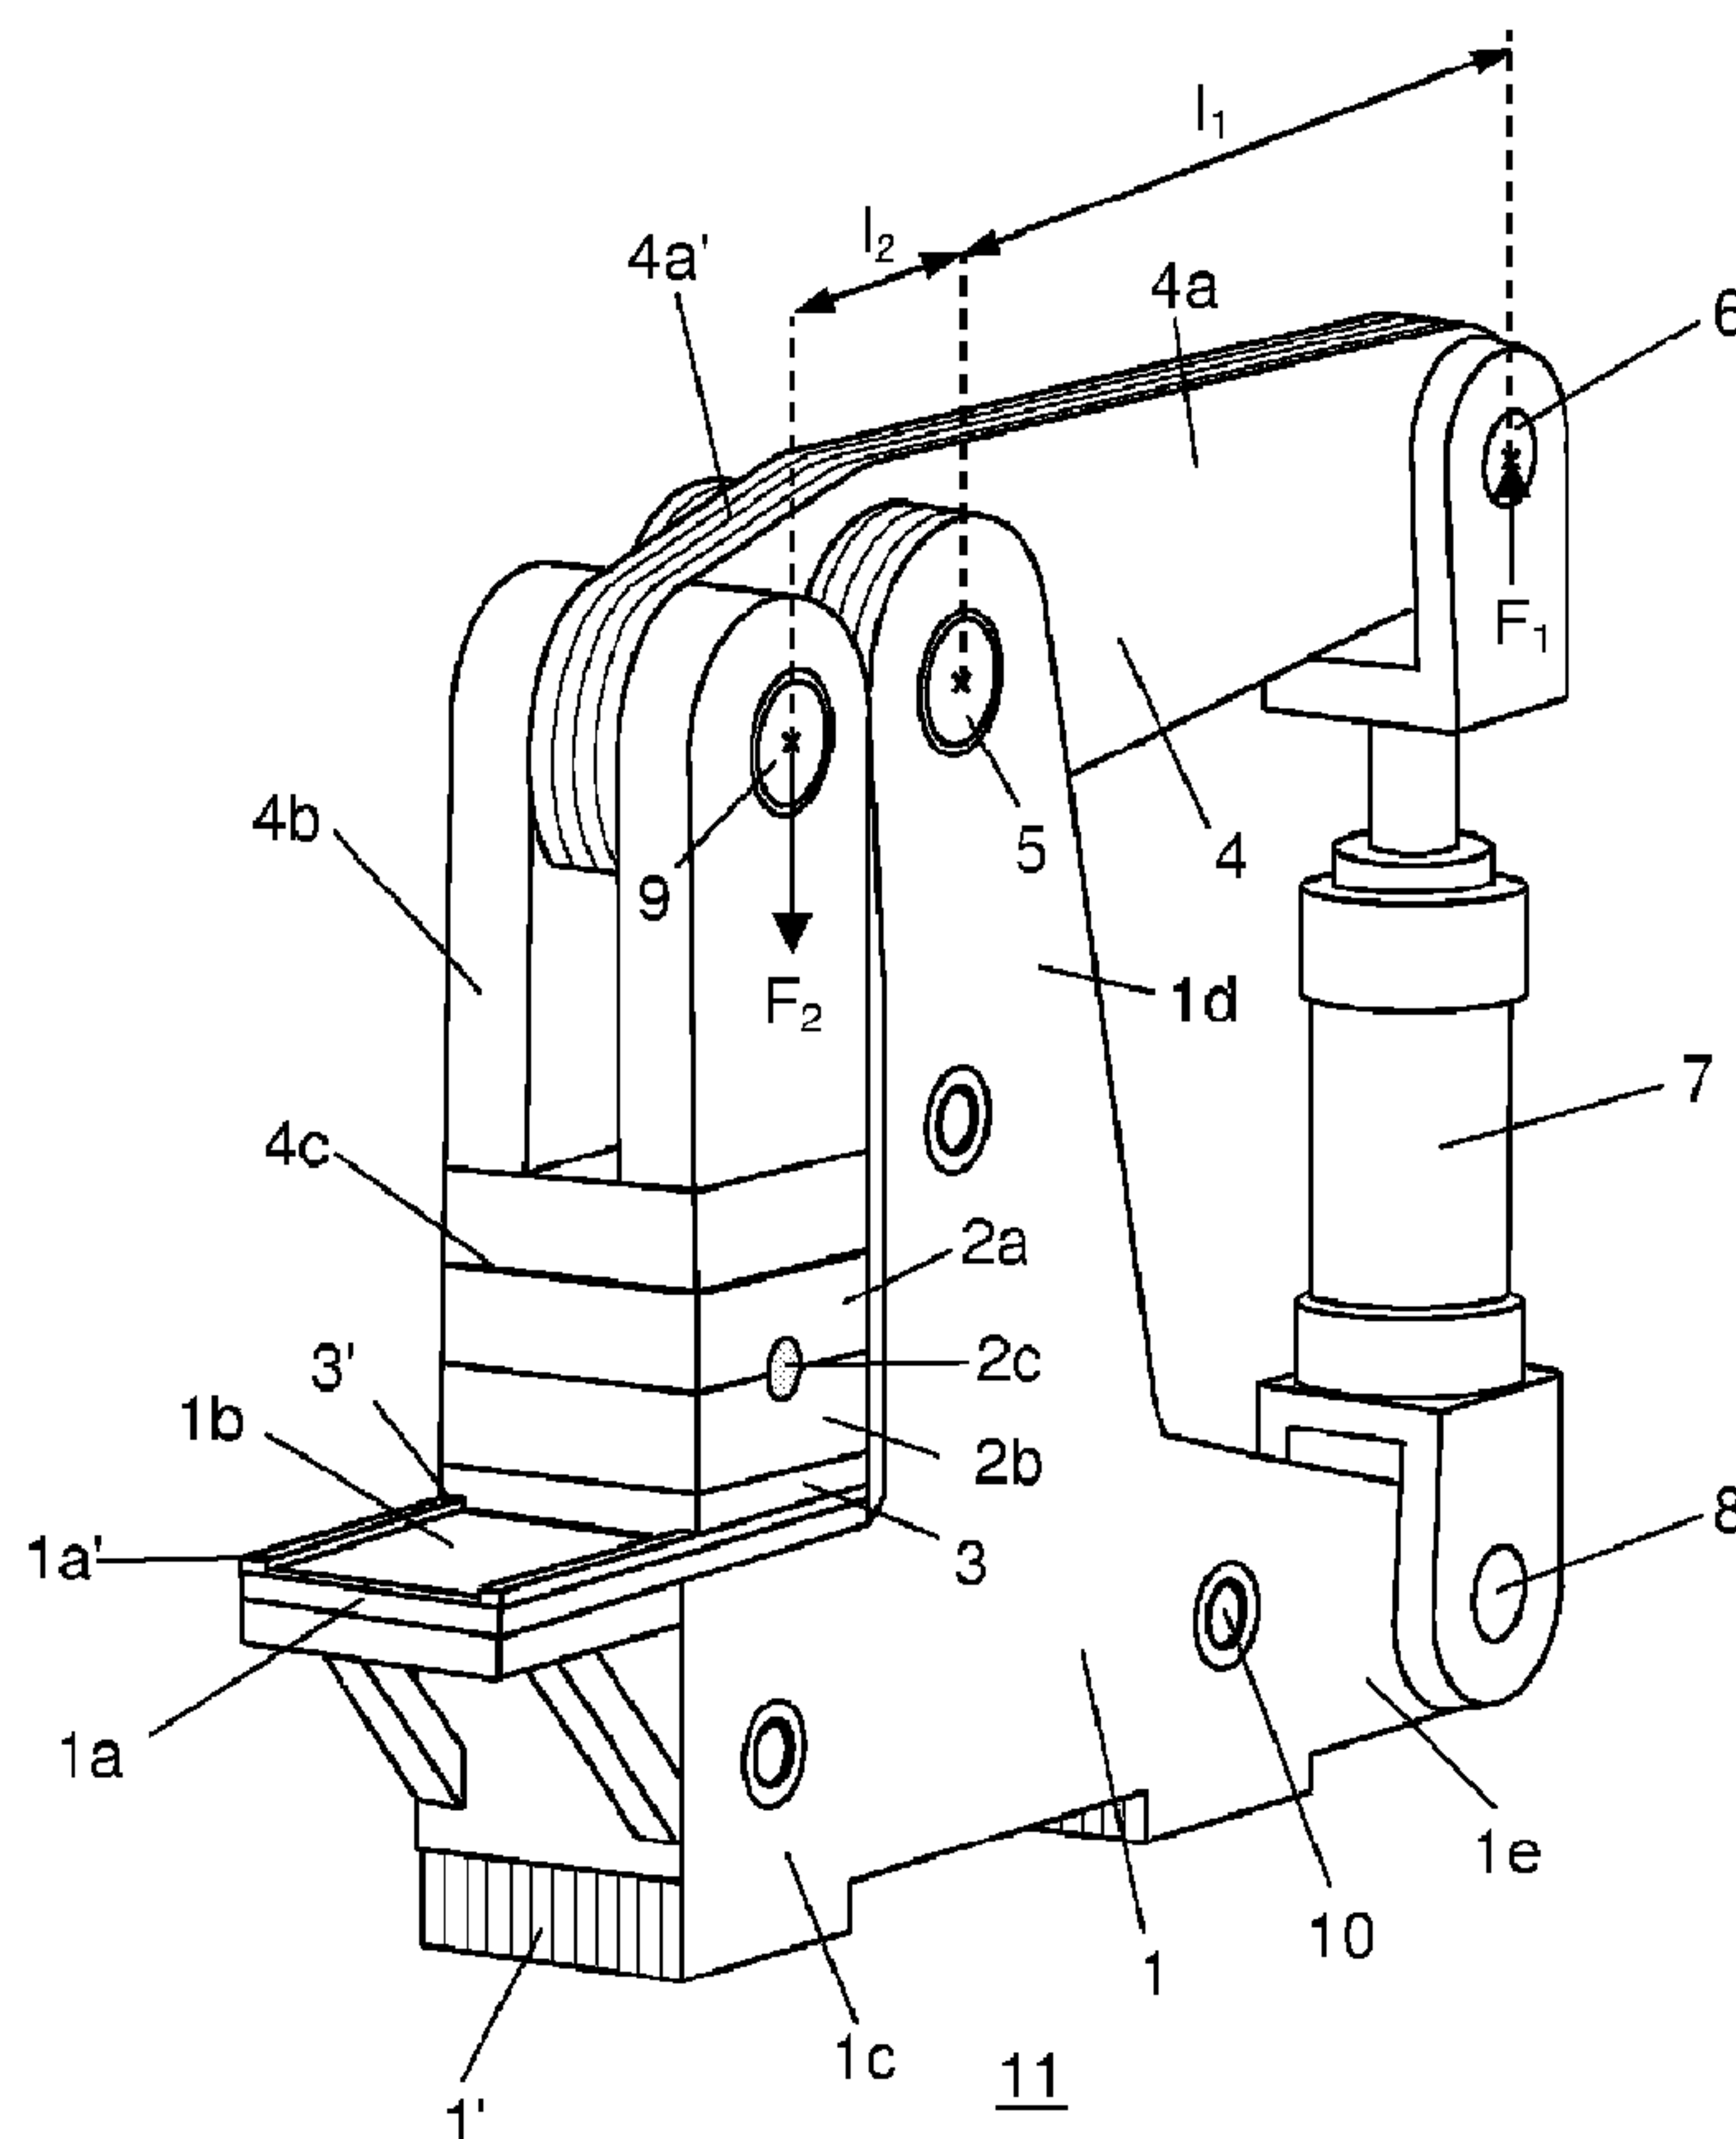

(57) Abrégé/Abstract:

The present invention relates to a device and a method for holding tool parts (2a, b) together during a hydroforming process. The device comprises a first portion (1) comprising a first force transmitting surface (1b) and a second portion (4) comprising a second



(57) **Abrégé(suite)/Abstract(continued):**

force transmitting surface (4c), which are connected by means of a pivot (5), and a length variable power member which, with a force (F1), tends to turn the second portion (4) in relation to the first portion (1) around the pivot (5) by means of a first lever (l1) which is longer than a second lever (l2) by means of which a resultant larger force (F2) is created which acts between said force transmitting surfaces (1 b, 4c) for holding the tool parts together (2a, b) during a hydroforming process.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
8 February 2007 (08.02.2007)

PCT

(10) International Publication Number
WO 2007/015671 A1

(51) International Patent Classification:

B21D 26/02 (2006.01)

(21) International Application Number:

PCT/SE2006/050236

(22) International Filing Date: 30 June 2006 (30.06.2006)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:

0501780-1 4 August 2005 (04.08.2005) SE

(71) Applicant (for all designated States except US): **HYDROFORMING DESIGN LIGHT AB** [SE/SE]; Box 51, S-780 50 Vansbro (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ERICSON, Jan** [SE/SE]; Bobergsvägen 2, S-783 93 Stora Skedvi (SE).(74) Agent: **BJERKÉNS PATENTBYRÅ KB**; Att. Kenneth Gustafsson, Östermalmsgatan 58, S-114 50 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: A DEVICE AND A METHOD FOR HOLDING TOGETHER TOOL PARTS DURING A HYDROFORMING PROCESS

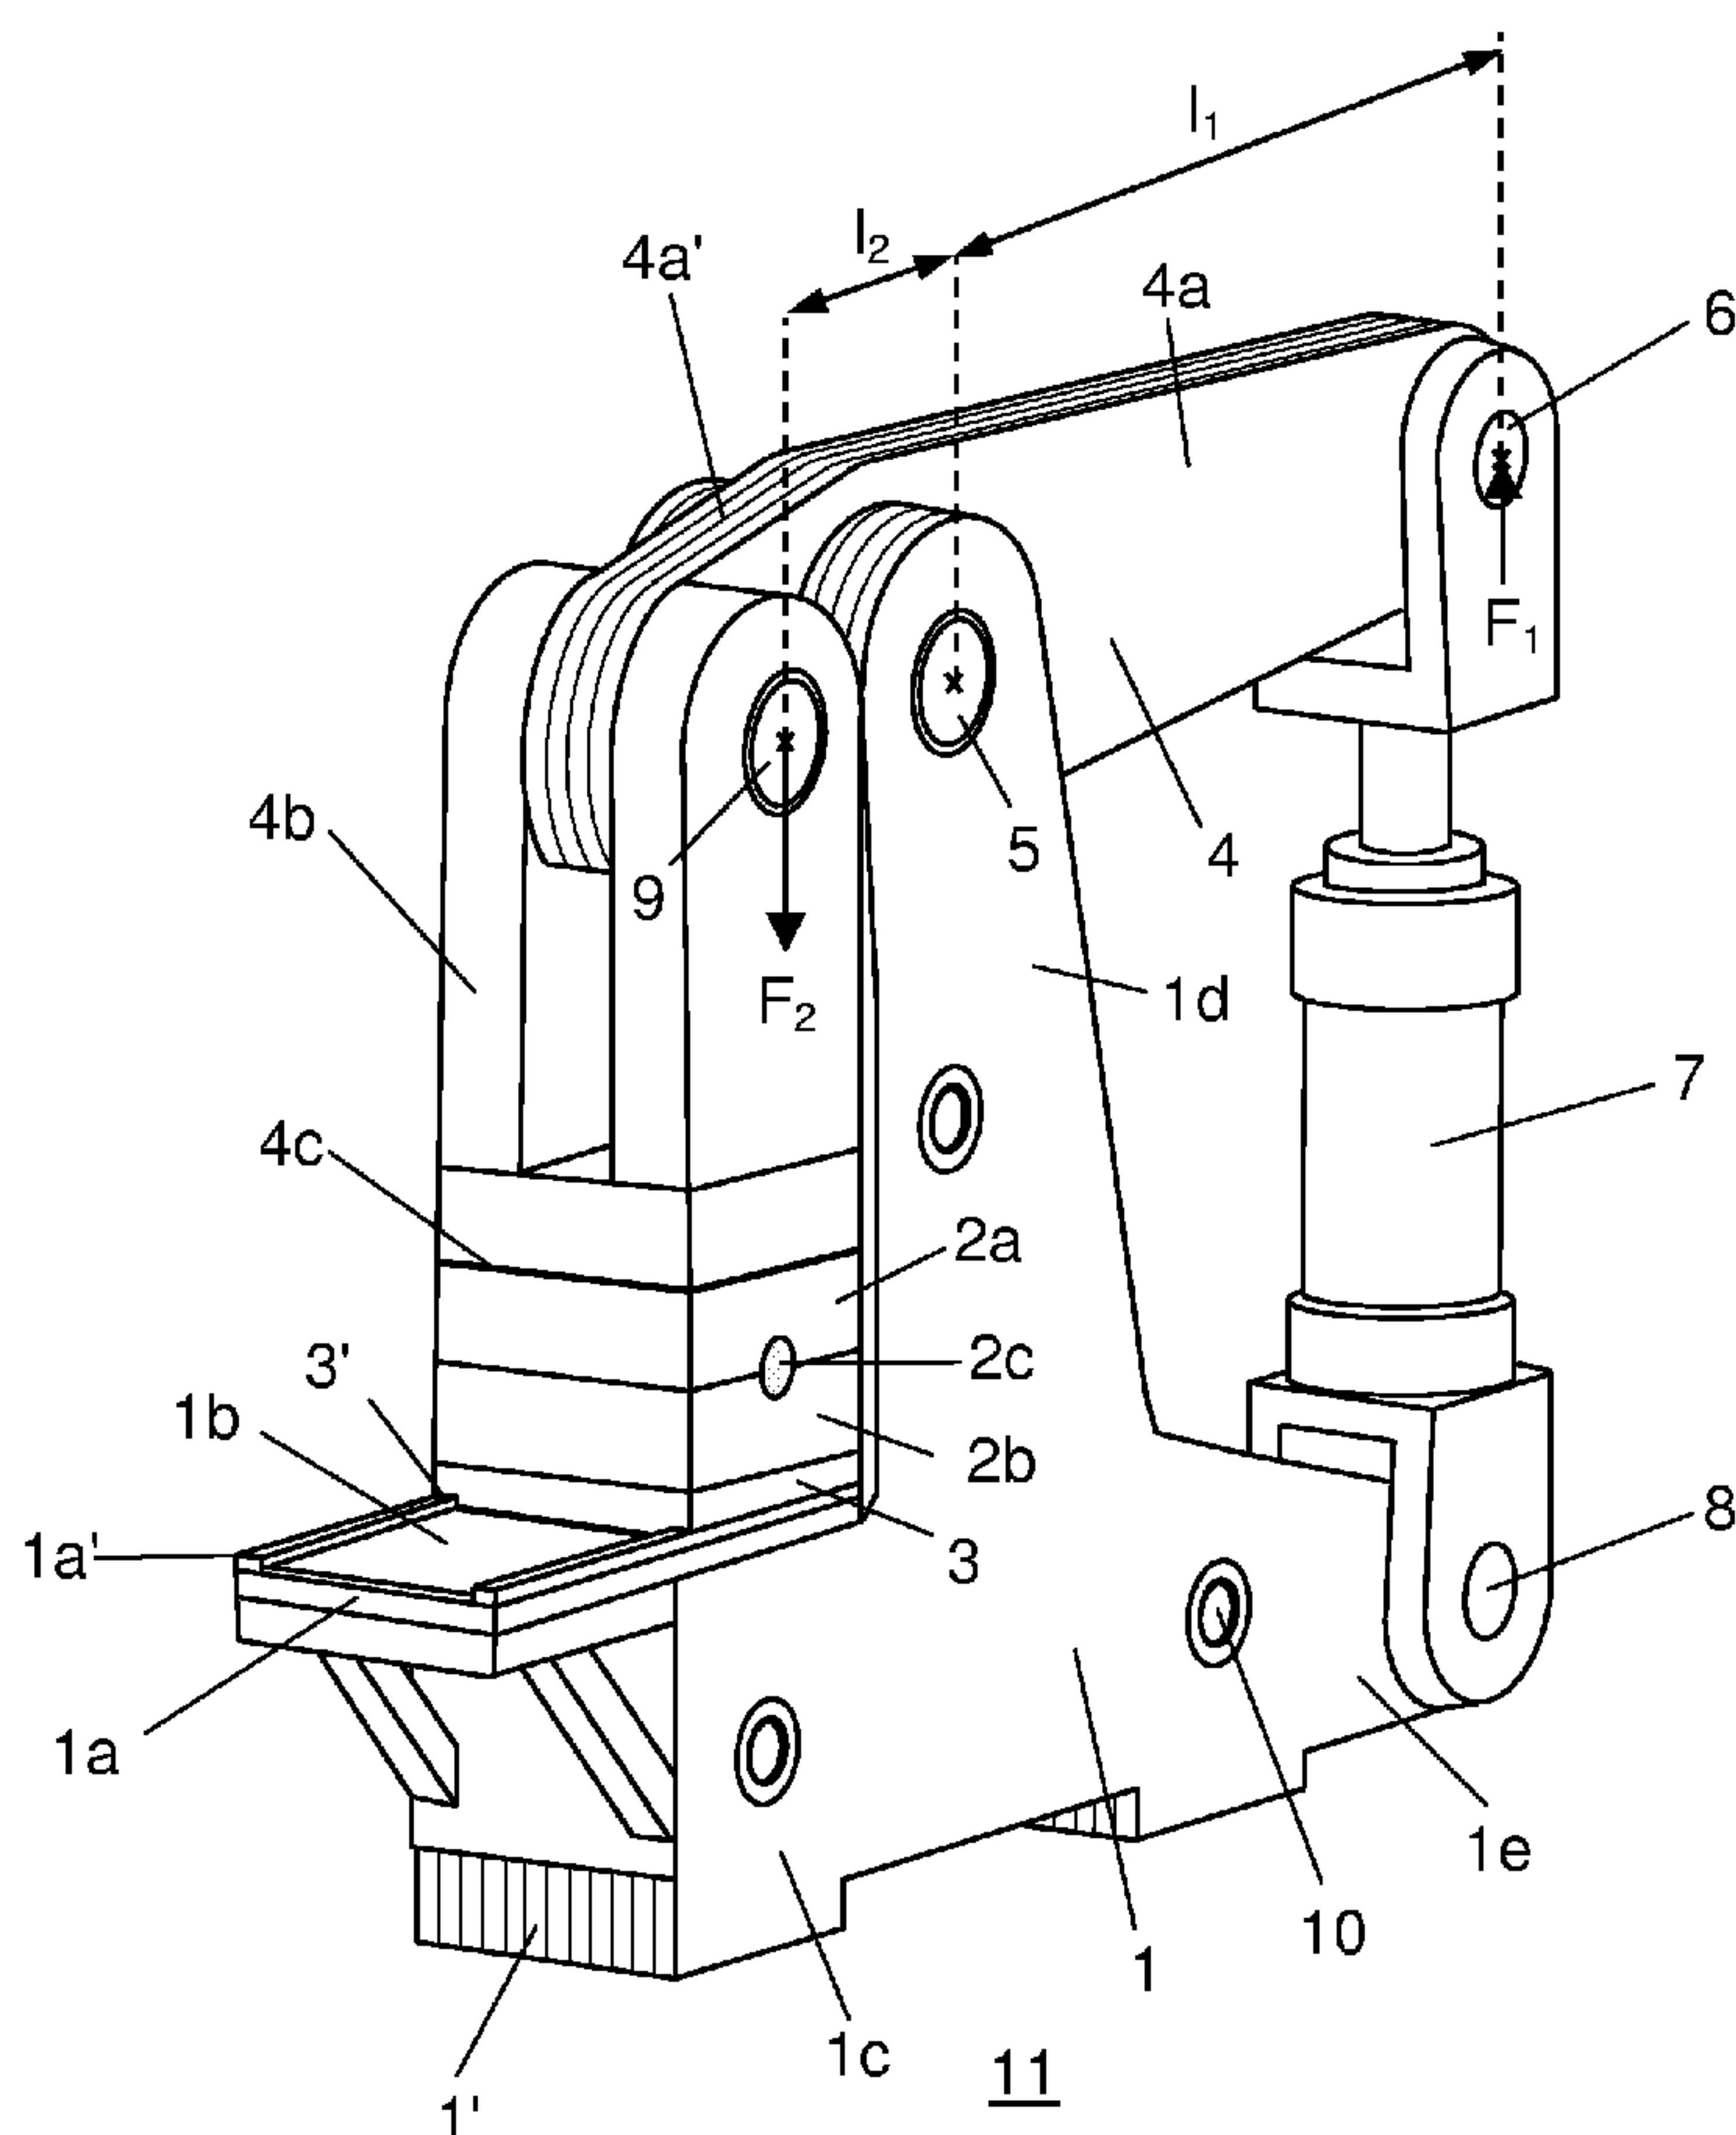

(57) Abstract: The present invention relates to a device and a method for holding tool parts (2a, b) together during a hydroforming process. The device comprises a first portion (1) comprising a first force transmitting surface (1b) and a second portion (4) comprising a second force transmitting surface (4c), which are connected by means of a pivot (5), and a length variable power member which, with a force (F1), tends to turn the second portion (4) in relation to the first portion (1) around the pivot (5) by means of a first lever (I1) which is longer than a second lever (I2) by means of which a resultant larger force (F2) is created which acts between said force transmitting surfaces (1b, 4c) for holding the tool parts together (2a, b) during a hydroforming process.

WO 2007/015671 A1

WO 2007/015671 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

5

A DEVICE AND A METHOD FOR HOLDING TOGETHER TOOL PARTS DURING
A HYDROFORMING PROCESS

10

THE BACKGROUND OF THE INVENTION AND PRIOR ART

The present invention relates to a device and a method for holding tool parts together during a hydroforming process. The device comprises a first portion having a first force transmitting surface, a second portion having a second force transmitting surface, which force transmitting surfaces are arranged to hold the tool parts together during a hydroforming process, and a length variable power member.

20

Hydroforming is a process, which principally is used for manufacturing components of metal which many times have a complicated geometrical shape. A conventional tool for hydroforming consists of two tool halves which are movably arranged in relation to each other between an open state and a closed state. At least one of the tool halves is provided with a recess in which it is possible to apply a blank to be worked. In the closed state of the tool halves, the recess is closed and the blank is formed after the surfaces of the recess by means of supply of a liquid with a very high pressure.

30

When a liquid with such a high pressure is accumulated in the closed recess, large forces are required for holding the tool halves together. Usually, presses of gigantic dimensions are used for generating the necessary forces. Such presses also require auxiliary equipment such as among other things a founda-

35

tion for supplying the large forces generated by the presses. Therefore, very large investments are required for the use of such presses for holding the tool halves together during a hydroforming process.

WO 01/36123 shows a hydroforming device for holding the tool halves together during a hydroforming process. The hydroforming device comprises an aggregate with clamps having wedge-shaped recesses by which they press the tool halves together from opposite sides during the hydroforming process. By means of such clamps the required forces are provided for holding the tool halves together during a hydroforming process in a relatively simple manner and without the need of using large presses. The clamps are arranged at equal distances along substantially the whole long sides of the tool halves. Thereby the accessible space is restricted for, for example, a robot which applies blanks in the tool and picks out formed details.

SUMMARY OF THE INVENTION


The object of the present invention is to provide a device for holding the tool parts together during a hydroforming process, which device has significantly smaller dimensions and fewer components than conventional press devices for hydroforming such that it can be manufactured to a significantly lower cost.

According to the present invention, there is provided a device for holding tool parts (2a, b) together during a hydroforming process, wherein the device comprises a first portion (1) having a first force transmitting surface (1b), a second portion (4) having a second force transmitting surface (4c), which force transmitting surfaces (1b, 4c) are arranged to hold the tool parts (2a, b) together during a hydroforming

2a

process, and a length variable power member (7), characterised in that the second portion (4) is connected to the first portion (1) via a pivot (5), and that the power member (7) has a connection (6) with the second portion (4) and a connection (8) with the first portion (1) such that when the power member (7) supplies a force (F_1) it tends to turn the second portion (4) in relation to the first portion (1) around the pivot (5) by means of a first lever (l_1) which is longer than a second lever (l_2) by means of which a resultant larger force (F_2) is created which acts between said force transmitting surfaces (1b, 4c) for holding the tool parts together (2a, b) during a hydroforming process.

Preferably, this object is achieved with the hydroforming device of the initially mentioned kind, which is characterised in that the second portion is connected to the first portion by means of a pivot, and that the power member has a connection with the second portion and a connection with the first portion such that when the power member supplies a force, the power member tends to turn the second portion in relation to the first portion around the pivot by means of a first lever which is longer than a second lever by means of which a resultant larger force is created acting between said force transmitting surfaces for holding the tool parts

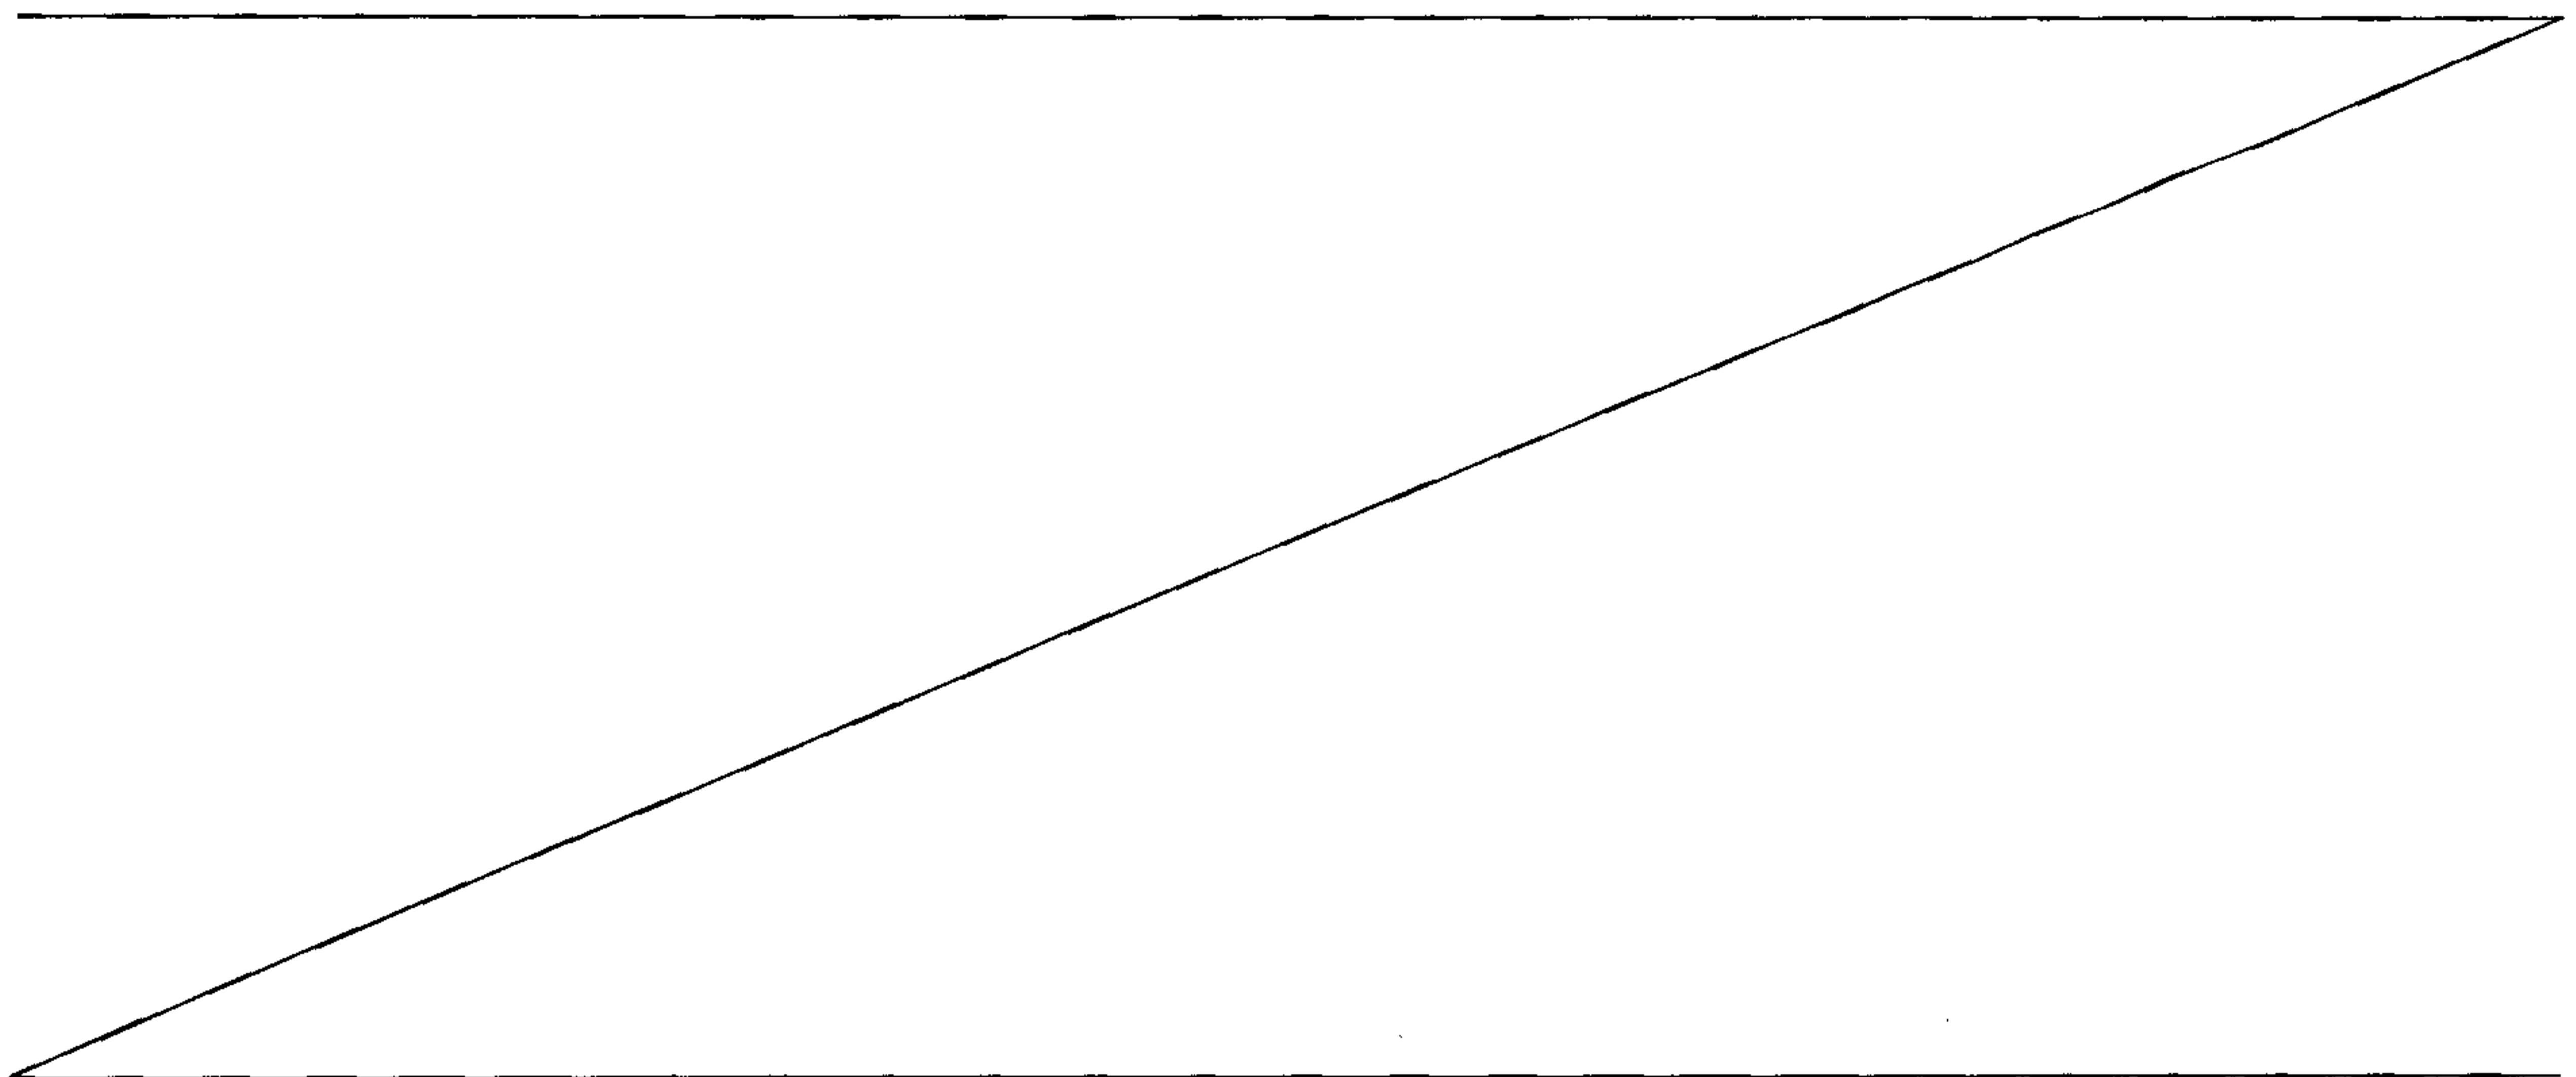

together during a hydroforming process. Consequently, the second portion here is used as a lever, which is turned around a pivot in relation to the first portion. The pivot is positioned in a place in relation to the second portion such that a desired ratio
5 between the first lever and the second lever is obtained. Thus, a corresponding force ratio between the supplied force and the resultant force is obtained. The resultant force, which holds the tool parts together during a hydroforming process, may be many times larger than the supplied force. Thus, the device does not
10 need to comprise large hydraulic cylinders and the need of other auxiliary equipment is also considerably reduced. The included components of the device can thus be given small dimensions. The supplied force as well as the resultant force tend to turn the portions of the device in relation to each other. Thus, either the
15 supplied force or the resultant force are transmitted to the ground on which the device stands. Thus, the device may be placed at a substantially arbitrary place on an ordinary factory floor. Consequently, the device does not need to be provided with a foundation, which absorbs these forces. The cost for the
20 device thus will be essentially lower than the cost for a conventional press device.

According to a preferred embodiment of present invention, the second portion comprises an elongated element connected to
25 the first portion via said pivot. If the second portion is to be used as lever, it is suitable that it has a relatively elongated shape for making a relatively large power exchanging possible. However, the elongated element has to have a sufficient rigidity for transmitting the large forces which here are present. The elongated
30 element may be connected to an extension element comprising the force transmitting surface of the second portion. In order to permit the force transmitting surface of the second portion be able to get into a position such that it can transmit the resultant force against one of the tool halves, it could be necessary to
35 provide the elongated element with such an extension element. Alternatively, the elongated element may comprise the force

transmitting surface of the second portion. The elongated element may here be given a suitable shape such that it can transmit the resultant force directly from its force transmitting surface against a tool half.

5

According to another preferred embodiment of present invention, the first portion comprises a table having a surface arranged to form the force transmitting surface of the first portion. Such a table may be a substantially horizontal surface on which the tool parts are directly or indirectly arranged. Advantageously, the surface of the table has a size such that the tool parts can be displaced along the surface of the table between an outer position on the surface of the table, in which the tool parts are adjustable to an open state, and an inner position on the surface of the table, in which the hydroforming process is performed. Since a lever effect is used, the force transmitting surfaces, which transmit the larger resultant force, provide a relatively small motion. It is simple to displace the tool parts to the outer position with the present invention as soon as the force transmitting surfaces have released their grip of the tool parts. In the outer position, there is space for adjusting the tool parts to an open state. There is usually a free space at the outer side of the table. Consequently, when the tool parts are in the outer position on the table, there is a lot of place to pick out a manufactured detail and to apply a new blanket in the tool. These steps may be performed by means of a robot.

According to another preferred embodiment of present invention, the first portion is stationarily arranged on a ground. The device thus has a restricted number of moveable parts. The stationary portion may comprise a support portion having a solid body with an extension between the force transmitting surface and the ground on which the stationary portion is placed. The force transmitting surface thus rest on a solid body such that it can hold the tool parts together with a large force. Advantageously the stationary portion comprises an upwardly projecting part

comprising the pivot by which the second portion is connected to the stationary portion. By means of such a pivot, a substantially elongated element may be given a substantially horizontal extension at a level largely located above the stationary portion. A length variable power member having an substantially vertical extension may here use such a horizontal element as lever in an optimal manner. The stationary portion may comprise a rearwardly projecting part comprising a connection to the power member. The rear part may extend rearwardly the same distance as a rear part of the elongated element. Thereby, a power member may be given a vertical attachment at a relatively long distance from the pivot.

Alternatively, both the first portion and the second portion may be moveably arranged. In this case, both the first portion and the second portion provide a motion when they transmit the supplied force of the power member to a larger resultant force holding the tool parts together during a hydroforming process. The first portion may comprise an elongated element crosswise connected to the elongated portion of the second portion by means of said pivot. In this case, the device comprises a scissors-like construction with two levers. The elongated element of the first portion may here comprise the force transmitting surface of the first portion. The first elongated element is given a shape such that it can transmit the resultant force directly to a tool half via its force transmitting surface.

According to another preferred embodiment of present invention, the first portion and/or the second portion are at least partly constructed by lamellae. By connecting together a suitable number of such lamella with the same size and shape, the parts of the first portion and the second portions may be given a variable width. Advantageously, the lamellae are constructed in a metal material with good strength properties.

According to the present invention, there is provided a method for holding tool parts (2a, b) together during a hydroforming process, characterised in that the method comprises the steps of connecting a first portion (1) comprising a first force transmitting surface (1b) with a second portion (4) comprising a second force transmitting surface (4c) by means of a pivot (5), connecting a length variable power member with the first portion (1) by means of a connection (8) and the second portion by means of a connection (6) and activating the power member (7) such that it supplies a force (F_1) which tends to turn the second portion (4) in relation to the first portion (1) around the pivot (5) by means of a first lever (l_1) which is longer than a second lever (l_2) by means of which a resultant larger force (F_2) is created which acts between said force transmitting surfaces (1b, 4c) for holding the tool parts together (2a, b) during a hydroforming process.


Preferably, the above mentioned object is also achieved by the method which comprises the steps of connecting a first portion comprising a first force transmitting surface with a second portion comprising a second force transmitting surface by means of a pivot, connecting a length variable power member with the first portion by means of a connection and the second portion by means of a connection and activating the power member such that it supplies a force which tends to turn the second portion in relation to the first portion around the pivot by means of a first lever which is longer than a second lever by means of which a resultant larger force is created which acts between said force transmitting surfaces for holding the tool parts together during a hydroforming process. The method means that the second portion is used as a lever, which transmits a supplied force to a larger resultant force. Thereby, it is possible to create a sufficiently large force in a relatively simple manner for holding the tool parts together during a hydroforming process by use of a comparatively small power member.

6a

SHORT DESCRIPTION OF THE DRAWINGS

In the following, preferred embodiments of the invention is described as examples with reference to the attached drawings, on which:

- Fig. 1 shows a first embodiment of a device according to the invention,
- Fig. 2 shows a second embodiment of a device according to the invention,
- Fig. 3 shows a third embodiment of a device according to the invention and
- Fig. 4 shows a fourth embodiment of a device according to the invention.

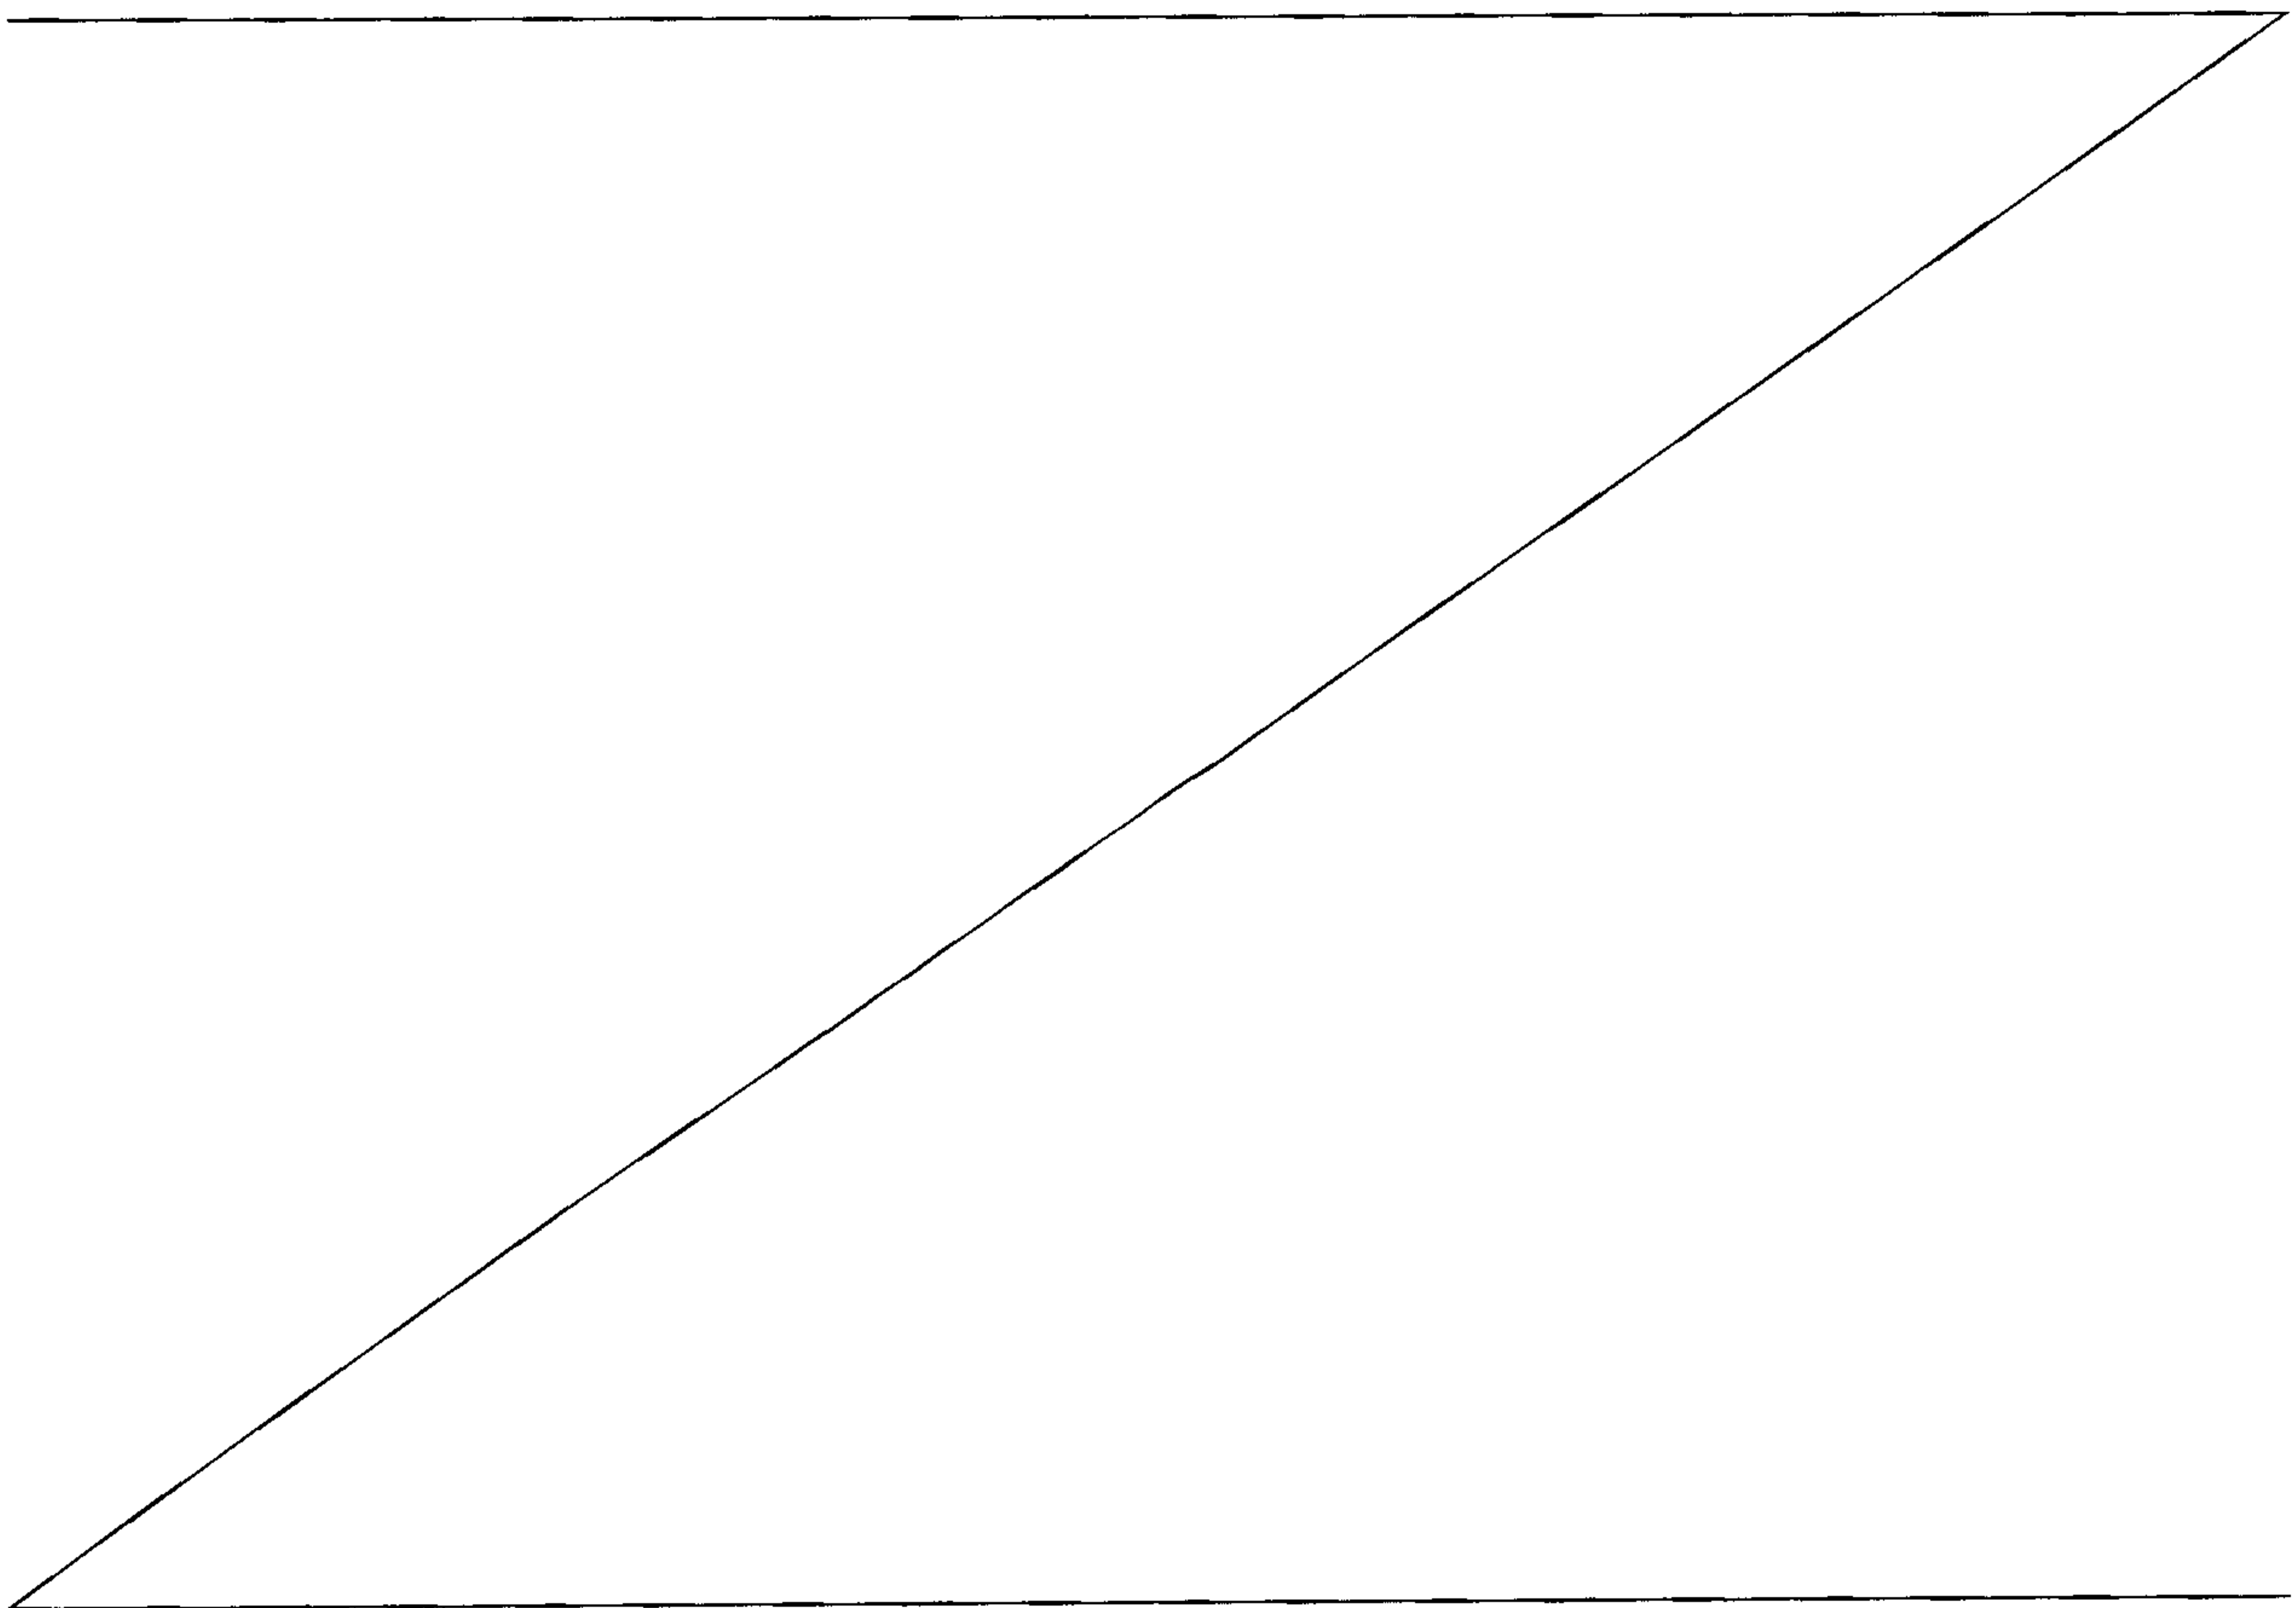

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

Fig. 1 shows a machine for hydroforming. The machine consists of a stationary first portion 1 comprising a table 1a for carrying a hydroforming tool consisting of an upper tool half 2a and a lower tool half 2b. The tool halves 2a, b are movably arranged in relation to each other between a closed state and an open state. The tool halves 2a, b are shown in the closed state in Fig. 1. The tool halves 2a, b are attached to a plate 3 having recesses 3' arranged on the sides, which recesses are adapted to cooperate with correspondingly shaped tracks 1a' of the table. The tool halves 2a, b are thus displaceably provided along the surface of the table 1b as a unit between an inner position and an outer position. The first portion 1 comprises a support portion 1c which forms an underlying solid support for the surface of the table 1b. The first portion 1 also comprises an upwardly projecting part 1d and a rearwardly projecting part 1e.

The machine consists of a second movable portion 4. The second portion 4 comprises an elongated element in the form of an arm 4a which, via a pivot 5, is turnably connected to an end of the upwardly projecting part 1d of the first portion 1. One end of the arm 4a is, via a pivot 6, connected to an end of a hydraulic cylinder 7. An opposite end of the hydraulic cylinder is, via a pivot 8, connected to an end of the rearwardly projecting part 1e of the first portion. The pivot 6 of the arm 4a is provided substantially vertically above the pivot 8 of the rearwardly projecting part 1d. Thereby, the hydraulic cylinder 7 has a substantially vertical extension. An opposite end of the arm 4a is, via a pivot 9, connected to an extension element 4b. The extension element 4b has a downwards turned force transmitting surface 4c which is intended to be in contact with a surface of the upper tool half 2a during a hydroforming process. The first portion 1 and the arm 4a of the second portion 4 are constructed of plate lamellae 1', 4'. By bringing together a suitable number of such plate la-

mellae 1', 4' with the same size and shape, the first portion 1 and the arm 4a of the second portion may be given a desired broad. The lamellae 1', 4' are held together by means of fastening members 10. The first portion 1 is stationary arranged on a
5 ground 11.

When a hydroforming process is to be started, the tool is placed in an outer position on the surface 1b of table with the tool halves 2a, b in an open state. At least the lower tool half 2b
10 is provided with a recess in which a blank is applied to be hydroformed to a detail. Thereafter, the tool halves 2a, b are brought together to a closed state whereupon they with aid of the recesses 3' of the plate and the tracks 1a' of the table are displaced to an inner position on the surface 1b of the table.
15 Thereafter, the hydraulic cylinder 7 is activated such that it provides a prolongation. The hydraulic cylinder 7 thus supplies a substantially vertically directed force F_1 . The hydraulic cylinder 7 thereby turns the arm 4a around the pivot 5 in an anticlockwise direction such that the force transmitting surface 4c of the
20 extension element 4b comes in contact with the upper tool half 2a. The hydraulic cylinder 7 turns the arm 4a with a torque, which is the product of the supplied force F_1 of the hydraulic cylinder and the length l_1 of a first lever. Since the arm 4a has a substantially horizontal extension, the vertical force F_1 is sub-
25 stantially applied in a direction perpendicular in relation to the extension of the arm 4a. Thus, the length l_1 of the first lever is substantially the distance between the pivots 5, 6. On the other side of the pivot 5, an equally large torque is provided which is the product of the length l_2 of a second lever and a resultant
30 substantially vertically downwards directed force F_2 , which the force transmitting surface 4c exerts to the upper tool half 2a. Since also the force F_2 substantially is applied perpendicularly in relation to the extension of the lever 4a, the length l_2 of the second lever is substantially the distance between the pivots 5,
35 9. When the length of the first lever l_1 is several times longer than the length l_2 of the second lever, the resultant force F_2 will

be a corresponding number of times larger than the supplied force F_1 . Since the surface of the table 1b consists a solid underlying support surface for the tool halves 2a, b, the tool halves 2a, b are held together between the force transmitting surface 1b of the table and the force transmitting surface 4c of the pressure element with the resultant force F_2 which thus is considerably larger than the supplied force F_1 .

In the closed state of the tool halves 2a, b, a closed space is provided. The tool halves 2a, b comprise openings 2c to the closed space. Not shown end feed cylinders are applied in the openings 2c by means of which a liquid with a very high pressure is conducted into the space. The pressure of the liquid is of a size such that it permits the blank to flow and be formed by the walls of the space to a detail with a desired shape. Usually, the process takes some tenth of a second. The pressure in the closed space, during a high pressure forming process may be of the magnitude of 700 Mpa. Consequently, a very large force for holding the tool halves 2a, b together during such a process is required.

With the above-described machine, an arm 4a is used which works as a lever for providing a considerably larger resultant force F_2 , which holds the tool halves 2a, b together, than the supplied force F_1 . Consequently, a required high uniting force can be provided in a relatively simple manner. No large hydraulic cylinders need to be used and the need for other auxiliary equipment is also considerably reduced. Since the resultant force F_2 and the supplied force F_1 act between the moveably connected portions 1, 4 of the machine, substantially no one of these forces F_1 , F_2 loads the ground 11, which supports the machine. Consequently, the machine can be placed on a substantially arbitrary place on an ordinary factory floor. Consequently, there exists no need of a foundation, which is the case when conventional presses are used in this connection. The cost for the machine according to the invention will thus be considerably

cheaper than the cost for the presses which conventionally are used for holding the tool halves together during a hydroforming process.

5 After that a hydroforming process has been finished, the hydraulic cylinder 7 is activated such that it turns the arm 4a around the pivot 5 in a clockwise direction such that the force transmitting surface 4c of the extension element 4b is raised a bit from the upper tool half 2a. Consequently, the tool 2a, b is free such
10 that it can be displaced to an outer position on surface of the table 1b. In this outer position, the tool halves 2a, b are adjusted to an open state such that the formed detail can be picked out. Thereafter, a new blanket is applied in the recess of the lower tool half 2b. When the tool halves 2a, b are in the
15 open state on the outer part of the surface 1b of the table, a very good accessibility is provided to apply blankets in the tool and to pick out ready details. The above-described hydroforming process may be performed substantially continuously and by means of a robot. With the above-described machine, a produc-
20 tion cycle may be provided which hydroforms details with a very high speed.

The machine shown in Fig. 1 is constructed as a module. Fig. 2 shows three such modules connected together to a larger ma-
25 chine. The modules have here been connected together in a row after each other such that a connected table 1a is provided having a relatively broad surface 1b. At the same time, the pressure parts 4b form a correspondingly elongated connected pressure surface 4c. In such a machine, a tool 2a, b can be applied,
30 which is intended for forming of elongated details.

Fig. 3 shows a further variant where two modules are connected together such that they form a larger machine. The modules have here been connected together against each other such that
35 a table 1a is formed which can support relatively broad tool halves 2a, b. At the same time, the pressure parts 4b form a

pressure surface 4c of a correspondingly size. In such a machine, a tool 2a, b can be applied, which is intended for hydro-forming of broad details.

- 5 Fig. 4 shows a machine with a first portion 1 in the form of an elongated arm 1a and a second portion 4 in the form of a correspondingly shaped elongated arm 4a. The first arm 1f and the second arm 4a are crosswise connected with each other via a pivot 5. A first hydraulic cylinder 7 is applied such that it can
10 supply a force $F_1/2$ between a stationary part 12 and a pivot 6 of an end of the first arm 1a. A second hydraulic cylinder 7 is applied such that it can supply a force $F_1/2$ between a stationary part 12 and a pivot 8 of an end of the second arm 4a. Advantageously, the stationary parts 12 are comprised in a common
15 frame construction which can support the forces from the hydraulic cylinders 7 such that they do not load the surrounding floor, roof etc. The two hydraulic cylinders 7 are capable to press said ends of the first arm 1a and the second arm 4a together with a total force F_1 . The hydraulic cylinders 7 supply a
20 total torque to the arms 1f, 4a which is the product of the first force F_1 and a first lever l_1 . On the other side of the pivot 5, the first arm 1 has an force transmitting surface 1b which is intended to come in contact with a surface of an upper tool half 2a. On the other side of the pivot 5, the second arm 4 has a
25 force transmitting surface 4c which is intended to come in contact with a surface of a lower tool half 2b. The total torque of the arms on the other side of the pivot 5 is equal with the torque on the first side of the pivot 5. Since the second lever the l_2 here has been made considerably shorter for the arms 1f, 4a than the
30 first lever l_1 , the total resultant the force F_2 , which holds the tool halves 2a, b together, will be considerably larger than the supplied force F_1 .

35 The present invention is not limited to the embodiments described on the drawings, but may be modified freely within the scope of the claims. The power member does not need to be a

hydraulic cylinder but may be a substantially arbitrary force member which is variable in length. The device is not limited to hold only two tool halves together but it can be used to hold more than two tool parts together during a hydroforming process.

WHAT IS CLAIMED IS:

1. A device for holding tool parts (2a, b) together during a hydroforming process, wherein the device comprises a first portion (1) having a first force transmitting surface (1b), a second portion (4) having a second force transmitting surface (4c), which force transmitting surfaces (1b, 4c) are arranged to hold the tool parts (2a, b) together during a hydroforming process, and a length variable power member (7), characterised in that the second portion (4) is connected to the first portion (1) via a pivot (5), and that the power member (7) has a connection (6) with the second portion (4) and a connection (8) with the first portion (1) such that when
10 the power member (7) supplies a force (F_1) it tends to turn the second portion (4) in relation to the first portion (1) around the pivot (5) by means of a first lever (l_1) which is longer than a second lever (l_2) by means of which a resultant larger force (F_2) is created which acts between said force transmitting surfaces (1b, 4c) for holding the tool parts together (2a, b) during a hydroforming process.
2. A device according to claim 1, characterised in that the second portion (4) comprises an elongated element (4a) connected to the first portion via said pivot (5).
3. A device according to claim 2, characterised in that the elongated element (4a) is connected to an extension element (4b) comprising the force transmitting
20 surface (4c) of the second portion.
4. A device according to any one of claims 1 to 3, characterised in that the first portion (1) comprises a table (1a) having a surface (1b) comprising the force transmitting surface of the first portion (1b).
5. A device according to claim 4, characterised in that the surface (1b) of the table has a size such that the tool parts (2a, b) can be displaced along the surface

of the table (1b) between an outer position on the surface of the table (1b) in which the tool parts (2a, b) are adjustable to an open state and an inner position on the surface of the table (1b) in which the hydroforming process is performed.

6. A device according to any one of claims 1 to 5, characterised in that the first portion (1) is stationarily arranged on a ground (11).

7. A device according to claim 6, characterised in that the stationary first portion (1) comprises a support portion (1c) having a solid body with an extension between the force transmitting surface (1b) and said ground (11).

10 8. A device according to claim 6 or 7, characterised in that the stationary portion (1) comprises an upwards projecting part (1d) comprising the pivot (5) by which the second portion (4) is connected to the stationary portion (1).

9. A device according to any one of claims 6 to 8, characterised in that the stationary portion (1) comprises a rearwardly projecting part (1e), which comprises a connection (8) with the power member (7).

10. A device according to any one of claims 1, 3, 4 and 5, characterised in that both the first portion (1) and the second portion (4) are movably arranged.

11. A device according to claim 2, characterised in that both the first portion (1) and the second portion (4) are movably arranged.

20 12. A device according to claim 11, characterised in that the first portion comprises an elongated element (1f) which is connected with the elongated portion (4a) of the second portion, in a crosswise manner, by means of said pivot (5).

13. A device according to claim 12, characterised in that the elongated element (1f) of the first portion comprises the force transmitting surface (1b) of the first portion (1).

14. A device according to any one of claims 1 to 13, characterised in that the first portion (1) and/or the second portion (4) are at least partly constructed by lamellae (1', 4').

15. A method for holding tool parts (2a, b) together during a hydroforming process, characterised in that the method comprises the steps of connecting a first portion (1) comprising a first force transmitting surface (1b) with a second portion (4) comprising a second force transmitting surface (4c) by means of a pivot (5), connecting a length variable power member with the first portion (1) by means of a connection (8) and the second portion by means of a connection (6) and activating the power member (7) such that it supplies a force (F_1) which tends to turn the second portion (4) in relation to the first portion (1) around the pivot (5) by means of a first lever (l_1) which is longer than a second lever (l_2) by means of which a resultant larger force (F_2) is created which acts between said force transmitting surfaces (1b, 4c) for holding the tool parts together (2a, b) during a hydroforming process.





Fig 2

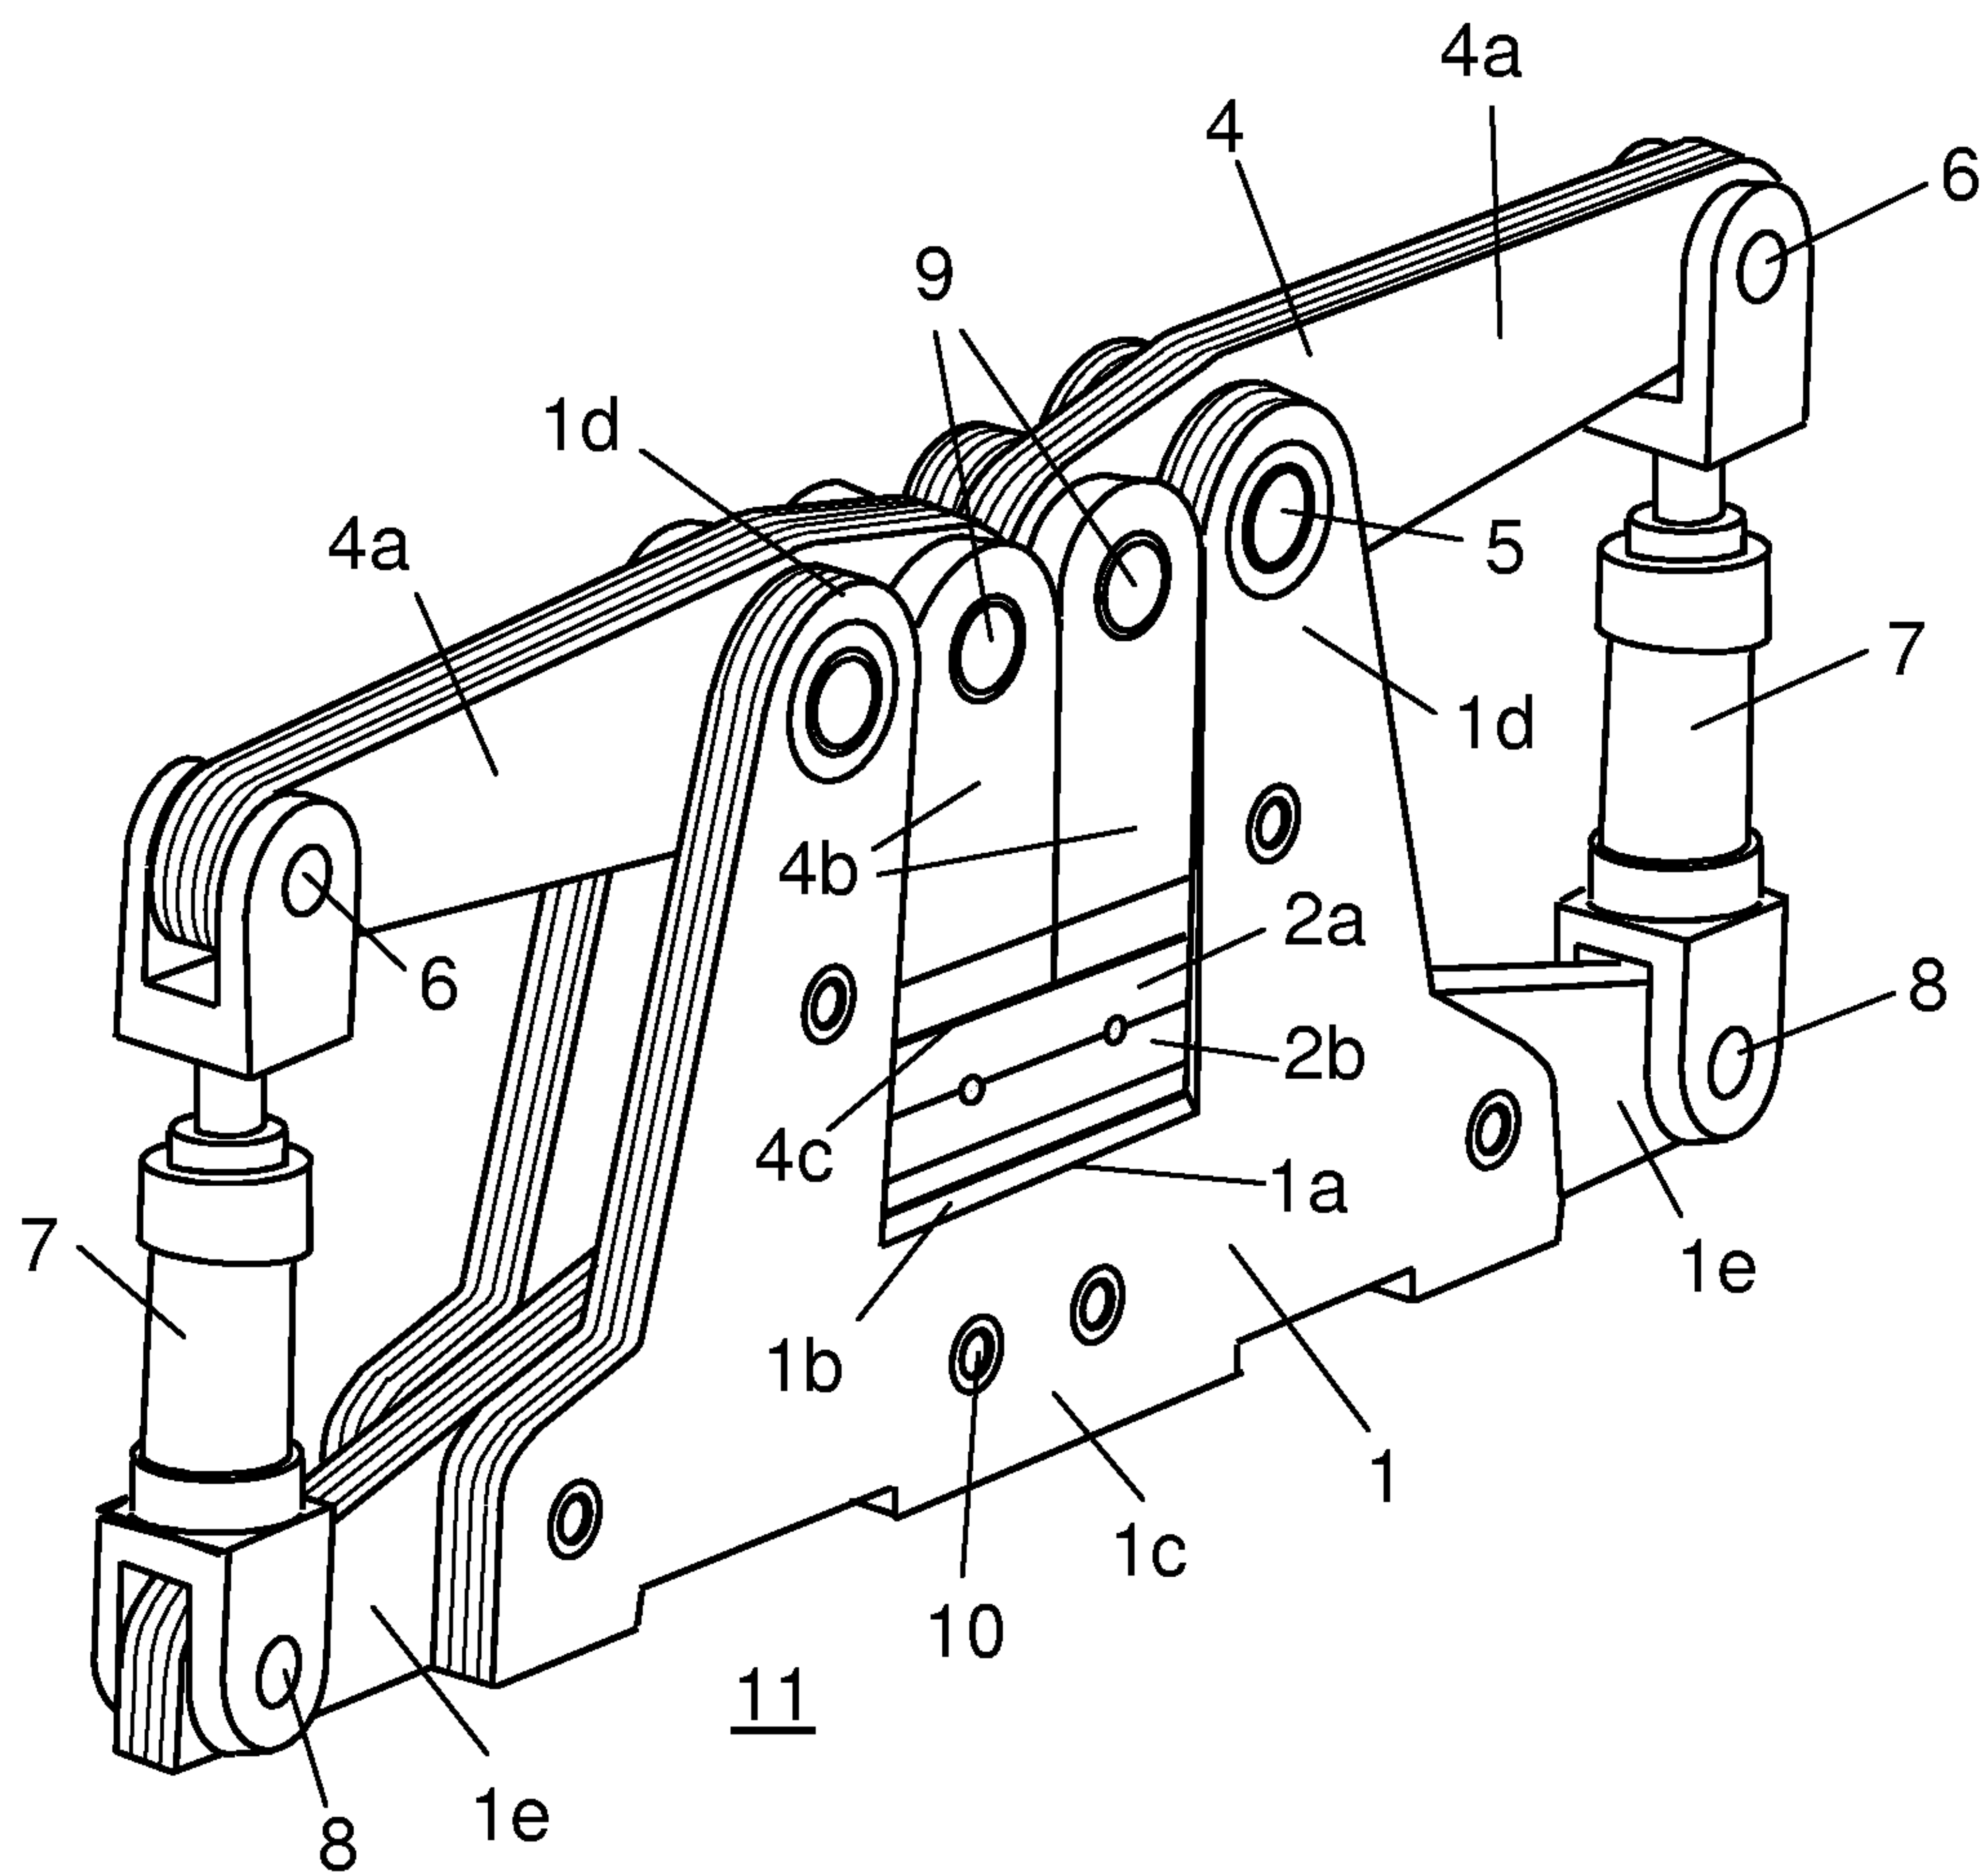


Fig 3

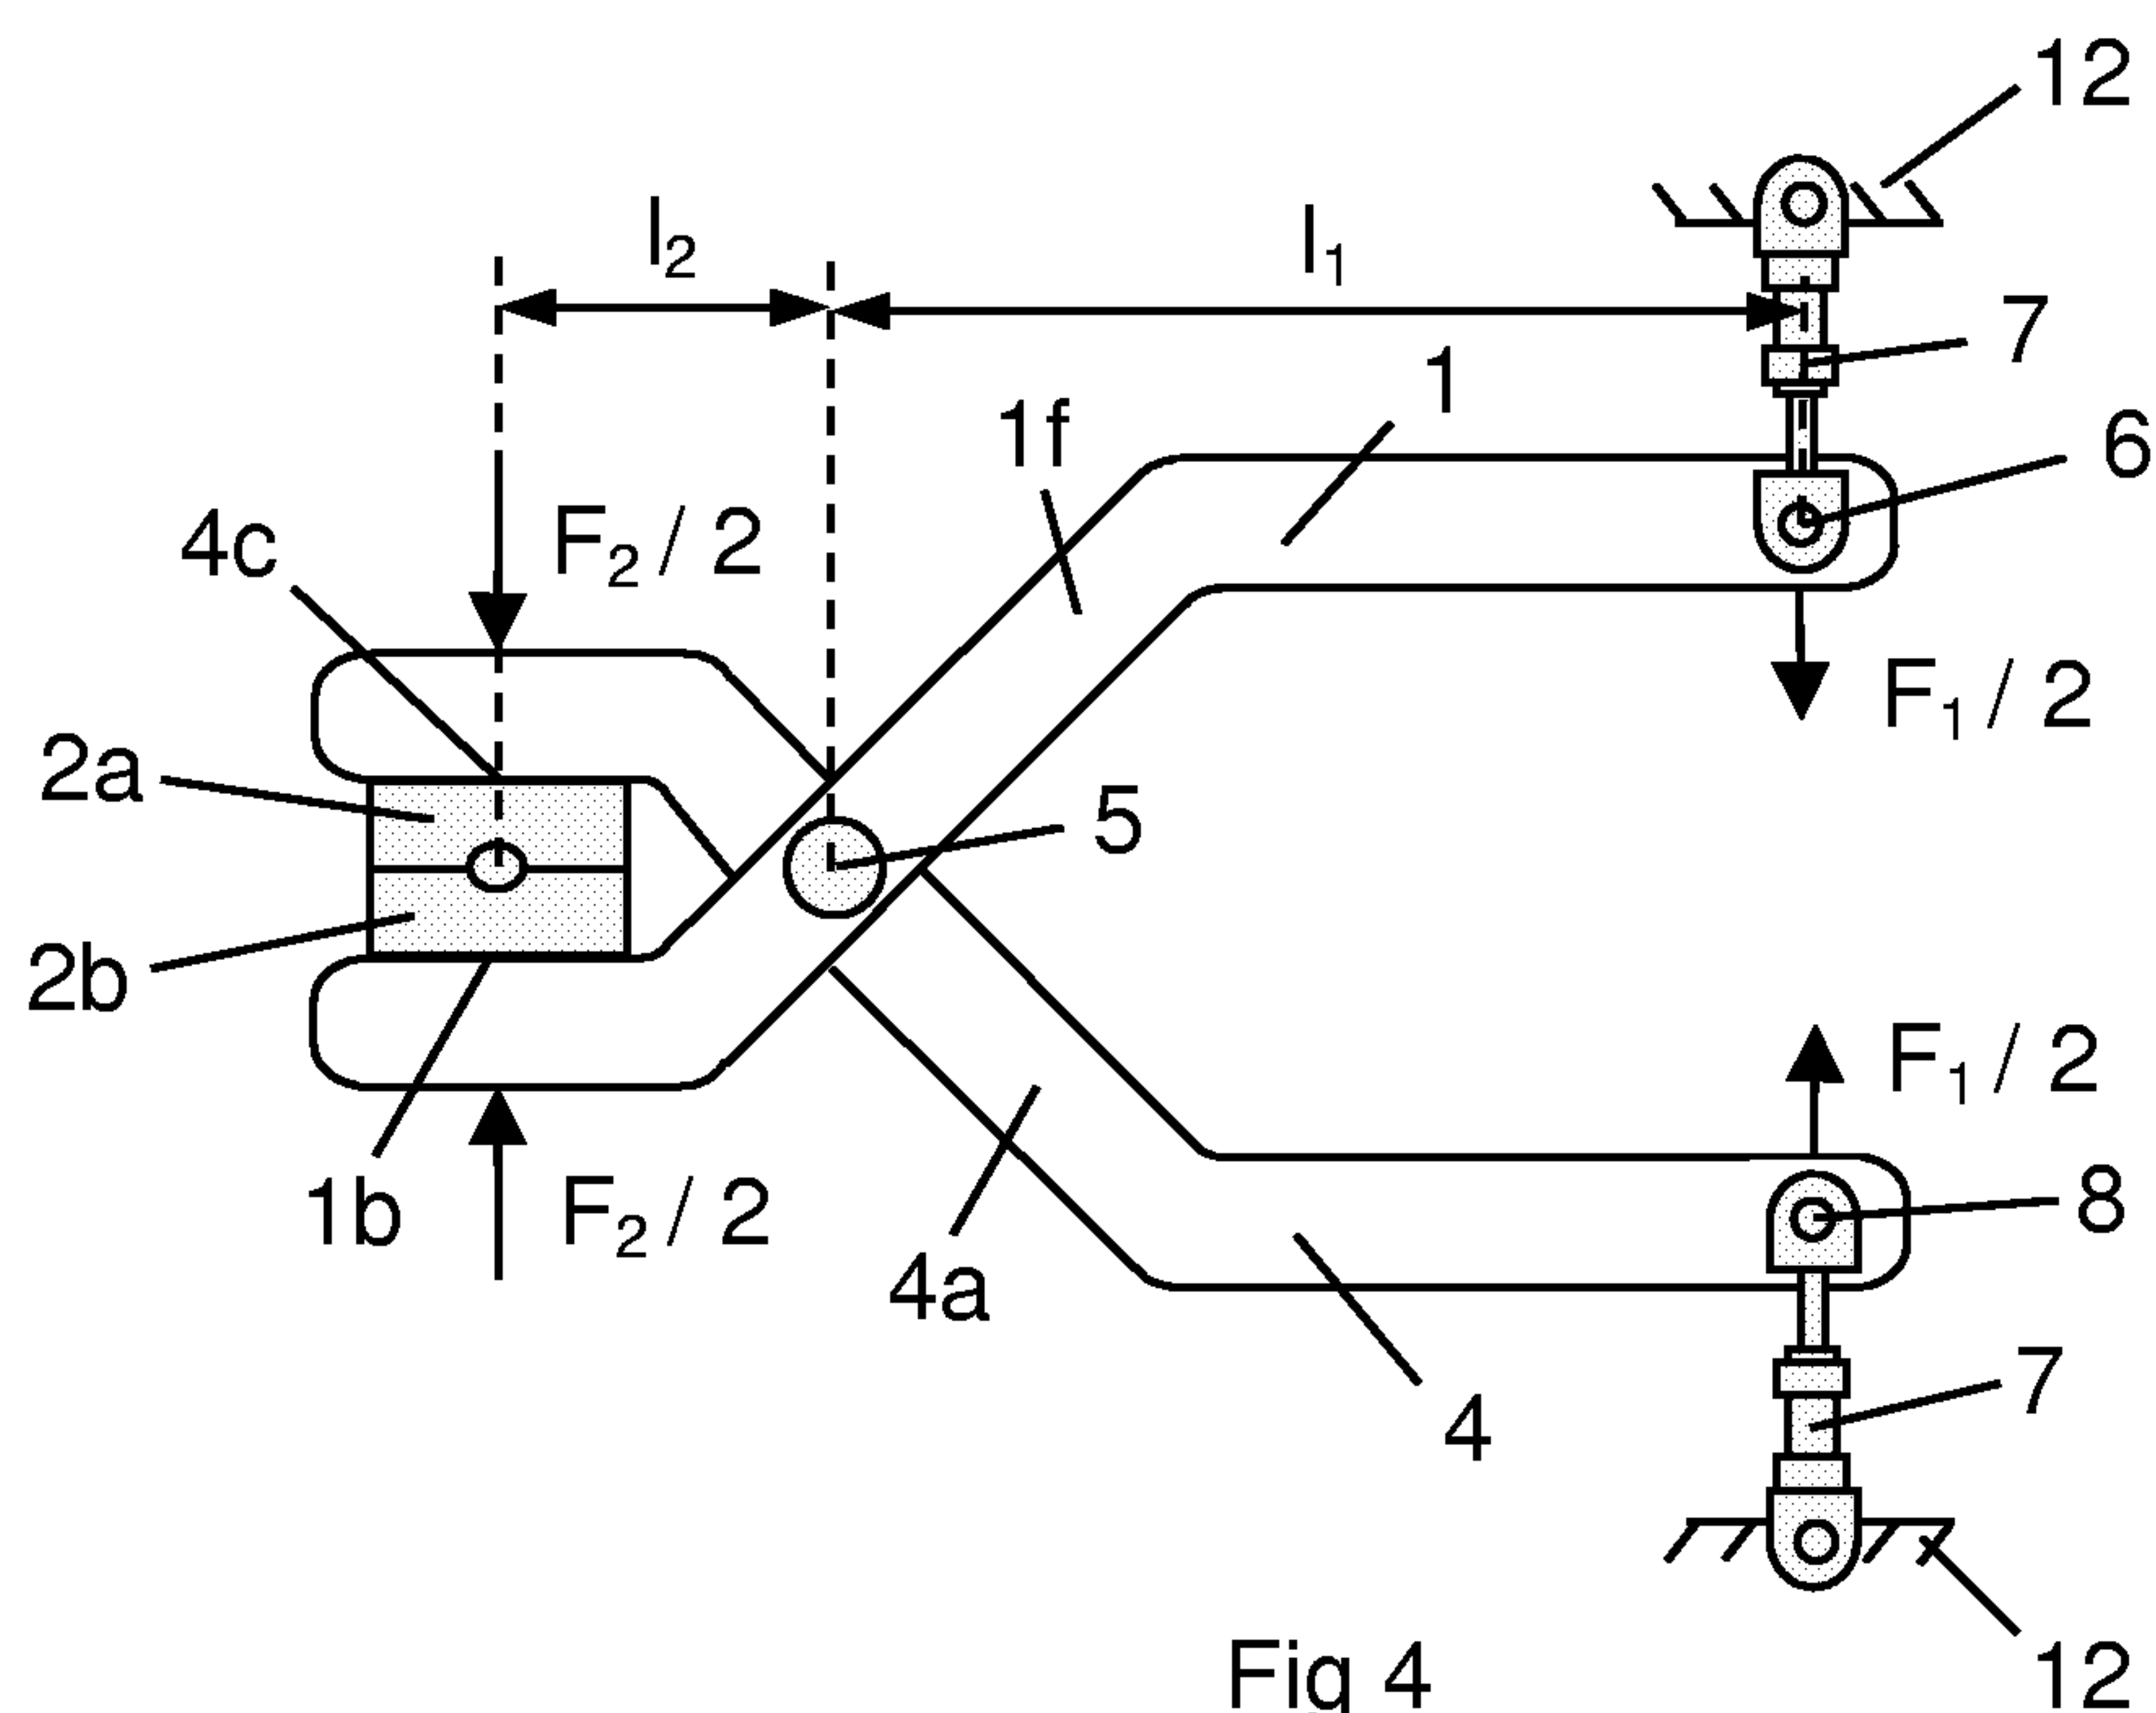


Fig 4

