



US00D797688S

(12) **United States Design Patent**
Tanaka et al.

(10) **Patent No.:** **US D797,688 S**

(45) **Date of Patent:** **** Sep. 19, 2017**

- (54) **LIGHT EMITTING DIODE**
- (71) Applicant: **TOYODA GOSEI CO., LTD.**, Kiyosu (JP)
- (72) Inventors: **Motoyuki Tanaka**, Kiyosu (JP); **Yosuke Tsuchiya**, Kiyosu (JP); **Aya Kawaoka**, Kiyosu (JP); **Makoto Ishida**, Kiyosu (JP)
- (73) Assignee: **Toyoda Gosei Co., Ltd.**, Kiyosu-shi, Aichi-ken (JP)

7,687,292 B2 * 3/2010 Park H01L 33/60
257/E21 499

D623,611 S * 9/2010 Okuwaki D13/180
7,960,748 B2 * 6/2011 Sakamoto H01L 33/60
257/100

D647,068 S * 10/2011 Okuwaki D13/180
D647,865 S * 11/2011 Miyashita D13/180
D661,263 S * 6/2012 Okuwaki D13/180
D662,903 S * 7/2012 Kobayakawa D13/180
D663,703 S * 7/2012 Kobayakawa D13/180
D664,106 S * 7/2012 Kobayakawa D13/180
D669,042 S * 10/2012 Kanemaru D13/180
D669,043 S * 10/2012 Kamijo D13/180
8,410,502 B2 * 4/2013 Okamoto G02B 6/0083
257/100

(**) Term: **15 Years**

(Continued)

(21) Appl. No.: **29/567,682**

FOREIGN PATENT DOCUMENTS

(22) Filed: **Jun. 10, 2016**

JP 1509220 S 10/2014

(30) **Foreign Application Priority Data**

Jan. 13, 2016 (JP) 2016-000505

(51) **LOC (10) Cl.** **13-03**

(52) **U.S. Cl.** **D13/180**

(58) **Field of Classification Search**

USPC D13/180; D26/1

CPC ... H01L 25/167; H01L 25/0753; H01L 27/15;
H01L 27/156; H01L 33/00; H01L 33/04;
H01L 33/08; H01L 33/10; H01L 33/20;
H01L 33/38; H01L 33/42; H01L 33/48;
H01L 33/483; H01L 33/486; H01L 33/60;
F21K 9/135; F21K 9/30; F21K 9/50;
Y10S 362/80

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

D476,960 S * 7/2003 Fukasawa D13/182
D478,879 S * 8/2003 Imai D13/182
D590,354 S * 4/2009 Tsuchiya D13/180

Primary Examiner — Selina Sikder

(74) *Attorney, Agent, or Firm* — McGinn IP Law Group, PLLC



(57) **CLAIM**

The ornamental design for a light emitting diode, as shown and described.

DESCRIPTION

FIG. 1 is a front perspective view of a light emitting diode showing our new design;
FIG. 2 is a rear perspective view thereof;
FIG. 3 is a front view thereof;
FIG. 4 is a rear view thereof;
FIG. 5 is a left side view thereof;
FIG. 6 is a right side view thereof;
FIG. 7 is a top plan view thereof;
FIG. 8 is a bottom view thereof; and,
FIG. 9 is an alternate front view thereof wherein the lighting emitting surfaces are translucent.

1 Claim, 9 Drawing Sheets

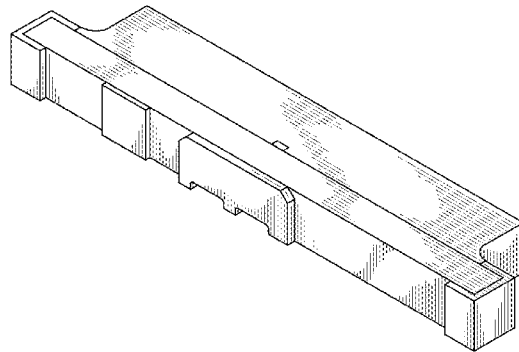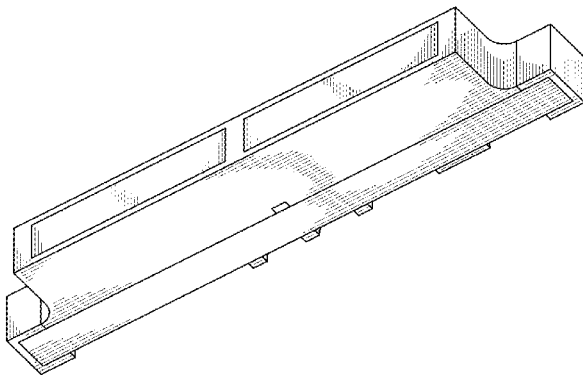

(56)


References Cited

U.S. PATENT DOCUMENTS

8,879,023	B2 *	11/2014	Tsou	H01L 33/62
				257/81
9,406,852	B2 *	8/2016	Nakabayashi	H01L 33/486
9,461,207	B2 *	10/2016	Yamashita	H01L 33/62
D781,256	S *	3/2017	Tanaka	D13/180
2011/0050071	A1 *	3/2011	Chung	F21K 9/00
				313/46
2016/0056350	A1 *	2/2016	Huang	H01L 33/62
				257/787
2016/0300987	A1 *	10/2016	Sanga	H01L 33/38

* cited by examiner

FIG. 1

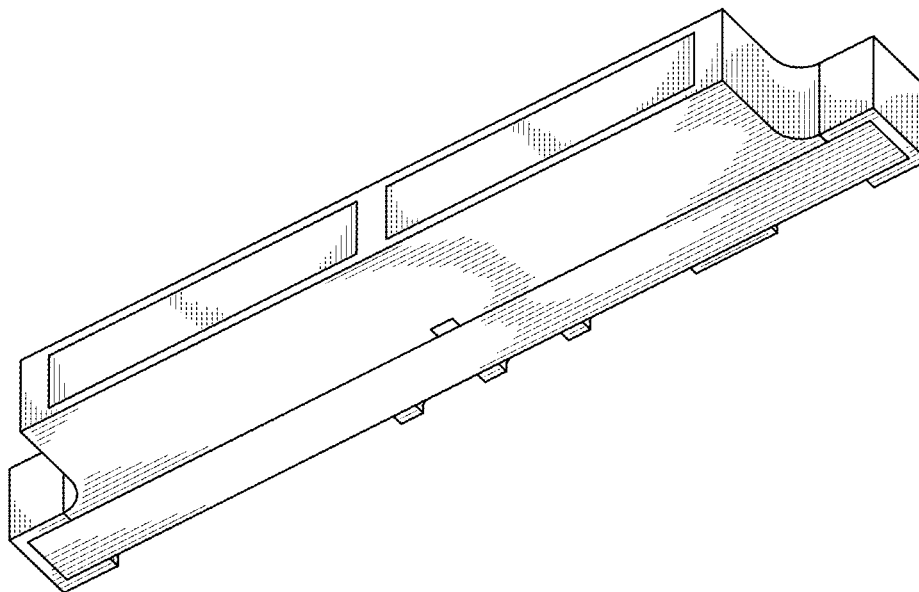

F I G. 2

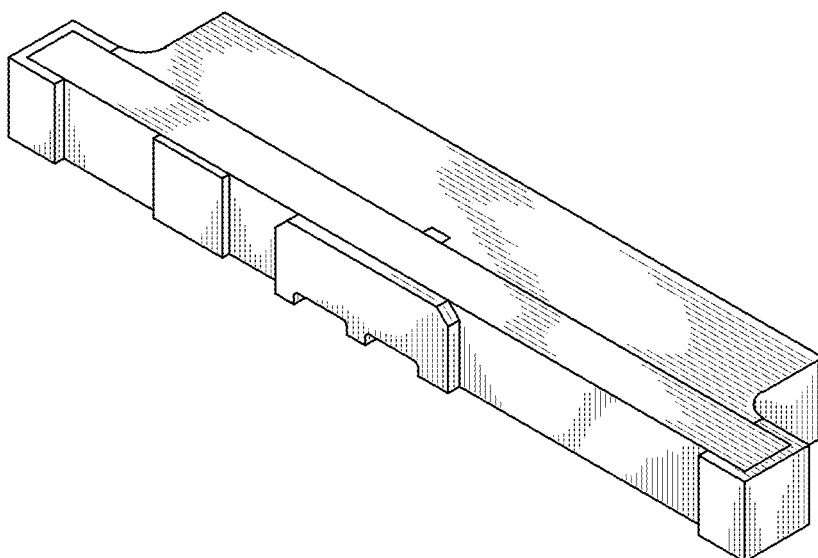


FIG. 3




FIG. 4






FIG. 5



F I G. 6



F I G. 7

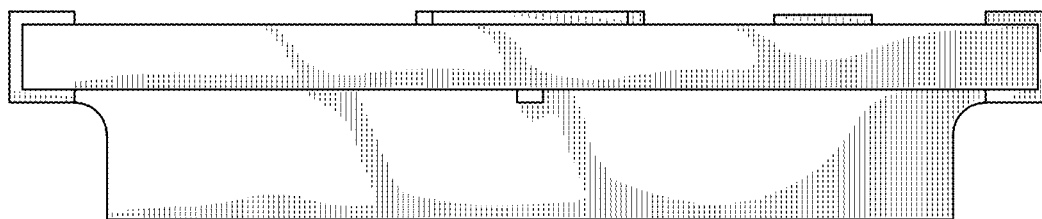


FIG. 8

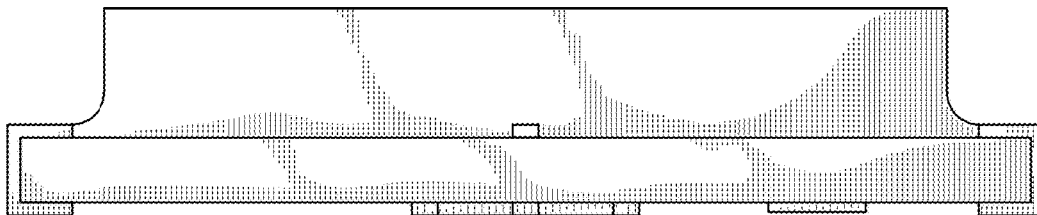




FIG. 9