




(86) Date de dépôt PCT/PCT Filing Date: 2004/07/13
(87) Date publication PCT/PCT Publication Date: 2005/02/24
(45) Date de délivrance/Issue Date: 2014/09/30
(85) Entrée phase nationale/National Entry: 2006/01/25
(86) N° demande PCT/PCT Application No.: US 2004/022422
(87) N° publication PCT/PCT Publication No.: 2005/018131
(30) Priorités/Priorities: 2003/07/28 (US60/490,638);
2003/08/05 (US60/492,710); 2004/06/28 (US10/880,023)

(51) Cl.Int./Int.Cl. *H04W 88/08* (2009.01),
H04B 7/14 (2006.01), *H04B 7/185* (2006.01),
H04W 16/00 (2009.01)
(72) Inventeur/Inventor:
KARABINIS, PETER D., US
(73) Propriétaire/Owner:
ATC TECHNOLOGIES, LLC, US
(74) Agent: SIM & MCBURNEY

(54) Titre : SYSTEMES ET PROCEDES PERMETTANT DE MODIFIER DES DIAGRAMMES DE RAYONNEMENT
D'ANTENNES DE STATIONS DE BASE PERIPHERIQUES D'UN RESEAU TERRESTRE POUR REDUIRE
L'INTERFERENCE
(54) Title: SYSTEMS AND METHODS FOR MODIFYING ANTENNA RADIATION PATTERNS OF PERIPHERAL BASE
STATIONS OF A TERRESTRIAL NETWORK TO ALLOW REDUCED INTERFERENCE

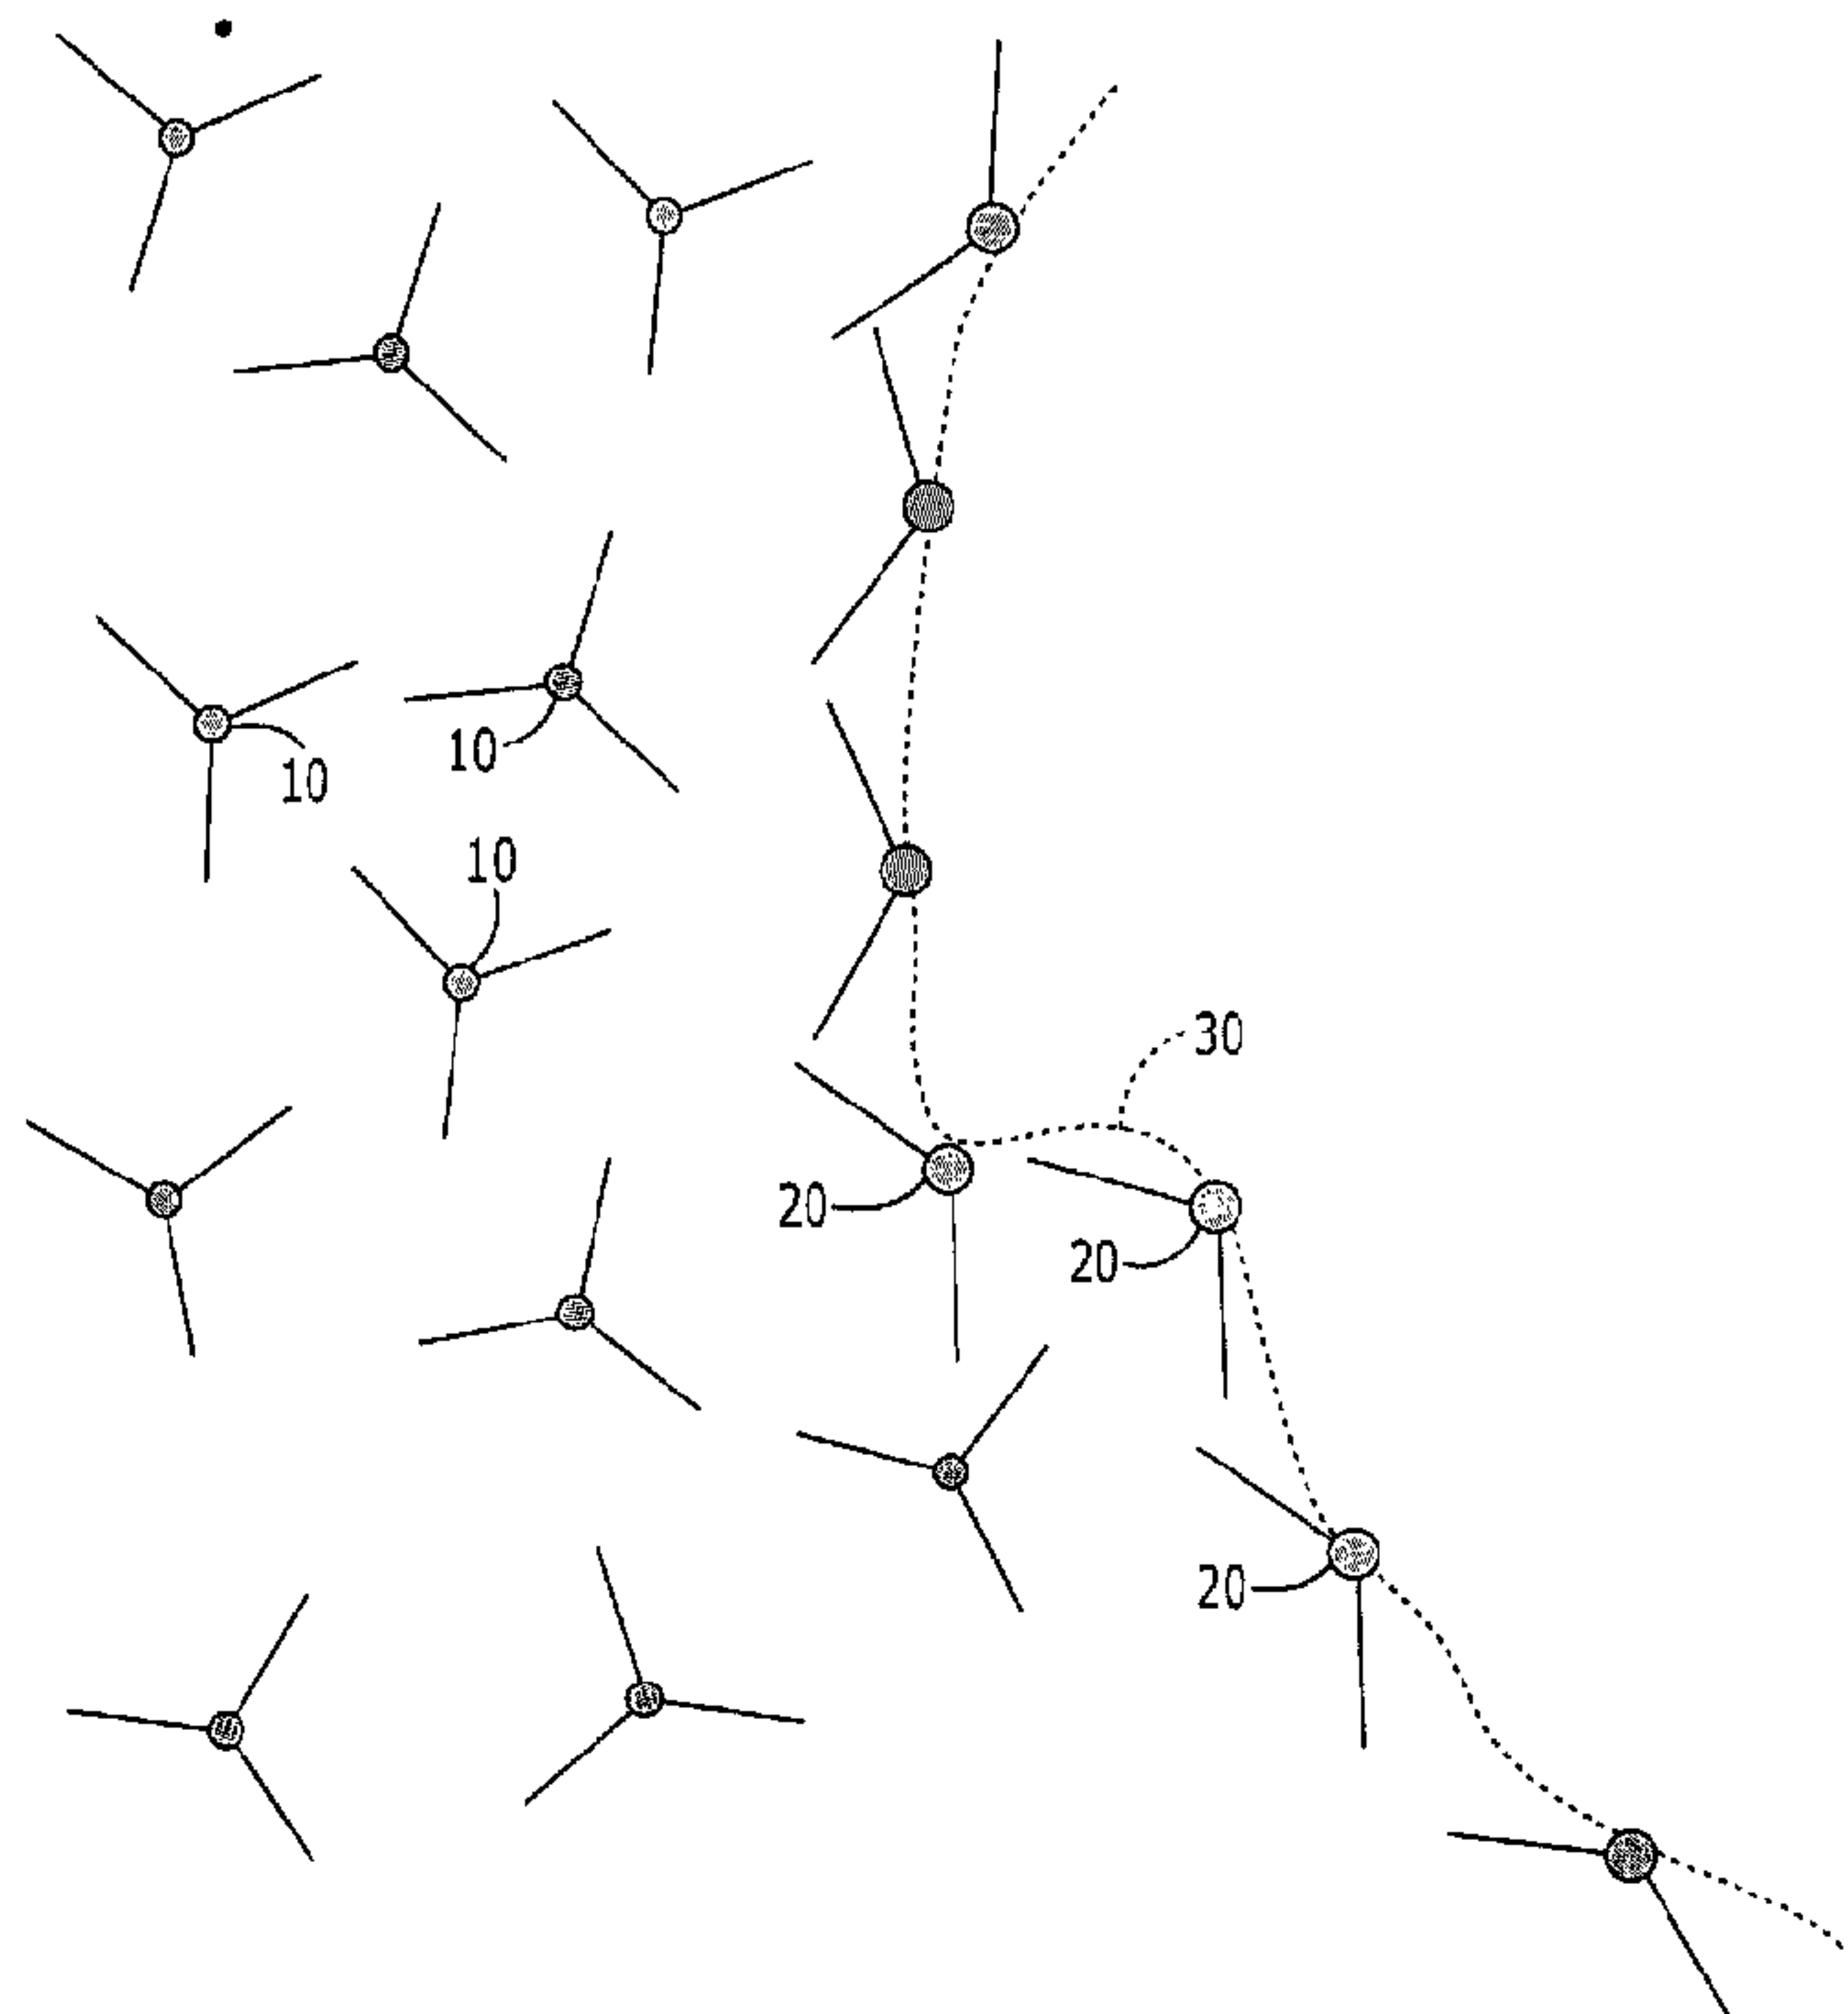

(57) Abrégé/Abstract:

A wireless communications system may include a terrestrial network including a plurality of base stations providing communications service for radioterminals over a terrestrial network coverage area. The plurality of base stations may include interior base stations



(57) **Abrégé(suite)/Abstract(continued):**

providing communications service for radioterminals in an interior portion of the terrestrial network coverage area and peripheral base stations providing communications service for radioterminals at a peripheral portion of the terrestrial network coverage area. At least one of the peripheral base stations provides transmissions directed toward an interior portion of the terrestrial network coverage area with greater power than transmissions directed away from interior portions of the terrestrial network coverage area. Related methods are also discussed.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 February 2005 (24.02.2005)


PCT

(10) International Publication Number
WO 2005/018131 A2

- (51) International Patent Classification⁷: **H04L**
- (72) Inventor; and
(75) Inventor/Applicant (*for US only*): **KARABINIS, Peter, D.** [US/US]; 101 Chalon Drive, Cary, NC 27511 (US).
- (21) International Application Number: PCT/US2004/022422
- (74) Agent: **MYERS BIGEL SIBLEY & SAJOVEC, P.A.**; P.O. Box 37428, Raleigh, NC 27627 (US).
- (22) International Filing Date: 13 July 2004 (13.07.2004)
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
- | | | |
|---------------|----------------------------|----|
| 60/490,638 | 28 July 2003 (28.07.2003) | US |
| 60/492,710 | 5 August 2003 (05.08.2003) | US |
| Not furnished | 28 June 2004 (28.06.2004) | US |
- (71) Applicant (*for all designated States except US*): **MOBILE SATELLITE VENTURES, L.P.** [US/US]; 10802 Parkridge Boulevard, Reston, VA 20191-5416 (US).
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: SYSTEMS AND METHODS FOR MODIFYING ANTENNA RADIATION PATTERNS OF PERIPHERAL BASE STATIONS OF A TERRESTRIAL NETWORK TO ALLOW REDUCED INTERFERENCE

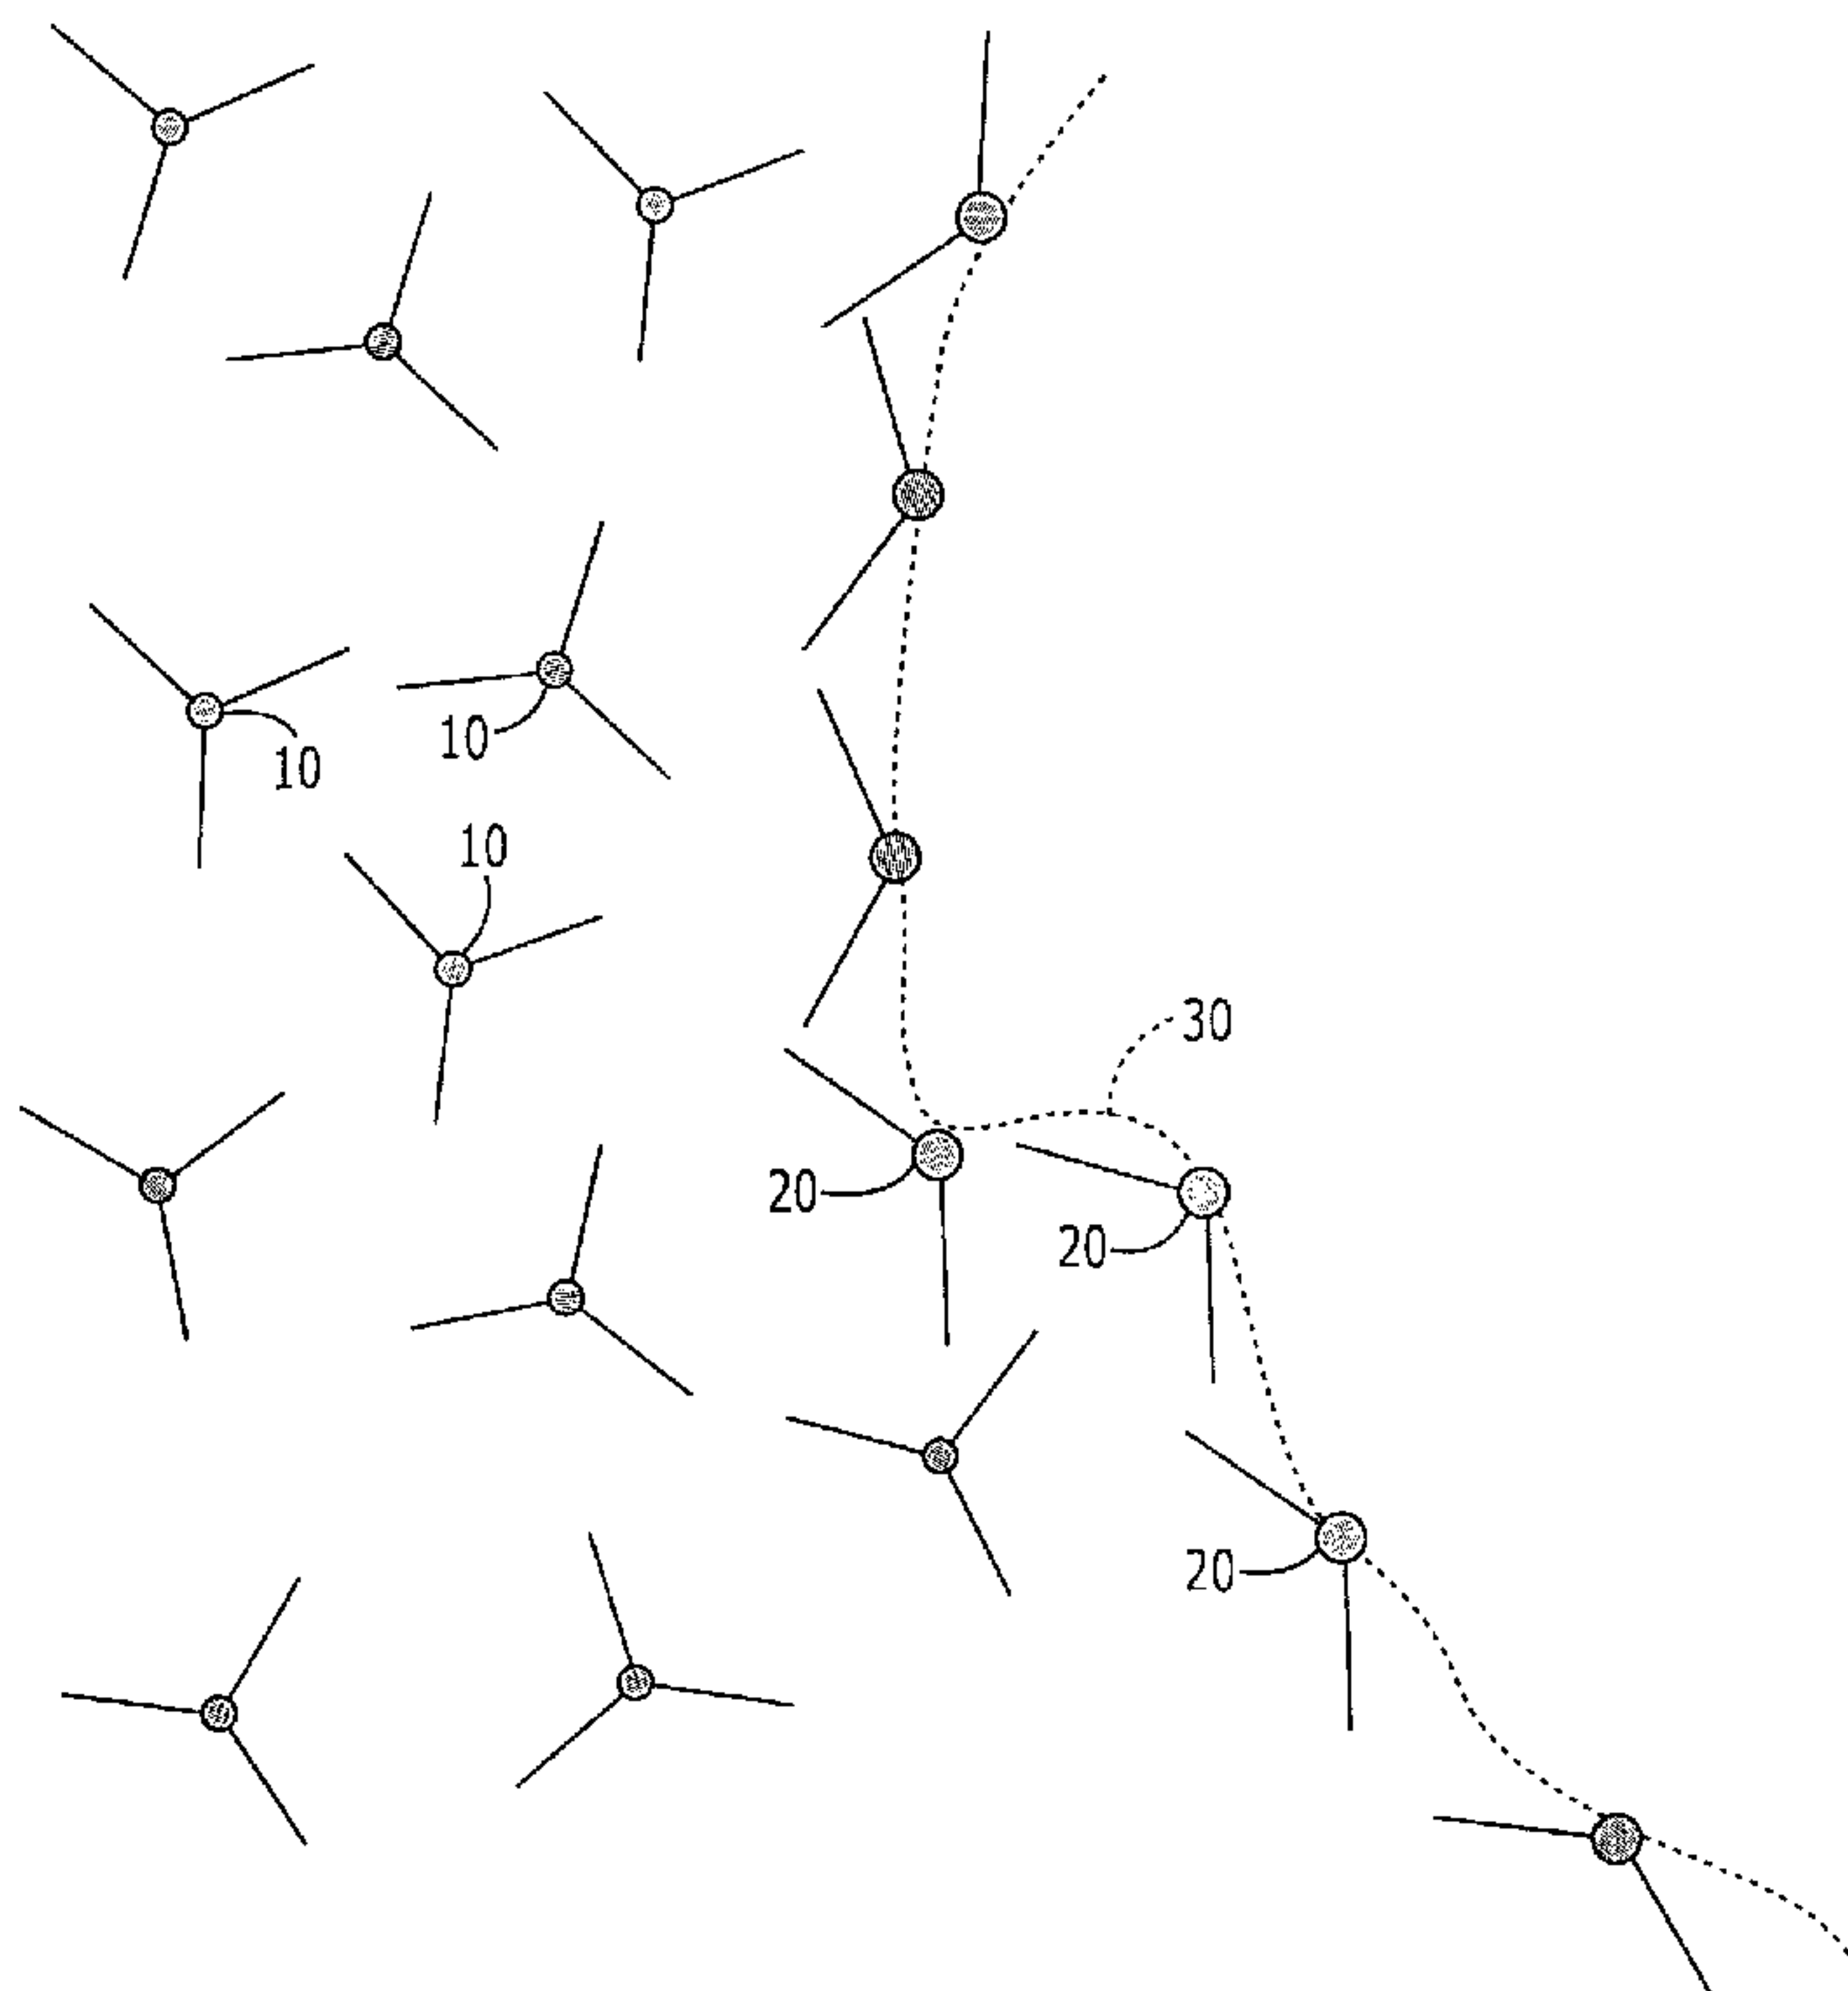

(57) Abstract: A wireless communications system may include a terrestrial network including a plurality of base stations providing communications service for radioterminals over a terrestrial network coverage area. The plurality of base stations may include interior base stations providing communications service for radioterminals in an interior portion of the terrestrial network coverage area and peripheral base stations providing communications service for radioterminals at a peripheral portion of the terrestrial network coverage area. At least one of the peripheral base stations provides transmissions directed toward an interior portion of the terrestrial network coverage area with greater power than transmissions directed away from interior portions of the terrestrial network coverage area. Related methods are also discussed.

WO 2005/018131 A2

WO 2005/018131 A2



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

**SYSTEMS AND METHODS FOR MODIFYING ANTENNA RADIATION
PATTERNS OF PERIPHERAL BASE STATIONS OF A TERRESTRIAL
NETWORK TO ALLOW REDUCED INTERFERENCE**

5

Field of the Invention

This invention relates to wireless communications systems and methods, and more particularly to terrestrial cellular communications systems and methods.

Background

10

Satellite radiotelephone communications systems and methods are widely used for radiotelephone communications. Satellite radiotelephone communications systems and methods generally employ at least one space-based component, such as one or more satellites that are configured to wirelessly communicate with a plurality of satellite radiotelephones.

15

A satellite radiotelephone communications system or method may utilize a single antenna beam covering an entire area served by the system. Alternatively, in cellular satellite radiotelephone communications systems and methods, multiple beams are provided, each of which can serve distinct geographical areas in the overall service region, to collectively serve an overall satellite footprint. Thus, a cellular

architecture similar to that used in conventional terrestrial cellular radiotelephone systems and methods can be implemented in cellular satellite-based systems and methods. The satellite typically communicates with radiotelephones over a bidirectional communications pathway, with radiotelephone communication signals being communicated from the satellite to the radiotelephone over a downlink or forward link, and from the radiotelephone to the satellite over an uplink or return link.

The overall design and operation of cellular satellite radiotelephone systems and methods are well known to those having skill in the art, and need not be described further herein. Moreover, as used herein, the term "radiotelephone" includes cellular and/or satellite radiotelephones with or without a multi-line display; Personal Communications System (PCS) terminals that may combine a radiotelephone with data processing, facsimile and/or data communications capabilities; Personal Digital Assistants (PDA) that can include a radio frequency transceiver and a pager, Internet and/or intranet access, Web browser, organizer, calendar and/or a global positioning system (GPS) receiver; and/or conventional laptop and/or palmtop computers or other appliances, which include a radio frequency transceiver. Radiotelephones may also be referred to herein as "radioterminals" or simply "terminals".

As is well known to those having skill in the art, terrestrial networks can enhance cellular satellite radiotelephone system availability, efficiency and/or economic viability by terrestrially reusing at least some of the frequency bands that are allocated to cellular satellite radiotelephone systems. In particular, it is known that it may be difficult for cellular satellite radiotelephone systems to reliably serve densely populated areas, because the satellite signal may be blocked by high-rise structures and/or may not penetrate into buildings. As a result, the satellite band spectrum may be underutilized or unutilized in such areas. The use of terrestrial retransmission of all or some of the satellite band frequencies can reduce or eliminate this problem.

Moreover, the capacity of the overall system can be increased significantly by the introduction of terrestrial retransmission, since terrestrial frequency reuse can be much denser than that of a satellite-only system. In fact, capacity can be enhanced where it may be mostly needed, i.e., in and/or proximate to densely populated urban, industrial, and/or commercial areas. As a result, the overall system can become much more economically viable, as it may be able to serve a much larger subscriber base. Finally, satellite radiotelephones for a satellite radiotelephone system having a

terrestrial component within the same satellite frequency band and using substantially the same air interface for both terrestrial and satellite communications can be more cost effective and/or aesthetically appealing. Conventional dual band and/or dual mode alternatives, such as the well known Thuraya, Iridium and/or Globalstar dual mode satellite and/or terrestrial radiotelephone systems, may duplicate some components, which may lead to increased cost, size and/or weight of the radiotelephone.

United States Patent No. 6,684,057 issued January 27, 2004, to the present inventor Karabinis, and entitled *Systems and Methods for Terrestrial Reuse of Cellular Satellite Frequency Spectrum* describes that a satellite radiotelephone frequency can be reused terrestrially by an ancillary terrestrial network even within the same satellite cell, using interference cancellation techniques. In particular, the satellite radiotelephone system according to some embodiments of U.S. Patent No. 6,684,057 includes a space-based component that is configured to receive wireless communications from a first radiotelephone in a satellite footprint over a satellite radiotelephone frequency band, and an ancillary terrestrial network that is configured to receive wireless communications from a second radiotelephone in the satellite footprint over the satellite radiotelephone frequency band. The space-based component also receives the wireless communications from the second radiotelephone in the satellite footprint over the satellite radiotelephone frequency band as interference, along with the wireless communications that are received from the first radiotelephone in the satellite footprint over the satellite radiotelephone frequency band. An interference reducer is responsive to the space-based component and to the ancillary terrestrial network that is configured to reduce the interference from the wireless communications that are received by the space-based component from the first radiotelephone in the satellite footprint over the satellite radiotelephone frequency band, using the wireless communications that are received by the ancillary terrestrial network from the second radiotelephone in the satellite footprint over the satellite radiotelephone frequency band.

United States Patent Application Publication No. 2003/0054761 A1, published March 20, 2003 to the present inventor Karabinis and entitled *Spatial Guardbands for Terrestrial Reuse of Satellite Frequencies* describes satellite radiotelephone systems

that include a space-based component that is configured to provide wireless radiotelephone communications in a satellite footprint over a satellite radiotelephone frequency band. The satellite footprint is divided into a plurality of satellite cells, in which satellite radiotelephone frequencies of the satellite radiotelephone frequency band are spatially reused. An ancillary terrestrial network is configured to terrestrially reuse at least one of the ancillary radiotelephone frequencies that is used in a satellite cell in the satellite footprint, outside the cell and in some embodiments separated therefrom by a spatial guardband. The spatial guardband may be sufficiently large to reduce or prevent interference between the at least one of the satellite radiotelephone frequencies that is used in the satellite cell in the satellite footprint, and the at least one of the satellite radiotelephone frequencies that is terrestrially reused outside the satellite cell and separated therefrom by the spatial guardband. The spatial guardband may be about half a radius of a satellite cell in width.

United States Patent Application Publication No. US 2003/0054815 A1, published March 20, 2003 to the present inventor Karabinis, and entitled *Methods and Systems for Modifying Satellite Antenna Cell Patterns in Response to Terrestrial Reuse of Satellite Frequencies* describes that space-based wireless radiotelephone communications are provided in a satellite footprint over a satellite radiotelephone frequency band. The satellite footprint is divided into satellite cells in which satellite radiotelephone frequencies of the satellite radiotelephone frequency band are spatially reused. At least one of the satellite radiotelephone frequencies that is assigned to a given satellite cell in the satellite footprint is terrestrially reused outside the given satellite cell. A radiation pattern of at least the given satellite cell is modified to reduce interference with the at least one of the satellite radiotelephone frequencies that is terrestrially reused outside the given satellite cell.

Summary

According to embodiments of the present invention, a communications system may include a terrestrial network having a plurality of base stations providing communications service for radioterminals over a terrestrial network coverage area. The plurality of base stations may include interior base stations providing

communications service for radioterminals in an interior portion of the terrestrial network coverage area and peripheral base stations providing communications service for radioterminals at a peripheral portion of the terrestrial network coverage area.

Moreover, at least one of the peripheral base stations may provide transmissions
5 directed toward an interior portion of the terrestrial network coverage area with greater power than transmissions directed away from interior portions of the terrestrial network coverage area.

The peripheral base stations and/or interior base stations may define a portion of a perimeter of the terrestrial network coverage area such that interior base stations
10 of the terrestrial network are located on one side of the perimeter and not on the other side of the perimeter. In addition, the perimeter may be closed surrounding interior portions of the terrestrial network coverage area. Moreover, at least one of the interior base stations may define a plurality of sectors surrounding the interior base station(s), and transmissions may be directed from the interior base station(s) to each
15 of the sectors so that transmissions are directed over a 360 degree pattern surrounding the interior base station.

At least one peripheral base stations may define a plurality of sectors surrounding the peripheral base station(s), and the peripheral base station(s) may provide transmissions to at least one sector directed substantially toward an interior
20 portion of the terrestrial network coverage area with greater power than toward another sector directed substantially away from interior portions of the terrestrial network coverage area. At least one peripheral base station(s) may include directional transmission antenna(s) for sector(s) directed substantially toward interior portions of the terrestrial network coverage area but not for the sector(s) directed substantially
25 away from interior portions of the terrestrial network coverage area. In addition, at least one peripheral base station(s) may include directional receive antenna(s) directed to at least one of the sectors surrounding the peripheral base station(s). Moreover, at least one peripheral base station(s) may have fewer transmit sectors, fewer transmit antenna elements, different transmit antenna elements, and/or different transmit gain
30 patterns than at least one interior base station.

The communications system may also include a second terrestrial network having a second plurality of base stations providing communications service for radioterminals over a second terrestrial network coverage area, and a no-service region may separate the first and second terrestrial network coverage areas.

Accordingly, communications services may not be provided by base stations of either of the first or the second terrestrial networks in the no-service region.

In addition, the communications system may include a space based network including at least one satellite. The space based network may provide

5 communications service for radioterminals in a first satellite coverage area using at least a first frequency of a satellite frequency band, and the space based network may provide communications service for radioterminals in a second satellite coverage area using at least a second frequency of the satellite frequency band. Moreover, at least a portion of the terrestrial network coverage area may be within the first satellite
10 coverage area, and an entirety of the terrestrial network coverage area may be outside the second satellite coverage area. In addition, at least one of the base stations of the terrestrial network may provide communications service using the second frequency of the satellite frequency band, and at least one of the base stations may not provide communications to and/or from the radioterminals receiving communications from
15 the base stations, using the first frequency of the satellite frequency band.

The space based network may transmit communications to radioterminals in the first satellite coverage area using the first frequency, and the space based network may transmit communications to radioterminals in the second satellite coverage area using the second frequency. Moreover, the at least one of the base stations of the
20 terrestrial network may transmit communications using the second frequency. In addition, the space based network may receive communications from radioterminals in the first satellite coverage area using at least a third frequency. The space based network may receive communications from radioterminals in the second satellite coverage area using at least a fourth frequency, at least one of the base stations of the
25 terrestrial network may receive communications using the fourth frequency, and at least one of the base stations of the terrestrial network may not receive communications from the radio terminals receiving communications from the base stations of the terrestrial network, using the third frequency.

The terrestrial network may also include a plurality of receive-only base
30 stations configured to receive communications from radioterminals at the peripheral portion of the terrestrial network coverage area. Accordingly, communications service for a radioterminal may be provided by a receive-only base station receiving communications from the radioterminal and by another base station transmitting communications to the radioterminal.

According to additional embodiments of the present invention, a communications system may include a terrestrial network having a plurality of base stations providing communications service for radioterminals over a terrestrial network coverage area. The plurality of base stations may include interior base stations providing communications service for radioterminals in an interior portion of the terrestrial network coverage area and peripheral base stations providing communications service for radioterminals at a peripheral portion of the terrestrial network coverage area. Moreover, at least one of the peripheral base stations may be a receive-only base station that does not transmit.

10 The peripheral base stations and/or interior base stations may define a portion of a perimeter of the terrestrial network coverage area such that interior base stations of the terrestrial network are located on one side of the perimeter and not on the other side of the perimeter. In addition, the perimeter may be closed surrounding interior portions of the terrestrial network coverage area. Moreover, at least one interior base station(s) may define a plurality of sectors surrounding the interior base station(s), and transmissions may be directed from at least one interior base station(s) to each of the sectors so that transmissions are directed over a 360 degree pattern surrounding at least one interior base station(s). At least one peripheral base station(s) may define a plurality of sectors surrounding the peripheral base station(s), and at least one
15 20 peripheral base station(s) may include directional reception antenna(s) for at least one of the sectors.

The communications system may also include a second terrestrial network having a second plurality of base stations providing communications service for radioterminals over a second terrestrial network coverage area. Moreover, a no-service region may separate the first and second terrestrial network coverage areas such that communications services are not provided by base stations of either of the first or the second terrestrial networks in the no-service region.

In addition, the communications system may also include a space based network having at least one satellite. The space based network may provide communications service for radioterminals in a first satellite coverage area using at least a first frequency of a satellite frequency band, and the space based network may provide communications service for radioterminals in a second satellite coverage area using at least a second frequency of the satellite frequency band. Moreover, at least a portion of the terrestrial network coverage area may be within the first satellite
30

coverage area, and an entirety of the terrestrial network coverage area may be outside the second satellite coverage area. In addition, at least one of the base stations may provide communications service using the second frequency of the satellite frequency band, and at least one of the base stations may not provide communications to and/or
5 from the radioterminals receiving communications from the base stations, using the first frequency of the satellite frequency band.

The space based network may transmit communications to radioterminals in the first satellite coverage area using the first frequency, and the space based network may transmit communications to radioterminals in the second satellite coverage area
10 using the second frequency. Moreover, the at least one of the base stations of the terrestrial network may transmit communications using the second frequency. The space based network may receive communications from radioterminals in the first satellite coverage area using at least a third frequency, and the space based network may receive communications from radioterminals in the second satellite coverage area
15 using at least a fourth frequency. In addition, at least one of the base stations of the terrestrial network may receive communications using the fourth frequency, and at least one of the base stations of the terrestrial network may not receive communications, from the radio terminals receiving communications from the base stations, using the third frequency.

20 According to still additional embodiments of the present invention, a communications system may include a terrestrial network having a plurality of base stations providing communications service for radioterminals over a terrestrial network coverage area. The plurality of base stations may include interior base stations providing communications service for radioterminals in an interior portion of
25 the terrestrial network coverage area and peripheral base stations providing communications service for radioterminals at a peripheral portion of the terrestrial network coverage area. In addition, at least one of the peripheral base stations may be substantially disabled for transmission away from interior portions of the terrestrial network coverage area.

30 The peripheral base stations and/or the interior base stations may define a portion of a perimeter of the terrestrial network coverage area such that interior base stations of the terrestrial network are located on one side of the perimeter and not on the other side of the perimeter. Moreover, the perimeter may be closed surrounding interior portions of the terrestrial network coverage area.

At least one of the peripheral base stations may have fewer transmit sectors, fewer transmit antenna elements, different transmit antenna elements, and/or different transmit gain patterns than at least one of the interior base stations. Moreover, at least one of the interior base stations may transmit and receive communications, and at least one of the peripheral base stations may be a receive-only peripheral base station. The communications system may also include a second terrestrial network having a second plurality of base stations providing communications service for radioterminals over a second terrestrial network coverage area. In addition, a no-service region may separate the first and second terrestrial network coverage areas such that communications services may not be provided by base stations of either of the first or the second terrestrial networks in the no-service region.

The communications system may also include a space based network having at least one satellite. The space based network may provide communications service for radioterminals in a first satellite coverage area using at least a first frequency of a satellite frequency band, and the space based network may provide communications service for radioterminals in a second satellite coverage area using at least a second frequency of the satellite frequency band. At least a portion of the terrestrial network coverage area may be within the first satellite coverage area, and an entirety of the terrestrial network coverage area may be outside the second satellite coverage area. Moreover, at least one of the base stations may provide communications service using the second frequency of the satellite frequency band, and at least one of the base stations may not provide communications to and/or from the radioterminals receiving communications from the base stations, using the first frequency of the satellite frequency band.

At least one of the peripheral base stations may provide transmissions directed toward an interior portion of the terrestrial network coverage area with greater power than transmissions directed away from interior portions of the terrestrial network coverage area. At least one of the peripheral base stations may be a receive-only base station that does not transmit.

According to yet additional embodiments of the present invention, methods of providing communications for radioterminals may include providing communications service for radioterminals at an interior portion of a terrestrial network coverage area using interior base stations. Communications service may be provided for radioterminals at a peripheral portion of the terrestrial network coverage area using

peripheral base stations. More particularly, at least one of the peripheral base stations may provide transmissions directed toward an interior portion of the terrestrial network coverage area with greater power than transmissions directed away from interior portions of the terrestrial network coverage area.

5 According to more embodiments of the present invention, methods of providing communications for radioterminals may include providing communications service for radioterminals at an interior portion of a terrestrial network coverage area using a plurality of interior base stations. Communications service may be provided for radioterminals at a peripheral portion of the terrestrial network coverage area
10 using a plurality of peripheral base stations wherein at least one of the peripheral base stations is a receive-only base station that does not transmit.

 According to still more embodiments of the present invention, methods of providing communications for radioterminals may include providing communications for radioterminals at an interior portion of a terrestrial network coverage area using a
15 plurality of interior base stations. Communications may be provided for radioterminals at a peripheral portion of the terrestrial network coverage area using a plurality of peripheral base stations wherein at least one of the peripheral base stations is substantially disabled for transmission away from interior portions of the terrestrial network coverage area.

20 According to yet more embodiments of the present invention, a communications system may include a plurality of interior down-link transmitters configured to transmit communications to radioterminals located in interior portions of a terrestrial network coverage area. A plurality of interior up-link receivers may be configured to receive communications from radioterminals located in the interior
25 portions of the terrestrial network coverage area. In addition, a plurality of peripheral up-link receivers may be configured to receive communications from radioterminals located in a peripheral region of the terrestrial network coverage area adjacent the interior portions of the terrestrial network coverage area, wherein at least a portion of the peripheral region is outside an engineered coverage area of any down-link
30 transmitters of the communications system.

 Some embodiments of the present invention provide an Ancillary Terrestrial Component (ATC) that is configured to wirelessly communicate with a plurality of radioterminals using at least one satellite radiotelephone frequency over an ATC service area. The ATC includes a plurality of base stations that are configured to

wirelessly communicate with the plurality of radioterminals using at least one satellite radiotelephone frequency. The plurality of base stations includes at least one interior base station that is located in an interior portion of the ATC service area, and at least one peripheral base station that is located at a periphery of the ATC service area. In
5 some embodiments, at least one peripheral base station has fewer transmit sectors, fewer transmit antenna elements, different transmit antenna elements and/or different transmit gain patterns than at least one interior base station. In other embodiments, at least one interior base station is at least one transmit and receive interior base station, and the ATC further includes at least one receive-only peripheral base station. Thus,
10 systems and methods are provided for modifying antenna radiation patterns of peripheral base stations of an ancillary terrestrial component, compared to interior base stations, to allow reduced interference.

According to an aspect there is provided a wireless communications system comprising:

- 15 a terrestrial network including a plurality of base stations providing communications service for radioterminals over a terrestrial network coverage area, the plurality of base stations including interior base stations providing communications service for radioterminals in an interior portion of the terrestrial network coverage area and peripheral base stations providing communications service
20 for radioterminals at a peripheral portion of the terrestrial network coverage area, wherein at least one of the peripheral base stations provides transmissions directed toward an interior portion of the terrestrial network coverage area with greater power than transmissions directed away from interior portions of the terrestrial network coverage area; and
- 25 a space based network comprising at least one satellite, the space based network providing communications service for radioterminals in a first satellite coverage area using at least a first frequency of a satellite frequency band and providing communications service for radioterminals in a second satellite coverage area using at least a second frequency of the satellite frequency band, wherein at least
30 a portion of the terrestrial network coverage area is within the first satellite coverage area, wherein an entirety of the terrestrial network coverage area is outside the second satellite coverage area, wherein at least one of the base stations provides communications service using the second frequency of the satellite frequency band, and wherein at least one of the base stations does not provide communications to

and/or from the radioterminals receiving communications from the at least one of the base stations using the first frequency of the satellite frequency band.

According to another aspect there is provided a wireless communications system comprising:

- 5 a terrestrial network including a plurality of base stations providing communications service for radioterminals over a terrestrial network coverage area, the plurality of base stations including interior base stations providing communications service for radioterminals in an interior portion of the terrestrial network coverage area and peripheral base stations providing communications service
10 for radioterminals at a peripheral portion of the terrestrial network coverage area, wherein at least one of the peripheral base stations is a receive-only peripheral base station that does not transmit, and wherein at least one of the interior base stations is a transmit and receive interior base station, so that a radiotelephone communication for a radio terminal is provided by the receive-only peripheral base station receiving
15 uplink communications for the radiotelephone communication from the radioterminal and by the transmit and receive interior base station transmitting downlink communications for the radiotelephone communication to the radio terminal.

According to another aspect there is provided a wireless communications system comprising:

- 20 a terrestrial network including a plurality of base stations providing communications service for radioterminals over a terrestrial network coverage area, the plurality of base stations including interior base stations providing communications service for radioterminals in an interior portion of the terrestrial network coverage area and peripheral base stations providing communications service
25 for radioterminals at a peripheral portion of the terrestrial network coverage area, wherein at least one of the peripheral base stations is substantially disabled for transmission away from interior portions of the terrestrial network coverage area; and
 a space based network comprising at least one satellite, the space based network providing communications service for radioterminals in a first satellite
30 coverage area using at least a first frequency of a satellite frequency band and providing communications service for radioterminals in a second satellite coverage area using at least a second frequency of the satellite frequency band, wherein at least a portion of the terrestrial network coverage area is within the first satellite coverage area, wherein an entirety of the terrestrial network coverage area is outside the second

satellite coverage area, wherein at least one of the base stations provides communications service using the second frequency of the satellite frequency band, and wherein at least one of the base stations does not provide communications to and/or from the radioterminals receiving communications from the base stations, using the first frequency of the satellite frequency band.

According to another aspect there is provided a method of providing communications for radioterminals, the method comprising:

providing communications service for radioterminals at an interior portion of a terrestrial network coverage area using interior base stations; and

providing communications service for radioterminals at a peripheral portion of the terrestrial network coverage area using peripheral base stations, wherein at least one of the peripheral base stations provides transmissions directed toward an interior portion of the terrestrial network coverage area with greater power than transmissions directed away from interior portions of the terrestrial network coverage area.

According to another aspect there is provided a method of providing communications for radioterminals, the method comprising:

providing communications service for radioterminals at an interior portion of a terrestrial network coverage area using a plurality of interior base stations wherein at least one of the interior base stations is a transmit and receive interior base station;

providing communications service for radioterminals at a peripheral portion of the terrestrial network coverage area using a plurality of peripheral base stations wherein at least one of the peripheral base stations is a receive-only peripheral base station that does not transmit; and

supporting a radiotelephone communication for one of the radioterminals by receiving uplink communications for the radiotelephone communication at the receive-only peripheral base station from the radioterminal and by transmitting downlink communications for the radiotelephone communication from the transmit and receive interior base station to the radioterminal.

According to another aspect there is provided a wireless communications system comprising:

a plurality of interior down-link transmitters configured to transmit communications to radioterminals located in interior portions of a terrestrial network coverage area;

a plurality of interior up-link receivers configured to receive communications from radioterminals located in the interior portions of the terrestrial network coverage area; and

a plurality of peripheral up-link receivers configured to receive
 5 communications from radioterminals located in a peripheral region of the terrestrial network coverage area adjacent the interior portions of the terrestrial network coverage area, wherein at least a portion of the peripheral region is outside an engineered coverage area of any down-link transmitters of the communications system;

10 wherein a down-link of a radiotelephone communication for a radioterminal in the peripheral region is provided from one of the interior down link transmitters and wherein an up-link of the radiotelephone communication for the radioterminal in the peripheral region is provided from one of the peripheral up-link receivers.

According to another aspect there is provided an Ancillary Terrestrial
 15 Component (ATC) that is configured to wirelessly communicate with a plurality of radiotelephones using at least one satellite radiotelephone frequency over an ATC service area, the ATC comprising:

a plurality of base stations that are configured to wirelessly communicate with the plurality of radiotelephones using at least one satellite radiotelephone frequency,
 20 the plurality of base stations including at least one interior base station that is located in an interior portion of the ATC service area and at least one peripheral base station that is located at a periphery of the ATC service area, at least one peripheral base station having fewer transmit sectors, fewer transmit antenna elements, different transmit antenna elements and/or different transmit gain patterns than at least one
 25 interior base station.

Brief Description Of The Drawings

Figure 1 is a diagram illustrating portions of a terrestrial network according to first embodiments of the present invention.

30 Figure 2 is a diagram illustrating portions of a terrestrial network according to second embodiments of the present invention.


Figure 3 is a diagram illustrating a terrestrial network according to third embodiments of the present invention.

Figure 4 is a diagram illustrating satellite and terrestrial communications

networks sharing a satellite frequency band according to fourth embodiments of the present invention.

Figure 5 is a diagram illustrating a terrestrial network according to fifth embodiments of the present invention.

5 Figure 6 is a diagram illustrating satellite and terrestrial communications networks sharing a satellite frequency band according to sixth embodiments of the present invention.

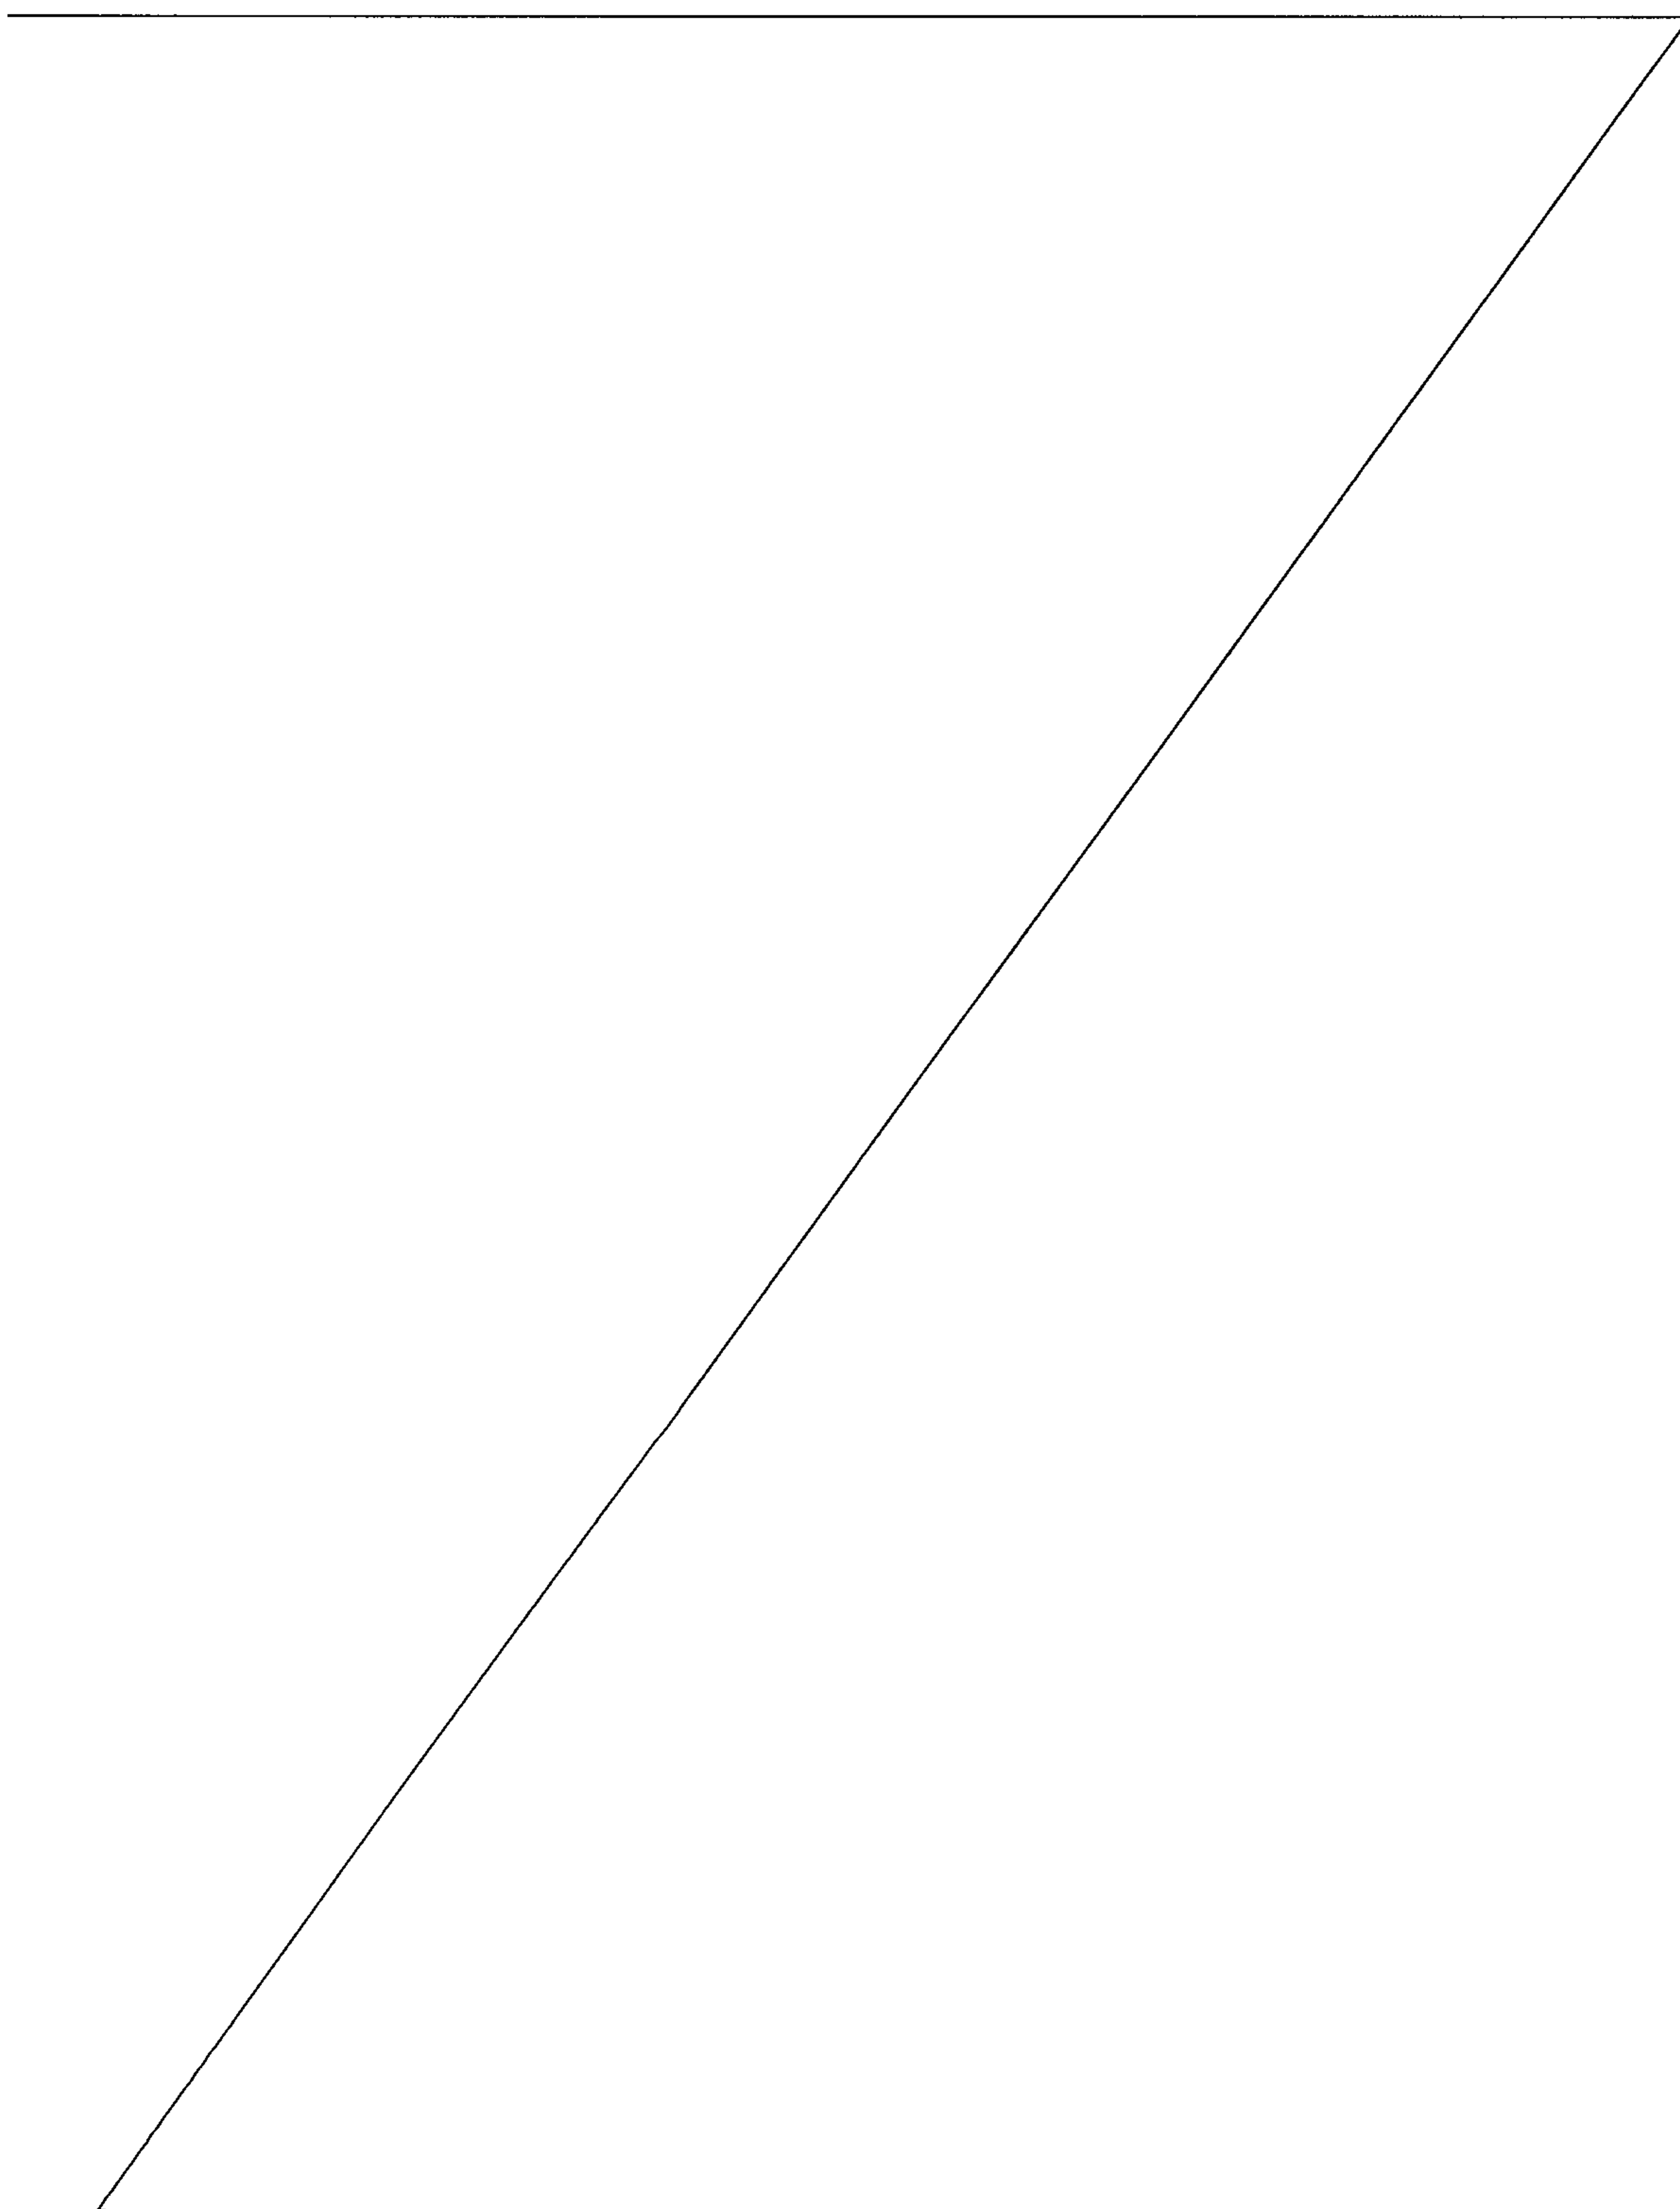

Detailed Description

The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which embodiments of the invention are shown. This invention may, however, be embodied in many different forms and
5 should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

It will be understood that although the terms first, second, etc. are used herein
10 to describe various elements, these elements should not be limited by these terms. These terms are only used to distinguish one element or embodiment from another element or embodiment. Thus, a first element or embodiment below could be termed a second element or embodiment, and similarly, a second element or embodiment may be termed a first element or embodiment without departing from the teachings of the
15 present invention. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items. Moreover, as used herein, "substantially the same" band means that the bands substantially overlap, but that there may be some areas of non-overlap, for example at the band ends. Moreover, "substantially the same" air interface(s) means that the air interfaces are similar but
20 need not be identical. Some changes may be made to one air interface (i.e., a satellite air interface) relative to another (i.e., a terrestrial air interface) to account for different characteristics that may exist between the terrestrial and satellite communications environments. For example, a different vocoder rate may be used for satellite communications compared to the vocoder rate that may be used for terrestrial
25 communications (i.e., for terrestrial communications, voice may be compressed ("vocoded") to approximately 9 to 13kbps, whereas for satellite communications a vocoder rate of 2 to 4kbps, for example, may be used). In addition or in alternatives, different forward error correction coding, different interleaving depth, and/or different spread-spectrum codes may be used, for example, for satellite communications
30 compared to the coding, interleaving depth, and/or spread spectrum codes (i.e., Walsh codes, long codes, and/or frequency hopping codes) that may be used for terrestrial communications.

Moreover, as used herein, a "substantially southern" or a "substantially northern" direction means a direction that includes a component in a southern or

northern direction, respectively. For example, a southwestern direction may be a substantially southern direction.

Satellite systems that may operate co-frequency (also referred to as co-channel) with at least some frequencies of a satellite system containing an Ancillary Terrestrial Component (ATC) may receive co-frequency (co-channel) interference from the co-frequency (co-channel) operations of the ATC. To reduce the level of co-frequency (co-channel) interference that may be generated by an ATC, the ATC base stations may be engineered with X dB (e.g., 18 dB) of in-building penetration signal margin, such as, for example, X dB of in-building penetration return-link signal margin. This signal margin may enable an ATC radioterminal (i.e., a radioterminal that is communicating with an ATC) to operate even when it is subjected to X dB of structural signal attenuation and may also facilitate a reduction of the radioterminal's output signal power when the radioterminal is being subjected to less than X dB of structural signal attenuation. In the limit, as the radioterminal is not being subjected to any structural signal attenuation (the radioterminal is entirely in the clear) the signal power that the radioterminal may radiate in order to communicate with a base station may be reduced by as much as X dB (e.g., 18 dB) relative to maximum. This can reduce the level of interference that may be sensed by a co-frequency (co-channel) satellite system.

As used herein, the term Ancillary Terrestrial Component (ATC) may refer to one or more terrestrial base stations in a terrestrial network of base stations providing communications service for radioterminals over a terrestrial network coverage area (also referred to as an ATC service area). For example, the term Ancillary Terrestrial Component may refer to a single terrestrial base station, with a plurality of such terrestrial base stations providing service for radioterminals over a coverage area of a terrestrial network (referred to as an Ancillary Terrestrial Network (ATN)).

Cellular and PCS systems are routinely deployed in urban areas with significant in-building signal penetration margins, typically ranging between 15 to 20 dB. Engineering an ATC with X dB (e.g., 18 dB) of structural attenuation signal margin may be accomplished by using one of a plurality of established statistical design methodologies that are known to those skilled in the art. In accordance with an example of such a design methodology and as an initial step, the link budget of a base station, and corresponding radioterminal equipment, may be calculated and balanced, bi-directionally, by taking into account some or all relevant base station,

radioterminal, and/or propagation environment parameters such as the maximum Effective Isotropic Radiated Power (EIRP) of the base station and radioterminal equipment, the propagation exponent factor appropriate for the ATC environment, signal attenuation due to multipath fading, receiver sensitivities of base station and radioterminal, base station and/or radioterminal antenna gain and diversity reception gain factor, etc., including a signal loss of X dB (e.g., 18 dB) due to structural attenuation. The bi-directionally balanced link budget can identify an estimate of the service radius of a base station. At this service radius a radioterminal may communicate with a base station, with certain probability of success, subject to the assumed link budget parameter values and propagation impairments including the effect of one or more signal attenuating structures that may, in the aggregate, impose X dB (e.g., 18 dB) of additional signal attenuation beyond that imposed by the propagation loss (as defined, for example, by the conventional Cost 231-Hata model) and multipath fading loss. It follows that when a radioterminal is not subject to any signal attenuating structures, it can, subject to closed-loop power control, radiate at a reduced signal power level that averages X dB (e.g., 18 dB) lower than its maximum.

An ATC service area may comprise an ensemble of ATC base stations that may be engineered and deployed based on the above design principles. In such an environment, as an active radioterminal migrates from one ATC base station service area to another, the system may continue to provide service to the radioterminal via the ATC base station that can nominally provide the highest signal quality and/or strength to that radioterminal. As such, a radioterminal that is transitioning from the service area of one ATC base station to another and is operating outside the influence of any signal attenuating structures may, on average, continue to radiate at a reduced signal power level of X dB (e.g., 18 dB) less than its maximum.

According to some embodiments of the present invention, in the proximity of a perimeter of an ATC service area, the ATC may be configured to reduce, completely avoid and/or substantially minimize serving radioterminals that may be beyond the engineered service area of a base station and may thus radiate a higher level of power. This may be accomplished, according to some embodiments, by configuring and/or orienting the antenna elements of a base station to substantially illuminate only certain directions that, according to a link budget, may satisfy the X dB (e.g., 18 dB) structural attenuation signal margin configuration design of an ATC. Thus, for example, at least one ATC base station proximate to a perimeter of an ATC

service area may be configured with a reduced (fewer) number of sectors, reduced (fewer) antenna elements and/or different antenna elements, and may thus not be capable of providing service in at least one direction, to substantially the same radius as in another direction.

5 Thus, as shown in Figure 1, an ATC includes a plurality of base stations that are configured to wirelessly communicate with a plurality of radioterminals using at least one satellite radiotelephone frequency. The plurality of base stations include at least one interior base station **10**, that is located at an interior portion of the ATC service area, and at least one peripheral base station **20** that is located at a perimeter
10 **30** of the ATC service area. As shown in Figure 1, at least one peripheral base station **20** has fewer sectors, fewer antenna elements, different antenna elements and/or different gain patterns than at least one interior base station **10**. For example, as shown in Figure 1, at least some of the interior base stations **10** have complete 360° coverage using, for example, three sectors, whereas at least one of the peripheral base
15 stations **20** have a reduced number of sectors, such as one or two sectors.

 It will be understood by those having skill in the art that, although Figure 1 depicts a single row of peripheral base stations **20** adjacent the perimeter **30** of the ATC service area, more than one row of peripheral base stations may be provided. It also will be understood that, in some embodiments, only a single sector may be
20 provided for the perimeter base stations **20**. In still other embodiments, a complete set of sectors, such as three sectors, may be provided, with reduced numbers of antenna elements, reduced antenna gain, and/or reduced EIRP in one or more of the sectors, compared to the interior base stations **10**. Combinations of these embodiments also may be provided. Moreover, each peripheral base station need not include the same
25 (reduced) number of sectors and/or antenna elements, and not all peripheral base stations **20** need include fewer sectors, fewer antenna elements, different antenna elements, and/or different (reduced) EIRP. In some embodiments, the perimeter base stations **20** may communicate with an interior base station **10**. In other embodiments, the peripheral base stations **20** may communicate with an ATC infrastructure.

30 In still other embodiments of the present invention, in lieu of, or in combination with, the ATC configuration of Figure 1, at least one receive-only base station may be provided proximate to a perimeter of an ATC footprint, that may have been engineered in accordance with a link budget inclusive of X dB (e.g., 18 dB) of structural signal attenuation, so as to maintain the emissions of a radioterminal

substantially in accordance with a reduced power level criterion as the radioterminal continues to operate outside of the engineered service footprint of the ATC.

Thus, as shown in Figure 2, at least one peripheral ATC base station may be a receive-only base station **40**, which may include the same number of sectors and/or receive antenna elements as the interior ATC base stations **10** or, as shown in Figure 2, may include fewer sectors, fewer receive antenna elements and/or different receive antenna elements compared to the interior ATC base stations **10**. It also will be understood that, as with the reduced sector and/or reduced antenna element peripheral base stations **20** of Figure 1, the receive-only base stations **40** of Figure 2 need not be identical in their number of sectors and/or antenna elements, and more than one row of receive-only base stations **40** may be provided. Moreover, at least some of the receive-only base stations **40** may communicate with an adjacent or non-adjacent interior ATC base station **10** or may communicate with the ATC infrastructure. Moreover, combinations of peripheral base stations **20** and **40** of Figures 1 and 2 may be provided according to other embodiments of the present invention.

Accordingly, embodiments of the present invention provide a plurality of base stations that are configured to wirelessly communicate with a plurality of radioterminals using at least one satellite radiotelephone frequency. The plurality of base stations include at least one interior base station that is located in an interior portion of the ATC service area and at least one peripheral base station that is located at a periphery of the ATC service area. At least one peripheral base station has fewer sectors, fewer antenna elements, different antenna elements, different gain patterns, and/or different EIRP than at least one interior base station. In other embodiments, at least one interior base station is at least one transmit and receive interior base station, and the ATC further includes at least one receive-only peripheral base station.

Other embodiments of the present invention can configure at least one peripheral base station **20** of an ATC, at the perimeter or fringes **30** of an ATC service area to reduce or avoid serving radioterminals that are beyond its engineered service footprint. This may be accomplished in a variety of ways including orienting some sectors of base stations to illuminate areas that are within the ATC service footprint while disabling other sectors that may illuminate areas away from the ATC service footprint. Such disabled sectors can be configured as receive-only sectors. In some embodiments, the signals that are received at a receive-only sector may also be

received by at least one other transmit and receive sector and may be combined, using conventional techniques.

As such, a radioterminal that may be drifting away from the core ATC service footprint, while continuing to communicate with a base station by receiving on the side-lobes of an enabled sector, may transmit back to that base station via the main lobe (or substantially via the main lobe) of a receive-only sector that is oriented toward it. In this configuration, the forward link to the radioterminal generally will be a much weaker link than the return link, and service to that radioterminal generally will terminate due to forward link "breakage" before the radioterminal is at a distance that may require it to radiate maximum or near maximum power. Thus, a sharp decrease in base station forward-link signal power may be established at an edge of an ATC service area by judiciously configuring the sectors of base stations **20** that are at or near the edge.

The front-to-back EIRP ratio of an ATC base station antenna may be, per the ATC Rules, approximately 25 dB (see 47 CFR 25.253 (e)). Thus, a base station that is located at (or near) the edge of an ATC service footprint can have at least one of its (typically three) sectors transmit-disabled. In other words, the sector(s) that would have pointed away from the ATC service footprint can be disabled in their ability to transmit. For such a base station, a user who is in an un-served area (an area that would have been served by one of the transmit-disabled sectors) generally will experience significant forward-link signal attenuation (of the order of 25 dB) relative to a user who is at the same distance from the base station tower and within a transmit-enabled sector. With a forward link disadvantage of approximately 25 dB, the base station service radius in the direction of a receive-only sector may shrink to less than two tenths of what it would have been otherwise. It follows that, in some embodiments, a radioterminal that is within a receive-only sector and outside the influence of any signal attenuating structures may radiate, subject to closed-loop power control, approximately 25 dB less than it would have radiated at the edge of a symmetrically engineered ATC sector.

According to additional embodiments of the present invention, as illustrated in Figure 3, a terrestrial communications network **100** may include a plurality of interior and peripheral base stations **110a-h** and **120a-o** respectively providing communications service for radioterminals **150** over a terrestrial network coverage area. The interior base stations **110** provide communications service for

radioterminals **150** in an interior portion of the terrestrial network coverage area, and the peripheral base stations **120** provide communications service for radioterminals at peripheral portions of the terrestrial network coverage area. More particularly, at least one of the peripheral base stations **120** may provide transmissions directed toward an interior portion of the terrestrial network coverage area with greater EIRP (power) than transmissions directed away from interior portions of the terrestrial network coverage area. For example, at least one of the peripheral base stations may have fewer transmit sectors, fewer transmit antenna elements, different transmit and/or receive antenna elements, and/or different transmit and/or receive gain patterns and/or parameters than at least one of the interior base stations.

More particularly, at least one interior base station(s) **110** may define a plurality of sectors surrounding the interior base station, and at least one interior base station(s) **110** may direct transmissions to all sectors surrounding the respective interior base station(s) so that transmissions are directed over a 360 degree pattern surrounding the respective interior base station(s). For example, one of the interior base stations may include directional transmit antennas configured to provide transmissions over a 120 degree sector, and the base station may include at least three such directional antennas so that transmissions are directed over three 120 degree sectors to cover a 360 degree pattern surrounding the base station. In addition or in an alternative, one or more interior base stations **110** may include omnidirectional antennas and/or directional antennas. At least one of the interior base stations may also be configured so that transmissions are directed to a pattern of less than 360 degrees surrounding the at least one interior base station. Transmission patterns and/or sectors are not shown for the interior base stations **110** of Figure 3 for the sake of clarity.

As discussed above, at least one of the peripheral base stations **120** may provide transmissions directed toward an interior portion of the terrestrial network coverage area with greater EIRP (power) than transmissions directed away from interior portions of the terrestrial network coverage area. More particularly, at least one of the peripheral base stations may include one or more directional transmit antennas each providing transmissions to a sector, such as a 120 degree sector. Moreover, the directional transmit antenna(s) on a peripheral base station **120** may be oriented such that transmissions from the peripheral base station **120** are directed over a sector (or sectors) oriented substantially toward interior portions of the terrestrial

network coverage area with greater EIRP (power) than is directed over a sector (or sectors) oriented substantially away from interior portions of the terrestrial network coverage area.

By way of example, the peripheral base stations **120** may respectively include one or more directional transmit antennas configured to provide transmissions to a respective 120 degree transmit sector **121a-o** or **122c** or **122n**. In the example of Figure 3, for the base stations **120a-b**, **120d-m**, and **120o**, one or more directional transmit antennas at each base station may be configured to provide transmissions to radioterminals in a single respective 120 degree sector **121a-b**, **121d-m**, and **121o**. Moreover, for the base stations **120c** and **120n**, directional transmit antennas at each base station may be configured to provide transmissions to radioterminals in two respective 120 degree sectors **121c**, **122c**, **121n**, and **122n**. Accordingly, the peripheral base stations **120a-o** may define a perimeter **125** (illustrated by the dotted line of Figure 3) of the terrestrial network coverage area such that interior base stations **110** are located on one side of the perimeter **125** and not on the other side of the perimeter **125**. As illustrated by the dotted line of Figure 3, the perimeter **125** may substantially follow boundaries of sectors to which the peripheral base stations **120** transmit. The transmit sectors of the peripheral base stations may define the peripheral portions of the terrestrial network coverage area, and areas bounded by the peripheral portions may define the interior portions of the terrestrial network coverage area.

In addition, the peripheral base stations **120a-o** may include directional receive antennas defining receive coverage sectors that span a full 360 degree pattern surrounding each of the peripheral base stations. For example, the peripheral base stations **120a-b**, **120d-m**, and **120o** may include directional transmit antennas that substantially transmit to a single respective 120 degree sector **121a-b**, **121d-m**, and **121o**, without substantially transmitting to sectors covering the remaining 240 degrees surrounding the base station. Similarly, the peripheral base stations **120c** and **120n** may include directional transmit antennas that substantially transmit to two 120 degree sectors without substantially transmitting to the remaining 120 degree sector surrounding the base station. The peripheral base stations, however, may include directional receive antennas configured to receive communications from radioterminals in the sectors **121a-o** and **122c** and **122n** to which the peripheral base stations transmit as well as directional receive antennas configured to receive

communications from radioterminals in sectors to which the peripheral base stations substantially do not transmit. In an alternative or in addition, one or more of the peripheral base stations may include one or more omnidirectional receive antenna(s).

Accordingly, interior and exterior base stations **110** and **120** may provide
5 communications services for radioterminals in a coverage area and/or sector thereof using, for example, air interface protocols and/or architectures such as FDM/FDMA (frequency division multiplexed/multiple access), TDM/TDMA (time division multiplexed/multiple access), CDM/CDMA (code division multiplexed/multiple access), and/or OFDM/OFDMA (orthogonal frequency division multiplexed/multiple
10 access). Moreover, the base stations of the terrestrial communications network **100** may employ a frequency reuse and/or spreading code reuse pattern to increase an efficiency of frequency usage and/or capacity and/or reduce interference. For example, each base station may have a relatively small coverage area and/or sector and adjacent base stations and/or sectors may use different frequencies and/or
15 spreading codes to reduce interference therebetween.

Communications for a radioterminal **150a** in an interior portion of the terrestrial network coverage area may be provided by an interior base station **110c** as illustrated in Figure 3. As the radioterminal **150a** changes position within the terrestrial network coverage area during a communication such as a radiotelephone
20 conversation, communications services for the radioterminal **150a** may be handed off from one sector of base station **110c** to another sector of base station **110c**, and/or to sectors of other interior or peripheral base stations.

Communications for a radioterminal **150b** in the peripheral portion of the terrestrial network coverage area may be provided by a peripheral base station **120g**.
25 As the radioterminal **150b** is in the sector **121g**, to which transmit and receive antennas of the base station **120g** are directed, communications can be provided for the radioterminal **150b** within the sector **121g**. Moreover, communications services for the radioterminal **150b** may be handed off from the base station **120g** to an adjacent interior or peripheral base station if the radioterminal **150b** moves from the
30 sector **121g** to a sector of another base station.

As shown in Figure 3, the sectors of peripheral base stations may appear to have fixed boundaries defined by the transmit sectors of the respective transmit antennas. As will be understood, however, side lobes of the radiation patterns generated by the directional transmit antennas of the peripheral base stations may

have sufficient energy to support acceptable link transmissions to a radioterminal **150c** outside the perimeter **125** of the terrestrial network coverage area and outside the sector **121f** of the peripheral base station **120f**. As discussed above, the peripheral base station **120f** may include receive antennas, that may, for example, be directional, supporting robust link reception of communications from the mobile terminal outside sector **121f**.

Accordingly, communications service for the radioterminal **150c** may initially be provided by the base station **120f** within sector **121f**, but the radioterminal **150c** may then move outside the sector **121f** and away from the terrestrial network coverage area. According to embodiments of the present invention, down-link transmissions from the base station **120f** to the radioterminal **150c** may continue to be provided by the directional antenna(s) servicing the sector **121f**, and the quality of the down-link communications received by the radioterminal **150c** may rapidly deteriorate. A relatively high quality of up-link communications received by the base station **120f** from the radioterminal **150c**, however, may be maintained as the radioterminal **150c** moves outside sector **121f**, because the base station **120f** includes receive antennas covering a full 360 degree pattern surrounding the base station **120f**. Accordingly, communications service for the radioterminal **150c** will most likely be terminated due to deterioration in the down-link from the peripheral base station **120f** to the radioterminal before significant deterioration in the up-link from the radioterminal **150c** to the base station **120f** occurs which may cause the radioterminal to radiate at, or near, maximum power.

By providing sectors outside the perimeter **125** wherein a peripheral base station can receive via antennas operative in these sectors up-link communications from a radioterminal without transmitting communications to the radioterminal via antennas operative in these sectors, communications with the radioterminal may be terminated without causing the radioterminal to increase its transmit power to a maximum, or near a maximum before termination. More particularly, in a closed loop power control system, the base station may request that the radioterminal increase its transmission power as the signal strength and/or quality of communications received by the base station decreases, and similarly, the radioterminal may request that the base station increase its transmission power as the signal strength and/or quality of communications received by the radioterminal decreases. Once the radioterminal **150c** moves outside the sector **121f**, a strength and/or quality measure of base station

transmissions outside the sector **121f** may decrease due to the directional nature of the base station transmit antenna(s) and due to the limited maximum EIRP (power) capability of the base station. The base station, however, may not request any, or any significant, power increases from the radioterminal because at least one base station receive antenna is directed outside the perimeter **125**. To increase further the available return link margin between a radioterminal and a base station and thus further reduce the transmit power of a radioterminal, at least one antenna sub-system of a peripheral and/or interior base station may be configured to receive in more than one spatial orientation, such as in a vertical and horizontal orientation (polarization diversity reception) and, in addition or in an alternative, may also be configured with more than one spatially distinct elements (space-diversity reception).

According to additional embodiments of the present invention, one or more of the peripheral base stations **120a-o** may be located proximate to an airport, a navigable waterway, or other region likely to include satellite communications terminals that may be communicating with a satellite. For example, one or more peripheral base stations **120a-o** may be located proximate to a boundary of an airport with at least one transmit sector of the peripheral base station(s) proximate to the boundary of the airport being directed away or substantially away from the airport and/or having a reduced EIRP relative to other sectors. An area proximate to an airport may also be served by configuring at least one base station having at least one transmit sector whose antenna is oriented to point and/or radiate substantially in a southern direction. Providing communications service to an area proximate to an airport with at least one base station sector that is oriented to point and/or radiate in a substantially southern direction may increase and/or maximize the antenna discrimination between a satellite terminal (that may also be operative with its antenna oriented in a substantially southern direction due to the location of an orbital slot of a geostationary satellite) and the base station sector. (It will be understood that a base station sector that may be providing communications service to an area proximate to an airport that is located below the earth's equator may be oriented to point and/or radiate substantially in a northern direction since relative to a satellite terminal that is located at or near the airport (below the earth's equator) a geostationary satellite orbital location may be at a northern or substantially northern direction.)

The at least one transmit sector of the peripheral base station(s) proximate to the airport being directed away or substantially away from the airport and/or configured to radiate substantially in a southern direction may also have a reduced EIRP value relative to other base station sectors of the same or other base stations. At
5 least one transmit sector of the peripheral and/or interior base stations(s) proximate and/or distant to the airport may also be configured with a Left-Hand Circularly Polarized (LHCP) antenna to further maximize a discrimination between the antenna systems of the at least one transmit sector and a satellite terminal that is configured with a Right-Hand Circularly Polarized (RHCP) receive antenna. Accordingly,
10 interference with satellite communications terminals (aeronautical or other) that may be operating at or near the airport resulting from base station transmissions can be reduced or eliminated. The interior base stations can thus be located on a first side of the perimeter 125, and the peripheral base stations 120a-o may be located such that the airport is on a second side of the perimeter 125.

15 In another example, one or more peripheral base stations 120a-o may be located proximate to a navigable waterway with at least one transmit sector of the peripheral base station(s) proximate to the navigable waterway being directed away or substantially away from the navigable waterway and/or pointed in a southern or substantially southern direction. Providing communications service to an area
20 proximate to a navigable waterway (in the northern hemisphere) with at least one base station sector that is oriented in a southern or substantially southern direction and/or is configured to radiate in a southern or substantially southern direction may increase and/or maximize the antenna discrimination between a satellite terminal (that may also be operative with its antenna oriented in a substantially southern direction due to
25 an orbital slot location of a geostationary satellite) and the base station sector. (It will be understood that a base station sector that may be providing communications service to an area proximate to a waterway that is located below the earth's equator (in the southern hemisphere) may be oriented to point and/or radiate substantially in a northern direction since relative to a satellite terminal that is located at or near the
30 waterway (below the earth's equator) a geo-stationary satellite orbital location may be at a northern or substantially northern direction.).

The at least one transmit sector of the peripheral base station(s) proximate to the navigable waterway being directed to radiate away or substantially away from the navigable waterway and/or being directed to radiate in a southern or substantially

southern direction may also have a reduced EIRP value relative to other base station sectors of the same or other base stations. At least one transmit sector of the peripheral and/or interior base station(s) proximate and/or distant to the navigable waterway may also be configured with a Left-Hand Circularly Polarized (LHCP) antenna to further maximize a discrimination between the antenna systems of the at least one transmit sector and a satellite terminal that is configured with a Right-Hand Circularly Polarized (RHCP) antenna. Accordingly, interference with satellite communications terminals at or proximate to the navigable waterway that may be operative, for example, on boats and/or ships in the navigable waterway, resulting from peripheral and/or interior base station transmissions can be reduced or eliminated. The interior base stations can thus be located on a first side of the perimeter **125**, and the peripheral base stations **120a-o** may be located such that the navigable waterway is on a second side of the perimeter **125**.

According to some embodiments of the present invention, the terrestrial network **100** may be ancillary to a space based communications network providing radiotelephone communications using a satellite radiotelephone frequency band. Moreover, base stations of the terrestrial network **100** may reuse at least one frequency of the satellite frequency band, and the space based communications network may provide communications for radioterminals when outside the terrestrial network coverage area. Accordingly, as the radioterminal **150c** moves away from the perimeter **125**, communications with the radioterminal **150c** may be handed off to the space based network and/or to an alternate terrestrial communications network such as a cellular and/or PCS terrestrial communications network.

The sharing of frequencies of a satellite frequency band between a space based communications network and a terrestrial communications network is discussed, for example, in the following U.S. patent and U.S. patent publications. Satellite radioterminal communications systems and methods that may employ terrestrial reuse of satellite frequencies are described, for example, in U.S. Patent 6,684,057 to Karabinis, entitled *Systems and Methods for Terrestrial Reuse of Cellular Satellite Frequency Spectrum*; and Published U.S. Patent Application Nos. US 2003/0054760 to Karabinis, entitled *Systems and Methods for Terrestrial Reuse of Cellular Satellite Frequency Spectrum*; US 2003/0054761 to Karabinis, entitled *Spatial Guardbands for Terrestrial Reuse of Satellite Frequencies*; US 2003/0054814 to Karabinis et al., entitled *Systems and Methods for Monitoring Terrestrially Reused Satellite*

Frequencies to Reduce Potential Interference; US 2003/0073436 to Karabinis et al,
 entitled *Additional Systems and Methods for Monitoring Terrestrially Reused Satellite*
Frequencies to Reduce Potential Interference; US 2003/0054762 to Karabinis,
 entitled *Multi-Band/Multi-Mode Satellite Radiotelephone Communications Systems*
 5 *and Methods*; US 2003/0153267 to Karabinis, entitled *Wireless Communications*
Systems and Methods Using Satellite-Linked Remote Terminal Interface Subsystems;
 US 2003/0224785 to Karabinis, entitled *Systems and Methods for Reducing Satellite*
Feeder Link Bandwidth/Carriers In Cellular Satellite Systems; US 2002/0041575 to
 Karabinis et al., entitled *Coordinated Satellite-Terrestrial Frequency Reuse*; US
 10 2002/0090942 to Karabinis et al., entitled *Integrated or Autonomous System and*
Method of Satellite-Terrestrial Frequency Reuse Using Signal Attenuation and/or
Blockage, Dynamic Assignment of Frequencies and/or Hysteresis; US 2003/0068978
 to Karabinis et al., entitled *Space-Based Network Architectures for Satellite*
Radiotelephone Systems; US 2003/0143949 to Karabinis, entitled *Filters for*
 15 *Combined Radiotelephone/GPS Terminals*; US 2003/0153308 to Karabinis, entitled
Staggered Sectorization for Terrestrial Reuse of Satellite Frequencies; and US
 2003/0054815 to Karabinis, entitled *Methods and Systems for Modifying Satellite*
Antenna Cell Patterns In Response to Terrestrial Reuse of Satellite Frequencies. All
 of the above referenced patent publications and patent are assigned to the assignee of
 20 the present invention.

As shown in Figure 4, a plurality of terrestrial communications networks
100a-d (for example, as discussed above with respect to Figure 3) may be separated
 by no-service regions such that communications services are not provided by base
 stations of any of the terrestrial communications networks **100a-d** in the no-service
 25 regions. Moreover, a space-based network including at least one satellite **210** may
 provide communications service for radioterminals outside coverage areas of
 terrestrial communications networks **100a-d** and within satellite coverage areas **212a-**
e (such as radioterminals **150i-m**) using frequencies of a satellite frequency band.

Frequencies of the satellite frequency band may be reused among the satellite
 30 coverage areas **212a-e** such that, for example, the same frequencies of the satellite
 frequency band may not be reused to provide communications service in overlapping
 satellite coverage areas. Moreover, frequencies of the satellite frequency band may be
 reused within the terrestrial networks **100a-d** such that, for example, the same

frequencies may not be reused in a satellite coverage area and in a terrestrial network located in the satellite coverage area. For example, the space-based network may provide communications service for radioterminals in satellite coverage area **212a** (such as radioterminal **150i**) using at least a first frequency of the satellite frequency band, and the space-based network may provide communications for radioterminals in satellite coverage area **212b** (such as radioterminal **150m**) using a second frequency of the satellite frequency band. In addition, the terrestrial network **100d** (or at least a portion thereof) is within the first satellite coverage area **212a**, and the terrestrial network **100d** is outside the satellite coverage area **212b**. Accordingly, at least one base station of the terrestrial network **100d** may provide communications service for radioterminals in a coverage area thereof (such as radioterminal **150h**) using the second frequency of the satellite frequency band, and none of the base stations of the terrestrial network **100d** may provide communications service using the first frequency of the satellite frequency band.

Similarly, base stations of terrestrial networks **100a-b** may provide communications service for radioterminals in a coverage area thereof (such as radioterminals **150e-f**) using frequencies of the satellite frequency band other than frequencies used by the space based network to provide communications service over satellite coverage area **212b**. Moreover, base stations of terrestrial network **100c** may provide communications service for radioterminals in a coverage area thereof (such as radioterminal **150g**) using frequencies of the satellite frequency band other than frequencies used by the space based network to provide communications service over satellite coverage area **212e**.

More particularly, the satellite frequency band may include down-link frequencies and up-link frequencies. Down-link frequencies may be used by the base stations of the terrestrial network(s) and by the satellite(s) of the space based network to transmit communications to radioterminals. Up-link frequencies may be used by the base stations of the terrestrial network(s) and by the satellite(s) of the space based network to receive communications from radioterminals. Accordingly, base stations of terrestrial network(s) may share a satellite frequency band with the space based network, but base stations of the terrestrial network(s) may not transmit on frequencies that are received by the space based network. Accordingly, base stations of the terrestrial networks sharing frequencies of the satellite frequency band may not interfere with frequencies received by the space based network. For example, the

space based network may transmit communications to radioterminals in the satellite coverage area **212a** using a first frequency of the satellite frequency band, the space based network may transmit to radioterminals in the satellite coverage area **212b** using a second frequency of the satellite frequency band, and at least one base station of the terrestrial network **100d** may transmit communications using the second frequency of the satellite frequency band.

Similarly, the space based network may receive communications from radioterminals in the first satellite coverage area **212a** using a third frequency of the satellite frequency band, and the space based network may receive communications from radioterminals in the satellite coverage area **212b** using a fourth frequency of the satellite frequency band. Moreover, at least one base station of the terrestrial network **100d** may receive communications from radioterminals using the fourth frequency of the satellite frequency band, and none of the base stations of the terrestrial network **100d** may receive communications from radioterminals that are communicating therewith using the third frequency of the satellite frequency band (at least some of the base stations of terrestrial network **100d** may also be configured to receive communications from radioterminals in the first satellite coverage area **212a** using the third frequency of the satellite frequency band to communicate with the space based network).

A first radioterminal may thus transmit communications to a peripheral base station of the terrestrial network **100d** using the fourth frequency and a second radioterminal in satellite coverage area **212b** may transmit to the space based network using the fourth frequency. As discussed above with respect to Figure 3, communications between the first radioterminal and the terrestrial network may be terminated without increasing a transmit power of the first radioterminal to a maximum, or near maximum, level because the peripheral base station provides transmissions directed toward an interior portion of the coverage area of the terrestrial network **100d** with greater EIRP (power) than transmissions directed away from interior portions of the terrestrial network **100d** coverage area. Accordingly, interference from the first radioterminal with transmissions from the second radioterminal in the satellite coverage area **212b** to the space base network may be reduced.

According to still additional embodiments of the present invention, as illustrated in Figure 5, a terrestrial communications network **500** may include a

plurality of interior and peripheral base stations **510a-i** and **520a-o** providing communications service for radioterminals **550** over a terrestrial network coverage area. The interior base stations **510** provide communications service (both transmitting down-link communications to radioterminals and receiving up-link communications from radioterminals) for radioterminals **550** in an interior portion of the terrestrial network coverage area. In contrast, the peripheral base stations **520** may only receive up-link communications from radioterminals. Stated in other words, at least one of the peripheral base stations **520** may be a receive-only base station.

10 More particularly, at least one of the interior base stations **510** may define a plurality of sectors surrounding the at least one interior base station, and the at least one interior base station(s) **510** may direct transmissions to all sectors surrounding the interior base station so that transmissions are directed over a 360 degree pattern surrounding the respective interior base station. For example, one of the interior base stations may include directional transmit antennas configured to provide
15 transmissions over a 120 degree sector, and the base station(s) may include at least three such directional antennas so that transmissions are directed over three 120 degree sectors to cover a 360 degree pattern surrounding the base station. In addition or in an alternative, one or more interior base stations **510** may include
20 omnidirectional antennas and/or directional antennas. At least one of the interior base stations may also be configured so that transmissions are directed to a pattern of less than 360 degrees surrounding the at least one interior base station. Complete transmission patterns and/or sectors are not shown for the interior base stations **510** of Figure 5 for the sake of clarity.

25 As discussed above, at least one of the peripheral base stations **520** may be a receive-only base station(s). More particularly, peripheral base stations may include one or more receive antennas providing reception capability to at least one sector, such as a 120 degree sector. Moreover, the receive antenna(s) on a peripheral base station **520** may be oriented such that reception for the peripheral base station **520** is
30 directed over a sector oriented substantially toward interior portions of the terrestrial network coverage area with greater sensitivity than is directed over a sector oriented substantially away from interior portions of the terrestrial network coverage area. In an alternative, a peripheral base station **520** may include receive antennas directed over two or more sectors oriented substantially toward interior portions of the

terrestrial network coverage area, and/or a peripheral base station **520** may include receive antennas directed over a plurality of sectors covering a 360 degree pattern surrounding the peripheral base station **520**. An engineered boundary of coverage areas of the interior base stations **510** may define a perimeter **525** (illustrated by the
5 dotted line of Figure 5) of the terrestrial network coverage area such that interior base stations **510** are located on one side of the perimeter **525** and not on the other side of the perimeter **525**. In an alternative or in addition, one or more of the peripheral base stations may include one or more omnidirectional receive antennas and/or one or more directional receive antennas.

10 Accordingly, interior and exterior base stations **510** and **520** may provide communications services for radioterminals in a coverage area and/or sector thereof using, for example, FDM/FDMA (frequency division multiplexed/multiple access), TDM/TDMA (time division multiplexed/multiple access), CDM/CDMA (code
15 division multiplexed/multiple access) architecture, and/or OFDM/OFDMA (orthogonal frequency division multiplexed/multiple access). Moreover, the base stations of the terrestrial communications network **500** may employ a frequency reuse and/or spreading code reuse pattern to increase an efficiency of frequency usage and/or capacity and/or reduce interference. For example, each base station may have a relatively small coverage area and/or sector and adjacent base stations and/or sectors
20 may use different frequencies and/or spreading codes to reduce interference therebetween.

Communications service for a radioterminal **550a** in an interior portion of the terrestrial network coverage area may be provided by an interior base station **510c** as illustrated in Figure 5. As the radioterminal **550a** moves within the terrestrial network
25 coverage area during a communication such as a radiotelephone conversation, communications services for the radioterminal **550a** may be handed off from one sector of base station **510c** to another sector of base station **510c**, and/or to sectors of other interior and/or peripheral base stations. More particularly, a down-link for transmissions to the radioterminal **510a** and an up-link for transmissions from the
30 radioterminal may be provided by one or more interior base stations as long as the radioterminal is within a coverage area of one of the interior base stations.

As shown in Figure 5, the engineered coverage areas of interior base stations **510** may appear to have fixed boundaries defined by the transmit sectors of the respective transmit antennas. As will be understood, however, radiation patterns

generated by transmit antennas, such as by the transmit antennas of the interior base station **510g**, may have sufficient energy to support transmissions to a radioterminal **550b** outside the perimeter **525** of the terrestrial network engineered coverage area. As discussed above, the peripheral base station **520g** may include receive antennas supporting robust link reception of communications from the mobile terminal **550b** outside the perimeter **525**.

Accordingly, communications service for the radioterminal **550b** may initially be provided by the interior base station **510g**, but the radioterminal **550b** may then move outside the engineered coverage area of interior base station **510g**, outside the perimeter **525**, and away from the terrestrial network engineered coverage area. According to embodiments of the present invention, transmissions from the base station **510g** to the radioterminal **550b** may continue to be provided by the transmit antenna(s) of interior base station **510g**, and the quality of the communications received by the radioterminal **550b** may deteriorate. A relatively high quality of communications received by the peripheral base station **520g** from the radioterminal **550b**, however, may be maintained as the radioterminal **550b** moves outside the engineered coverage area of interior base station **510g**. Accordingly, communications service for the radioterminal **550b** will most likely be terminated due to deterioration in the down-link from the interior base station **510g** to the radioterminal **550b** before significant deterioration in the up-link from the radioterminal **550b** to the base station **520g** occurs. (In an alternative, base station **520g** and base station **510g** may be configured to combine their corresponding receptions from a radioterminal such as their receptions from radioterminal **550b**.) Accordingly, down-link communications to the radioterminal **550b** and up-link communications from the radioterminal may be provided using different base stations when the radioterminal **550b** is outside the engineered terrestrial network service perimeter **525**.

By providing receive-only peripheral base stations outside the perimeter **525** that can receive communications from a radioterminal, communications with the radioterminal can be terminated without causing the radioterminal to boost its transmit power to a maximum, or a near maximum, level before termination. More particularly, in a closed loop power control system, a terrestrial network infrastructure such as, for example, a base station (or base stations) may request that the radioterminal increase its transmission power as the quality of communications received by the infrastructure (base station or base stations) decreases, and similarly,

the radioterminal may request that an infrastructure, such as, for example, a base station, providing communications information to the radioterminal increase its transmission power as the quality of communications received by the radioterminal decreases. Once the radioterminal **550b** moves substantially outside the engineered coverage area of interior base station **510g**, and because the EIRP (power) from the base station **510g** may be limited to a predetermined maximum, a strength and/or quality measure of base station transmissions outside the engineered coverage area thereof may decrease. An infrastructure of the terrestrial communications network, however, such as base station **510g**, may not request any, or any significant, power increases for transmissions from the radioterminal **550b** that is outside of the network's engineered limit(s) because receive antennas from the base station **520g** (and/or **510g**) may be configured to cover the areas outside of perimeter **525** not covered by transmit and/or receive antennas of base station **510g** in accordance with the system's engineered limits and/or parameters. That is, for at least some areas outside of perimeter **525** base station **510g** on its own, without aid of peripheral base station **520g**, may not provide X dB (i.e., 18 dB) of return-link structural attenuation margin.

According to additional embodiments of the present invention, one or more of the peripheral base stations **520a-o** may be located proximate to an airport, a navigable waterway, or other region likely to include satellite communications terminals. For example, one or more peripheral base stations **520a-o** may be located proximate to a boundary of an airport with the peripheral base station(s) being located between one or more of the interior base stations **510a-i** and the airport. Accordingly, interference with satellite communications terminals in airplanes at the airport resulting from base station transmissions of the terrestrial network **500** can be reduced. The interior base stations **510a-i** can thus be located on a first side of the perimeter **525**, and the peripheral base stations **520a-o** may be located such that the airport is on a second side of the perimeter **525**. Moreover, one or more of the peripheral base stations may be between the perimeter **525** and the airport. In another example, one or more peripheral base stations **520a-o** may be located proximate to a navigable waterway with one or more of the peripheral base stations **520a-o** being located between one or more of the interior base stations **510a-i** and the waterway. Accordingly, interference with satellite communications terminals on boats and/or ships in the navigable waterway resulting from base station transmissions of the

terrestrial network **500** can be reduced. The interior base stations can thus be located on a first side of the perimeter **525**, and the peripheral base stations **520a-o** may be located such that the navigable waterway is on a second side of the perimeter **525**. Moreover, one or more of the peripheral base stations **520a-o** may be between the
5 perimeter **525** and the waterway.

According to some embodiments of the present invention, the terrestrial network **500** may be ancillary to a space based communications network providing radiotelephone communications using a satellite radiotelephone frequency band. Moreover, base stations of the terrestrial network **500** may reuse at least one
10 frequency of the satellite frequency band, and the space based communications network may provide communications for radioterminals when outside the terrestrial network coverage area. Accordingly, as the radioterminal **550b** moves away from the perimeter **525**, communications with the radioterminal **550b** may be handed off to the space based network and/or to an alternative terrestrial communications network such
15 as a cellular and/or PCS terrestrial communications network.

The sharing of frequencies of a satellite frequency band between a space based communications network and a terrestrial communications network is discussed, for example, in the following U.S. patent and U.S. patent publications. Satellite radioterminal communications systems and methods that may employ terrestrial reuse
20 of satellite frequencies are described, for example, in U.S. Patent 6,684,057 to Karabinis, entitled *Systems and Methods for Terrestrial Reuse of Cellular Satellite Frequency Spectrum*; and Published U.S. Patent Application Nos. US 2003/0054760 to Karabinis, entitled *Systems and Methods for Terrestrial Reuse of Cellular Satellite Frequency Spectrum*; US 2003/0054761 to Karabinis, entitled *Spatial Guardbands for*
25 *Terrestrial Reuse of Satellite Frequencies*; US 2003/0054814 to Karabinis et al., entitled *Systems and Methods for Monitoring Terrestrially Reused Satellite Frequencies to Reduce Potential Interference*; US 2003/0073436 to Karabinis et al., entitled *Additional Systems and Methods for Monitoring Terrestrially Reused Satellite Frequencies to Reduce Potential Interference*; US 2003/0054762 to Karabinis,
30 entitled *Multi-Band/Multi-Mode Satellite Radiotelephone Communications Systems and Methods*; US 2003/0153267 to Karabinis, entitled *Wireless Communications Systems and Methods Using Satellite-Linked Remote Terminal Interface Subsystems*; US 2003/0224785 to Karabinis, entitled *Systems and Methods for Reducing Satellite Feeder Link Bandwidth/Carriers In Cellular Satellite Systems*; US 2002/0041575 to

Karabinis et al., entitled *Coordinated Satellite-Terrestrial Frequency Reuse*; US 2002/0090942 to Karabinis et al., entitled *Integrated or Autonomous System and Method of Satellite-Terrestrial Frequency Reuse Using Signal Attenuation and/or Blockage, Dynamic Assignment of Frequencies and/or Hysteresis*; US 2003/0068978
 5 to Karabinis et al., entitled *Space-Based Network Architectures for Satellite Radiotelephone Systems*; US 2003/0143949 to Karabinis, entitled *Filters for Combined Radiotelephone/GPS Terminals*; US 2003/0153308 to Karabinis, entitled *Staggered Sectorization for Terrestrial Reuse of Satellite Frequencies*; and US 2003/0054815 to Karabinis, entitled *Methods and Systems for Modifying Satellite*
 10 *Antenna Cell Patterns In Response to Terrestrial Reuse of Satellite Frequencies*. All of the above referenced patent publications and patent are assigned to the assignee of the present invention.

As shown in Figure 6, a plurality of terrestrial communications networks **500a-d** (for example, as discussed above with respect to Figure 3) may be separated
 15 by no-service regions such that communications services are not provided by base stations of any of the terrestrial communications networks **500a-d** in the no-service regions. Moreover, a space-based network including at least one satellite **610** may provide communications service for radioterminals outside coverage areas of terrestrial communications networks **500a-d** and within satellite coverage areas **612a-**
 20 **e** (such as radioterminals **550i-m**) using frequencies of a satellite frequency band.

Frequencies of the satellite frequency band may be reused among the satellite coverage areas **612a-e** such that, for example, the same frequencies of the satellite frequency band may not be reused to provide communications service in overlapping satellite coverage areas. Moreover, frequencies of the satellite frequency band may be
 25 reused within the terrestrial networks **500a-d** such that, for example, the same frequencies may not be reused in a satellite coverage area and in a terrestrial network located in the satellite coverage area. For example, the space-based network may provide communications service for radioterminals in satellite coverage area **612a** (such as radioterminal **550i**) using at least a first frequency of the satellite frequency
 30 band, and the space-based network may provide communications for radioterminals in satellite coverage area **612b** (such as radioterminal **550m**) using a second frequency of the satellite frequency band. In addition, the terrestrial network **500d** (or at least a portion thereof) is within the first satellite coverage area **612a**, and the terrestrial

network **500d** is outside the satellite coverage area **612b**. Accordingly, at least one base station of the terrestrial network **500d** may provide communications service for radioterminals in a coverage area thereof (such as radioterminal **550h**) using the second frequency of the satellite frequency band, and none of the base stations of the terrestrial network **500d** may provide communications service using the first frequency of the satellite frequency band.

Similarly, base stations of terrestrial networks **500a-b** may, for example, provide communications service for radioterminals in a coverage area thereof (such as radioterminals **550e-f**) using frequencies of the satellite frequency band other than frequencies used by the space based network to provide communications service over satellite coverage area **612b**. Moreover, base stations of terrestrial network **500c** may, for example, provide communications service for radioterminals in a coverage area thereof (such as radioterminal **550g**) using frequencies of the satellite frequency band other than frequencies used by the space based network to provide communications service over satellite coverage area **612e**.

More particularly, the satellite frequency band may include down-link frequencies and up-link frequencies. Down-link frequencies may be used by the base stations of the terrestrial network(s) and by the satellite(s) of the space based network to transmit communications to radioterminals. Up-link frequencies may be used by the base stations of the terrestrial networks and by the satellite(s) of the space based network to receive communications from radioterminals. Accordingly, base stations of terrestrial networks may share a satellite frequency band with the space based network, but base stations of the terrestrial networks may not, for example, transmit on frequencies that are received by the space based network. Accordingly, base stations of the terrestrial networks sharing frequencies of the satellite frequency band may not interfere with frequencies received by the space based network. For example, the space based network may transmit communications to radioterminals in the satellite coverage area **612a** using a first frequency of the satellite frequency band, the space based network may transmit to radioterminals in the satellite coverage area **612b** using a second frequency of the satellite frequency band, and at least one base station of the terrestrial network **500d** may transmit communications using the second frequency of the satellite frequency band.

Similarly, the space based network may receive communications from radioterminals in the first satellite coverage area **612a** using a third frequency of the

satellite frequency band, and the space based network may receive communications from radioterminals in the satellite coverage area **612b** using a fourth frequency of the satellite frequency band. Moreover, at least one base station of the terrestrial network **500d** may receive communications from radioterminals that it is transmitting

5 communications to using the fourth frequency of the satellite frequency band, and none of the base stations of the terrestrial network **500d** may receive communications from radioterminals that are communicating therewith using the third frequency of the satellite frequency band. (At least some of the base stations of the terrestrial network **500d** may also be configured to receive communications from radioterminals in the

10 first satellite coverage area **612a** using the third frequency of the satellite frequency band to communicate with the space based network.)

A first radioterminal may thus transmit communications to a peripheral base station of the terrestrial network **500d** using the fourth frequency and a second radioterminal in satellite coverage area **612b** may transmit to the space based network

15 using the fourth frequency. As discussed above with respect to Figure 5, communications between the first radioterminal and the terrestrial network may be terminated without increasing a transmit power of the first radioterminal to a maximum, or near maximum, level because the peripheral receive-only base station provides at least one receive antenna directed toward an interior portion of the

20 coverage area of the terrestrial network **500d** such as to provide a high-quality return link for the first radioterminal. Accordingly, interference from the first radioterminal with transmission from the second radioterminal in the satellite coverage area **612b** to the space base network can be reduced.

Moreover, elements of embodiments discussed above with respect to Figures

25 3-6 may be combined. For example, the terrestrial communications networks **100** of Figures 3 and/or 4 may include one or more receive-only base stations configured to receive communications from radioterminals outside the perimeter **125** (as discussed above with respect to peripheral base stations **520** of Figure 5) thereby further enhancing up-link quality as compared to down-link quality outside the perimeter

30 **125**. In addition or in an alternative, a receive-only base station may be substituted for one or more of the peripheral base stations **120** of Figures 3 and/or 4.

Similarly, the terrestrial communications networks **500** of Figures 5 and 6 may include one or more base stations providing transmissions directed toward an interior portion of the terrestrial network coverage area with greater power than transmissions

directed away from interior portions of the terrestrial network coverage area (as discussed above with respect to peripheral base stations **120** of Figure 3). For example, a peripheral base station **120** as discussed above with respect to Figure 3 may be substituted for one or more of the interior base stations **510a-b**, **510d**, **510e-g**,
5 or **510h-i** along the perimeter **525**. In addition or in an alternative, a peripheral base station **120** as discussed above with respect to Figure 3 may be substituted for one or more of the peripheral base stations **520** of Figure 5.

In the drawings and specification, there have been disclosed typical embodiments of the invention and, although specific terms are employed, they are
10 used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention being set forth in the following claims. Moreover, while particular systems are discussed above with respect to the figures, analogous methods are also included in the present invention.

What is Claimed is:

1. A wireless communications system comprising:

a terrestrial network including a plurality of base stations providing communications service for radioterminals over a terrestrial network coverage area, the plurality of base stations including interior base stations providing communications service for radioterminals in an interior portion of the terrestrial network coverage area and peripheral base stations providing communications service for radioterminals at a peripheral portion of the terrestrial network coverage area, wherein at least one of the peripheral base stations provides transmissions directed toward an interior portion of the terrestrial network coverage area with greater power than transmissions directed away from interior portions of the terrestrial network coverage area; and

a space based network comprising at least one satellite, the space based network providing communications service for radioterminals in a first satellite coverage area using at least a first frequency of a satellite frequency band and providing communications service for radioterminals in a second satellite coverage area using at least a second frequency of the satellite frequency band, wherein at least a portion of the terrestrial network coverage area is within the first satellite coverage area, wherein an entirety of the terrestrial network coverage area is outside the second satellite coverage area, wherein at least one of the base stations provides communications service using the second frequency of the satellite frequency band, and wherein at least one of the base stations does not provide communications to and/or from the radioterminals receiving communications from the at least one of the base stations using the first frequency of the satellite frequency band.

2. A wireless communications system according to Claim 1 wherein the peripheral base stations and/or interior base stations define a portion of a perimeter of the terrestrial network coverage area such that interior base stations of the terrestrial network are located on one side of the perimeter and not on the other side of the perimeter.

3. A wireless communications system according to Claim 2 wherein the perimeter is closed surrounding interior portions of the terrestrial network coverage area.

4. A wireless communications system according to Claim 1 wherein at least one of the interior base stations defines a plurality of sectors surrounding the interior base station and wherein transmissions are directed from the at least one interior base station to each of the sectors so that transmissions are directed over a 360 degree pattern surrounding the at least one interior base station.

5. A wireless communications system according to Claim 1 wherein at least one of the peripheral base stations defines a plurality of sectors surrounding the at least one peripheral base station and wherein the at least one peripheral base station provides transmissions to at least one sector directed substantially toward an interior portion of the terrestrial network coverage area with greater power than toward another sector directed substantially away from interior portions of the terrestrial network coverage area.

6. A wireless communications system according to Claim 5 wherein the at least one peripheral base stations includes directional transmission antennas for sectors directed substantially toward interior portions of the terrestrial network coverage area but not for the sector directed substantially away from interior portions of the terrestrial network coverage area.

7. A wireless communications system according to Claim 6 wherein the at least one peripheral base stations includes directional receive antennas directed to each of the sectors surrounding the at least one peripheral base station.

8. A wireless communications system according to Claim 1 wherein at least one of the peripheral base stations has fewer transmit sectors, fewer transmit antenna elements, different transmit antenna elements, and/or different transmit gain patterns than at least one interior base station.

9. A wireless communications system according to any one of claims 1 to 8 further comprising:

a second terrestrial network including a second plurality of base stations providing communications service for radioterminals over a second terrestrial network coverage area, wherein a no-service region separates the terrestrial network coverage area and the second terrestrial network coverage area such that communications services are not provided by base stations of either of the terrestrial network or the second terrestrial network in the no-service region.

10. A wireless communications system according to claim 1 wherein the space based network transmits communications to radioterminals in the first satellite coverage area using the first frequency, wherein the space based network transmits communications to radioterminals in the second satellite coverage area using the second frequency, and wherein the at least one of the base stations transmits communications using the second frequency.

11. A wireless communications system according to Claim 10 wherein the space based network receives communications from radioterminals in the first satellite coverage area using at least a third frequency, wherein the space based network receives communications from radioterminals in the second satellite coverage area using at least a fourth frequency, wherein at least one of the base stations receives communications using the fourth frequency, and wherein at least one of the base stations does not receive communications, from the radioterminals receiving communications from the at least one of the base stations, using the third frequency.

12. A wireless communications system according to Claim 1 wherein the terrestrial network includes a plurality of receive-only base stations configured to receive communications from radioterminals at the peripheral portion of the terrestrial network coverage area so that communications service for a radioterminal is provided by a receive-only base station receiving communications from the radioterminal and by another base station transmitting communications to the radioterminal.

13. A wireless communications system comprising:

a terrestrial network including a plurality of base stations providing communications service for radioterminals over a terrestrial network coverage area, the plurality of base stations including interior base stations providing communications service for radioterminals in an interior portion of the terrestrial network coverage area and peripheral base stations providing communications service for radioterminals at a peripheral portion of the terrestrial network coverage area, wherein at least one of the peripheral base stations is a receive-only peripheral base station that does not transmit, and wherein at least one of the interior base stations is a transmit and receive interior base station, so that a radiotelephone communication for a radio terminal is provided by the receive-only peripheral base station receiving uplink communications for the radiotelephone communication from the radioterminal and by the transmit and receive interior base station transmitting downlink communications for the radiotelephone communication to the radio terminal.

14. A wireless communications system according to Claim 13 wherein the peripheral base stations and/or interior base stations define a portion of a perimeter of the terrestrial network coverage area such that interior base stations of the terrestrial network are located on one side of the perimeter and not on the other side of the perimeter.

15. A wireless communications system according to Claim 14 wherein the perimeter is closed surrounding interior portions of the terrestrial network coverage area.

16. A wireless communications system according to Claim 13 wherein at least one of the interior base stations defines a plurality of sectors surrounding the at least one interior base station and wherein transmissions are directed from the at least one interior base station to each of the sectors so that transmissions are directed over a 360 degree pattern surrounding the at least one interior base station.

17. A wireless communications system according to Claim 13 wherein at least one of the peripheral base stations defines a plurality of sectors surrounding the at

least one peripheral base station and wherein the at least one peripheral base stations includes directional reception antennas for at least one of the sectors.

18. A wireless communications system according to any one of claims 13 to 17 further comprising:

a second terrestrial network including a second plurality of base stations providing communications service for radioterminals over a second terrestrial network coverage area, wherein a no-service region separates the terrestrial network coverage area and the second terrestrial network coverage area such that communications services are not provided by base stations of either of the terrestrial network or the second terrestrial network in the no-service region.

19. A wireless communications system according to any one of claims 13 to 17 further comprising:

a space based network comprising at least one satellite, the space based network providing communications service for radioterminals in a first satellite coverage area using at least a first frequency of a satellite frequency band and providing communications service for radioterminals in a second satellite coverage area using at least a second frequency of the satellite frequency band, wherein at least a portion of the terrestrial network coverage area is within the first satellite coverage area, wherein an entirety of the terrestrial network coverage area is outside the second satellite coverage area, wherein at least one of the base stations provides communications service using the second frequency of the satellite frequency band, and wherein at least one of the base stations does not provide communications to and/or from the radioterminals receiving communications from the base stations, using the first frequency of the satellite frequency band.

20. A wireless communications system according to claim 19 wherein the space based network transmits communications to radioterminals in the first satellite coverage area using the first frequency, wherein the space based network transmits communications to radioterminals in the second satellite coverage area using the second frequency, and wherein the at least one of the base stations transmits communications using the second frequency.

21. A wireless communications system according to Claim 19 wherein the space based network receives communications from radioterminals in the first satellite coverage area using at least a third frequency, wherein the space based network receives communications from radioterminals in the second satellite coverage area using at least a fourth frequency, wherein at least one of the base stations receives communications using the fourth frequency, and wherein at least one of the base stations does not receive communications from the radioterminals receiving communications from the base stations, using the third frequency.

22. A wireless communications system comprising:

a terrestrial network including a plurality of base stations providing communications service for radioterminals over a terrestrial network coverage area, the plurality of base stations including interior base stations providing communications service for radioterminals in an interior portion of the terrestrial network coverage area and peripheral base stations providing communications service for radioterminals at a peripheral portion of the terrestrial network coverage area, wherein at least one of the peripheral base stations is substantially disabled for transmission away from interior portions of the terrestrial network coverage area; and

a space based network comprising at least one satellite, the space based network providing communications service for radioterminals in a first satellite coverage area using at least a first frequency of a satellite frequency band and providing communications service for radioterminals in a second satellite coverage area using at least a second frequency of the satellite frequency band, wherein at least a portion of the terrestrial network coverage area is within the first satellite coverage area, wherein an entirety of the terrestrial network coverage area is outside the second satellite coverage area, wherein at least one of the base stations provides communications service using the second frequency of the satellite frequency band, and wherein at least one of the base stations does not provide communications to and/or from the radioterminals receiving communications from the base stations, using the first frequency of the satellite frequency band.

23. A wireless communications system according to Claim 22 wherein the peripheral base stations and/or the interior base stations define a portion of a perimeter of the terrestrial network coverage area such that interior base stations of

the terrestrial network are located on one side of the perimeter and not on the other side of the perimeter.

24. A wireless communications system according to Claim 23 wherein the perimeter is closed surrounding interior portions of the terrestrial network coverage area.

25. A wireless communications system according to Claim 22 wherein at least one of the peripheral base stations has fewer transmit sectors, fewer transmit antenna elements, different transmit antenna elements, and/or different transmit gain patterns than at least one of the interior base stations.

26. A wireless communications system according to Claim 22 wherein at least one of the interior base stations transmits and receives communications and wherein at least one of the peripheral base stations comprises a receive-only peripheral base station.

27. A wireless communications system according to any one of claims 22 to 26 further comprising:

a second terrestrial network including a second plurality of base stations providing communications service for radioterminals over a second terrestrial network coverage area, wherein a no-service region separates the first and second terrestrial network coverage areas such that communications services are not provided by base stations of either of the first or the second terrestrial networks in the no-service region.

28. A wireless communications system according to Claim 22 wherein at least one of the peripheral base stations provides transmissions directed toward an interior portion of the terrestrial network coverage area with greater power than transmissions directed away from interior portions of the terrestrial network coverage area.

29. A wireless communications system according to Claim 22 wherein at least one of the peripheral base stations is a receive-only base stations that does not transmit.

30. A method of providing communications for radioterminals, the method comprising:

providing communications service for radioterminals at an interior portion of a terrestrial network coverage area using interior base stations; and

providing communications service for radioterminals at a peripheral portion of the terrestrial network coverage area using peripheral base stations, wherein at least one of the peripheral base stations provides transmissions directed toward an interior portion of the terrestrial network coverage area with greater power than transmissions directed away from interior portions of the terrestrial network coverage area.

31. A method according to Claim 30 wherein the peripheral base stations and/or interior base stations define a portion of a perimeter of the terrestrial network coverage area such that interior base stations of the terrestrial network coverage area are located on one side of the perimeter and not on the other side of the perimeter.

32. A method according to Claim 31 wherein the perimeter is closed surrounding interior portions of the terrestrial network coverage area.

33. A method according to Claim 31 wherein at least one of the interior base stations defines a plurality of sectors surrounding the at least one interior base station and wherein transmissions are directed from the at least one interior base station to each of the sectors so that transmissions are directed over a 360 degree pattern surrounding the at least one interior base station.

34. A method according to Claim 30 wherein at least one of the peripheral base stations defines a plurality of sectors surrounding the at least one peripheral base station and wherein the at least one peripheral base station provides transmissions to at least one sector directed substantially toward an interior portion of the terrestrial network coverage area with greater power than toward another sector directed substantially away from interior portions of the terrestrial network coverage area.

35. A method according to Claim 34 wherein at least one of the peripheral base stations includes directional transmission antennas for sectors directed

substantially toward interior portions of the terrestrial network coverage area but not for the sector directed substantially away from interior portions of the terrestrial network coverage area.

36. A method according to Claim 35 wherein at least one of the peripheral base stations includes directional receive antennas directed to at least one of the sectors surrounding the at least one peripheral base station.

37. A method according to Claim 30 wherein at least one of the peripheral base stations has fewer transmit sectors, fewer transmit antenna elements, different transmit antenna elements, and/or different transmit gain patterns than at least one interior base station.

38. A method according to any one of claims 30 to 37 further comprising:
 providing communications for radioterminals at a second terrestrial network coverage area using a second plurality of base stations wherein a no-service region separates the terrestrial network coverage area and second terrestrial network coverage area such that communications services are not provided by base stations of either of the terrestrial network coverage area or the second terrestrial network coverage area in the no-service region.

39. A method of providing communications for radioterminals, the method comprising:

providing communications service for radioterminals at an interior portion of a terrestrial network coverage area using a plurality of interior base stations wherein at least one of the interior base stations is a transmit and receive interior base station;

providing communications service for radioterminals at a peripheral portion of the terrestrial network coverage area using a plurality of peripheral base stations wherein at least one of the peripheral base stations is a receive-only peripheral base station that does not transmit; and

supporting a radiotelephone communication for one of the radioterminals by receiving uplink communications for the radiotelephone communication at the receive-only peripheral base station from the radioterminal and by transmitting

downlink communications for the radiotelephone communication from the transmit and receive interior base station to the radioterminal.

40. A method according to Claim 39 wherein the peripheral base stations and/or interior base stations define a portion of a perimeter of the terrestrial network coverage area such that interior base stations of the terrestrial network coverage area are located on one side of the perimeter and not on the other side of the perimeter.

41. A method according to Claim 40 wherein the perimeter is closed surrounding interior portions of the terrestrial network coverage area.

42. A method according to Claim 39 wherein at least one of the interior base stations defines a plurality of sectors surrounding the interior base station and wherein transmissions are directed from the at least one interior base station to each of the sectors so that transmissions are directed over a 360 degree pattern surrounding the at least one interior base station.

43. A method according to Claim 39 wherein at least one of the peripheral base stations defines a plurality of sectors surrounding the at least one peripheral base station and wherein the at least one peripheral base station includes directional reception antennas for at least one of the sectors.

44. A method according to any one of claims 39 to 43 further comprising:
providing communications service for radioterminals at a second terrestrial network coverage area using a second plurality of base stations wherein a no-service region separates the terrestrial network coverage area and second terrestrial network coverage area such that communications services are not provided by base stations of either of the terrestrial network coverage area or the second terrestrial network coverage area in the no-service region.

45. A wireless communications system comprising:
a plurality of interior down-link transmitters configured to transmit communications to radioterminals located in interior portions of a terrestrial network coverage area;

a plurality of interior up-link receivers configured to receive communications from radioterminals located in the interior portions of the terrestrial network coverage area; and

a plurality of peripheral up-link receivers configured to receive communications from radioterminals located in a peripheral region of the terrestrial network coverage area adjacent the interior portions of the terrestrial network coverage area, wherein at least a portion of the peripheral region is outside an engineered coverage area of any down-link transmitters of the communications system;

wherein a down-link of a radiotelephone communication for a radioterminal in the peripheral region is provided from one of the interior down link transmitters and wherein an up-link of the radiotelephone communication for the radioterminal in the peripheral region is provided from one of the peripheral up-link receivers.


46. An Ancillary Terrestrial Component (ATC) that is configured to wirelessly communicate with a plurality of radiotelephones using at least one satellite radiotelephone frequency over an ATC service area, the ATC comprising:

a plurality of base stations that are configured to wirelessly communicate with the plurality of radiotelephones using at least one satellite radiotelephone frequency, the plurality of base stations including at least one interior base station that is located in an interior portion of the ATC service area and at least one peripheral base station that is located at a periphery of the ATC service area, at least one peripheral base station having fewer transmit sectors, fewer transmit antenna elements, different transmit antenna elements and/or different transmit gain patterns than at least one interior base station; and


at least one receive-only peripheral base station;

wherein the ATC system is configured to support a radiotelephone conversation for one of the radiotelephones by transmitting a downlink for the radiotelephone conversation from the at least one interior base station to the radiotelephone and by receiving an uplink for the radiotelephone conversation from the radiotelephone at the at least one receive-only peripheral bases station.

1/6

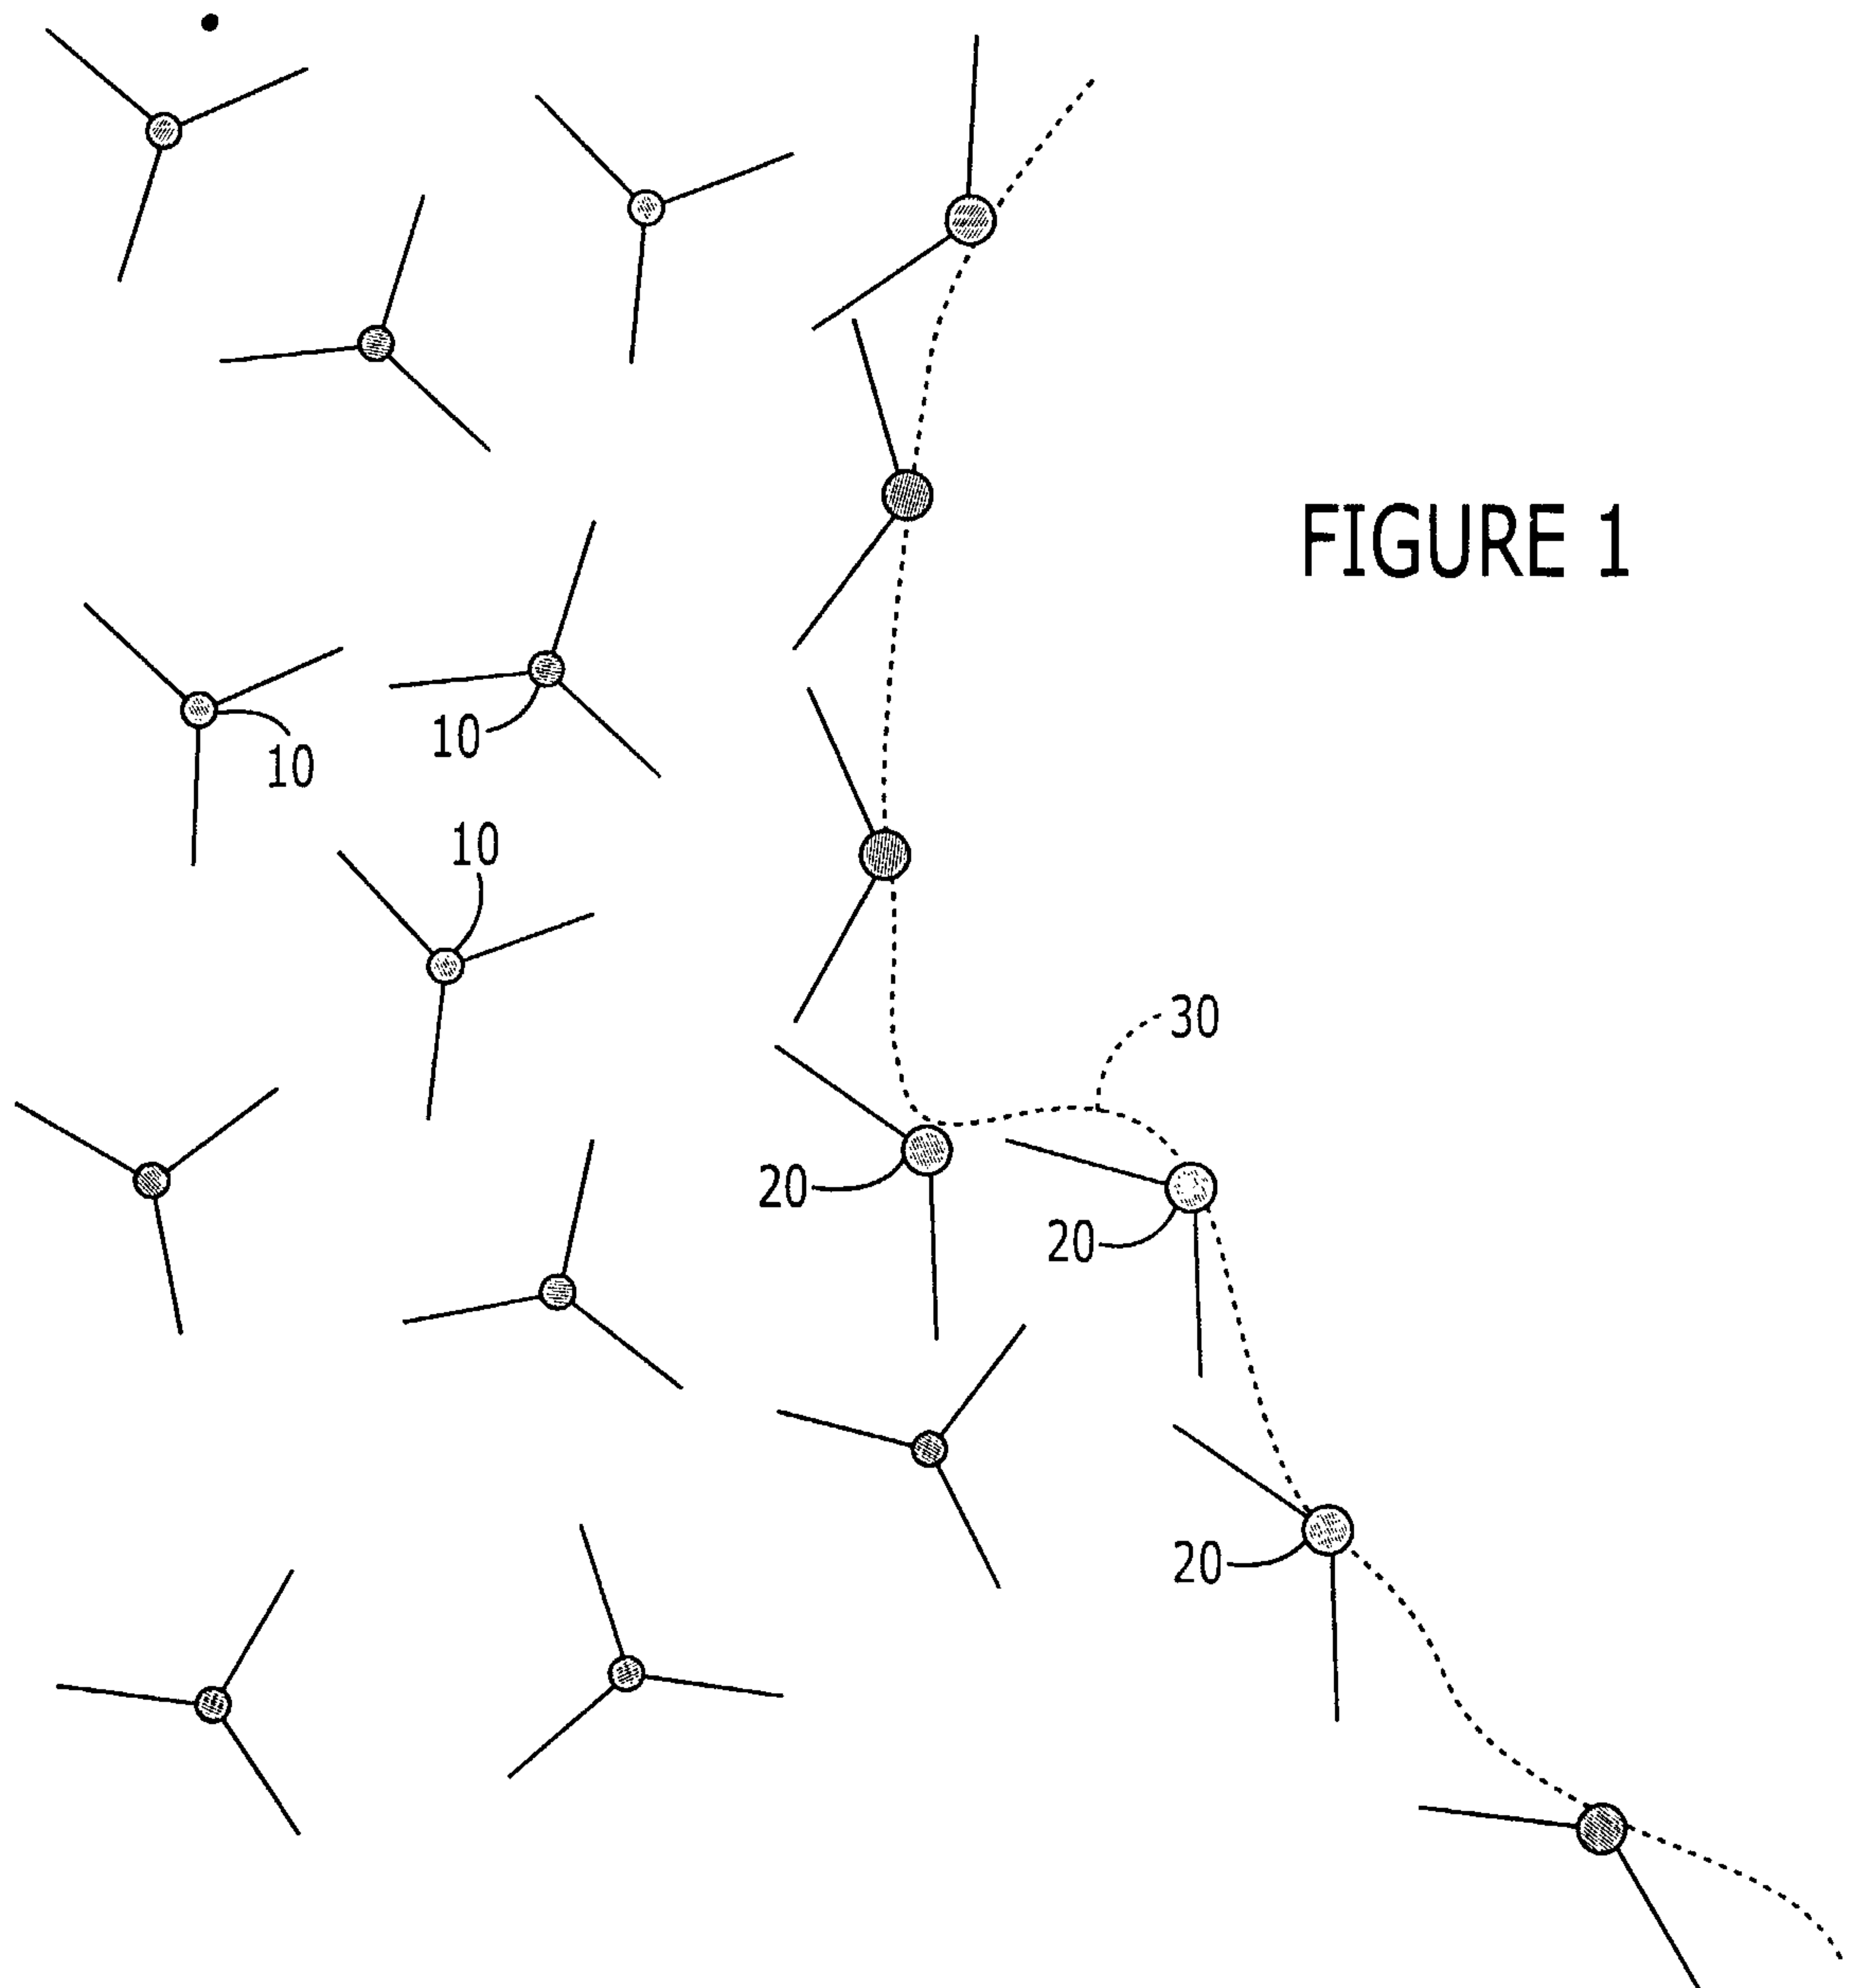

2/6

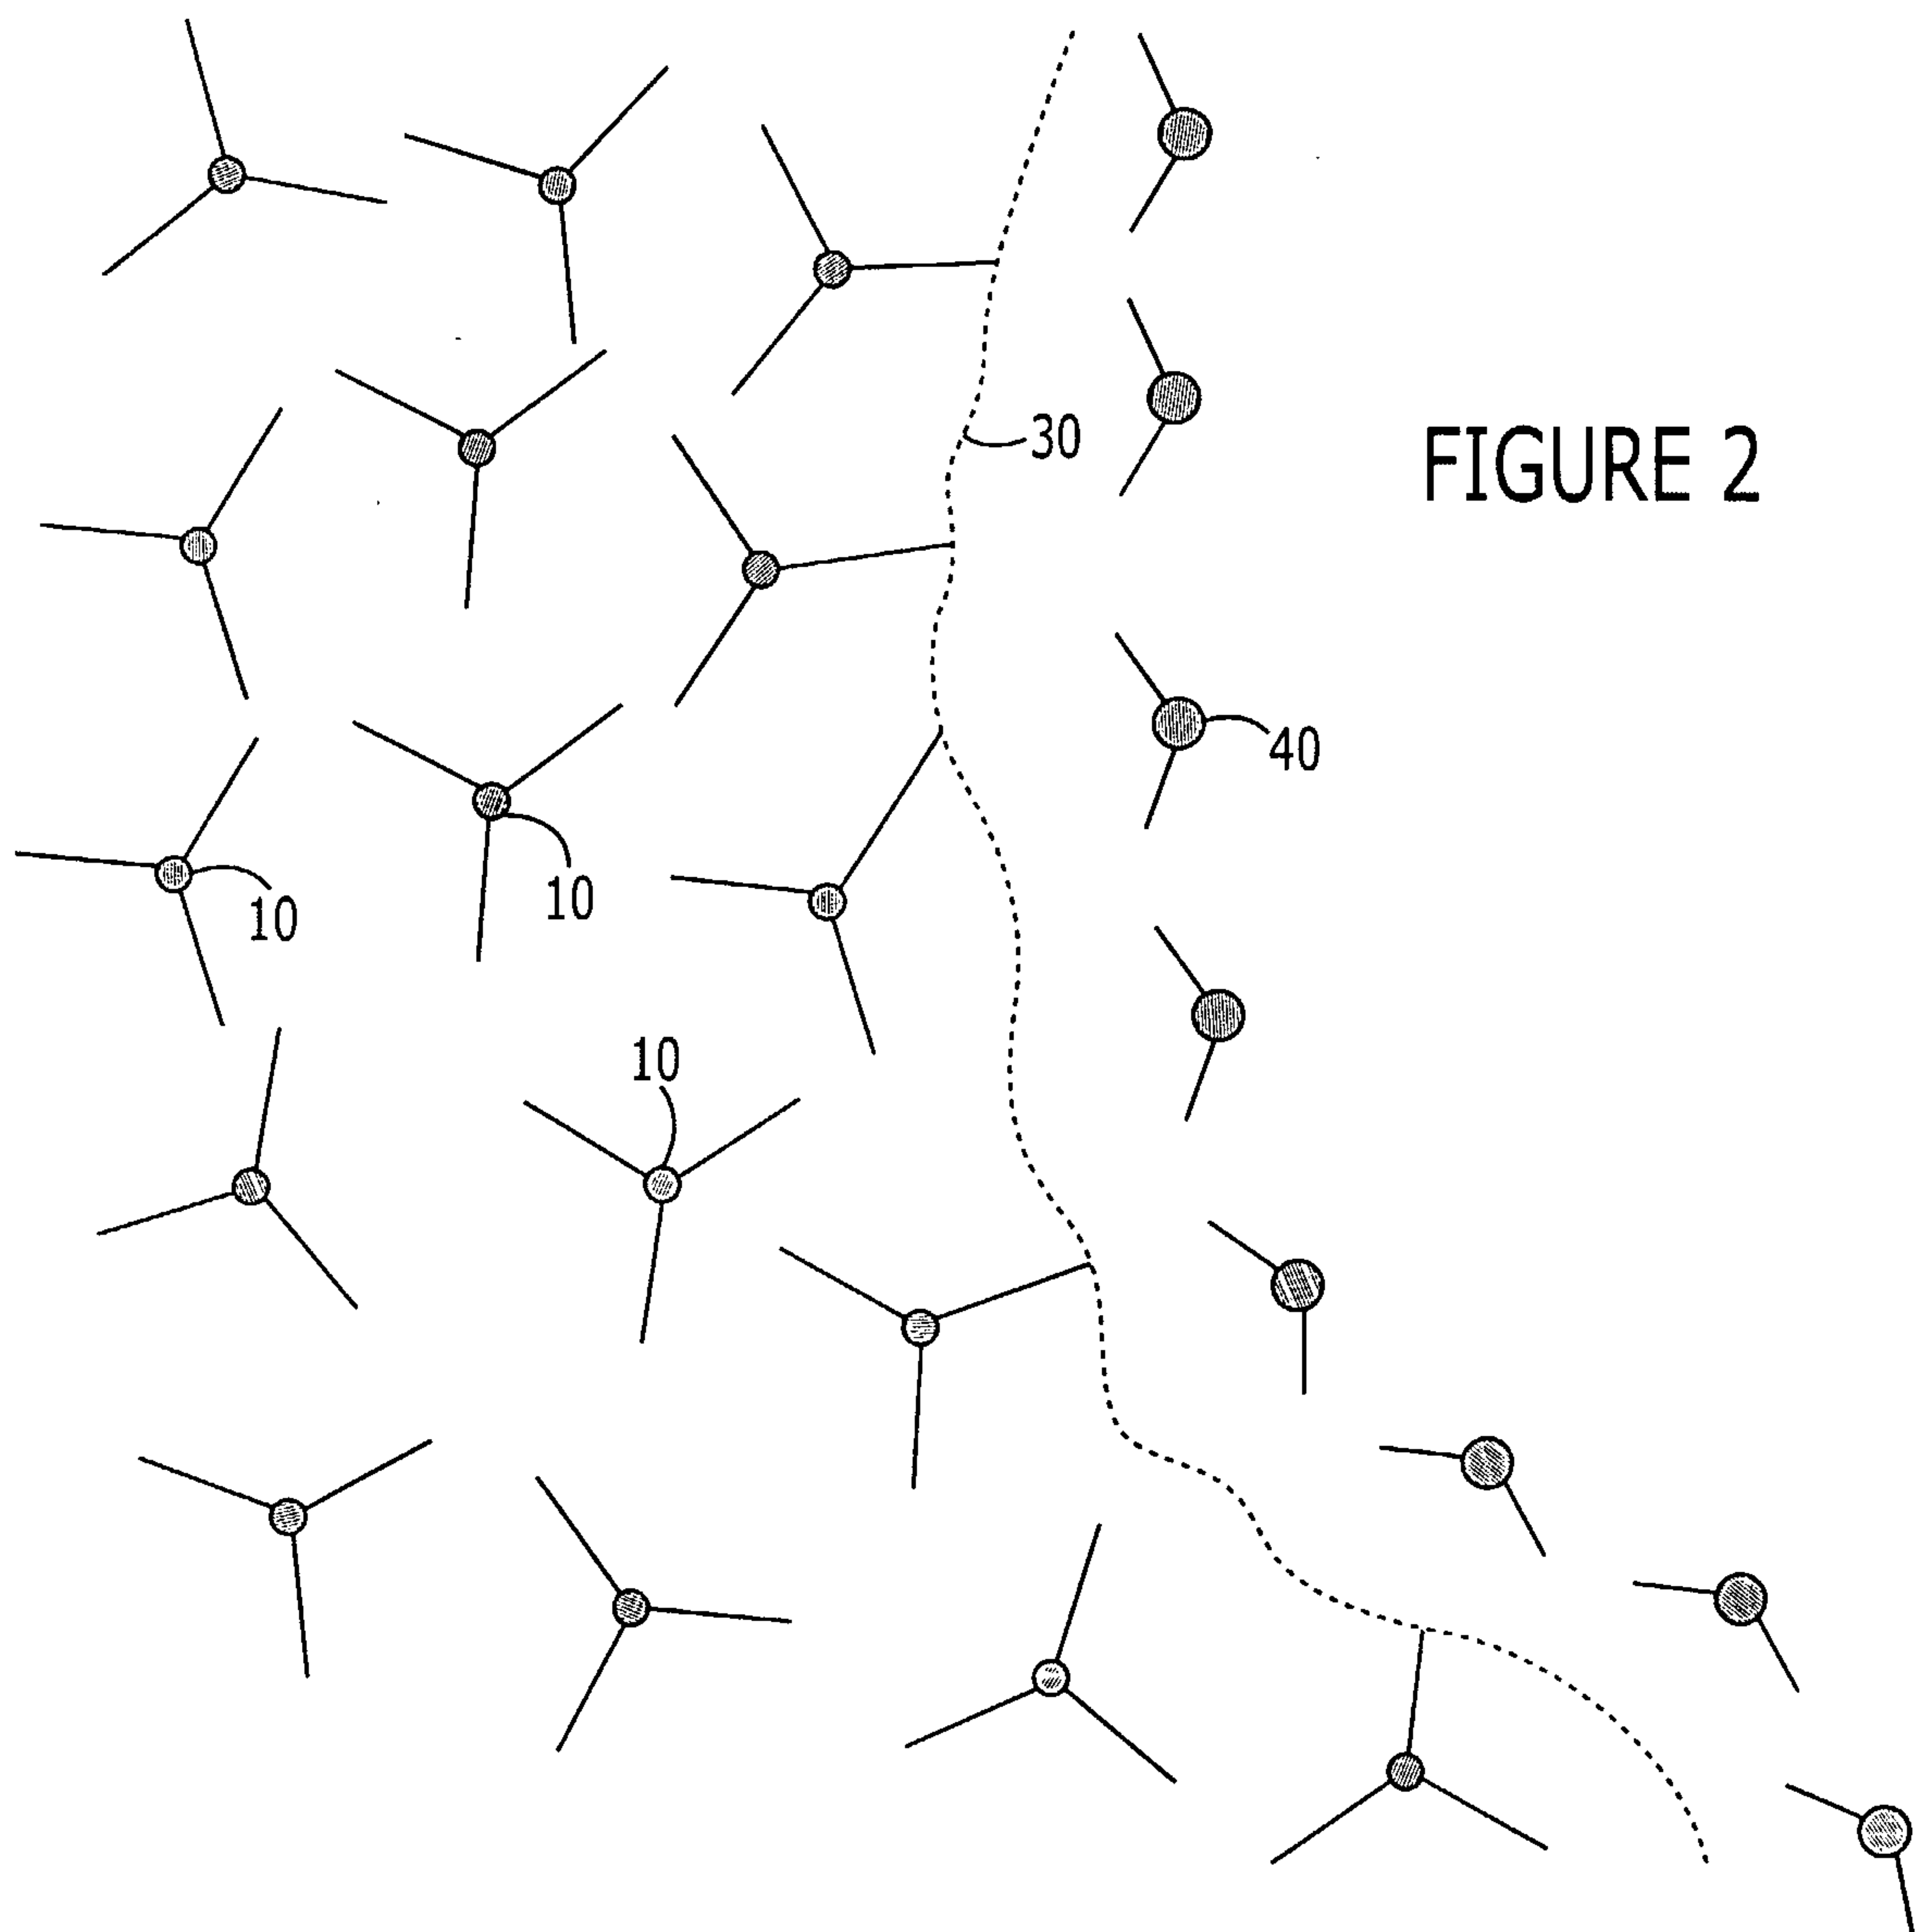

3/6

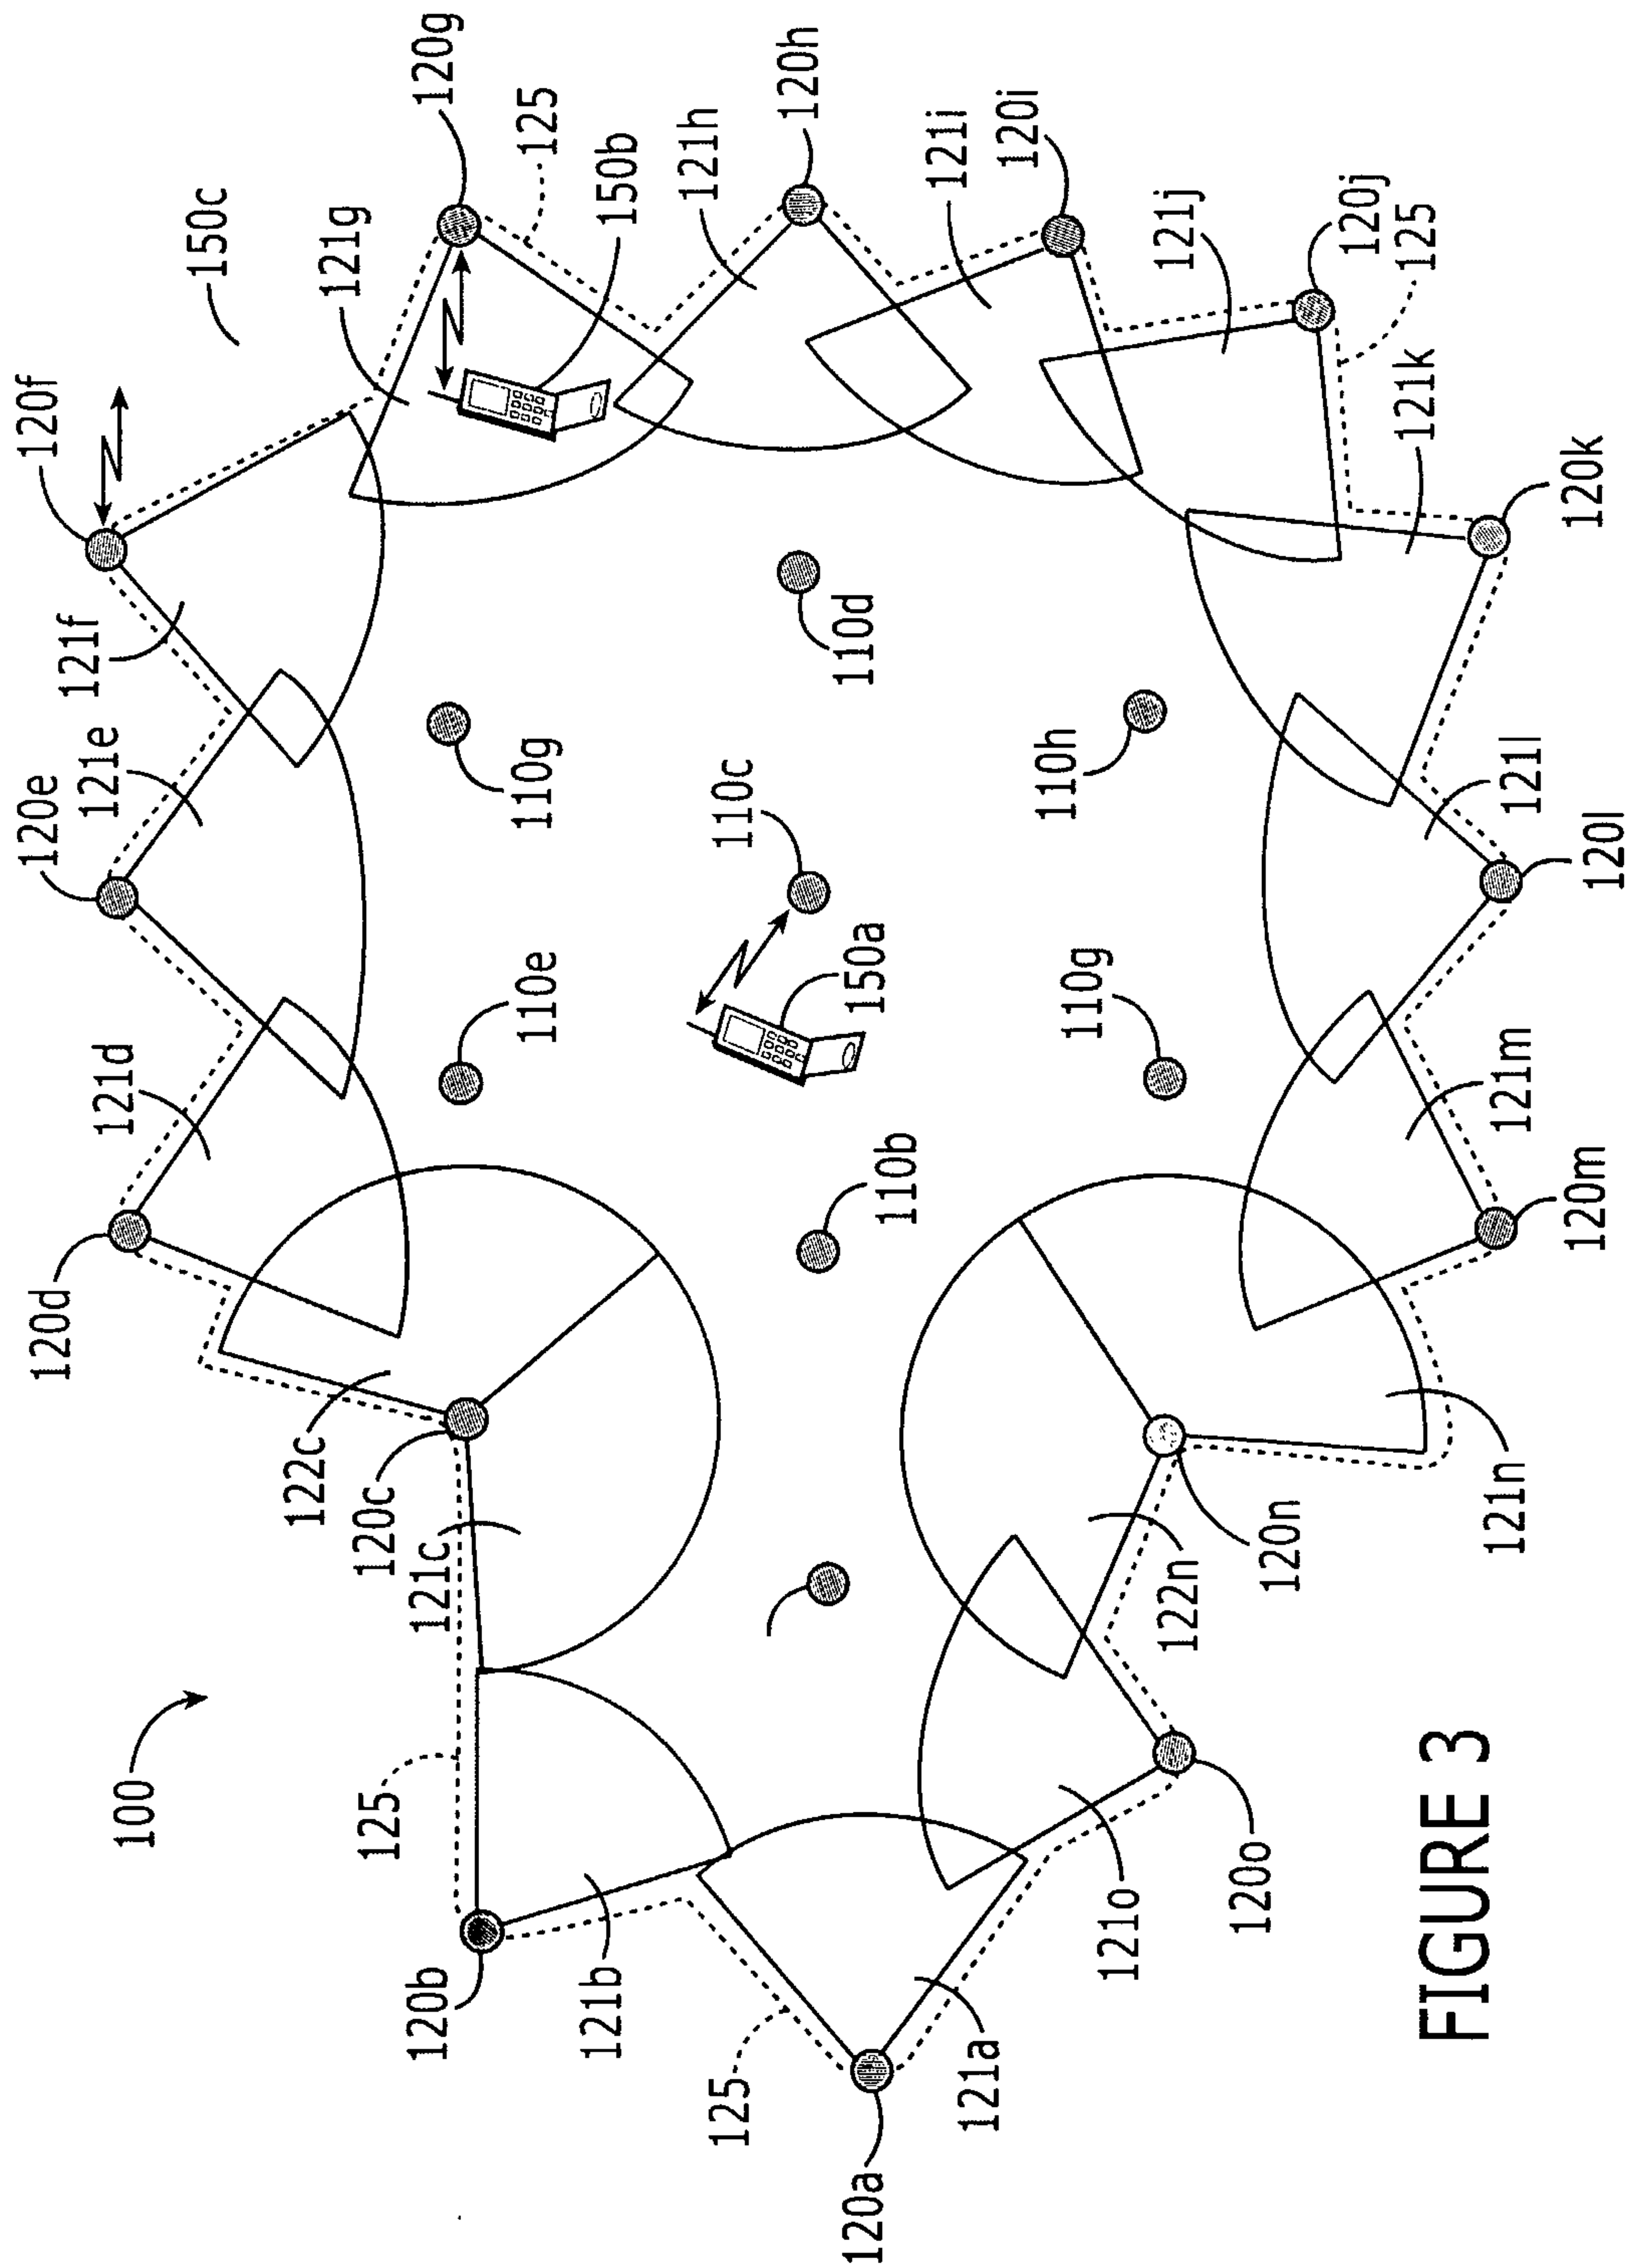


FIGURE 3

4/6

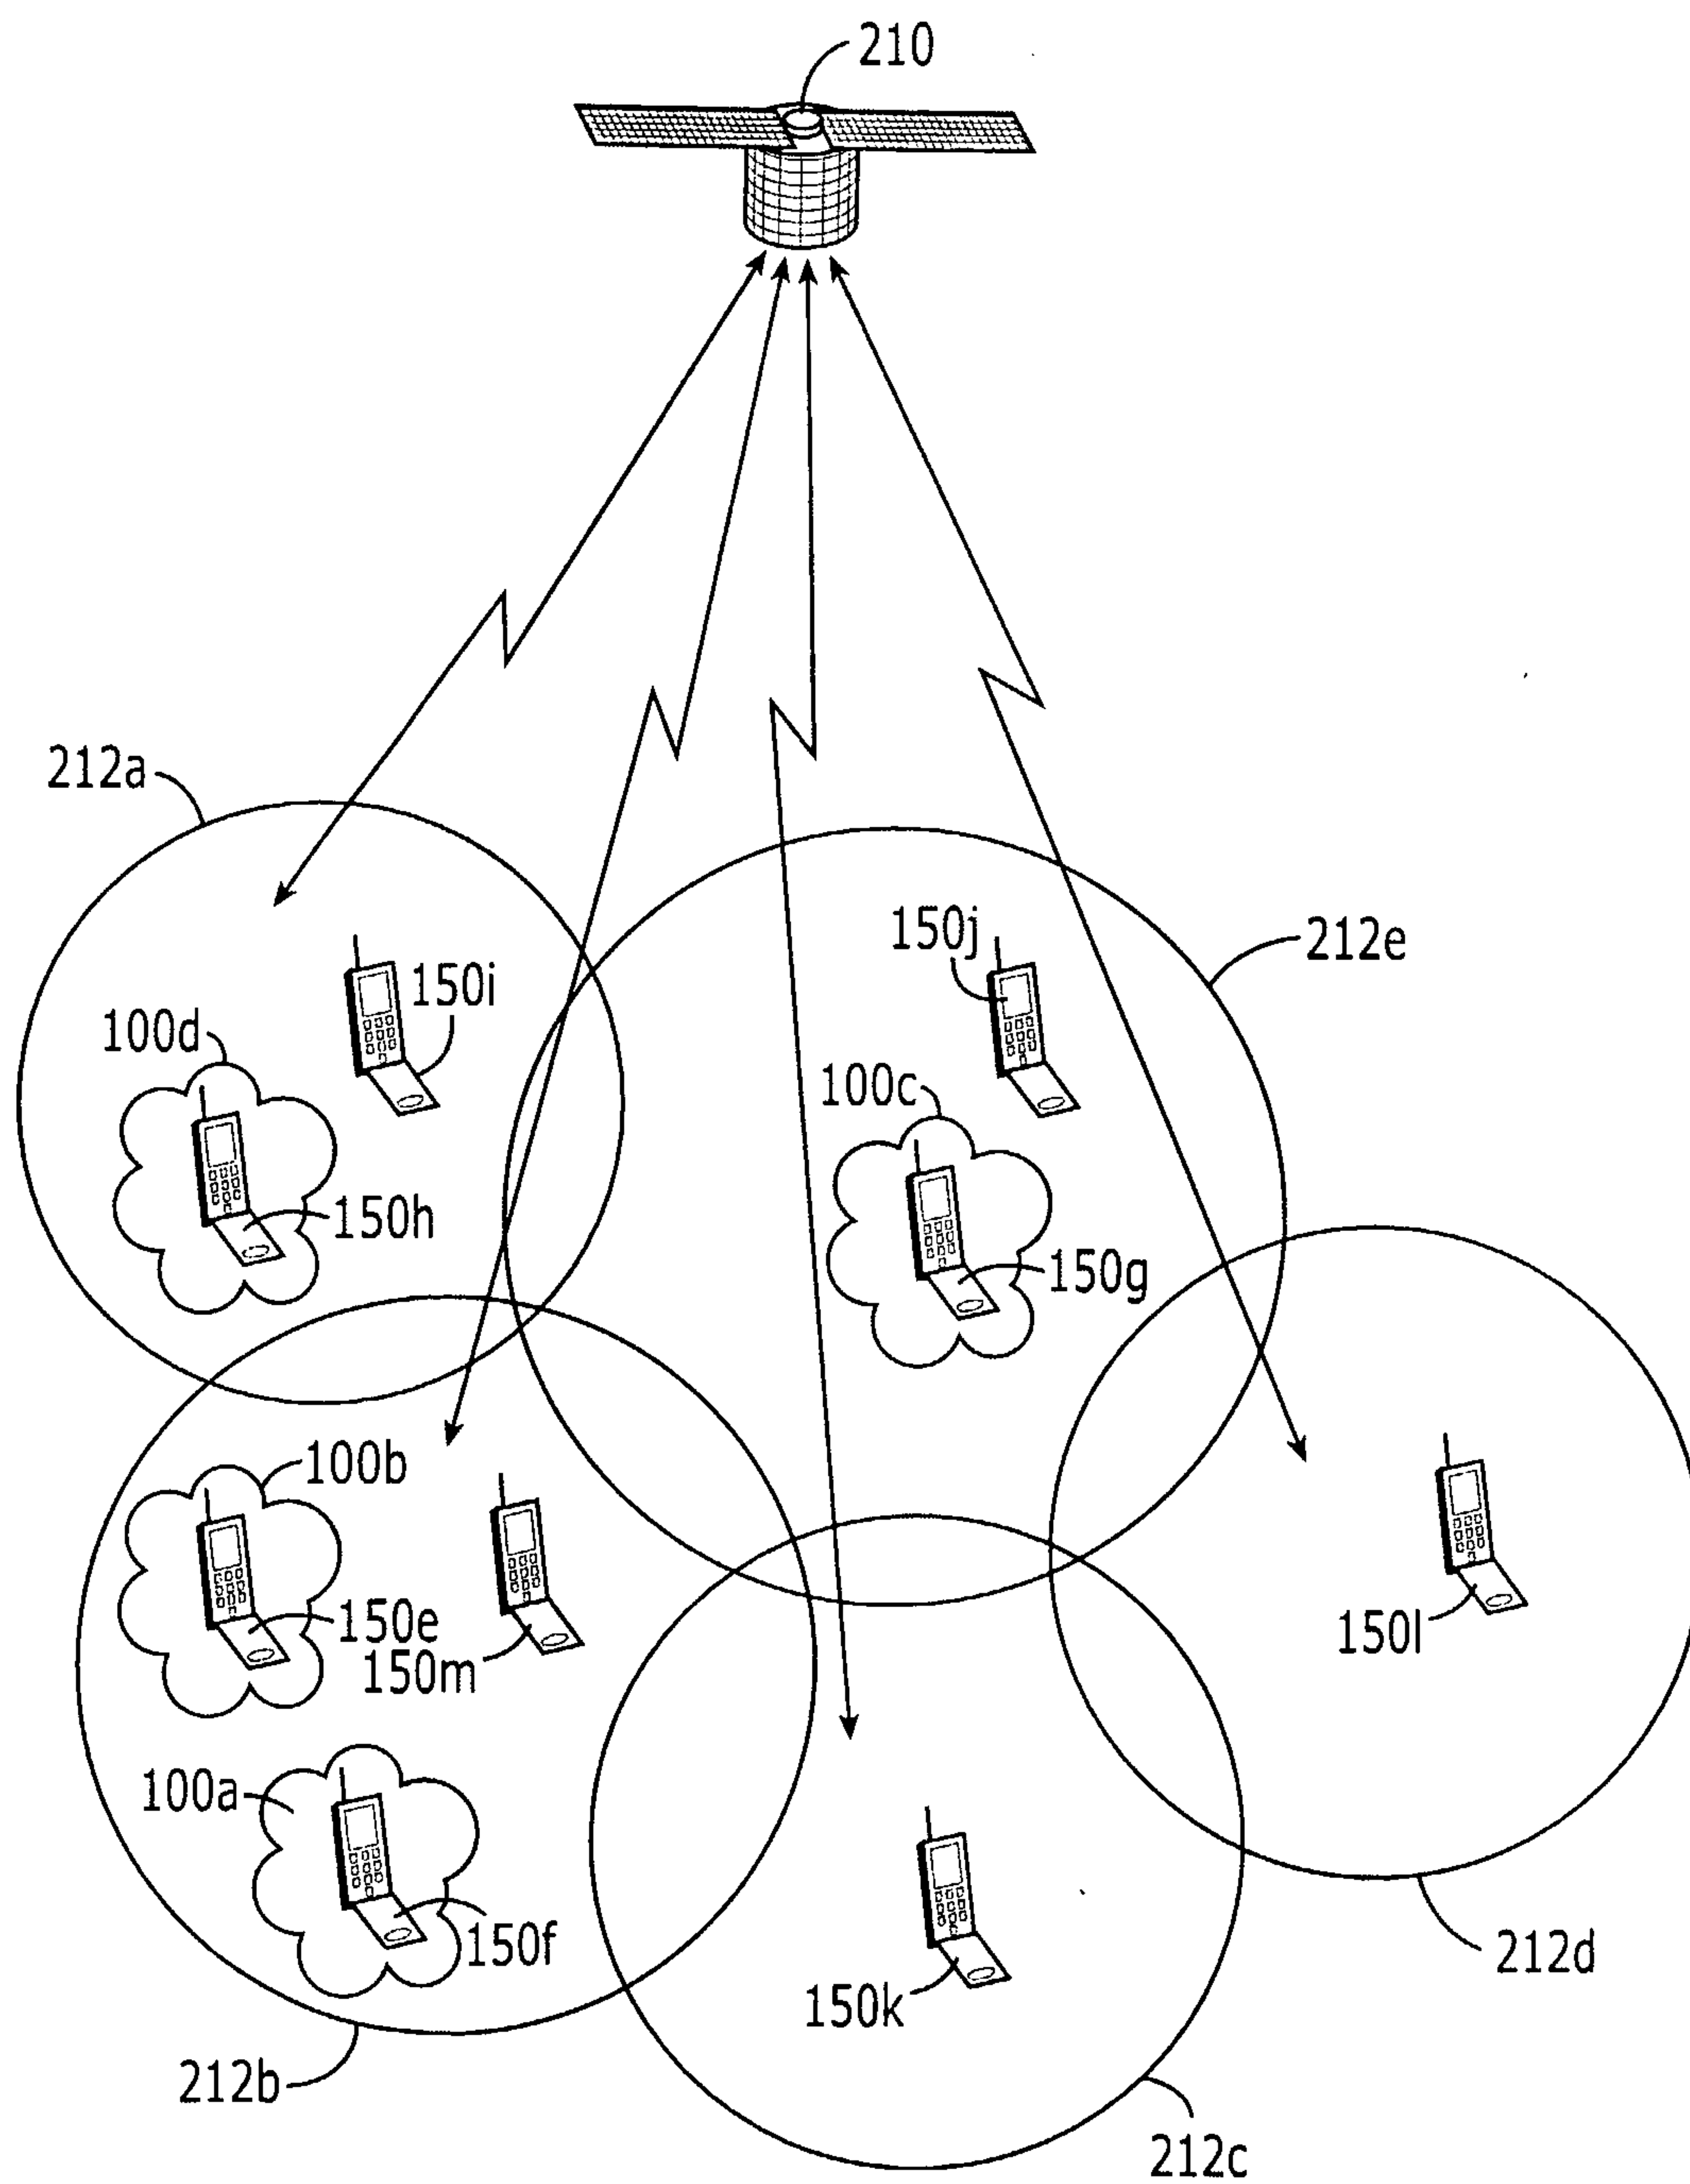


FIGURE 4

5/6

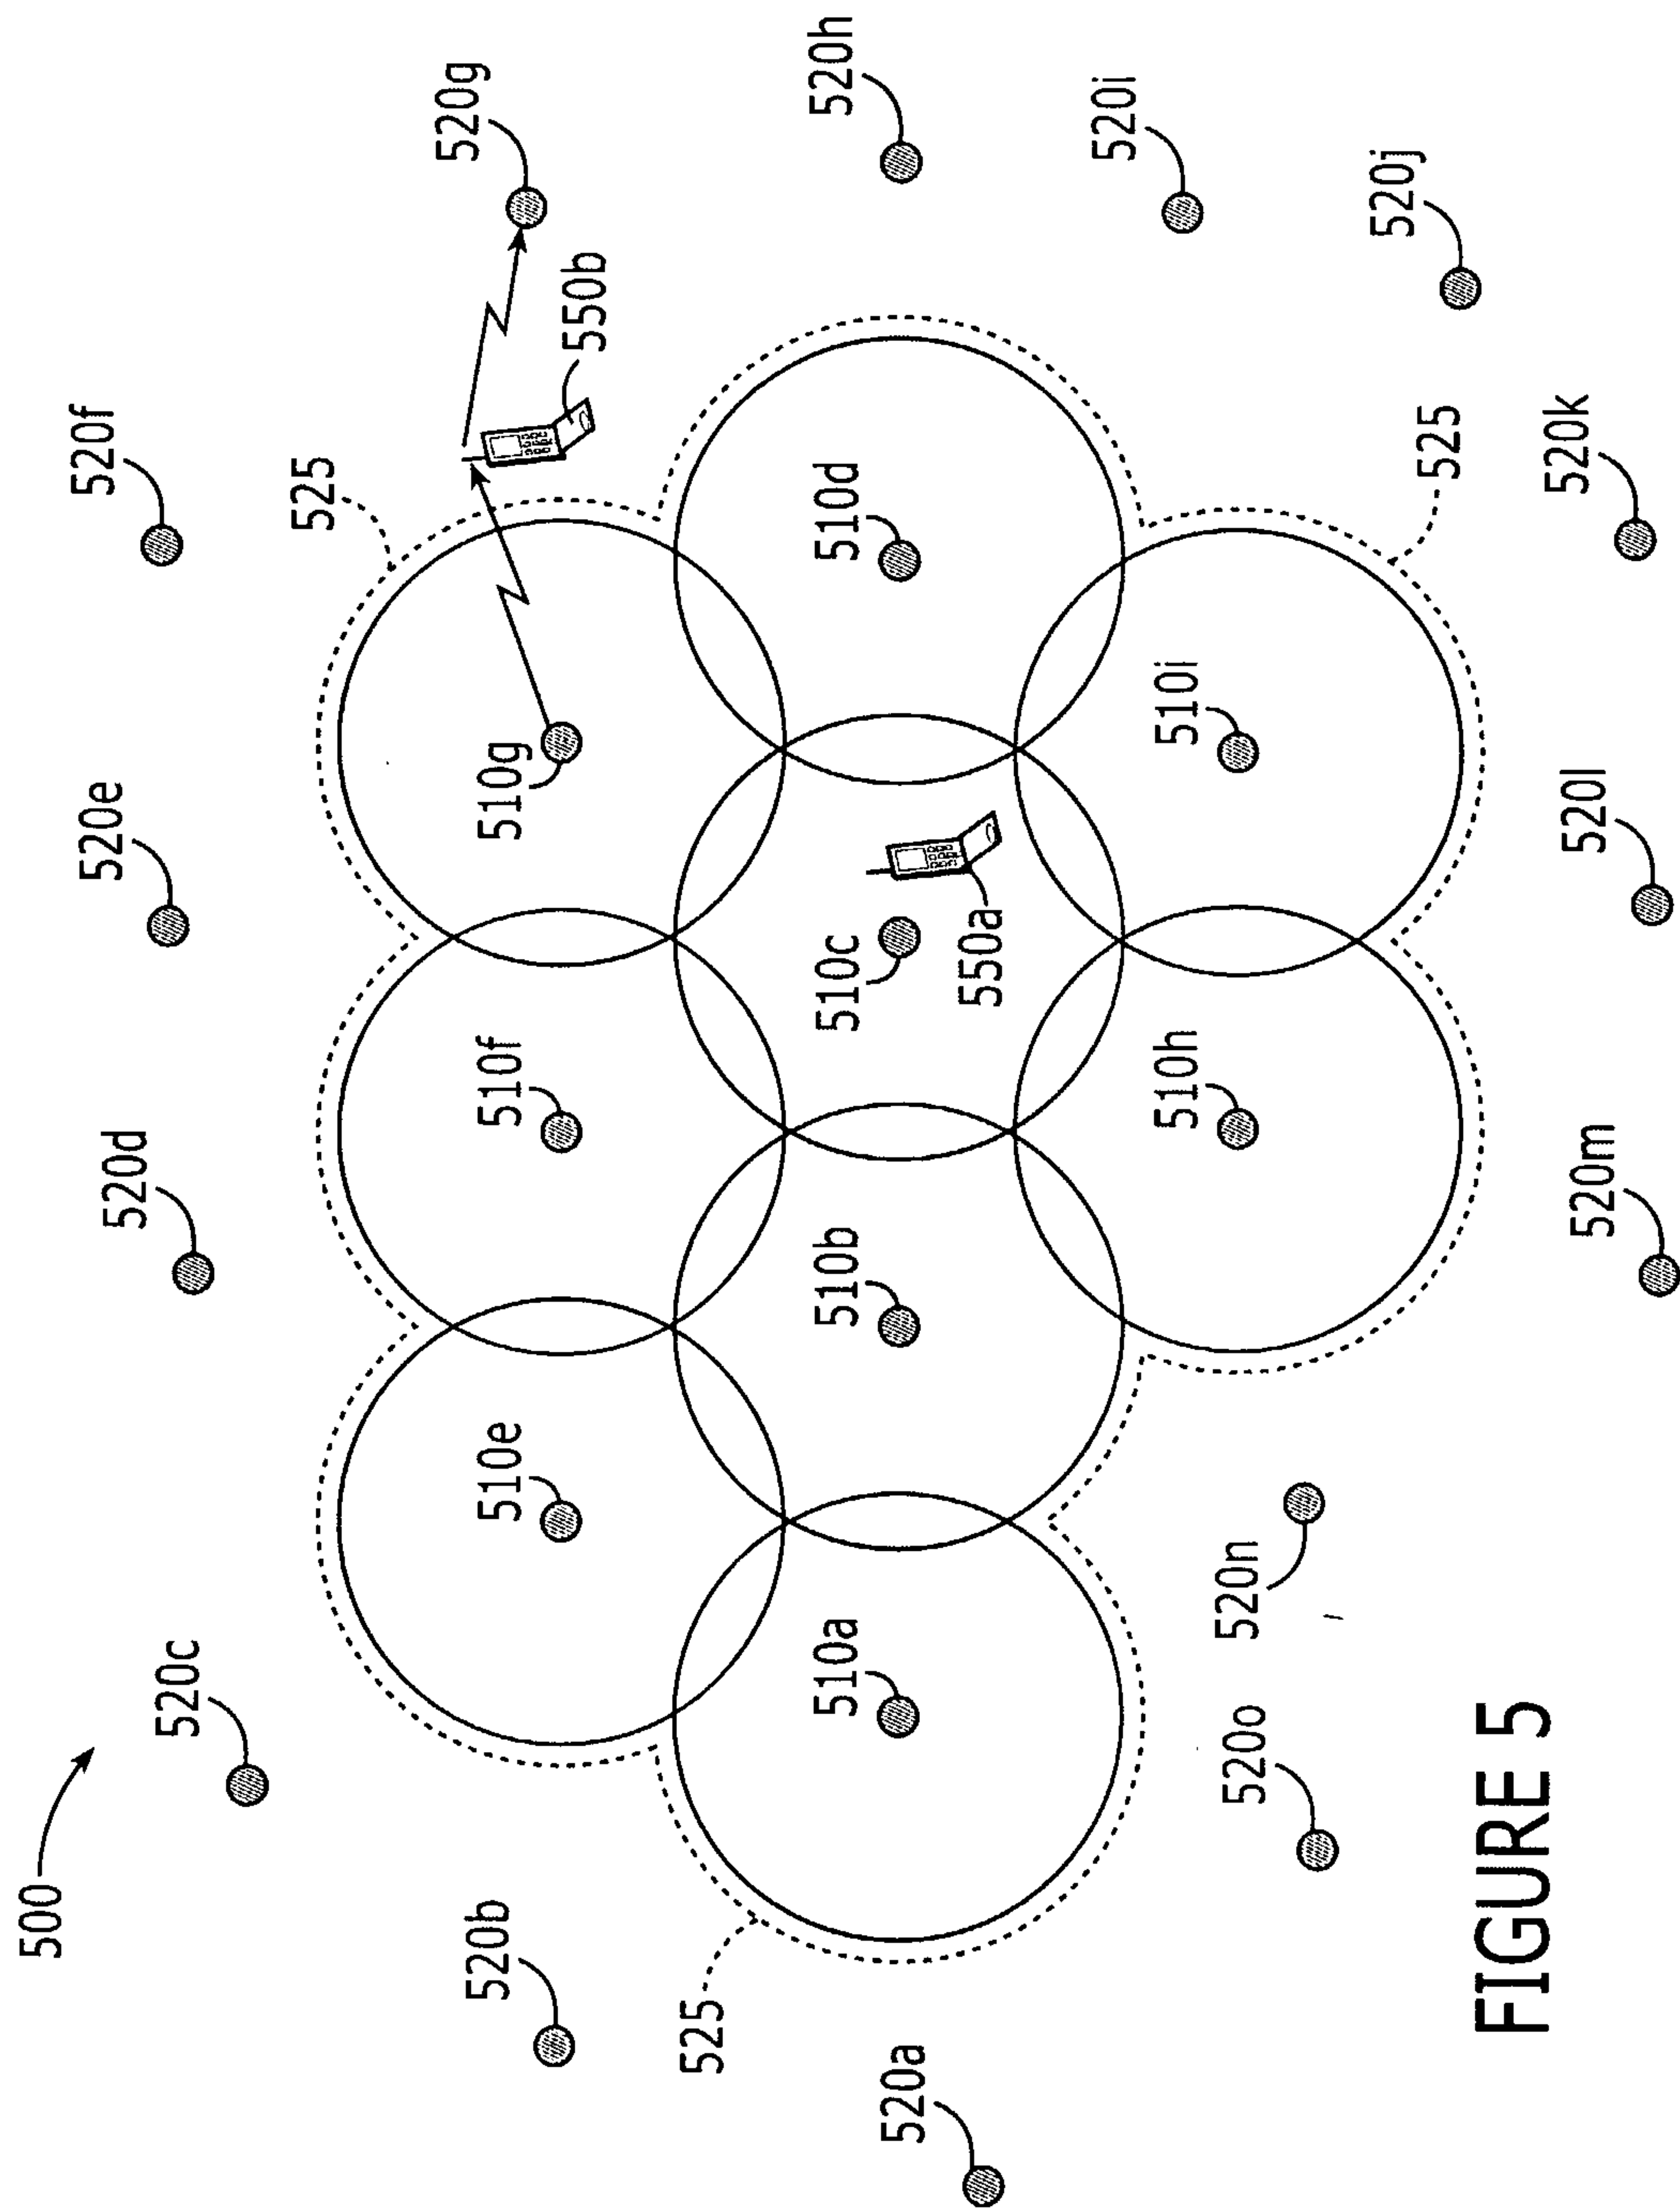


FIGURE 5

6/6

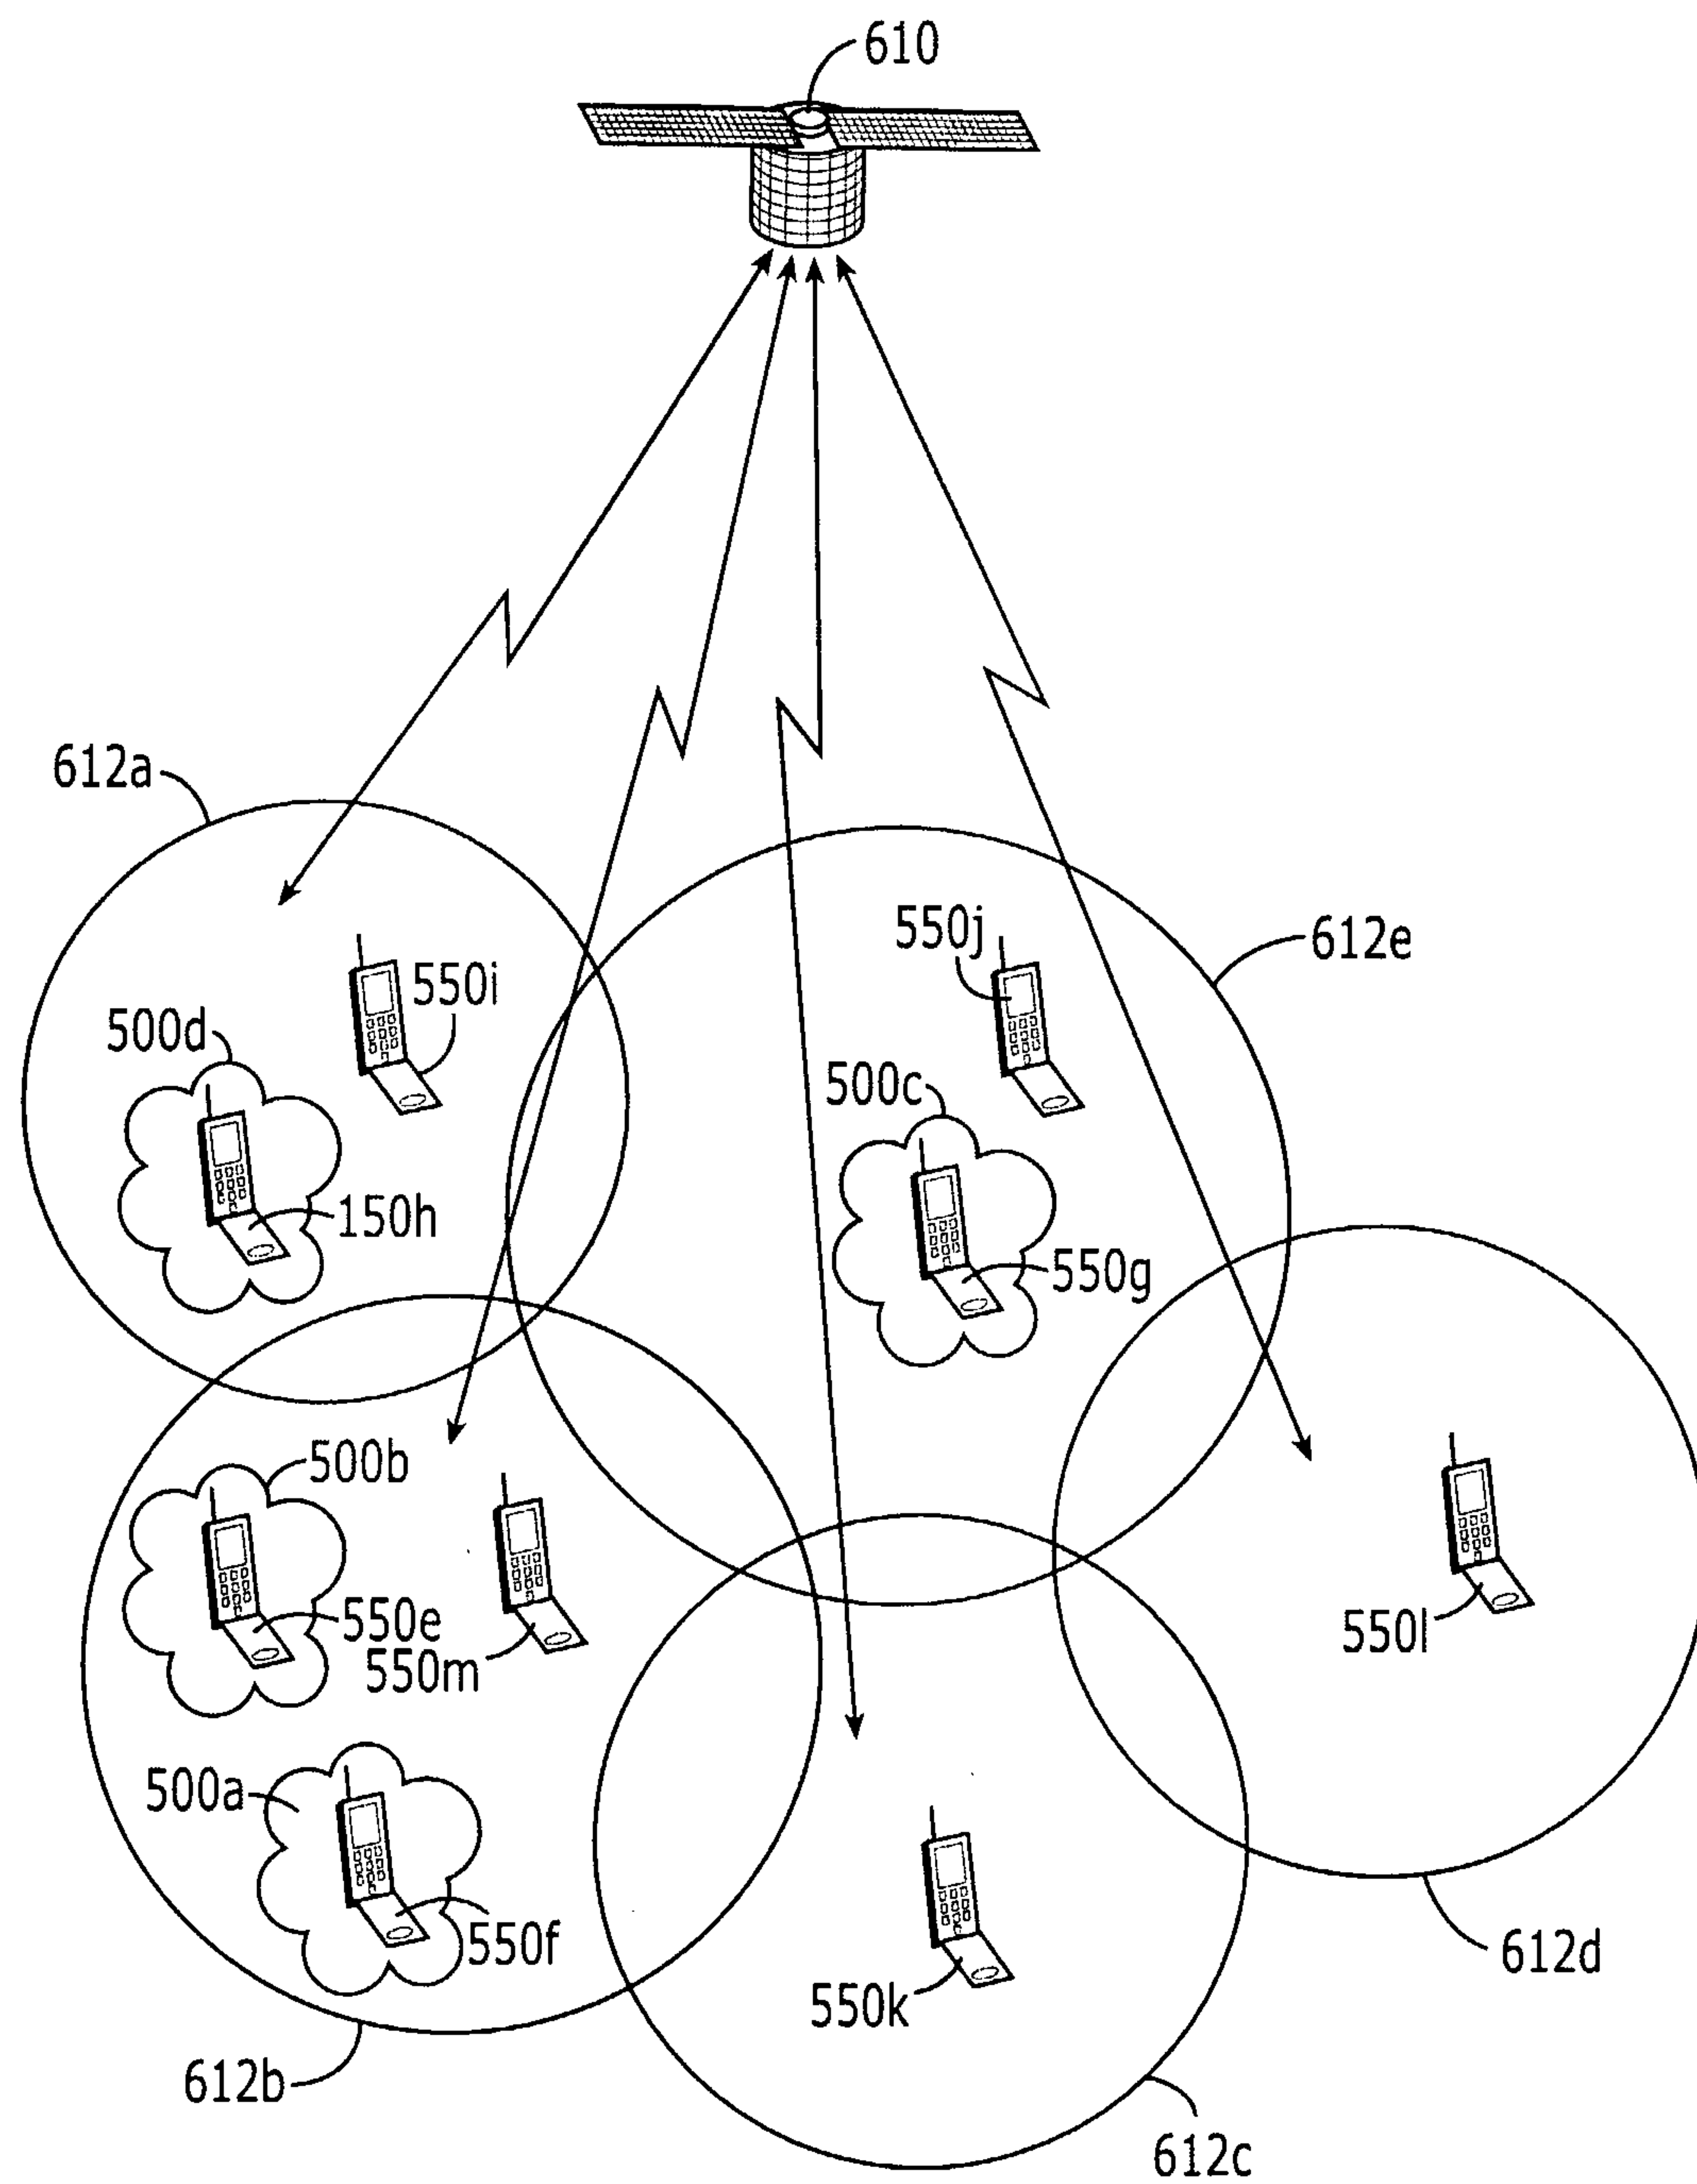


FIGURE 6

