

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 June 2006 (15.06.2006)

PCT

(10) International Publication Number
WO 2006/062757 A1

(51) International Patent Classification:

A61M 25/00 (2006.01) A61B 17/22 (2006.01)
A61M 25/10 (2006.01)

(21) International Application Number:

PCT/US2005/043019

(22) International Filing Date:

29 November 2005 (29.11.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11/008,452 9 December 2004 (09.12.2004) US

(71) Applicant (for all designated States except US): **BOSTON SCIENTIFIC SCIMED, INC.** [US/US]; One Scimed Place, Maple Grove, MN 55311 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GRIFFIN, Stephen** [IE/US]; 6226 Valroy Drive, San Jose, CA 95123 (US). **CHAN, Huey Quoc** [US/US]; 1784 Lochness Way, San Jose, CA 95121 (US). **LIM, Elaine** [US/US]; 5493 Reseda Circle, Fremont, CA 94538 (US). **TO, Nhan Hue** [US/US]; 2790 Sand Point Court, San Jose, CA 95121 (US).

(74) Agent: **CROMPTON, David M.**; Crompton, Seager & Tufte, LLC, 1221 Nicollet Avenue, Suite 800, Minneapolis, MN 55403 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CATHETER INCLUDING A COMPLIANT BALLOON

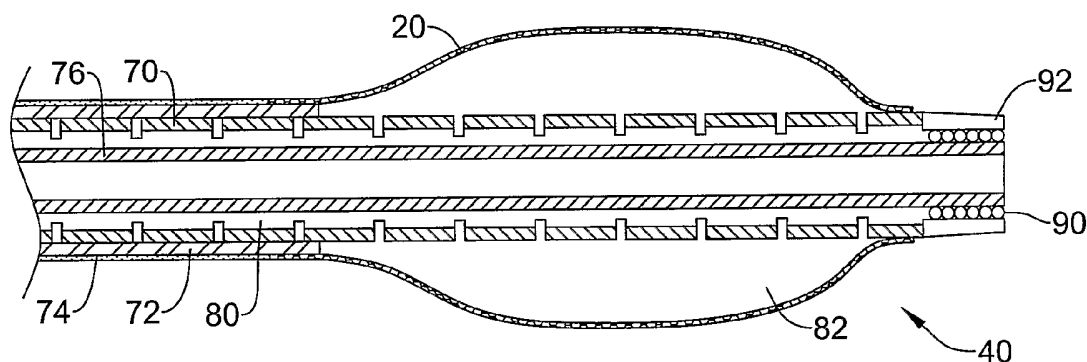

(57) Abstract: A catheter (10) having an elongate shaft including a plurality of apertures disposed along at least a length of the shaft to facilitate bending. The catheter (10) includes an inflatable balloon (20), wherein a subset of the plurality of apertures (100) provides fluid communication from an inflation lumen (80) to the inflatable balloon (20).

CATHETER INCLUDING A COMPLIANT BALLOON

Field of the Invention

The present invention generally relates to medical devices for navigating body
5 lumens. More specifically, the present invention relates to flexible medical devices
for providing an inflatable balloon in a body lumen during a medical procedure.

Background of the Invention

Medical devices such as intravascular and endovascular catheters are
10 commonly used in medical procedures such as treatment of aneurysms, arteriovenous
malformations (AVM), arteriovenous fistulae (AVF), as well as, intracranial
procedures, neurological procedures, radiological procedures, and peripheral vascular
procedures. There is an ongoing need to develop medical devices possessing
improved characteristics in order to facilitate navigation of the tortuous vasculature of
15 the human body during a medical procedure.

Summary of the Invention

The present invention provides a medical device having improved
characteristics for use during a medical procedure. The present invention includes an
20 elongate shaft having a plurality of apertures formed along the length of the shaft to
increase and/or control catheter flexibility and facilitate bending. An inflatable
balloon may be placed at a distal portion of the elongate shaft and a hub assembly
may be placed at a proximal portion of the elongate shaft. The hub assembly may
include an inflation port in fluid communication with the inflatable balloon. There
25 may be a polymer layer disposed along the portion of the shaft between the hub
assembly and the inflatable balloon. The polymer layer covers the apertures along
this portion to provide a fluid tight seal within the elongate shaft, while any apertures
located on the portion of the elongate shaft including the hub assembly and the
inflatable balloon remain unobstructed. Therefore, an inflation passageway is formed
30 from the hub assembly, through the lumen of the elongate shaft, through the
unobstructed apertures to the inflatable balloon.

Brief Description of the Drawings

The invention may be more completely understood in consideration of the following detailed description of various embodiments of the invention in connection with the accompanying drawings, in which:

5 Figure 1 is a plan view of a balloon catheter in accordance with an embodiment of the invention;

 Figure 2A is a cross-section taken along line 2A-2A in Figure 1;

 Figure 2B is a cross-section taken along line 2B-2B in Figure 1;

10 Figure 3 is a cross-sectional view of the distal portion of a balloon catheter in accordance with an embodiment of the invention;

 Figure 4 is a partially sectioned view of the distal portion of a balloon catheter as embodied in Figure 3;

 Figures 5-8 are alternate embodiments of a portion of the catheter in accordance with the invention;

15 Figure 9 is a cross-sectional view of the proximal portion of a catheter in accordance with an embodiment of the invention;

 Figure 10 is a cross-sectional view of the proximal portion of another catheter in accordance with an embodiment of the invention and

20 Figure 11 is a cross-sectional view of the proximal portion of another catheter in accordance with an embodiment of the invention.

Detailed Description of Preferred Embodiments

The following detailed description should be read with reference to the drawings in which similar elements in different drawings are numbered the same.

25 The detailed description and the drawings, which are not necessarily to scale, depict illustrative embodiments and are not intended to limit the scope of the invention.

 Figure 1 generally shows a catheter 10 within the scope of the invention. In a preferred embodiment, the catheter 10 can include a distal portion 40 including an inflatable balloon 20 and a proximal portion 30 including a hub assembly 50. The
30 catheter 10 can also include an elongate shaft 15 extending from the proximal portion 30 to the distal portion 40. The catheter 10 may have a length that is in the range of about 50 centimeters to about 250 centimeters.

 Figure 2A shows a cross-section of catheter 10 taken along line 2A-2A. As shown in Figure 2A, the elongate shaft 10 may include an outer tubular member 70.

The outer tubular member 70 may be formed of materials such as metals, metal alloys, polymers, metal-polymer composites, or other suitable materials. Some examples of some suitable materials may include stainless steels (e.g., 304v stainless steel), nickel-titanium alloys (e.g., nitinol, such as super elastic or linear elastic nitinol), nickel-chromium alloys, nickel-chromium-iron alloys, cobalt alloys, nickel, titanium, platinum, or alternatively, a polymer material such as a high performance polymer, or other suitable materials, and the like.

As can be better shown in Figures 5-8, outer tubular member 70 may include a plurality of apertures 100 formed along the length of outer tubular member 70 to increase the flexibility of the elongate shaft 15 to a desired level. Apertures 100 may be slots, slits, grooves, helical cuts, or the like. The spacing, depth and type of apertures 100 may be varied to control the flexure profile and torsional stiffness of the outer tubular member 70. The spacing of apertures 100 may vary gradually along outer tubular member 70, or may change incrementally. Apertures 100 may extend through the wall of the outer tubular member 70, or they may extend only partially through the wall. It is contemplated that at least some of the apertures extend through the wall of the outer tubular member 70. Apertures may be micromachined into the outer tubular member 70 by electrostatic discharge machining (EDM), chemical milling, ablation, laser cutting, saw cutting, grinding, etching, or the like. Apertures 100 may extend substantially the full length of the elongate shaft 15, or apertures may be positioned along selected portions of the elongate shaft 15 where increased flexibility is desired. Such techniques for creating apertures 100 along the outer tubular member 70 are discussed in detail in U.S. Patent Publication 2003/0069522 to Jacobsen et al., as herein incorporated by reference in its entirety.

A polymer layer 72 may be disposed about at least a portion of the outer tubular member 70. Polymer layer 72 may extend from the proximal portion 30 to the distal portion 40 of outer tubular member 70. The polymer layer may cover the apertures 100 along a portion of the outer tubular member 70, providing the outer tubular member 70 with a fluid tight seal along the portion having the polymer 72. Polymer layer 72 may be formed of a flexible material such as polyurethane, low-density polyethylene (LDPE), polyvinyl chloride, polyether block amide (PEBAX), styrene-ethylene/butylenes-styrene (SEBS), styrene-butadiene-styrene (SBS), as well as other polymers of suitable properties.

In some embodiments, part of or all of the elongate shaft 15 may be coated with a lubricious layer 74 such as a hydrophilic polymer such as polyarylene oxides, polyvinylpyrrolidones, polyvinylalcohols, hydroxyl alkyl celluloses, aligns, saccharides, caprolactones, and the like, and mixtures and combinations thereof.

5 Lubricious layer 74 may improve steerability and improve lesion crossing capability of the catheter 10. The lubricious layer 74 may be chemically bonded to polymer layer 72 or physically coated on the surface of polymer layer 72. In some embodiments, a distal portion of the catheter 10 may be coated with a hydrophilic polymer, while the more proximal portions may be coated with a fluoropolymer.

10 Lubricious layer 74 may be absent from the elongate shaft, or a portion thereof.

As shown in Figure 2A, an inner tubular member 76 may be disposed within the outer tubular member 70. The outer surface of the inner tubular member 76 is spaced away from the inner surface of the outer tubular member 70, defining an annular inflation lumen 80 therebetween. The inner tubular member 76 may extend

15 substantially the entire length of the catheter 10. The inner tubular member may provide a lumen 78 for a guidewire or delivering a medical device.

The inner tubular member 76 may be formed of materials such as metals, metal alloys, polymers, metal-polymer composites, or other suitable materials. Some examples of some suitable materials may include high-density polyethylene (HDPE),

20 low-density polyethylene (LDPE), silicon, fluoropolymer, liquid crystal polymer (LCP), polyimide, polyamide, polyester, polyethylene (PE), polypropylene, polyvinyl chloride (PVC), polyfluorocarbon, polyurethane, polysulfone, ethyl vinyl acetate (EVA), polyether block amide (PEBAX), styrene-ethylene/butylenes-styrene (SEBS), styrene-butadiene-styrene (SBS), polyethylene terephthalate (PET), and their

25 mixtures, alloys, blends, copolymers, and block copolymers.

Figure 2B shows a cross-section taken along line 2B-2B at distal portion 40 of catheter 10. Distal portion 40 includes inflatable balloon 20 disposed about elongate shaft 15. In one embodiment, the inflatable balloon 20 is a compliant inflatable membrane with elastomeric properties. Inflatable balloon 20 may be formed of a

30 urethane polymer or a thermoplastic rubber elastomer, such as Chronoprene™, available from CardioTech International, Inc. The balloon 20 may be expandable between a collapsed configuration and an inflated configuration. Upon inflation, the balloon 20 may conform to the shape of the interior of a body lumen in which the catheter 10 is disposed, such as a blood vessel. In the collapsed configuration (not

shown), the balloon 20 may be collapsed about the distal portion 20 of the catheter 10 to create a low profile. As can be seen in Figure 2B, at least a portion of the outer tubular member 70 of the elongate shaft 15 proximate the inflatable balloon 20 is free of the polymer layer 72. As can more clearly be seen in Figure 4, apertures 100 along the portion of the outer tubular member 70 including the balloon 20 are free of the polymer layer 72. Unobstructed apertures 100 may be a subset of the apertures 100 extending along the length of the outer tubular member 70. Unobstructed apertures 100 along distal balloon section 25 are preferably formed during the same process as forming apertures 100 along the length of the outer tubular member 70, as discussed above. Unobstructed apertures 100 in distal balloon section 25 allow for fluid communication between the interior of the balloon 82 and inflation lumen 80. Inflation of the balloon 20 will be described in more detail with regard to Figures 3 and 4.

Figures 3 and 4 show a distal portion 40 of the catheter 10. Figure 3 shows a cross-sectional view of the distal portion 40, while Figure 4 shows a plan view of distal portion 40 with inflatable balloon 20 shown in cross-section. The distal portion 40 of the catheter 10 includes a distal balloon section 25 free of the polymer layer 72. The distal balloon section 25 may extend substantially the length of the balloon 20 or a portion thereof. The distal balloon section 25 includes a subset of apertures 100 formed about outer tubular member 70. At least some of apertures 100 in distal balloon section 25 extend through the wall of outer tubular member 70. Unobstructed apertures 100 in the distal balloon section 25 provide fluid communication between the interior of the balloon 82 and inflation lumen 80. Further, it is noted that flexibility under the balloon can be dramatically increased by the combination of multiple apertures and lack of polymer coating, which would tend to reduce flexibility. Further, the multiple apertures allow for quick inflation/deflation of the balloon.

A distal tip 92 may be placed distal of the balloon 20. Inner tubular member 76 may extend into distal tip 92. Distal tip may include a coil 90 to provide flexibility during navigation of the tortuous vasculature. Distal tip 92 may occlude the distal end of inflation lumen 80 to provide a fluid-tight passageway along the length of elongate shaft 15 to inflatable balloon 20. Distal tip may include radiopaque material. Radiopaque materials are understood to be materials capable of producing a relatively bright image on a fluoroscopy screen or other imaging technique during a medical

procedure. Some examples of radiopaque materials may include, but are not limited to, gold, platinum, palladium, tantalum, tungsten alloy, plastic material loaded with a radiopaque filler, and the like.

Figure 9 shows one embodiment of the proximal portion 30 of the catheter 10. Proximal portion 30 includes a hub assembly 50. Hub assembly 50 includes hub 52 disposed about a portion of elongate shaft 15. Outer tubular member 70 extends into at least a portion of hub 50. Inner tubular member 76 may extend into at least a portion of hub 50 and may provide a working lumen 78 extending to the proximal end of hub 52 for use during a medical procedure. As shown in Figure 9, polymer layer 72 may terminate distal of the hub assembly 50. Termination of polymer layer 72 distal of hub assembly 50 provides a proximal segment 27 of outer tubular member 70 free of the polymer layer 72. Proximal segment 27 may include a plurality of apertures 100 disposed along outer tubular member 70 unobstructed by the polymer layer 72. Unobstructed apertures 100 may be a subset of the apertures 100 extending along the length of the outer tubular member 70. Unobstructed apertures 100 along proximal segment 27 are preferably formed during the same process as forming apertures 100 along the length of the outer tubular member 70, as discussed above. At least some of apertures 100 disposed along proximal segment 27 extend through the wall of outer tubular member 70. The hub assembly 50 may also include an inflation port 81. Inflation port 81 may be disposed about at least a portion of the elongate shaft 15 including the proximal segment 27 having unobstructed apertures 100. Unobstructed apertures 100 in proximal segment 27 provide fluid communication between inflation port 81 and inflation lumen 80 of catheter 10.

Figure 10 shows another embodiment of the proximal portion 30 of the catheter 10 in accordance with the invention. In this embodiment, polymer layer 72 extends into at least a portion of the hub assembly. However, proximal segment 27 adjacent to inflation port 81 is free of the polymer layer 72, such that a plurality of apertures 100 are unobstructed by the polymer layer 72 along proximal segment 27.

Figure 11 shows another embodiment of the proximal portion 30 of the catheter 10 in accordance with the invention. Hub assembly 50 may include a hub 52 and an inflation port 81. Inflation port 81 is disposed about at least a portion of proximal segment 27 free of the polymer layer 72. Unobstructed apertures 100 provide fluid communication between inflation port 81 and inflation lumen 80. Inner

tubular member 76 may extend substantially to distal end of the hub 50 to provide a working lumen 78.

Those skilled in the art will recognize that the present invention may be manifested in a variety of forms other than the specific embodiments described and contemplated herein. Accordingly, departure in form and detail may be made without
5 departing from the scope and spirit of the present invention as described in the appended claims.

What we claim is:

1. A medical device comprising:

an elongate shaft including a metallic tube having a proximal end, a distal end, a length and a lumen extending therethrough, the metallic tube having an outer surface and an inner surface defining a wall therebetween; wherein the metallic tube includes a plurality of apertures extending through the wall along at least a portion of the length to facilitate bending;

a polymer layer disposed about at least a portion of the metallic tube, wherein at least a portion of the plurality of apertures are fluidly sealed, a distal portion of the metallic tube having a subset of the plurality of apertures being free of the polymer coating; and

an inflatable balloon disposed about at least the distal portion of the metallic tube having a plurality of the apertures free of the polymer coating; wherein the inflatable balloon is in fluid communication with the lumen of the metallic tube.

2. The medical device of claim 1, further comprising:

an inner tubular member disposed in at least a portion of the metallic tube, the inner tubular member having an outer surface spaced away from the inner surface of the metallic tube, defining an annular inflation lumen therebetween in fluid communication with the inflatable balloon.

3. The medical device of claim 2, further comprising:

a proximal portion of the metallic tube having a subset of the plurality of apertures being free of the polymer layer; and

a hub assembly having an inflation port disposed about at least the proximal portion of the metallic tube having a subset of the plurality of apertures being free of the polymer layer, wherein the inflation port is in fluid communication with the annular inflation lumen.

4. The medical device of claim 1, further comprising:
a proximal portion of the metallic tube having a subset of the plurality of apertures being free of the polymer layer; and
a hub assembly having an inflation port disposed about at least the proximal portion of the metallic tube having a subset of the plurality of apertures being free of the polymer layer, wherein the inflation port is in fluid communication with the inflatable balloon.
5. The medical device of claim 1, wherein the plurality of apertures are micromachined.
6. The medical device of claim 1, wherein the plurality of apertures extend substantially the length of the metallic tube.
7. The medical device of claim 2, further comprising a distal tip.
8. The medical device of claim 7, wherein the inner tubular member extends distal of the distal end of the metallic tube, wherein the distal tip includes the inner tubular member.
9. The medical device of claim 7, wherein the distal tip includes a coil.
10. The medical device of claim 7, wherein the distal tip occludes the lumen of the metallic tube at the distal end.
11. The medical device of claim 1, wherein the metallic tube is a nickel-titanium alloy.
12. The medical device of claim 1, wherein the metallic tube is a stainless steel.
13. The medical device of claim 1, wherein the polymer layer is PEBAX.

14. The medical device of claim 1, further comprising a hydrophilic coating disposed over at least a portion of the polymer layer.

15. A medical device comprising:

an elongate shaft having a proximal end, a distal end, a length and a lumen extending therethrough, the elongate shaft including a plurality of micromachined apertures along at least a portion of the length to facilitate bending;

a polymer layer disposed on at least a portion of the elongate shaft, the polymer layer fluidly sealing at least a portion of the plurality of micromachined apertures, a distal portion of the elongate shaft including at least one of the plurality of micromachined apertures being free of the polymer layer;

an inner tubular member disposed in the lumen of the elongate shaft, the inner tubular member having an outer surface and the elongate shaft having an inner surface;

an inflation lumen defined by a space between the outer surface of the inner tubular member and the inner surface of the elongate shaft;

an inflatable balloon disposed about at least the distal portion of the elongate shaft being free of the polymer layer, the inflatable balloon in fluid communication with the inflation lumen.

16. The medical device of claim 15, further comprising:

a proximal portion of the elongate shaft including at least one of the plurality of micromachined apertures being free of the polymer layer; and

a hub assembly having an inflation port disposed about at least the proximal portion of the elongate shaft being free of the polymer layer, wherein the inflation port is in fluid communication with the inflatable balloon.

17. The medical device of claim 15, wherein the micromachined apertures extend substantially the length of the elongate shaft.

18. The medical device of claim 15, further comprising a distal tip.

19. The medical device of claim 18, wherein the distal tip includes a coil.

20. The medical device of claim 18, wherein the distal tip occludes the inflation lumen at the distal end of the elongate shaft.

21. The medical device of claim 15, wherein the elongate shaft is a nickel-titanium alloy.

22. The medical device of claim 15, wherein the elongate shaft is a stainless steel.

23. The medical device of claim 15, wherein the polymer layer is PEBAX.

24. The medical device of claim 15, further comprising a hydrophilic coating disposed over at least a portion of the polymer layer.

25. A medical device comprising:

an elongate shaft including a metallic tube having a proximal end, a distal end and a lumen extending therethrough, the metallic tube having an inner surface and an outer surface defining a wall therebetween, wherein the metallic tube includes a plurality of micromachined apertures to facilitate bending extending through the wall of at least a portion of a proximal section, an intermediate section, and a distal section of the tubular member,

a polymer layer disposed about at least the intermediate section of the metallic tube, wherein a subset of the plurality of micromachined apertures are fluidly sealed, the proximal section and the distal section being free of the polymer layer,

an inner tubular member disposed in the lumen of the metallic tube, the inner tubular member having an outer surface,

an annular inflation lumen defined by a space between the outer surface of the inner tubular member and the inner surface of the metallic tube,

a hub assembly including an inflation port disposed about at least the proximal section of the metallic tube,

an inflatable balloon disposed about at least the distal section of the metallic tube, and

an inflation passageway defined by the inflation port, the plurality of micromachined apertures of the proximal section of the metallic tube, the annular

inflation lumen, the plurality of micromachined apertures of the distal section of the metallic tube, and the inflatable balloon.

26. The medical device of claim 25, wherein the metallic tube is a nickel-titanium alloy.

27. The medical device of claim 25, wherein the metallic tube is a stainless steel.

28. The medical device of claim 25, wherein the polymer layer is PEBAX.

29. The medical device of claim 25, further comprising a hydrophilic coating disposed over at least a portion of the polymer layer.

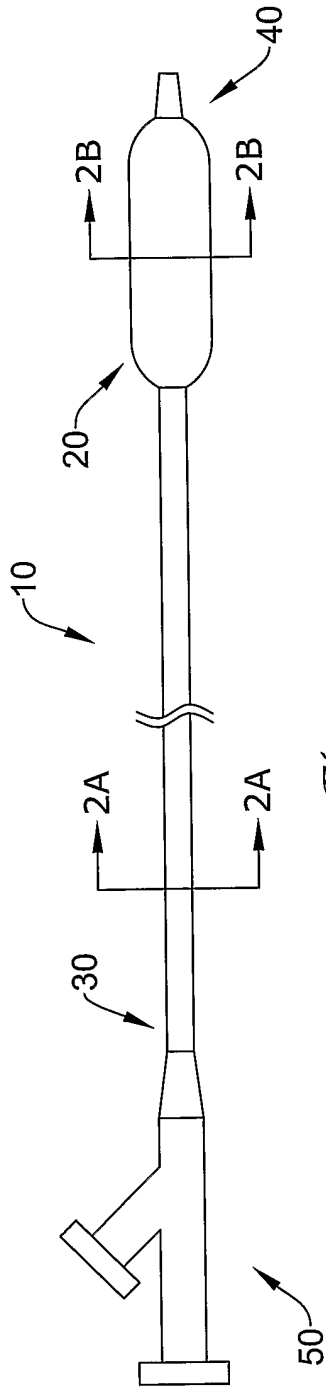


Figure 1

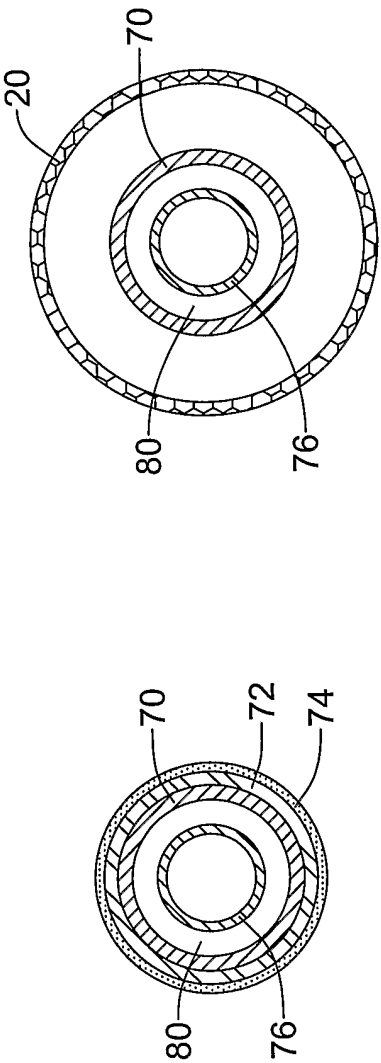


Figure 2A

Figure 2B

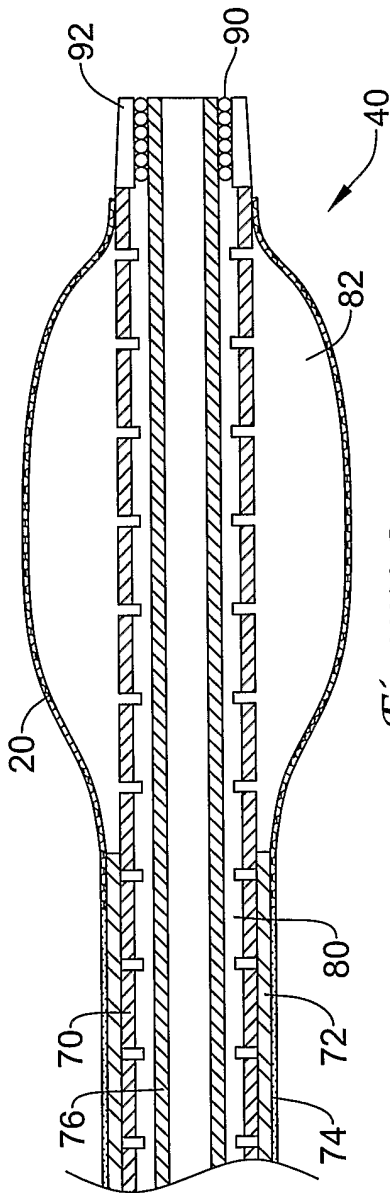


Figure 3

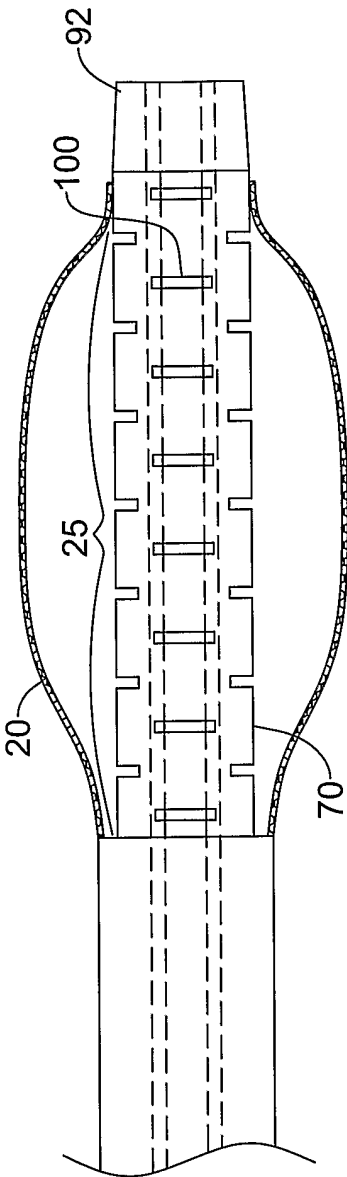


Figure 4




Figure 6




Figure 8




Figure 5




Figure 7

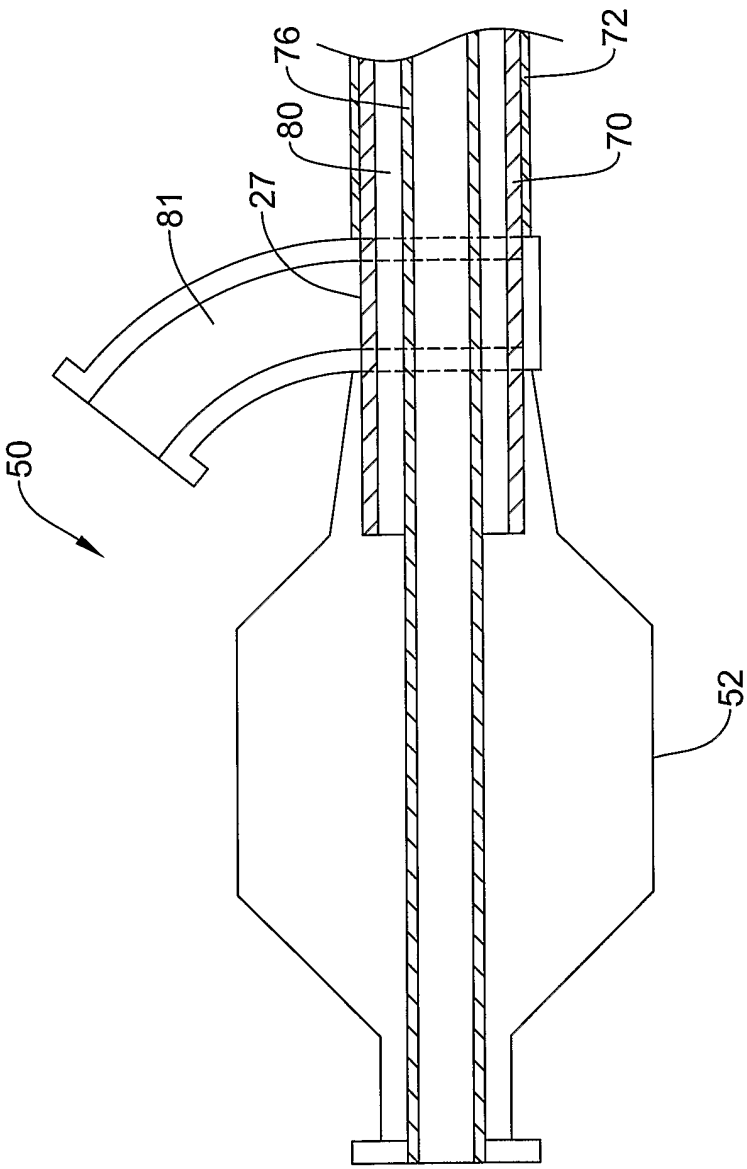


Figure 11

INTERNATIONAL SEARCH REPORT

International application No

/US2005/043019

A. CLASSIFICATION OF SUBJECT MATTER

A61M25/00 A61M25/10 A61B17/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61M A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 573 520 A (SCHWARTZ ET AL) 12 November 1996 (1996-11-12) column 4, lines 23-58 column 7, line 56 - column 12, line 12 figures 6-11,16	1-9, 11, 12, 14-19, 21,22, 24-27,29
Y		10,13, 20,23,28
X	US 5 141 518 A (HESS ET AL) 25 August 1992 (1992-08-25) column 2, line 67 - column 4, line 10 figures 1,6	1,4,6,12
A		2,3,7,9, 15,25
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

4 April 2006

Date of mailing of the international search report

13/04/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kakoullis, M

INTERNATIONAL SEARCH REPORT

International application No

/US2005/043019

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2003/069522 A1 (JACOBSEN STEPHEN J ET AL) 10 April 2003 (2003-04-10) cited in the application page 1, paragraph 4 page 2, paragraphs 9,11 page 3, paragraphs 51,52 page 4, paragraphs 53,56,57 page 5, paragraph 71 page 7, paragraph 85-87 page 16, paragraph 160 figure 13	10,13, 20,23,28
A		1,5-9, 14,15, 17-19, 24,25,29
A	----- US 2002/077594 A1 (CHIEN THOMAS YUNG-HUI ET AL) 20 June 2002 (2002-06-20) page 1, paragraphs 2,5,17,18 page 2, paragraph 24 - page 3, paragraph 41 figures 1A,1B -----	1-4,15, 16,24, 25,29

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

T/US2005/043019

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5573520	A	12-11-1996	CA	2117088 A1	18-03-1993
US 5141518	A	25-08-1992	WO	9215360 A1	17-09-1992
US 2003069522	A1	10-04-2003	NONE		
US 2002077594	A1	20-06-2002	AU	3080102 A	01-07-2002
			CA	2431427 A1	27-06-2002
			EP	1351738 A2	15-10-2003
			JP	2004538036 T	24-12-2004
			WO	0249706 A2	27-06-2002