



(51) International Patent Classification:

C08J 3/20 (2006.01) *C08K 3/34* (2006.01)
C08J 3/22 (2006.01) *C08K 5/00* (2006.01)
C12N 9/00 (2006.01) *C08L 67/02* (2006.01)
C08K 3/22 (2006.01) *C08L 67/04* (2006.01)
C08K 3/26 (2006.01)

(21) International Application Number:

PCT/EP2016/063373

(22) International Filing Date:

10 June 2016 (10.06.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15305903.5 12 June 2015 (12.06.2015) EP

(71) Applicant: **CARBIOS** [FR/FR]; Rue Emile Duclaux
Biopôle Clermont-Limagne, 63360 Saint-Beauzire (FR).

(72) Inventors: **GUEMARD, Elodie**; 30 rue des roches fleur-
ies, 63400 Chamalières (FR). **CHATEAU, Michel**; 42 bis
rue du Colombier Lanore, 63200 Riom (FR). **MARTY,**
Alain; 32 bis rue raymond IV, 31000 Toulouse (FR).

(74) Agent: **CABINET BECKER ET ASSOCIES**; 25, rue
Louis le Grand, 75002 Paris (FR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: BIODEGRADABLE POLYESTER COMPOSITION AND USES THEREOF

(57) Abstract: The present invention relates to plastic composition comprising at least one polyester, biological entities having a polyester-degrading activity and at least an anti-acid filler, wherein the biological entities represent less than 11% by weight, based on the total weight of the plastic composition, and uses thereof for manufacturing biodegradable plastic articles.



BIODEGRADABLE POLYESTER COMPOSITION AND USES THEREOF

The present invention relates to a novel plastic composition comprising at least one polyester, biological entities able to degrade said polyester and anti-acid filler. The invention also relates to a process for producing such plastic composition, and uses thereof for the production of biodegradable plastic articles.

BACKGROUND

Plastics are inexpensive and durable materials, which are employed to manufacture products that find uses in a wide range of applications. As a consequence, the production of plastics has increased dramatically over the last decades. A large part of these plastics are used for single-use disposable applications, or for short-lived products (such as bags, packaging including trays, containers, bottles, agricultural films, etc.) that are discarded within a year of manufacture. Because of the durability of the polymers involved and their high resistance to biodegradation (due to high molecular mass values, hydrophobicity and crystallinity), substantial quantities of plastics are piling up in landfill sites and in natural habitats, generating increasing environmental problems worldwide.

To answer these problems, different physical, chemical and/or biochemical approaches have been developed to reduce the biodegradation resistance of polymers and to increase their biodegradation rate. For example, biodegradable plastic products have been developed. However, the environmental degradation conditions are not optimal for such biodegradable plastics and their degradation generally takes place partially.

Recently, a novel plastic material has been developed that contains a small amount of biological entities having a polymer-degrading activity. The biological entities are interestingly able to degrade at least one polymer of said plastic material. The process for manufacturing such plastic material has been described in patent application WO 2013/093355. The plastic material obtained by this process contains biological entities dispersed in a polymer, and is directly usable through an extrusion die for producing plastic articles having improved biodegradability.

By working on polyester-containing plastic material, the inventors have discovered that it is possible to further increase the polyester-degrading activity of biological entities, by introducing into the plastic material specific filler(s). More particularly, the inventors have developed plastic compositions containing at least one polyester, biological entities having a polyester-degrading activity and anti-acid filler(s), and they have shown that such compositions have an improved biodegradability compared to traditional plastic compositions, and even compared to plastic compositions containing solely biological entities and polyesters. Furthermore, the plastic compositions of the invention can be used in standard operations of plastic processing and do not impair the mechanical properties of the resulting plastic articles.

SUMMARY OF THE INVENTION

The present invention relates to the use of anti-acid filler(s) to enhance the polyester degrading activity of biological entities into a plastic composition. More particularly, the invention proposes to add both anti-acid filler(s) and biological entities having a polyester degrading activity into a polyester-containing plastic composition to obtain a plastic composition with biodegradable properties and thereby degradable plastic articles, made from this plastic composition. According to the invention, the biological entities and anti-acid filler(s) are both embedded into the polyester of the plastic composition, leading to a homogenous dispersion of them into the final plastic articles.

It is therefore an object of the present invention to provide a plastic composition comprising at least one polyester, biological entities having a polyester-degrading activity and at least an anti-acid filler, wherein the biological entities represent less than 11% by weight, based on the total weight of the plastic composition.

It is another object of the present invention to provide a plastic composition comprising at least one polyester, biological entities having a polyester-degrading activity and at least an anti-acid filler, wherein the total amount of polymer(s) and anti-acid filler(s) in the plastic composition represent more than 90 % by weight of the plastic composition. Advantageously, the anti-acid filler represents between 0.1% and 50% by weight of the plastic composition, based on the total weight of the plastic composition, preferably between 2% and 25%, more preferably between 5% and 10%, even more preferably about 5%.

In a particular embodiment, the plastic composition comprises, based on the total weight of the plastic composition:

- (i) from 65 to 95% of at least one polyester, preferably PLA and/or PCL;
- (ii) from 2 to 25% of at least one anti-acid filler, preferably selected from hydrotalcite, calcium carbonate, talc, mica, clay and/or calcium hydroxide;
- (iii) from 0,1-10% of biological entities having a polyester-degrading activity, preferably a protease.

It is a further object of the invention to provide a process for preparing such plastic composition, comprising a step (a) of mixing between 0.1% and 10% by weight based on the total weight of the plastic composition of biological entities having a polyester-degrading activity, with a polyester and anti-acid filler(s), and a step (b) of conditioning said mixture of step (a) in a solid form, wherein the step (a) of mixing is preferably performed at a temperature at which the polyester is in a partially or totally molten state and/or in an extruder, preferably a twin-screw extruder, and more preferably a co-rotative twin-screw extruder.

The invention further relates to the use of the plastic composition of the invention, for the manufacture of a plastic article, and to a plastic article made from a plastic composition of the invention, wherein the biological entities of the plastic composition are suitable for degrading at least one polyester of the plastic article.

The invention also relates to a method for manufacturing a plastic article comprising at least one polyester, the method comprising:

- a. providing a plastic composition according to the invention, and
- b. manufacturing a plastic article,

wherein step b is preferably implemented at a temperature at which the polyester of the plastic composition is in a partially or totally molten state, and/or is performed by extrusion, extrusion-compounding, extrusion blow-molding, blown film extrusion, cast film extrusion, calendaring and thermoforming, injection-molding, compression molding, extrusion-swelling,

rotary molding, ironing, coating, stratification, expansion, pultrusion, compression-granulation and 3D printing.

In it another object of the invention to provide a method for increasing the biodegradability of a plastic article comprising at least one polyester, said method comprising mixing the polyester with biological entities suitable for degrading said polyester, and with an anti-acid filler to obtained a plastic composition, and further manufacturing a plastic article with said plastic composition.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1: Comparative degradation rate of plastic compositions containing PLA after 12 days. A: Control (comprising protease but deprived of anti-acid filler) reached 28% of degradation; D and E: Negative controls (comprising anti-acid filler but deprived of protease) reached less than 2% of degradation; B and C: plastic compositions according to the invention (comprising both protease and an anti-acid filler) reached both 85% of degradation;

Figure 2: Comparative depolymerization rate of plastic compositions containing PLA after 3 days. A: Control (comprising protease but deprived of anti-acid filler); B and C: plastic compositions according to the invention (comprising both protease and calcium hydroxide, or a mix of calcium carbonate and calcium hydroxide respectively). After 3 days, plastic compositions B and C show respectively 28% and 22% more depolymerization than the control A.

Figure 3: Comparative degradation rate of plastic compositions containing PLA after 2 days. A: Control (comprising protease but deprived of anti-acid filler) reached 7.5% degradation. B and C: plastic compositions according to the invention (comprising both protease and calcium carbonate and hydrotalcite respectively as anti-acid filler) reached about 17% and 42% biodegradation respectively.

Figure 4: Comparative degradation rate of plastic compositions containing PLA after 3 days. A: Control (comprising protease but deprived of anti-acid filler) reached 10% of degradation; B: Negative controls (comprising anti-acid filler but deprived of protease) reached less than

1% of degradation; and C: plastic composition according to the invention (comprising protease and 25% of an anti-acid filler) reached 30% of degradation;

Figure 5: Comparative degradation rate of two plastic compositions containing PLA after 3 days. B: Plastic composition according to the invention (comprising both protease and calcium carbonate) reached 42% of degradation after 3 days whereas A: Control (comprising protease but deprived of calcium carbonate) reached solely 12% of degradation;

Figure 6: Comparative degradation rate of two plastic compositions comprising PCL and lipase after 3 days. B (with calcium carbonate) reached 86% of degradation, whereas Control A (without calcium carbonate) reached 21% of degradation.

10 DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to novel plastic compositions, with improved degradability and methods for producing them. More particularly, the invention provides novel plastic compositions comprising both biological entities and anti-acid filler suitable for enhancing the degrading activity of said biological entities. The invention shows that such compositions, with suitable dispersion and distribution rate of active biological entities, are particularly useful for producing single-use and short-lived plastic articles.

Definitions

The present disclosure will be best understood by reference to the following definitions.

As used herein, the terms “*plastic composition*”, “*plastic formulation*”, “*plastic compound*” or “*plastic material*” are used interchangeably and designate a mixture of polymers and additional compounds (e.g., active agents, additives, carrier material, filler, etc.) before any shaping or conditioning step.

In the context of the invention, a “*polyester-containing plastic composition*” refers to a plastic compound, or plastic formulation, in a molten or solid state, suitable for making a plastic product. In the context of the invention, the plastic compound encompasses homogeneous blends of at least one polyester, biological entities able to degrade at least said polyester, and

at least one anti-acid filler. Preferably, the plastic compound is constituted of a mix of semi-crystalline and/or amorphous polyesters, or semi-crystalline polyesters and additives.

Within the context of the invention, the terms “*plastic article*” or “*plastic product*” are used interchangeably and refer to any item made from at least one polymer, such as plastic sheet, tube, rod, profile, shape, massive block, fiber, etc. Preferably, the plastic article is a manufactured product, such as a rigid or flexible packaging, agricultural films, bags and sacks, disposable items or the like. Preferably, the plastic article comprises a mix of semi-crystalline and/or amorphous polymers, or semi-crystalline polymers and additives. The plastic articles may contain additional substances or additives, such as plasticizers, mineral or organic fillers.

A “*polymer*” refers to a chemical compound or mixture of compounds whose structure is constituted of multiple repeating units linked by covalent chemical bonds. Within the context of the invention, the term “polymer” includes natural or synthetic polymers, comprising a single type of repeating unit (i.e., homopolymers) or different types of repeating units (i.e., block copolymers and random copolymers). As an example, synthetic polymers include polymers derived from petroleum oil or biobased polymers, such as polyolefins, aliphatic or aromatic polyesters, polyamides, polyurethanes and polyvinyl chloride. Natural polymers include lignin and polysaccharides, such as cellulose, hemi-cellulose, starch and derivatives thereof that may or may not be plasticized.

Within the context of the invention, the term “*polyester*” refers to a polymer that contains the ester functional group in their main chain. Ester functional group is characterized by a carbon bound to three other atoms: a single bond to a carbon, a double bond to an oxygen, and a single bond to an oxygen. The singly bound oxygen is bound to another carbon. According to the composition of their main chain, polyesters can be aliphatic, aromatic or semi-aromatic. Polyester can be homopolymer or copolymer. As an example, polylactic acid is an aliphatic homopolymer composed of one monomer, lactic acid; and polyethylene terephthalate is an aliphatic-aromatic copolymer composed of two monomers, terephthalic acid and ethylene glycol.

In the context of the invention, the term “*filler*” refers to a compound that is incorporated to a plastic material and/or to a plastic product to reduce the costs thereof or, optionally, improve

the physical properties thereof (e.g., its hardness, stiffness, or strength). Fillers can be inactive (i.e., inert) or active material, and may form chemical bonds with the components of the plastic material or product. Fillers may comprise mineral and/or organic fillers. Examples of mineral fillers used in the plastic manufacturing industry include without limitation calcium carbonate (limestone), magnesium silicates (talc), calcium sulfate (gypsum), mica, calcium silicate, barium sulphate and kaolin (China clay). Examples of organic fillers include without limitation starch, cellulose or hemi-cellulose, cereal flour, wood flour, tree bark flour, nut flours, hemp fibers, chicken feathers, and rice hulls.

In the context of the invention, the term “*anti-acid filler*” or “acid scavenger” are used interchangeably and designate more specifically a filler that has the ability to chemically neutralize an acid molecule, even contained in a plastic composition. The neutralizing reaction performed by an anti-acid filler, in the context of the invention, is generally based on ion-exchange. The presence of an anti-acid filler in a plastic composition may help to increase and/or maintain the pH of the composition. Anti-acid fillers may be mineral or organic, synthetic or natural, and used alone or as a mix of several anti-acid fillers.

As used herein, the term “*biological entities*” designates active enzymes or enzyme-producing microorganisms, such as sporulating microorganisms, as well as combinations or formulations thereof. For instance, “*biological entities*” may refer to pure enzymes or microorganisms as well as to formulations containing enzymes and/or microorganisms and a diluent or carrier, such as stabilizing and/or solubilizing component(s), including water, glycerol, sorbitol, dextrin, including maltodextrin and/or cyclodextrin starch, glycol such as propanediol, salt, etc. The biological entities may be in solid (e.g., powder) or liquid form.

As used herein, the term “*by weight*” refers to the ratio based on the total weight of the considered composition or product.

In the context of the invention, the term “*about*” refers to a margin of +/- 5%, preferably of +/- 1%, or within the tolerance of a suitable measuring device or instrument.

In the context of the invention, all percentages are by weight, based on the total weight of the plastic composition, unless explicitly stated otherwise.

Anti-acid filler

The inventors have shown that it is possible to improve the degradability of a plastic composition comprising polyester and biological entities having a polyester-degrading activity by the addition of anti-acid filler. The presence of the anti-acid filler, embedded into the mass of the polyester with the biological entities enhances the activity of said biological entities. More particularly, the depolymerase activity of the biological entities in the polyester-containing plastic composition in presence of anti-acid filler is higher than without such anti-acid filler in the composition. Thereby, the degradation rate of a composition of the invention and/or plastic article made with such composition is improved (i.e., higher) than the degradation rate of composition/plastic article deprived of such anti-acid filler.

It is therefore an object of the invention to provide a plastic composition comprising at least one polyester, biological entities having a polyester-degrading activity and at least an anti-acid filler. According to the invention, such biological entities represent less than 11% by weight of the plastic composition. Particularly, the biological entities represent between 0.1% and 10% by weight of the plastic composition.

It is another object of the invention to provide a method for enhancing the degradability of a polyester-containing plastic composition, or any plastic product made with said plastic composition, wherein both biological entities having polyester-degrading activity and anti-acid filler(s) are added in the plastic composition. Advantageously, both biological entities and anti-acid filler are mixed with the polyester to form the plastic composition that may be further used for manufacturing any plastic products.

The invention further relates to the use of anti-acid filler for enhancing the activity of biological entities, and more particularly their polyester-degrading activity, into a polyester-containing plastic composition.

In a particular embodiment, the plastic composition comprises less than 50%, preferably less than 40%, 30%, 25%, 20%, 10%, 9%, 8%, 7%, 6% by weight of anti-acid filler. Particularly, the plastic composition comprises between 0.1% and 50% by weight of anti-acid filler, preferably between 2% and 25%, more preferably between 2% and 15%, even more preferably between 5% and 10%. In a particular embodiment, the plastic composition

comprises about 10% by weight of anti-acid filler. In another embodiment, the plastic composition comprises about 5% by weight of anti-acid filler.

Anti-acid fillers may be mineral or organic. In a particular embodiment, the anti-acid filler is selected among mineral anti-acid fillers. Such mineral anti-acid filler can be synthetic or natural. Examples of mineral anti-acid filler include, without limitation:

- carbonate salts or metal carbonate such as calcium carbonate (or limestone), potassium carbonate, magnesium carbonate, aluminium carbonate, zinc carbonate, copper carbonate
- hydroxide salt or metal hydroxide such as calcium hydroxide or potassium hydroxide (potash) or magnesium hydroxide or aluminium hydroxide or sodium hydroxide (caustic soda)
- silicate salts such as calcium silicate, potassium silicate, magnesium silicates (talc), aluminium silicate (kaolin), or mix thereof such as mica
- hydrotalcite (magnesium aluminum hydroxide carbonate, $\text{Mg}_6\text{Al}_2\text{CO}_3(\text{OH})_{16}\cdot 4(\text{H}_2\text{O})$) such as synthetic commercial DHT-4A2 or DHT-4A
- metal oxide or oxide salts such as oxide of magnesium, oxide of calcium, oxide of aluminium, iron oxide, copper oxide
- sulphate salts such as calcium sulfate (gypsum), barium sulphate
- phosphate salts as calcium phosphate, hydroxyapatite
- Clays such vermiculite, palygorskite-sepiolite and clays from smectite such as montmorillonite.

Preferably, the mineral anti-acid filler is selected from calcium carbonate, calcium hydroxide, hydrotalcite, talc, mica, or clay.

It is a particular object of the invention to provide a plastic composition comprising PLA and/or PCL, biological entities able to degrade PLA and/or PCL and between 1 and 50% by weight of calcium carbonate and/or hydrotalcite and/or calcium hydroxide. Preferably, the biological entities comprise a protease selected from Savinase®, Everlase®, Protease enzyme from *Actinomadura keratinolytica* or from *Laceyella sacchari* LP175, lipase PS from *Pseudomonas cepacia*, lipase AK from *Pseudomonas fluorescens*, lipase B from *Candida antarctica* (CalB).

In a particular embodiment, the molar ratio (anti-acid filler)/(acid contained in the polyester) is less than 0.5, preferably less than 0.45, more preferably less than 0.4. For instance, in a PLA-containing plastic composition of the invention, the molar ratio (anti-acid filler)/(lactic acid) is less than 0.5, preferably less than 0.45, more preferably less than 0.4.

5 Biological entities

According to the invention, the plastic composition comprises biological entities suitable for degrading at least one polyester contained in said plastic composition. The inventors have shown that the presence of anti-acid filler(s) embedded into a plastic composition with biological entities allows to increase their enzymatic activity and thereby to enhance the
10 degradability of the plastic composition.

In a preferred embodiment, the biological entities comprise at least an enzyme with polyester-degrading activity and/or at least a microorganism expressing, and optionally excreting, an enzyme having a polyester-degrading activity. In a preferred embodiment, the biological entities consist in at least an enzyme with polyester-degrading activity. Examples of suitable
15 enzymes having a polyester-degrading activity for use in the invention include, without limitation, depolymerase, esterase, lipase, cutinase, carboxylesterase, protease, or polyesterase. The enzymes may be in pure or enriched form, or in mixture with other excipients or diluents. A combination of enzymes may be used as well.

In an alternative embodiment, the biological entities comprise microorganisms that produce
20 such enzymes, either naturally or as a result of particular engineering (e.g., recombinant microorganisms). Preferred examples of suitable microorganisms include, without limitation, bacteria, fungi and yeasts. In an embodiment, the biological entities comprise sporulating microorganisms and/or spores thereof.

In a particular embodiment, the biological entities comprise enzymes encapsulated in
25 nanocapsules, enzymes encapsulated in cage molecules, and enzymes aggregated together. The term "cage molecule" designates a molecule that can be inserted into the structure of said enzymes to stabilize them and to make them resistant to high temperatures. Encapsulation techniques are well known to those skilled in the art and include, for instance, nanoemulsions.

The biological entities may be supplied in a liquid or solid form. For instance, the biological entities may be in a powder form. To this aim, the biological entities may be dried or dehydrated. Methods for drying or dehydrating biological entities such as microorganisms or enzymes are well known to the one skilled in the art and include, without limitation, lyophilisation, freeze-drying, spray-drying, supercritical drying, down-draught evaporation, thin-layer evaporation, centrifugal evaporation, conveyer drying, fluidized bed drying, drum drying or any combination thereof.

In a particular embodiment, the biological entities used to prepare the plastic composition are a formulation of enzymes and/or microorganisms mixed with a diluent or carrier, such as stabilizing and/or solubilizing component(s). For instance, the formulation may be a solution comprising enzymes and/or microorganisms in suspension in water, and optionally additional components, such as glycerol, sorbitol, dextrin, starch, glycol such as propanediol, salt, etc. Alternatively, the formulation may be a powder comprising enzymes and/or microorganisms in powder form mixed with a stabilizing powder, such as maltodextrin.

In a particular embodiment, the biological entities used to prepare the plastic composition are contained in a masterbatch comprising such biological entities mixed with a polymer. Such masterbatch composition may comprises from 11% to 90% by weight of biological entities having a polyester-degrading activity, based on the total weight of the masterbatch composition. Preferably, the polymer of the masterbatch is compatible with the polyester of the plastic composition. Particularly, such polymer is the polyester of the intended plastic composition. The masterbatch is mixed with the polyester of the plastic composition so that the plastic composition comprises between 0.1 and 10% by weight of biological entities.

In another particular embodiment, the biological entities comprise the culture supernatant of a polyester-degrading microorganism. In this regard, a particular object of the invention relates to a plastic composition as defined above, which comprises between 0.1% and 10%, by weight of a culture supernatant of a polymer-degrading microorganism. The supernatant may have been preliminary treated (e.g., mechanically or physically or chemically) to increase the concentration of enzymes and/or to remove other components such as DNA or cell debris.

Plastic compositions

It is an object of the invention to provide plastic compositions comprising active biological entities embedded with an anti-acid filler in a polyester. The plastic compositions of the invention may be easily used for further preparing plastic articles with improved degradability in environmental conditions.

The plastic composition may be in solid form (e.g., powder or granulates) or in liquid form. Preferably, the plastic composition is in a solid physical form with a melt flow index comprised between 1 to 60 g/10min. Such melt flow index may be measured by techniques known by a person skilled in the art such as flow extrusion plastometer, or capillary rheometers. The form of the plastic composition may be advantageously adapted to the final purpose of said composition (e.g., the nature of the polymer, the kind of plastic product to be produced, etc.).

Advantageously, the plastic composition comprises at least one polyester selected from polylactic acid (PLA) (such as poly(L-lactic acid) (PLLA), poly(D-lactic acid) (PDLA), poly(D,L-lactic acid) (PDLLA) or PLA stereocomplex (scPLA)), polyglycolic acid (PGA), polyhydroxyalkanoate (PHA), polycaprolactone (PCL), polybutylene succinate (PBS), polybutylene terephthalate (PBT), polyethylene isosorbide terephthalate (PEIT), polybutylene succinate adipate (PBSA), polybutylene adipate terephthalate (PBAT), polyethylene terephthalate (PET), polytrimethylene terephthalate (PTT), polyethylene furanoate (PEF), poly(ethylene adipate) (PEA), polyethylene naphthalate (PEN), and derivatives or blends/mixtures thereof.

In a preferred embodiment, the plastic composition comprises at least PLA and/or PCL, and optionally one or more polyesters preferably selected from PBAT, PBS, PBSA and PHA.

In a particular embodiment, the plastic composition may further comprise at least one natural polymer, preferably selected from cellulose, hemi-cellulose, starch and derivatives. Preferably, the plastic composition of the invention comprises PLA and/or PCL and at least one additional polymer selected from PBAT, starch or flour or mixtures thereof.

In another particular embodiment, the plastic composition comprises PLA and/or PCL and at least one polyolefin.

According to the invention, the plastic composition may further comprise one or more additives. Generally speaking, the additives are used in order to enhance specific properties in the final product (i.e., the final plastic article made with said plastic composition). For instance, the additives may be selected from the group consisting without limitation of plasticizers, coloring agents, processing aids, rheological agents, anti-static agents, anti-UV agents, toughening agents, anti-fogging agents, compatibilizers, slip agents, flame retardant agents, anti-oxidants, light stabilizers, oxygen scavengers, inks, adhesives, fertilizers, and phytosanitary products. Advantageously, the plastic composition comprises less than 25%, by weight of such additives, preferably less than 20%, more preferably less than 10%, even more preferably less than 5%, typically between 0.1 and 4% by weight of such additives.

Alternatively or in addition, the plastic composition may further comprise one or more additional fillers. For instance, such fillers may be selected from the group consisting without limitation of silica, graphite, carbon black, metal fibers or metal flakes, glass fibers, magnetic fillers, aramid fibers, ceramic fibers, saw dust, plant fibers such as flax fibers, wood fibers, hemp fibers, bamboo fibers, chicken feathers and derivatives thereof or blends/mixtures of these materials.

In a particular embodiment, the plastic composition comprises, based on the total weight of the plastic composition:

- from 65 to 95% by weight of at least one polyester;
- from 2 to 25% by weight of at least one anti-acid filler;
- from 0.1 to 10% by weight of biological entities having a polyester-degrading activity; and optionally
- at least one additional polymer and/or additive and/or additional filler.

Particularly, the plastic composition comprises, based on the total weight of the plastic composition:

- from 65 to 95% by weight of PLA;

- from 2 to 25% by weight of at least one anti-acid filler, preferably selected from hydrotalcite, calcium carbonate, calcium hydroxide, talc, mica and clay;
 - from 0.1 to 10% by weight of protease having a PLA-degrading activity; and optionally
 - at least one additional polymer and/or one additive and/or one additional filler.
- 5 In another particular embodiment, the plastic composition comprises, based on the total weight of the plastic composition:
- from 5 to 65% by weight of a first polyester;
 - from 10 to 60% by weight of a second polyester and/or natural polymer such as starch or flour;
- 10 - from 2 to 25% by weight of at least one anti-acid filler;
- from 0.1 to 10% by weight of biological entities having a degrading activity for the first polyester; and optionally
 - at least one additive and/or one additional filler.
- 15 Particularly, the plastic composition comprises, based on the total weight of the plastic composition:
- from 5 to 65% by weight of PLA;
 - from 10 to 60% by weight of at least an additional polyester selected from PBAT, PHAs, PBS, or PBSA and/or a natural polymer selected from starch or flour;
- 20 - from 2 to 25% by weight of at least one anti-acid filler selected from hydrotalcite, calcium carbonate, calcium hydroxide, talc, mica and clay;
- from 0.1 to 10% by weight of protease having a PLA-degrading activity; and optionally
 - at least one additive and/or one additional filler.
- 25 Table 1 below lists examples of particular plastic compositions according to the invention wherein the anti-acid filler is or comprises CaCO_3 . Preferably, the polyester is PLA, the biological entities comprise protease having a PLA-degrading activity.

Table 1: Composition of biodegradable plastic compositions comprising CaCO₃

Amount of Polyester	Amount of Biological entities	Amount of CaCO ₃ .	Amount of additional polymer(s) and/or additional filler(s) and/or additive(s)
3% to 97%	0.1 to 10%	2%	0% to 94%
8% to 94%	0.1 to 10%	5%	0% to 86%
15% to 89%	0.1 to 10%	10%	0% to 74%
22% to 84%	0.1 to 10%	15%	0% to 62%
29% to 79%	0.1 to 10%	20%	0% to 50%
36% to 74%	0.1 to 10%	25%	0% to 38%
44% to 69%	0.1 to 10%	30%	0% to 25%
58% to 60%	0.1 to 10%	40%	0% to 2%
5%	0.1 to 10%	0.1 to 3%	82% to 94%
10%	0.1 to 10%	0.1 to 6%	74% to 89%
20%	0.1 to 10%	0.1 to 13%	57% to 79%
30%	0.1 to 10%	0.1 to 20%	40% to 69%
40%	0.1 to 10%	0.1 to 27%	23% to 59%
50%	0.1 to 10%	0.1 to 34%	6% to 49%
60%	0.1 to 10%	0.1 to 40%	0% to 39%
70%	0.1 to 10%	0.1 to 30%	0% to 29%
80%	0.1 to 10%	0.1 to 20%	0% to 19%
90%	0.1 to 10%	0.1 to 10%	0% to 9%

Table 2 below lists examples of particular plastic compositions according to the invention wherein the anti-acid filler is or comprises CaOH₂. Such plastic compositions may also contain one or more additive(s) and/or additional filler(s). Preferably, the Polyester is PLA, the biological entities comprise protease having a PLA-degrading activity.

Table 2: Composition of biodegradable plastic compositions

Amount of Polyester	Amount of Biological entities	Amount of CaOH ₂ .	Amount of additional polymer(s) and/or additional filler(s) and/or additive(s)
4% to 97%	0.1 to 10%	2%	0% to 93%
10% to 94%	0.1 to 10%	5%	0% to 84%
20% to 89%	0.1 to 10%	10%	0% to 69%
30% to 84%	0.1 to 10%	15%	0% to 54%
39% to 79%	0.1 to 10%	20%	0% to 40%
49% to 74%	0.1 to 10%	25%	0% to 25%
59% to 69%	0.1 to 10%	30%	0% to 10%
64% to 66%	0.1 to 10%	33%	0% to 2%
5%	0.1 to 10%	0.1 to 2%	83% to 94%
10%	0.1 to 10%	0.1 to 5%	75% to 89%
20%	0.1 to 10%	0.1 to 10%	60% to 79%
30%	0.1 to 10%	0.1 to 15%	45% to 69%
40%	0.1 to 10%	0.1 to 20%	30% to 59%
50%	0.1 to 10%	0.1 to 25%	15% to 49%
60%	0.1 to 10%	0.1 to 30%	0% to 39%
70%	0.1 to 10%	0.1 to 30%	0% to 29%
80%	0.1 to 10%	0.1 to 20%	0% to 19%
90%	0.1 to 10%	0.1 to 10%	0% to 9%

In a particular embodiment, the plastic composition is a biodegradable plastic composition complying with at least one of the relevant standards and/or labels known by a person skilled in the art such as standard EN 13432, standard ASTM D6400, OK Biodegradation Soil (Label Vinçotte), OK Biodegradation Water (Label Vinçotte), OK Compost (Label Vinçotte), OK Compost Home (Label Vinçotte).

A biodegradable plastic composition refers to a plastic composition that is at least partially transformed under environmental conditions into oligomers and/or monomers of at least one polyester of the plastic composition, water, carbon dioxide or methane and biomass. As

illustrated in the examples, preferred plastic compositions of the invention are biodegradable in water. Preferably, about 90% by weight of the plastic composition is biodegraded in water within less than 90 days, more preferably within less than 60 days, even more preferably within less than 30 days. Alternatively or in addition, the plastic composition may be biodegraded when exposed to wet and temperature conditions that occur in landscape. Preferably, about 90% by weight of the plastic composition is biodegraded with less than 3 years in the environment, more preferably within less than 2 years, even more preferably within less than 1 year. Alternatively, the plastic composition may be biodegraded under industrial composting conditions, wherein the temperature is maintained above 50°C.

10 *Process for producing the plastic compositions*

The present invention also relates to a process for preparing a plastic composition as described above, comprising a step (a) of mixing 0.1% to 10% by weight of biological entities having a polyester-degrading activity, with a polyester and an anti-acid filler, and, optionally, a step (b) of conditioning said mixture of step (a) in a solid form. In a particular embodiment, the process further comprises a step of mixing at least one additive with the polyester, biological entities and anti-acid filler, before step (b). Alternatively, such additive can be mixed in step (a) with the polyester, biological entities and anti-acid filler.

In a particular embodiment, step (a) of mixing is performed at ambient temperature, i.e., a temperature below 45°C, preferably below 35°C, more preferably between 30°C and 20°C, by mixing powders and/or liquids.

In a particular embodiment, the polyester used in step (a) is under a granulated form. In another embodiment, the polyester, the anti-acid filler and the biological entities are under powder form. To this aim, the polyester and/or the anti-acid filler and/or the biological entities can be mechanically pre-treated before step (a) of mixing, to lead to such powder forms. Particularly, the polyester and/or the anti-acid filler may be crushed, and/or the biological entities may be dried or dehydrated. Preferably, the process further comprises a step of homogenisation of the powders (i.e., polyester and anti-acid filler and biological entities), for instance by shaking or the like. Such powder mixture may be blended into an extruder, such as single-screw extruders, multi-screw extruders of either co-rotating or counter-rotating design, dispersive kneaders, reciprocating single-screw extruder (co-kneaders). Such

extrusion step may ensure uniformity and homogeneity of the dispersion of both biological entities and anti-acid filler in the polyester-containing composition.

Alternatively, step (a) of mixing is performed with liquid forms of polyester, anti-acid filler and/or biological entities. For instance, the polyester and/or the anti-acid filler are diluted in a liquid before step (a) and/or a liquid formulation of biological entities that may comprise stabilizing and/or solubilizing component(s) is used.

Alternatively, step (a) of mixing is performed at a temperature at which the polyester is in a partially or totally molten state. The step (a) of mixing may thus be performed at a temperature at or above 40°C, particularly at or above 45°C, 55°C, 60°C, 70°C, 80°C, 90°C, 100°C, or even above 150°C, depending on the nature of the polyester. Typically, this temperature does not exceed 300°C. More particularly, the temperature does not exceed 250°C. The temperature of the mixing step can be adapted by a person skilled in the art depending on the type of polyester, biological entities, and/or anti-acid filler used for the production of the plastic composition. Particularly, the temperature is chosen according to the melting point, or melting temperature of the polyester. In a particular embodiment, step (a) of mixing is performed at the melting point of the polyester of the plastic composition. The polyester is then in a partially or totally molten state. In another embodiment, step (a) of mixing is performed at a temperature above the glass transition temperature of said polyester, particularly between the glass transition temperature (T_g) and the melting temperature of said polyester. In another particular embodiment, the step (a) of mixing is performed at a temperature above the melting temperature of said polyester.

In a particular embodiment, the plastic composition may be produced by a process called “compounding”, usually an extrusion-granulation process, in which the polyester is melted and mixed with the biological entities and the anti-acid filler. Compounding combines mixing and blending techniques during a heat process, in order to ensure uniformity, homogeneity and dispersion in the final compound. The compounding is a technique known by a person skilled in the art. Such compounding process may be carried out with an extruder, such as single-screw extruders, multi-screw extruders of either co-rotating or counter-rotating design, dispersive kneaders, reciprocating single-screw extruder (co-kneaders).

More generally, the step (a) of mixing may be carried out with an extruder, wherein the polyester is heated and melted and mixed with the biological entities and the anti-acid filler. The polyester may be introduced in the extruder in a powder or granulated form, preferably in a granulated form.

- 5 In a preferred embodiment, the extruder used for the production of the plastic composition is a multi-screw extruder, preferably a twin-screw extruder, more preferably a co-rotative twin-screw extruder. In a particular embodiment, the extruder further comprises, after the screws, a static mixer. In another embodiment, the extruder is used with a die pierced with hole(s).

10 In a preferred embodiment, the residence time of the mixture in the extruder is comprised between 5 seconds and 3 minutes, preferably is less than 2 minutes, more preferably less than 1 minute. When the plastic composition comprises a polyester with a melting temperature below 150°C, the residence time of the mixture in the extruder is preferably less than 2 minutes.

15 One skilled in the art will easily adapt the characteristics of the extruder (e.g., the length and diameter of the screw(s), etc.), and the residence time to the polyester, the biological entities, and the type of plastic composition intended.

As disclosed above, the biological entities may be introduced in the extruder in a powder or liquid form, such as a liquid formulation comprising a stabilizing and/or solubilizing component (e.g., water, glycerol, sorbitol, dextrin, including maltodextrine and cyclodextrine, 20 starch, glycol such as propanediol, salt, etc.).

Particularly, such extruder may contain a principal hopper and several successive heating zones, wherein the temperature may be independently controlled and regulated and wherein additional components may be added at different time during the process.

25 Advantageously the anti-acid filler is introduced at a late stage of the mixing step and more particularly when the polyester is in a partially or totally molten state. Thus a homogenous mix is favored.

Advantageously, the biological entities are introduced at a late stage of the mixing step (i.e, in the last heating zones), and more particularly when the polyester is in a partially or totally

molten state and after the anti-acid filler has been added. Thus, the exposure to elevated temperature is reduced. Preferably, the residence time of the biological entities in the extruder is half as long as the residence time of the polyester and/or anti-acid filler, or less.

According to the invention, after step (a) of mixing, the mixture may be conditioned (b) in any suitable solid form. In this regard, in a preferred embodiment, the mixture issued from step (a) is shaped into a rod through a die. The rod is then cooled, and optionally dried before to be chopped in the form of granulates of plastic composition. In a further embodiment, said granulates of plastic composition may be pulverized or micronized to produce a powder of said plastic composition.

- 10 When the mixture issued of step (a) is a powder mixture, it is possible to submit the powder mixture to an extrusion-granulation process, preferably in an extruder so that the mixture is in a partially or totally molten state, before step (b).

Alternatively, the mixture issued of step (a) may be agglomerated in a solid physical form.

- 15 In a particular embodiment, the present invention relates to a process for preparing a plastic composition, comprising a step (a) of mixing between 0.1% and 10% by weight of proteases having a PLA-degrading activity, based on the total weight of the plastic composition, with PLA and an anti-acid filler and a step (b) of conditioning said mixture of step (a) in a solid form, wherein the step (a) of mixing is preferably performed at a temperature between 150 and 180°C and/or in an extruder, preferably a twin-screw extruder, and more preferably a co-rotative twin-screw extruder, and wherein the anti-acid filler is preferably selected from hydrotalcite, calcium carbonate and/or calcium hydroxide.

- 25 In another particular embodiment, the present invention relates to a process for preparing a plastic composition, comprising a step (a) of mixing between 0.1% and 10% by weight of lipases having a PCL-degrading activity, based on the total weight of the plastic composition, with PCL and an anti-acid filler and a step (b) of conditioning said mixture of step (a) in a solid form, wherein the step (a) of mixing is preferably performed at a temperature between 60 and 80°C and/or in an extruder, preferably a twin-screw extruder, and more preferably a co-rotative twin-screw extruder, and wherein the anti-acid filler is preferably selected from hydrotalcite, calcium carbonate and/or calcium hydroxide.

In another particular embodiment, the plastic composition may be obtained via an enzyme adsorption process (Jesionowski *et al.*, Adsorption (2014) 20:801–821). The person skilled in the art will easily adapt the process to the type of plastic composition, biological entities and/or anti-acid filler.

- 5 More generally, the plastic composition may be produced by any techniques known by a person skilled in the art.

Plastic articles

The invention also relates to the use of such plastic compositions for manufacturing plastic articles with improved and/or controlled degradability.

- 10 It is also an object of the invention to provide a plastic article made with the plastic composition of the invention, wherein the biological entities of the plastic composition are suitable for degrading at least one polyester of the plastic article and the anti-acid filler is able to enhance the degrading activity of the biological entities.

Therefore, the invention relates to a method for manufacturing a plastic article comprising at
15 least one polyester, the method comprising:

- A. providing a plastic composition of the invention; and
- B. shaping said plastic composition into a plastic article.

Advantageously, step B is implemented at a temperature at which the polyester of the plastic composition is in a partially or totally molten state. For instance, step B may be performed at
20 a temperature at or above 40°C, particularly at or above 45°C, 55°C, 60°C, 70°C, 80°C, 90°C, 100°C, or even above 150°C, depending on the nature of the polyester in the plastic composition. Typically, this temperature does not exceed 300°C. More particularly, the temperature does not exceed 250°C. The temperature of the step B can be adapted by a person skilled in the art depending on the type of the plastic composition and/or the kind of plastic
25 articles intended. Particularly, the temperature is chosen according to the melting point, or melting temperature of the polyester of the plastic composition.

In a particular embodiment, step B is performed at the melting point of the polyester. The polyester is then in a partially or totally molten state. In another embodiment, step B is performed at a temperature between the glass transition temperature (T_g) and the melting point of said polyester. In another particular embodiment, step B is performed at a temperature above the melting point of said polyester.

Typically, said step B may be carried out by extrusion, extrusion-compounding, extrusion blow-molding, blown film extrusion, cast film extrusion, calendering and thermoforming, injection-molding, compression molding, extrusion-swelling, rotary molding, ironing, coating, stratification, expansion, pultrusion, compression-granulation, or 3D printing. Such operations are well known by the person skilled in the art, who will easily adapt the process conditions (e.g., temperature, residence time, etc.).

In a particular embodiment, step B is implemented with a solid plastic composition under a powder or granulated form, preferably under a granulated form. In another embodiment, step B is implemented with a liquid plastic composition.

Advantageously, the resulting plastic article is a biodegradable plastic article complying with at least one of the relevant standards and/or labels known by a person skilled in the art such as standard EN 13432, standard ASTM D6400, OK Biodegradation Soil (Label Vinçotte), OK Biodegradation Water (Label Vinçotte), OK Compost (Label Vinçotte), OK Compost Home (Label Vinçotte).

A biodegradable plastic article refers to a plastic that is at least partially transformed under environmental conditions into oligomers and/or monomers of at least one polyester of the plastic article, water, carbon dioxide or methane and biomass. For instance, the plastic article is biodegradable in water. Preferably, about 90% by weight of the plastic article is biodegraded in water within less than 90 days, more preferably within less than 60 days, even more preferably within less than 30 days. More preferably, the plastic article may be biodegraded when exposed to wet and temperature conditions that occur in landscape. Preferably, about 90% by weight of the plastic article is biodegraded with less than 3 years in the environment, more preferably within less than 2 years, even more preferably within less than 1 year. Alternatively, the plastic article may be biodegraded under industrial composting conditions, wherein the temperature is maintained above 50°C.

The invention also provides a method for increasing the biodegradability of a plastic article comprising at least one polyester, wherein the method comprises the step of mixing a polyester with both biological entities suitable for degrading said polyester and anti-acid filler to obtain a plastic composition and the step of manufacturing a plastic article with said plastic composition.

EXAMPLES

Example 1 – Plastic composition comprising polylactic acid (PLA), Savinase®, and calcium carbonate or calcium hydroxide as anti-acid filler.

1A- Process of manufacturing the plastic composition through an extrusion process

The formulations A-E (table 3) were prepared in order to assess the ability of Calcium carbonate (CaCO_3) or Calcium hydroxide (Ca(OH)_2), as anti-acid fillers, to increase the degradation of PLA compositions.

Table 3: Formulations

	PLA	Protease (Savinase®)	Dextrin	CaCO_3	Ca(OH)_2
A	95%	2.5%	2.5%	-	-
B	95%	2.5%	-	2.5%	
C	95%	2.5%	-	-	2.5%
D	95%	-	2.5%	2.5%	-
E	95%	-	2.5%	-	2.5%

Percentages are given by weight, based on the total weight of the formulation.

A corresponds to the control : the anti-acid filler has been replaced by a neutral dextrin;

D and E correspond to negative controls, deprived of protease.

The formulations have been prepared using:

- PLA (polylactic acid polymer, PLA 4043D from NatureWorks), under a powder form (<500µm) obtained from PLA pellets immersed in liquid nitrogen and micronized using an Ultra Centrifugal Mill ZM 200 system.
- Savinase® 16L from Novozymes, under solid form, that is known to have the ability to
5 degrade PLA (Degradation of Polylactide by commercial proteases; Y.Oda, A. Yonetsu, T. Urakami and K. Tonomura; 2000). Solid Form of Savinase® 16L was obtained from commercial liquid form by ultrafiltration on 3.5 kDa membrane, diafiltration, addition of dextrin and drying by freeze-drying.
- dextrin (MALDEX 190 Wheat from Terreos) or calcium carbonate (CaCO₃ from OMYA)
10 or calcium hydroxide (Ca(OH)₂ from Sigma Aldrich).

Based on these formulations, biodegradable polylactic acid-based plastic compositions have been prepared through an extrusion process.

A compounding machine, or co-rotating twin-screw extruder, has been used (“Haake MiniLab II ThermoFisher”). This compounding machine comprised successively a manual feed
15 element, two co rotating screws and the head of the twin screw.

All powders were mixed together by manual shaking before introduction in the compounding machine. The mix was then introduced in the feeding zone, and push into the screw extruder applying manual pressure. The mix went through co-rotating screws using a rotation speed of the twin-screw of 80 RPM. The temperature of the extrusion was fixed to 165°C. The mix of
20 PLA, biological entities and anti-acid filler (or dextrin) then arrived in the screw head, comprising one hole of 0.4 mm in diameter, wherein the mix was pushed in order to form strip shapes. This extrudate was then cut with cutting pliers to obtain the plastic composition under granulated form.

1B – Tests of biodegradability of the plastic compositions

25 The biodegradability of the plastic compositions obtained from example 1A has been assessed.

100 mg of each granulated sample (from A to E) were weighted and introduced in dialysis tubing. 3 mL of 0.1 M Tris-HCl buffer pH 9.5 were added in the dialysis tubing before

closing it. The dialysis tubing was then introduced in a plastic bottle containing 50 mL of 0.1 M Tris-HCl buffer pH 9.5.

The depolymerization was started by incubating each sample at 45°C, 150 rpm in an Infors HT Multitron Pro incubation shaker. Aliquots of 1 mL of buffer were sampled regularly, filtered on 0.22 µm syringe filter, and analyzed by High Pressure Liquid Chromatography (HPLC) with an Aminex HPX-87H column to monitor the liberation of lactic acid (LA) and lactic acid dimer (DP2). Chromatography system used was an Ultimate 3000 UHPLC system (Thermo Fisher Scientific, Inc. Waltham, MA, USA) including a pump module, an autosampler, a column oven thermostated at 50°C, and an UV detector at 220 nm. Eluent was 5 mM H₂SO₄. Injection was 20 µL of sample. LA was measured according to standard curves prepared from commercial LA.

Hydrolysis of plastic articles was calculated based on LA and DP2 released. Percentage of degradation was calculated by the molar ratio of LA plus the LA contained in DP2 at a given time versus the LA contained initially in the PLA in the plastic composition. Results of depolymerization, after 12 days of test, are shown in Figure 1.

The results show that the addition of CaCO₃ or Ca(OH)₂ to the plastic composition allows to increase significantly the degradation of the PLA.

Example 2 – Plastic compositions comprising PLA, protease and a mix of anti-acid fillers

2A- Process of manufacturing the plastic compositions through an extrusion process

The following formulations A-C (table 4) were prepared in order to assess the ability of Calcium carbonate (CaCO₃) alone or mixed with Calcium hydroxide (Ca(OH)₂) as anti-acid fillers, to increase the degradation of PLA compositions.

Table 4: Formulations

	PLA	Protease	CaCO ₃	Ca(OH) ₂
A	90%	10%	-	-
B	85%	10%	-	5%

C	85%	10%	2.5%	2.5%
---	-----	-----	------	------

Percentages are given by weight, based on the total weight of formulations.

The formulations have been prepared using

- PLA, calcium carbonate and calcium hydroxide in powder form as described in Example 1A,
 - 5 - a Protease enzyme from *Actinomadura keratinilytica* strain under solid form. Solid form of protease from *Actinomadura keratinilytica* was obtained from fermentation process, followed by ultrafiltration on 3.5 kDa membrane, diafiltration, addition of dextrin and drying by atomization. Such protease is known for degrading PLA as described in patent WO 2016/062695.
- 10 Based on these formulations, biodegradable polylactic acid-based plastic compositions have been prepared through an extrusion process. The extrusion process was the same as the one described in Example 1A.

2B – Tests of biodegradability of the plastic compositions

15 The biodegradability of the plastic compositions obtained from example 2A has been assessed.

The depolymerization test was performed using the same material and method as exposed in Example 1.

20 The hydrolysis of the plastic compositions was calculated based on LA and dimer of LA released. Percentage of degradation was calculated regarding the final percentage of PLA in the formulation. Results of depolymerization were expressed compared to the control sample A (without anti-acid filler, base 100%), after 3 days of test (Figure 2).

The results show that the addition of both CaCO_3 and Ca(OH)_2 to the plastic composition also allows to enhance the degradation of PLA based composition.

Example 3 – Plastic compositions comprising PLA, protease and natural or commercial mineral acid filler

3A- Process of manufacturing plastic compositions through an extrusion process

The efficiency of both a mineral synthetic acid scavenger (DHT4-A2) and a mineral natural acid scavenger (CaCO₃) has been evaluated and compared.

The following formulations A-C (Table 5) were prepared in order to assess the ability of a commercial hydrotalcite (Magnesium Aluminium Hydroxide Carbonate (DHT4-A2)), to increase the degradation of PLA compositions.

Table 5: Formulations

	PLA	Protease	CaCo3	DHT4-A2
A	95%	5%	-	-
B	90%	5%	5%	-
C	90%	5%	-	5%

Percentages are given by weight, based on the total weight of formulations.

The formulations have been prepared using PLA and calcium carbonate in powder form as described in Example 1A, a Protease enzyme from *Actinomadura keratinilytica* strain under solid form as described in Example 2A, and DHT4-A2 (from Kyowa Chemical Industry).

Based on these formulations, biodegradable polylactic acid-based plastic compositions have been prepared through an extrusion process as the one described in Example 1.A

3B – Tests of biodegradability of the plastics compositions

The biodegradability of the plastic compositions obtained from example 3A has been assessed.

The depolymerization test was performed using the same material and method as exposed in Example 1.

The hydrolysis of the plastic compositions was calculated based on LA and dimer of LA released. Percentage of degradation was calculated regarding the final percentage of PLA in the formulation. Results of depolymerization, after 2 days of test, are shown in Figure 3.

The results show that, after two days of tests, the degradation rate of the composition C, comprising the commercial hydrotalcite is more than twice higher than the degradation rate of the composition comprising the natural calcium carbonate.

Example 4 – Plastic composition comprising PLA, Savinase®, and various amounts of calcium carbonate (CaCO₃)

4A- Process of manufacturing plastic compositions through an extrusion process

The efficiency of Calcium carbonate (CaCO₃) at a higher concentration has been evaluated.

To this end, different formulations A-C (table 6) have been prepared.

Table 6: Formulations

	PLA	Protease	Dextrin	CaCO ₃
A	95%	5%	-	-
B	70%	-	-	25%
C	70%	5%	-	25%

Percentages are given by weight, based on the total weight of formulations.

A corresponds to a control sample (without anti-acid filler) and B corresponds to a negative control (without protease).

The formulations comprising PLA, Protease Savinase® 16L, and calcium carbonate in powder form have been prepared as described in Example 1A.

Based on these formulations, biodegradable polylactic acid-based plastic compositions have been prepared through an extrusion process as described in Example 1.A

4B – Tests of biodegradability of the plastic compositions

The biodegradability of the plastic compositions obtained from example 4A has been assessed.

The depolymerization test was performed using the same material and method as exposed in
5 Example 1.

Hydrolysis of plastic articles was calculated based on LA and dimer of LA released. Percentage of degradation was calculated regarding the final percentage of PLA in the formulation. Results of depolymerization, after 3 days of test, are shown in Figure 4.

Example 5 –Plastic compositions comprising PLA, Everlase®, and calcium carbonate

10 5A- Process of manufacturing plastic compositions through an extrusion process

According to this experiment, the ability of calcium carbonate to enhance the degradation activity of Everlase® contained in a PLA composition has been assessed.

To this end, the formulations A and B have been prepared:

- Formulation A = 95% of PLA + 5% of Everlase®
- 15 - Formulation B = 90% of PLA + 5% of Everlase® + 5% of calcium carbonate

Percentage was calculated by weight based on the total weight of composition.

Compositions have been prepared comprising PLA in solid form (polylactic acid polymer, PLA XP951/B by Accurel) and calcium carbonate as described in Example 1 and Everlase® 16L from Novozymes, under solid form (reformulated in the solid state with dextrin). Solid
20 Form of Everlase® 16L was obtained from commercial liquid form by diafiltration, addition of dextrin and drying by freeze-drying.

Based on these formulations, biodegradable polylactic acid-based plastic compositions have been prepared through an extrusion process.

Extrusion process used was the same as the one described in Example 1A.

5B – Tests of biodegradability of plastic compositions

The biodegradability of said plastic compositions has been further tested.

100 mg of sample A and B were each introduced in a plastic bottle containing 50 mL of 0.1 M Tris-HCl buffer pH 9.5. The depolymerization was started by incubating each sample at 45°C,
5 150 rpm in a Infors HT Multitron Pro incubation shaker. Aliquots of 1 mL of buffer were sampled regularly and filtered on 0.22 µm syringe filter. Samples were analyzed following the same material and method described in example 1A.

Hydrolysis of plastic articles was calculated based on LA and dimer of LA released. Percentage of degradation is calculated regarding the final percentage of PLA in the
10 formulation. Results of depolymerization, after 3 days of test, are shown in Figure 5.

Example 6–Plastic compositions comprising polycaprolactone (PCL), lipase and calcium carbonate (CaCO₃)

6A- Process of manufacturing plastic compositions through an extrusion process

Two formulations A and B (Table 7) were prepared to evaluate the influence of calcium
15 carbonate on plastic composition containing PCL:

Table 7: Formulations

	PCL	Lipase	CaCo3
A	95%	5%	-
B	90%	5%	5%

Percentage was calculated by weight based on the total weight of composition.

The formulations have been prepared using:

- PCL in powder form (polycaprolactone polymer, CAPA 6500 from Perstorp). PCL is used
20 under a powder form (<1mm) obtained from PCL granulate immersed in liquid nitrogen and micronized using an Ultra Centrifugal Mill ZM 200 system.

- a lipase enzyme under solid form (Amano Lipase PS from Amano), known for degrading PCL and
- calcium carbonate (from OMYA).

Based on these formulations, biodegradable PCL-based plastic compositions have been prepared through an extrusion process.

All powders were mixed together by manual shaking before introduction in the compounding machine (same compounding machine used as in example 1A). The mix was then introduced in the feeding zone, and pushed into the screw extruder applying manual pressure. The mix went through co-rotating screw, through the rotation of the twin-screw at 80 RPM. The temperature was fixed to 80°C. The mix of polymer, biological entities and anti-acid filler then arrived in the screw head, comprising one hole of 0.4 mm long, wherein the mix was pushed in order to form strip shapes. This extrudate was then cut with cutting pliers to obtain granulate form.

6B – Tests of biodegradability of plastics compositions

The biodegradability of said plastic compositions has been further assessed.

To this end, 500 mg of each sample were weighted and introduced in a plastic bottle containing 25 mL of osmosis water.

The depolymerization was started by incubating each sample at 45°C, 150 rpm in a Infors HT Multitron Pro incubation shaker. Aliquots of 1 mL of buffer were sampled regularly and filtered on 0.22 µm syringe filter, samples were analyzed by High Pressure Liquid Chromatography (HPLC) with an Aminex HPX-87H column to monitor the liberation of 6-hexanoic acid (HHA). Chromatography system used was an Ultimate 3000 UHPLC system (Thermo Fisher Scientific, Inc. Waltham, MA, USA) including a pump module, an autosampler, a column oven thermostated at 50°C, and an UV detector at 220 nm. Eluent was 5 mM H₂SO₄. Injection was 20 µL of sample. HHA was measured according to standard curves prepared from commercial HHA (Alfa Aesar).

Hydrolysis of plastic articles was calculated based on HHA released. Percentage of degradation is calculated regarding the final percentage of PCL in the formulation. Results of depolymerization, after 3 days of test, are shown in Figure 6.

The results show that the addition of CaCO_3 to the plastic composition allows to increase
5 significantly the degradation of the PCL.

CLAIMS

1. A plastic composition comprising at least one polyester, biological entities having a polyester-degrading activity and at least an anti-acid filler, wherein the biological entities represent less than 11% by weight, based on the total weight of the plastic composition.
- 5 2. The plastic composition of claim 1, wherein the plastic composition comprises between 0.1% and 50% by weight of anti-acid filler, preferably between 2% and 25%.
3. The plastic composition of claim 1 or 2, wherein the anti-acid filler is a mineral anti-acid filler, preferably selected from carbonate salts, metals, hydroxide salts, hydrotalcite group, talc, mica, and clay.
- 10 4. The plastic composition of anyone of the previous claims, wherein the biological entities comprise at least an enzyme having a polyester-degrading activity and/or at least a microorganism expressing an enzyme having a polyester-degrading activity
5. The plastic composition of anyone of the previous claims, wherein the biological entities are selected from depolymerase, esterase, lipase, cutinase, carboxylesterase, protease, and
15 polyesterase, preferably from lipase and protease.
6. The plastic composition of anyone of the previous claims, wherein the polyester is selected from PLA, PCL, PBAT, PHAs and PBS, preferably from PLA and PCL.
7. The plastic composition of anyone of the previous claims, further comprising another synthetic polymer, preferably selected from PBAT, PHAs, PBS, and/or at least one natural
20 polymer preferably selected from starch, flour and cellulose, and/or at least one additive, preferably selected from the group consisting of plasticizers, coloring agents, processing aids, flame retardant agents and light stabilizers.
8. The plastic composition of anyone of the preceding claims, comprising, based on the total weight of the plastic composition:
25 - from 65 to 95% of at least one polyester,

- from 2 to 25% of at least one anti-acid filler, preferably selected from hydrotalcite, calcium carbonate, talc, mica, clay and/or calcium hydroxide
- from 0,1 to 10% of biological entities having a polyester-degrading activity

5 9. The plastic composition of anyone of the preceding claims, comprising PLA, biological entities having a PLA-degrading activity and an anti-acid filler selected from hydrotalcite, calcium carbonate, talc, mica, clay and calcium hydroxide.

10 10. A process for preparing a plastic composition according to any one of the previous claims, comprising a step (a) of mixing between 0.1% and 10% by weight of biological entities having a polyester-degrading activity, with a polyester and an anti-acid filler and a step (b) of conditioning said mixture of step (a) in a solid form.

11. Process according to claim 10, wherein the step (a) of mixing is performed at a temperature at which the polyester is in a partially or totally molten state and/or in an extruder, preferably a twin-screw extruder, and more preferably a co-rotative twin-screw extruder.

15 12. Use of the plastic composition according to claims 1 to 9, for the manufacture of a plastic article.

13. A plastic article made from a plastic composition as claimed in anyone of claims 1 to 9, wherein the biological entities of the plastic composition are suitable for degrading at least one polyester of the plastic article.

20 14. A method for manufacturing a polyester-containing plastic article comprising the steps of:

(a) providing a plastic composition as defined in anyone of claims 1 to 9, wherein the biological entities are suitable for degrading said at least one polyester of the plastic composition, and

(b) transforming said plastic composition in said plastic article,

25 wherein step (b) is implemented at a temperature at which the polyester of said plastic composition is in a partially or totally molten state, and/or is performed by extrusion, extrusion-compounding, extrusion blow-molding, blown film extrusion, cast film extrusion, calendering and thermoforming, injection-molding, compression molding, extrusion-swelling,

rotary molding, ironing, coating, stratification, expansion, pultrusion, compression-granulation and 3D printing.

15. A method for increasing biodegradability of a plastic article comprising at least one polyester, said method comprising mixing the polyester with biological entities suitable for
5 degrading said polyester, and with an anti-acid filler to obtained a plastic composition, and further manufacturing a plastic article with said plastic composition.

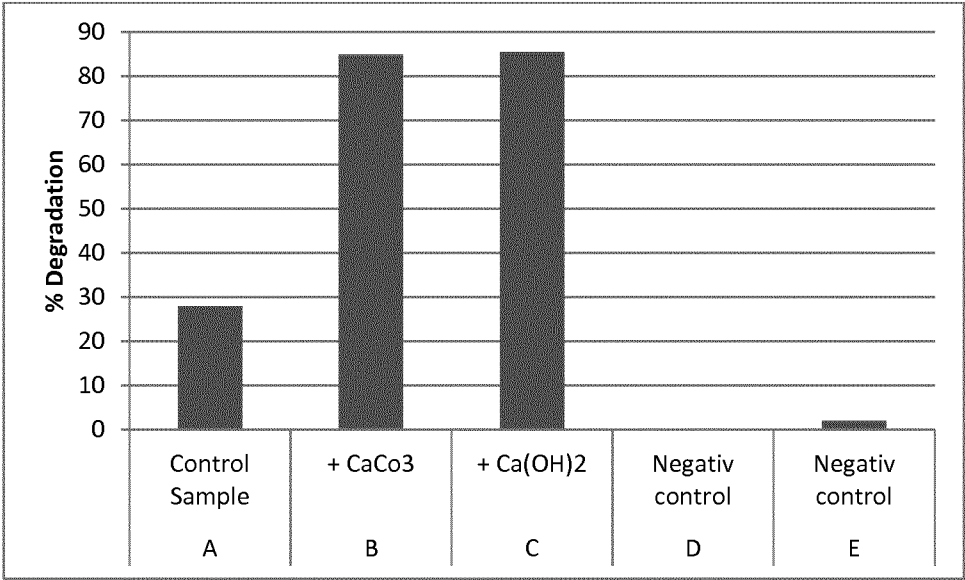


FIGURE 1

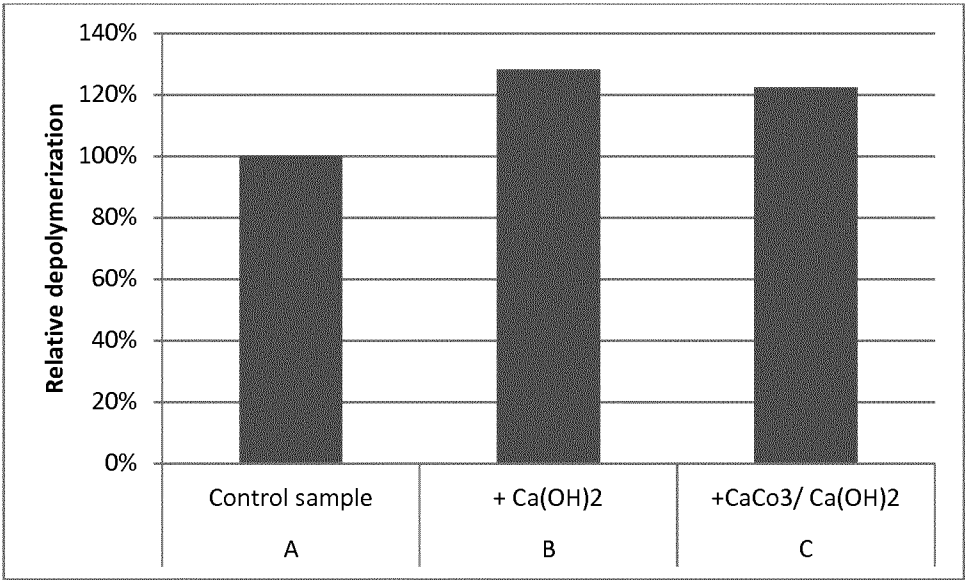


FIGURE 2

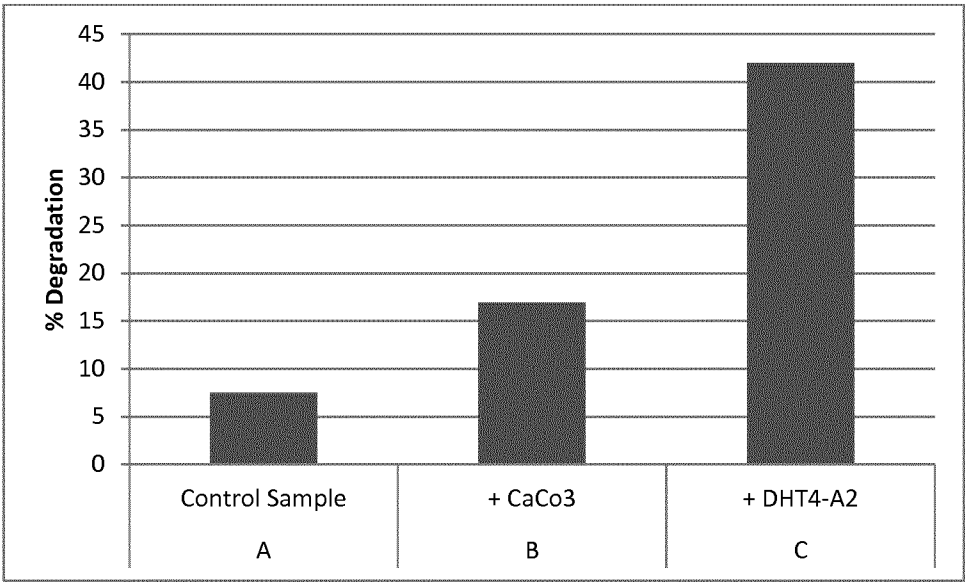


FIGURE 3

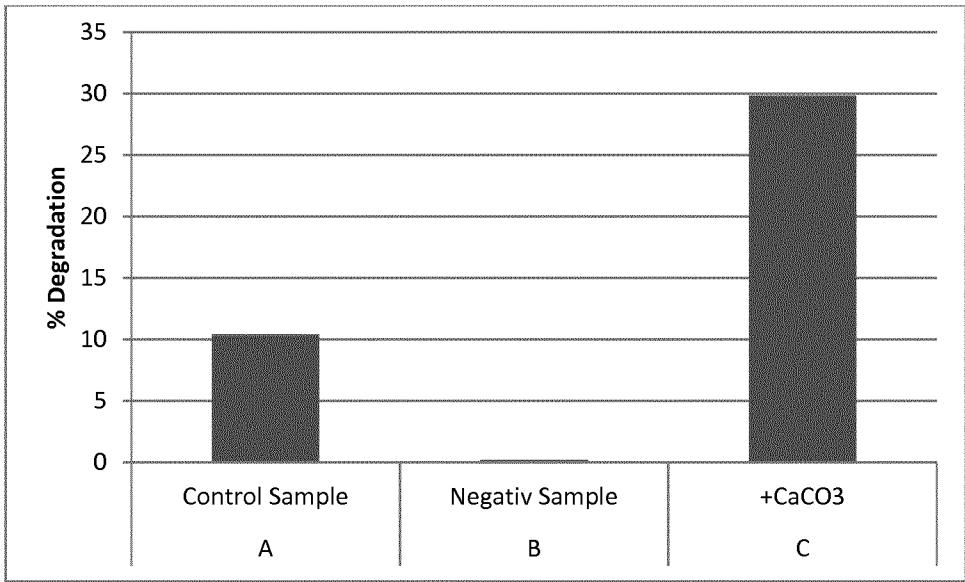


FIGURE 4

3/3

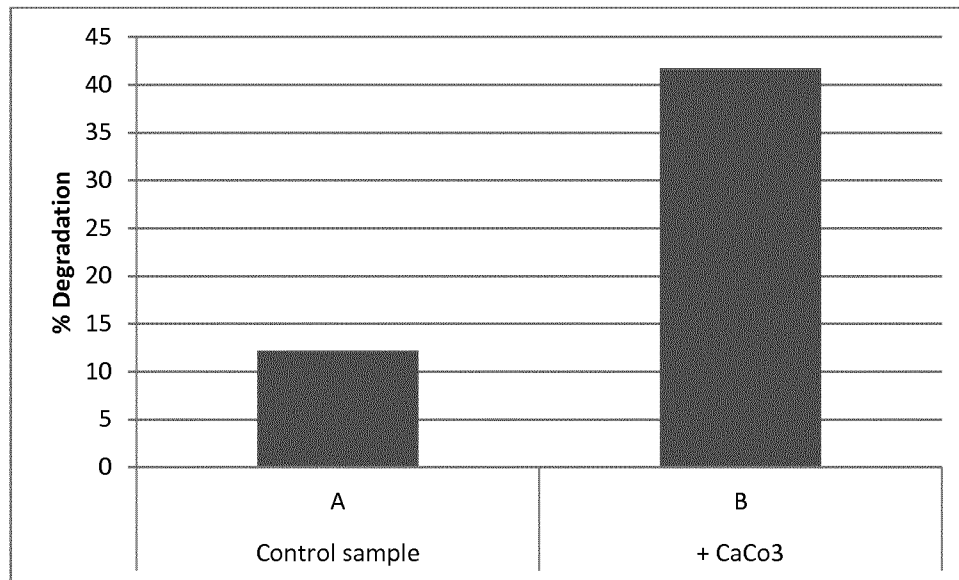


FIGURE 5

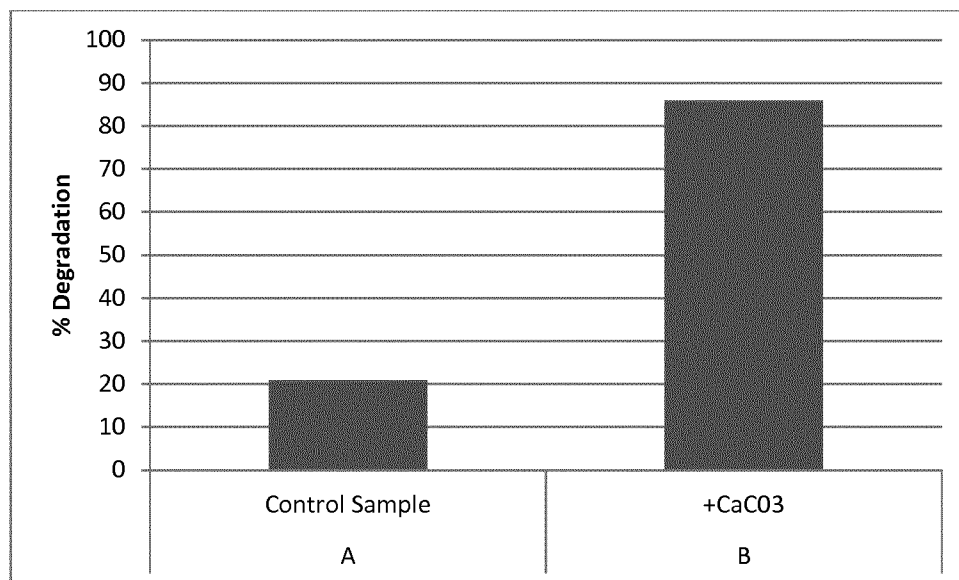


FIGURE 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/063373

A. CLASSIFICATION OF SUBJECT MATTER INV. C08J3/20 C08J3/22 C12N9/00 C08K3/22 C08K3/26 C08K3/34 C08K5/00 C08L67/02 C08L67/04 ADD. According to International Patent Classification (IPC) or to both national classification and IPC																	
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) C08J C08K C12N C08L Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data																	
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Category*</th> <th style="width: 70%;">Citation of document, with indication, where appropriate, of the relevant passages</th> <th style="width: 20%;">Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td style="vertical-align: top;">JP 2002 362578 A (JUJO PAPER CO LTD) 18 December 2002 (2002-12-18)</td> <td style="text-align: center; vertical-align: top;">1-4,6-15</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">Y</td> <td style="vertical-align: top;">paragraphs [0010] - [0012] paragraphs [0015] - [0017] paragraph [0001]; claims 1-5; examples 1-14</td> <td style="text-align: center; vertical-align: top;">5</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td style="text-align: center; vertical-align: top;">----- US 2011/200771 A1 (BARCLAY ANDREW [GB]) 18 August 2011 (2011-08-18)</td> <td style="text-align: center; vertical-align: top;">1-4,6,7, 12-15</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">Y</td> <td style="vertical-align: top;">paragraph [0010] paragraphs [0025] - [0030] paragraphs [0050] - [0052] claims 1-11,14,15,20 ----- -/-</td> <td style="text-align: center; vertical-align: top;">5,8-11</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	JP 2002 362578 A (JUJO PAPER CO LTD) 18 December 2002 (2002-12-18)	1-4,6-15	Y	paragraphs [0010] - [0012] paragraphs [0015] - [0017] paragraph [0001]; claims 1-5; examples 1-14	5	X	----- US 2011/200771 A1 (BARCLAY ANDREW [GB]) 18 August 2011 (2011-08-18)	1-4,6,7, 12-15	Y	paragraph [0010] paragraphs [0025] - [0030] paragraphs [0050] - [0052] claims 1-11,14,15,20 ----- -/-	5,8-11
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.															
X	JP 2002 362578 A (JUJO PAPER CO LTD) 18 December 2002 (2002-12-18)	1-4,6-15															
Y	paragraphs [0010] - [0012] paragraphs [0015] - [0017] paragraph [0001]; claims 1-5; examples 1-14	5															
X	----- US 2011/200771 A1 (BARCLAY ANDREW [GB]) 18 August 2011 (2011-08-18)	1-4,6,7, 12-15															
Y	paragraph [0010] paragraphs [0025] - [0030] paragraphs [0050] - [0052] claims 1-11,14,15,20 ----- -/-	5,8-11															
<div style="display: flex; justify-content: space-between;"> <div> <input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. </div> <div> <input checked="" type="checkbox"/> See patent family annex. </div> </div>																	
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </div> </div>																	
Date of the actual completion of the international search <div style="text-align: center; font-size: 1.2em;">29 July 2016</div>		Date of mailing of the international search report <div style="text-align: center; font-size: 1.2em;">08/08/2016</div>															
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer <div style="text-align: center; font-size: 1.2em;">Alevizopoulou, M</div>															

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/063373

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2014/303278 A1 (FERREIRA THIERRY [FR] ET AL) 9 October 2014 (2014-10-09) abstract paragraph [0001] paragraphs [0032], [0122] paragraphs [0142], [0144], [0147]; claims 1-24 -----	1-15
Y	EP 0 421 413 A1 (BIODATA OY [FI]) 10 April 1991 (1991-04-10) column 5, line 58 - column 6, line 5 column 6, line 54 - column 8, line 32 column 9, line 26 - column 11, line 2 column 11, lines 29-46 claims 1-8 -----	1-15
Y	JP 2012 149273 A (TOYO SEIKAN KAISHA LTD) 9 August 2012 (2012-08-09) paragraphs [0001], [0035] - [0044] paragraphs [0045] - [0048] paragraphs [0059], [0071] -----	1-15
Y	EP 2 626 386 A1 (TOYO SEIKAN KAISHA LTD [JP]; KUREHA CORP [JP]) 14 August 2013 (2013-08-14) paragraphs [0011], [0015] - [0017] paragraphs [0032], [0038], [0040] paragraphs [0045] - [0054]; claims 1-5 -----	1-15
Y	US 2013/274373 A1 (YOSHIKAWA SEISHI [JP] ET AL) 17 October 2013 (2013-10-17) paragraphs [0017], [0064] - [0067] paragraphs [0074], [0090] - [0101]; table 2 -----	1-15
Y	JP 5 630597 B2 (TOYO SEIKAN KAISHA LTD) 26 November 2014 (2014-11-26) abstract paragraphs [0006], [0021], [0024], [0028], [0030]; claims 1,2 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/063373

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2002362578 A	18-12-2002	JP 3922033 B2 JP 2002362578 A KR 20020077056 A	30-05-2007 18-12-2002 11-10-2002
US 2011200771 A1	18-08-2011	CN 102177196 A EP 2334723 A2 GB 2464285 A US 2011200771 A1 WO 2010041063 A2	07-09-2011 22-06-2011 14-04-2010 18-08-2011 15-04-2010
US 2014303278 A1	09-10-2014	CA 2859479 A1 CN 104159950 A EP 2794730 A1 FR 2984354 A1 FR 2984355 A1 JP 2015509990 A KR 20140116418 A US 2014303278 A1 WO 2013093355 A1	27-06-2013 19-11-2014 29-10-2014 21-06-2013 21-06-2013 02-04-2015 02-10-2014 09-10-2014 27-06-2013
EP 0421413 A1	10-04-1991	AU 6363390 A CA 2027063 A1 CN 1051188 A EP 0421413 A1 FI 894736 A JP H03179036 A US 5118725 A	11-04-1991 06-04-1991 08-05-1991 10-04-1991 06-04-1991 05-08-1991 02-06-1992
JP 2012149273 A	09-08-2012	JP 5071598 B2 JP 2012149273 A	14-11-2012 09-08-2012
EP 2626386 A1	14-08-2013	CA 2813660 A1 CN 103210043 A EP 2626386 A1 JP 5829393 B2 JP 2012077245 A RU 2013120288 A US 2013184415 A1 WO 2012046709 A1	12-04-2012 17-07-2013 14-08-2013 09-12-2015 19-04-2012 20-11-2014 18-07-2013 12-04-2012
US 2013274373 A1	17-10-2013	CN 103328580 A EP 2666827 A1 JP 5286505 B2 JP 2012149176 A KR 20130093170 A US 2013274373 A1 WO 2012099017 A1	25-09-2013 27-11-2013 11-09-2013 09-08-2012 21-08-2013 17-10-2013 26-07-2012
JP 5630597 B2	26-11-2014	JP 5630597 B2 JP 2010131528 A	26-11-2014 17-06-2010