Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2641771 C 2014/11/18

(11)(21) **2 641 771**

(12) **BREVET CANADIEN**
CANADIAN PATENT

(13) **C**

(86) **Date de dépôt PCT/PCT Filing Date:** 2007/03/13
(87) **Date publication PCT/PCT Publication Date:** 2007/10/25
(45) **Date de délivrance/Issue Date:** 2014/11/18
(85) **Entrée phase nationale/National Entry:** 2008/08/07
(86) **N° demande PCT/PCT Application No.:** US 2007/006236
(87) **N° publication PCT/PCT Publication No.:** 2007/120415
(30) **Priorité/Priority:** 2006/03/28 (US11/390,187)


(51) **Cl.Int./Int.Cl.** ***A47K 10/32*** (2006.01),
A47K 10/36 (2006.01), ***B65H 35/00*** (2006.01)

(72) **Inventeurs/Inventors:**
FORMON, JOHN S., US;
WIESER, RUSSELL G., US

(73) **Propriétaire/Owner:**
SCA TISSUE NORTH AMERICA LLC, US

(74) **Agent:** FETHERSTONHAUGH & CO.

(54) **Titre : DISTRIBUTEUR MAINS LIBRES MOTORISE DE FEUILLE ABSORBANTE**
(54) **Title: HANDS-FREE POWERED ABSORBENT SHEET DISPENSER**

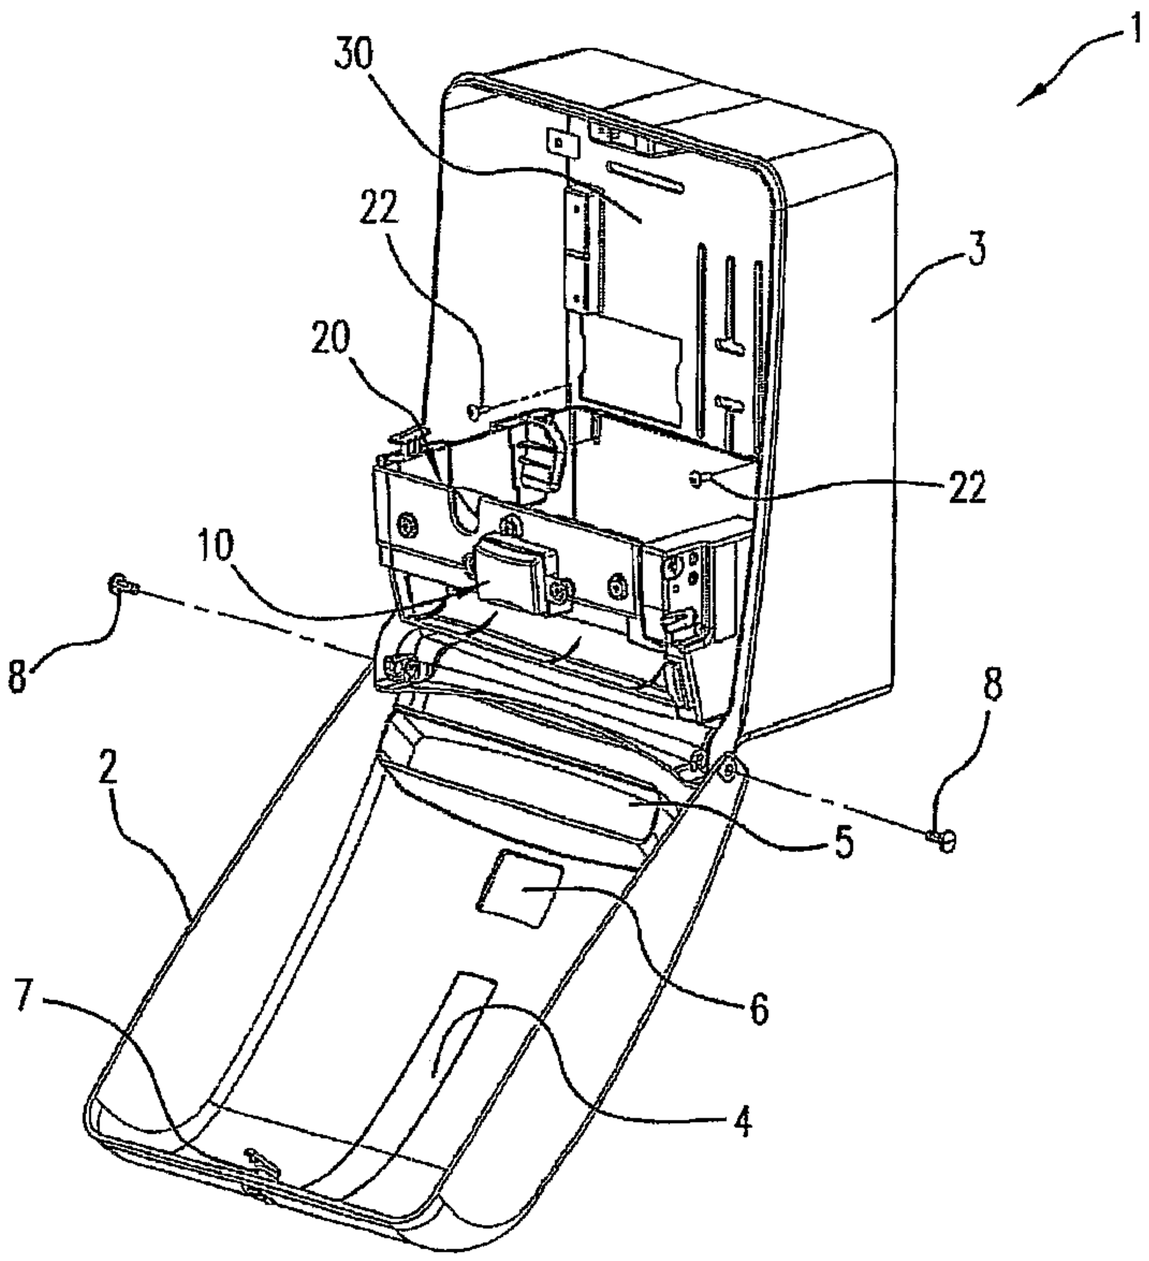

(57) **Abrégé/Abstract:**
A hands-free dispenser has a body and a cover connected to the body. A sensor element is attached to the body. The cover has an opening that enables the sensor to protrude through the cover and extend beyond a plane of the cover when the cover is closed.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
25 October 2007 (25.10.2007)

PCT

(10) International Publication Number
WO 2007/120415 A3

(51) International Patent Classification:
B65H 61/00 (2006.01)

(21) International Application Number:
PCT/US2007/006236

(22) International Filing Date: 13 March 2007 (13.03.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/390,187 28 March 2006 (28.03.2006) US

(71) Applicant *(for all designated States except US)*: **SCA TISSUE NORTH AMERICA LLC** [US/US]; P.O. Box 2400, Neenah, WI 54957-2400 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **FORMON, John S.** [US/US]; 324 East Carrington Lane, Appleton, WI 54913 (US). **WEISER, Russell, G.** [US/US]; 320 E. Applecreek Road, Appleton, WI 54913 (US).

(74) Agents: **MCDOWELL, Liam** et al.; Young & Thompson, 745 South 23rd Street, Arlington, VA 22202 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

[Continued on next page]

(54) Title: HANDS-FREE POWERED ABSORBENT SHEET DISPENSER

(57) Abstract: A hands-free dispenser has a body and a cover connected to the body. A sensor element is attached to the body. The cover has an opening that enables the sensor to protrude through the cover and extend beyond a plane of the cover when the cover is closed.

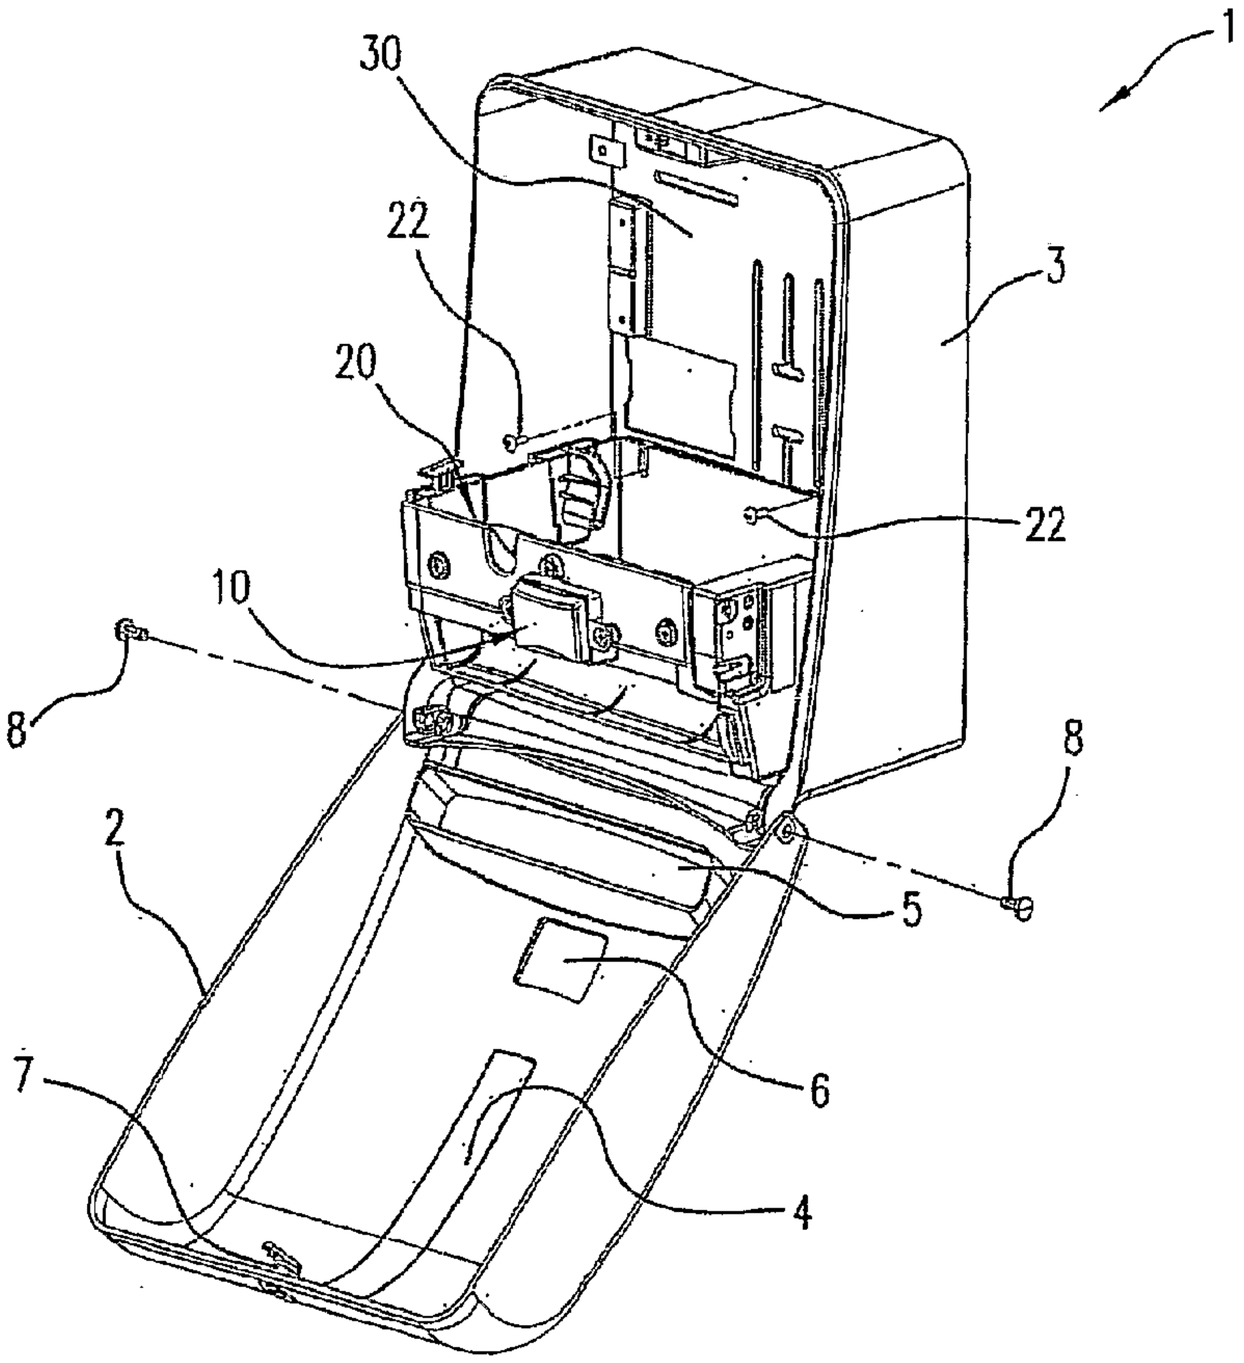

WO 2007/120415 A3

WO 2007/120415 A3

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) Date of publication of the international search report:
13 December 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Hands-Free Powered Absorbent Sheet Dispenser

BACKGROUND OF THE INVENTION

Field of the Invention

The invention relates to a hands-free dispenser for absorbent sheet products contained in roll form within a dispenser body, preferably paper towels.

Description of Related Art

Hands-free paper towel dispensers in which the towels are supplied in roll form are widely used in commercial establishments and have the advantage of relatively high capacity, and thus a less frequent need to replace the rolls. In addition, many users prefer these types of dispensers for hygienic reasons because the user need not touch the dispenser to obtain a quantity of paper towel. Current commercial embodiments of these paper towel housings are often made from molded plastics that are translucent or have white or off-white colors.

A number of prior art hands-free dispensers have a hand sensor mounted behind the front cover, which gives rise to certain limitations as will be discussed below.

22578-70

SUMMARY OF THE INVENTION

Some aspects of the present invention provide hands-free dispenser comprising a dispenser body adapted to receive a roll of absorbent sheet products to be disposed within the dispenser; a cover secured to the dispenser body while permitting the cover to be opened for service of the dispenser or replacement of a roll of absorbent sheet products therein, the cover having an opening; and a sensor connected to the dispenser body and extending at least part way through the opening to protrude beyond a main plane of the cover when the cover is closed.

According to one aspect of the present invention, there is provided a hands-free dispenser for dispensing lengths of absorbent sheet products from a roll to be disposed within said dispenser, said dispenser comprising: a dispenser body; a cover pivotally connected to said dispenser body, said cover having an opening; and an object detecting sensor that at least partially projects through said opening forwardly of the dispenser when the cover is closed, wherein said sensor comprises a printed circuit board and at least one antenna, said printed circuit board and said at least one antenna being disposed entirely forward of a plane containing at least part of upper and lower outer edges of said opening when said cover is closed.

According to another aspect of the present invention, there is provided a hands-free dispenser for dispensing lengths of absorbent sheet products from a roll to be disposed within said dispenser, said dispenser comprising: a dispenser body comprising a rear mounting surface, said dispenser body being adapted to receive a roll of absorbent sheet products to be

disposed within said dispenser, said dispenser body further comprising a first hinge structure and a first lock structure; a cover comprising a second hinge structure engaging said first hinge structure to secure the cover to the dispenser body while permitting the cover to be opened for service of said dispenser or replacement of a roll of absorbent sheet products therein, and a second lock structure adapted to engage the first lock structure to secure the cover in a closed position, said cover having a first opening permitting passage of lengths of absorbent sheet products to pass therethrough and a second opening above said first opening; and a sensor housed mounted on said dispenser body and extending at least part way through said second opening to extend beyond a plane of the cover when the cover is closed, said sensor being supported by said dispenser body when said cover is open, wherein said sensor comprises a printed circuit board and at least one antenna.

According to still another aspect of the present invention, there is provided a hands-free dispenser, comprising: a dispenser body; a cover connected to said dispenser body, said cover having first and second openings; and a sensor that protrudes through said second opening and extends beyond a plane of said cover when said cover is closed, wherein said sensor comprises a printed circuit board and at least one antenna.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, features and advantages of the invention will become more apparent after reading the following detailed description of preferred embodiments of the invention, given with reference to the accompanying drawings, in which:

22578-70

Figure 1 is a perspective view showing an embodiment of a dispenser according to the present invention;

Figure 2 is a front view showing the dispenser according to Figure 1 with the cover closed;

Figure 3 is a side view showing the dispenser according to Figure 1 with the cover closed;

Figure 4 is a sectional view through the line A-A of Figure 2;

Figure 5 is an exploded view of a cassette of Figure 1; and

Figure 6 is a front view of an embodiment of a sensor according to a preferred embodiment of the invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In Figure 1, it can be seen that the dispenser 1 comprises a cover 2 and a body portion 3. The cover 2 in this embodiment is pivotally mounted to the body portion 3 via pivot pins 8 that pass through complementary aligned openings in the cover 2 and body portion 3, although another hinge type or other pivotal mounting structure could also be used. The term "hinge structure" is used broadly herein to designate any structure that allows the cover to be pivotally mounted to the cover. The cooperating hinge structures could also take the form of bosses formed on the dispenser body that fit within openings formed on the cover.

With the cover closed as shown in Fig. 3, the cover 2 is held to the body portion 3 by a lock 7, which

involves a conventional key-actuated locking structure engaging with a cooperating locking structure on the body portion 3.

In the presently preferred embodiment, the dispenser is a powered hands-free dispenser having an object sensor 10. The object sensor 10 detects, for example, the presence of a user's hand, and in response to that detection automatically dispenses a predetermined or adjustable length of paper towel, which the user then tears off by pulling the towel against a cutting blade disposed inside the dispenser housing. The type of sensing is not limited in this invention, and could be for example passive or active infrared sensing, or sensing based on disruption of an electromagnetic field generated between a transmitting and receiving antenna.

As seen in Figure 1, the body portion 3 supports the entirety of the object sensor 10. Thus, when the cover 2 is opened, the object sensor 10 remains joined to the body portion 3 without any part of the sensor being connected to the cover 2. Therefore, the openings in the cover 2 including dispensing opening 5, and sensor opening 6 are distinctly defined.

In the presently preferred embodiment, the sensor 10 is part of a cassette 20 (see Figures 1 and 5) that is removable from the remainder of the body portion

3. Thus, reference to the "body portion" herein includes in this embodiment both the cassette and the remaining wall-mounted rear portion of body portion 3. The cassette also includes a motor 40 and gearing 50 to drive a drive roller 15 for unwinding material from the roll of absorbent material R when the sensor 10 is activated. The cassette 20 may also include a cutting member 9 for cutting sheets of absorbent material that are to be dispensed through the dispensing opening 5.

In the presently preferred embodiment as seen in Figures 4 and 6, the object sensor 10 includes an antenna printed circuit board (PCB) 14 having a pair of antennae 12, 13 thereon. The antenna PCB 14 and antennae 12, 13 in this embodiment remain outside a plane of the cover 2 when the cover is closed and extend through the sensor opening 6. In greater detail, the PCB 14 preferably is disposed entirely forward of a plane containing at least part of each of the upper and lower outer edges of the opening 6, when the cover is closed. The PCB 14 preferably projects at least partially through the opening 6, it being understood that the area of the dispenser cover 2 surrounding opening 6 is a non-recessed region of the cover 2.

A sensor lens 11 preferably surrounds the antenna PCB 14 and antenna 12, 13 to protect them. An advantage

of this configuration of the antenna PCB 14 and antenna 12, 13, is that it allows the cover 2 and/or the body portion 3 to be made from stainless steel, aluminum or other metal material, or metallized or metal-plated plastic material, without disruption of the electromagnetic field or IR radiation that might occur if the sensor were disposed behind a metallized or metal cover. Of course, the invention is nonetheless not limited to the use of a metal or metallized or metal-plated cover. A further advantage of this arrangement is that it eliminates the need for an external wiring harness to connect the sensor to a control board.

In alternative embodiments, cover 2 and body portion 3 may be made by injection molding of plastic. When the dispenser is plastic, cover 2 may be entirely opaque or mainly opaque or translucent, except in an area of the window 4, which is preferably transparent.

Returning to Figure 1, the body portion 3 comprises a rear mounting surface 30 that is generally perpendicular to the top, bottom and side surfaces. In the embodiment of Figure 1, the rear mounting surface 30 includes mounting holes for mounting cassette 20 thereto. When the screws 22 holding the cassette 20 to the rear mounting surface 30 are unscrewed, the cassette may be readily slid from the body portion to, for example,

enable batteries (not shown) that power the dispenser to be changed or so that the cassette can be returned to the manufacturer for repair and/or software upgrades. A replacement cassette may then be exchanged for the first cassette so that the dispenser can remain in use. Although a battery-operated dispenser is preferred, a hard-wired or plug-in or solar-powered dispenser is also within the scope of the present invention.

As to the roll of absorbent sheet material to be dispensed from the dispenser, this roll may either be a continuous imperforate roll, which is detached from the roll by the user pulling the dispensed sheet against a cutting blade of the cutting member 9, or may instead be a partially pre-cut web in which the force of the user pulling on the dispensed sheet serves to sever the tabs that connect the dispensed sheet to the next sheet to be dispensed, as is common in hands-free mechanical dispensers. Those pre-cuts can be made either during manufacturing converting of the roll, or in-situ by a blade in the dispenser that pre-cuts the tail of the sheet as it is being dispensed.

The term "absorbent sheet products" as used herein embraces not only paper products such as paper napkins, but also absorbent nonwoven materials not normally classed as papers or tissues. Such nonwoven

materials include pure nonwovens and hybrid nonwoven/pulp webs whose properties are similar to those of tissue paper, but which are based for example on nonwoven or airlaid materials containing low amounts of synthetic fibers, binders, wet strength agents and the like. An example of such a material would be a wetlaid or foam-formed hydraulically entangled nonwoven material comprising at least 30% by weight pulp fibers and at least 20% by weight manmade fibers or filaments.

While the present invention has been described in connection with various preferred embodiments thereof, it is to be understood that those embodiments are provided merely to illustrate the invention, and should not be used as a pretext to limit the scope of protection conferred by the true scope of the appended claims.

22578-70

CLAIMS:

1. A hands-free dispenser for dispensing lengths of absorbent sheet products from a roll to be disposed within said dispenser, said dispenser comprising:

a dispenser body;

a cover pivotally connected to said dispenser body, said cover having an opening; and

an object detecting sensor that at least partially projects through said opening forwardly of the dispenser when the cover is closed,

wherein said sensor comprises a printed circuit board and at least one antenna, said printed circuit board and said at least one antenna being disposed entirely forward of a plane containing at least part of upper and lower outer edges of said opening when said cover is closed.

2. The dispenser as claimed in claim 1, further comprising a cassette mounted within said dispenser body and including a drive mechanism that unrolls lengths of absorbent sheet products when said object detecting sensor is activated.

3. The dispenser as claimed in claim 2, wherein said cover is made from stainless steel or aluminum.

4. The dispenser as claimed in claim 2, wherein said cover is a plated metal cover.

22578-70

5. A hands-free dispenser for dispensing lengths of absorbent sheet products from a roll to be disposed within said dispenser, said dispenser comprising:

a dispenser body comprising a rear mounting surface, said dispenser body being adapted to receive a roll of absorbent sheet products to be disposed within said dispenser, said dispenser body further comprising a first hinge structure and a first lock structure;

a cover comprising a second hinge structure engaging said first hinge structure to secure the cover to the dispenser body while permitting the cover to be opened for service of said dispenser or replacement of a roll of absorbent sheet products therein, and a second lock structure adapted to engage the first lock structure to secure the cover in a closed position, said cover having a first opening permitting passage of lengths of absorbent sheet products to pass therethrough and a second opening above said first opening; and

a sensor housed mounted on said dispenser body and extending at least part way through said second opening to extend beyond a plane of the cover when the cover is closed, said sensor being supported by said dispenser body when said cover is open,

wherein said sensor comprises a printed circuit board and at least one antenna.

6. The dispenser according to claim 5, wherein said cover is made from stainless steel or aluminum.

7. The dispenser according to claim 5, wherein said cover is made from injection-molded plastic.

8. The dispenser according to claim 7, wherein said cover is opaque or translucent over most of its surface area, and comprises a transparent window formed therein.

9. The dispenser according to claim 5, further comprising a drive mechanism within said housing, said sensor and said drive mechanism being integral.

10. The dispenser according to claim 9, wherein said drive mechanism and said sensor are part of a cassette that is releasably attached to said rear mounting surface.

11. The dispenser as claimed in claim 10, further comprising a cutting member that cuts lengths of absorbent sheet product dispensed from said first opening.

12. A hands-free dispenser, comprising:

a dispenser body;

a cover connected to said dispenser body, said cover having first and second openings; and

a sensor that protrudes through said second opening and extends beyond a plane of said cover when said cover is closed,

wherein said sensor comprises a printed circuit board and at least one antenna.

13. The dispenser as claimed in claim 12, wherein said sensor is an object detecting sensor that sends a signal for

the dispenser to dispense a sheet of absorbent sheet product through said first opening when activated.

14. The dispenser as claimed in claim 13, further comprising a battery operated motor and a drive roller connected to said motor, said signal energizing said motor to rotate said drive roller and dispense a sheet of absorbent sheet product through said first opening.

15. The dispenser as claimed in claim 14, further comprising a cutting member for cutting a sheet of absorbent sheet product dispensed through said first opening.

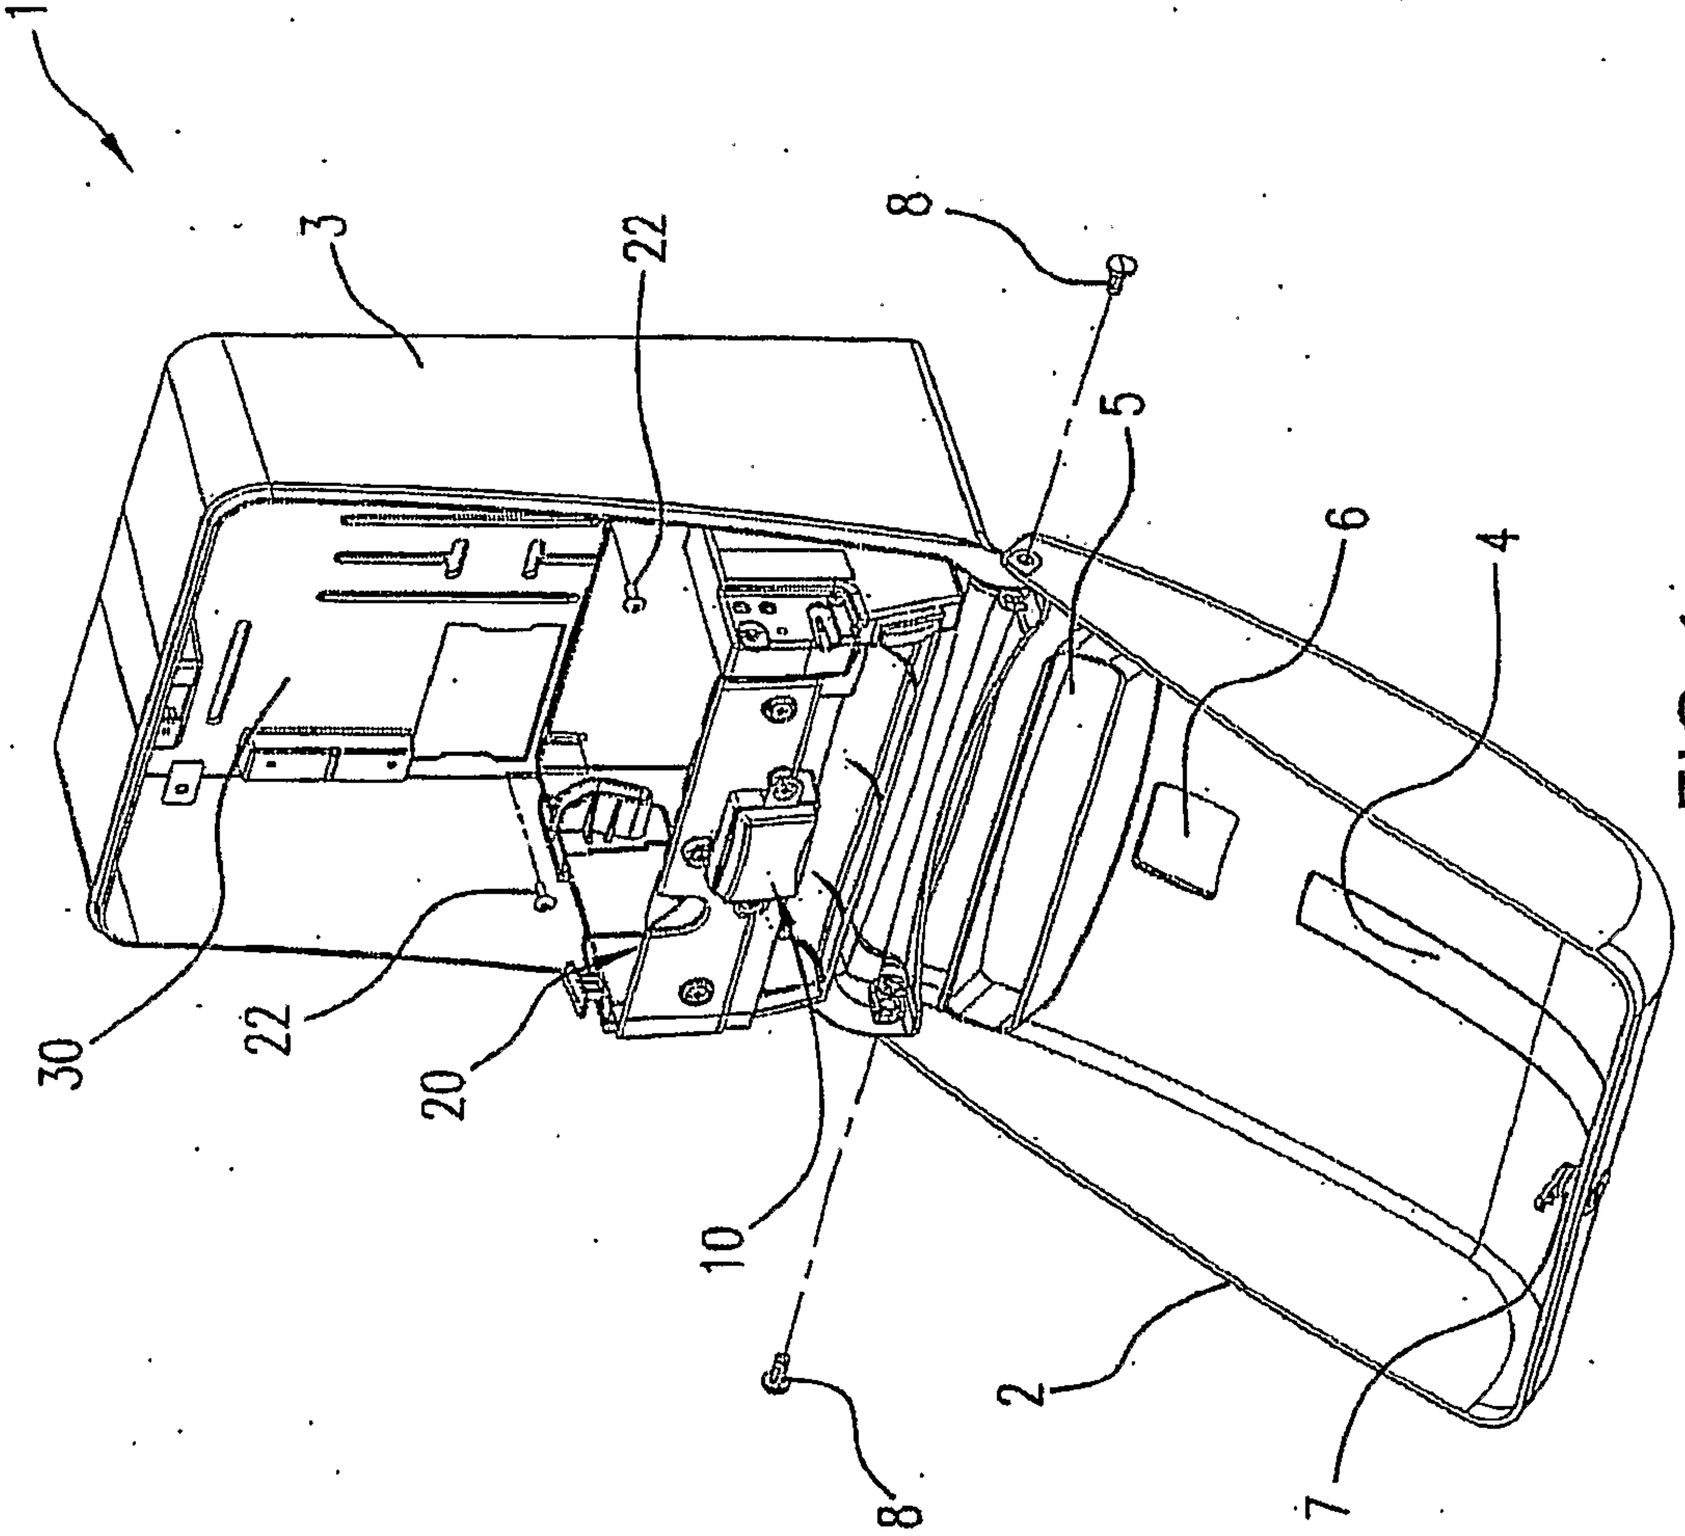


FIG. 1

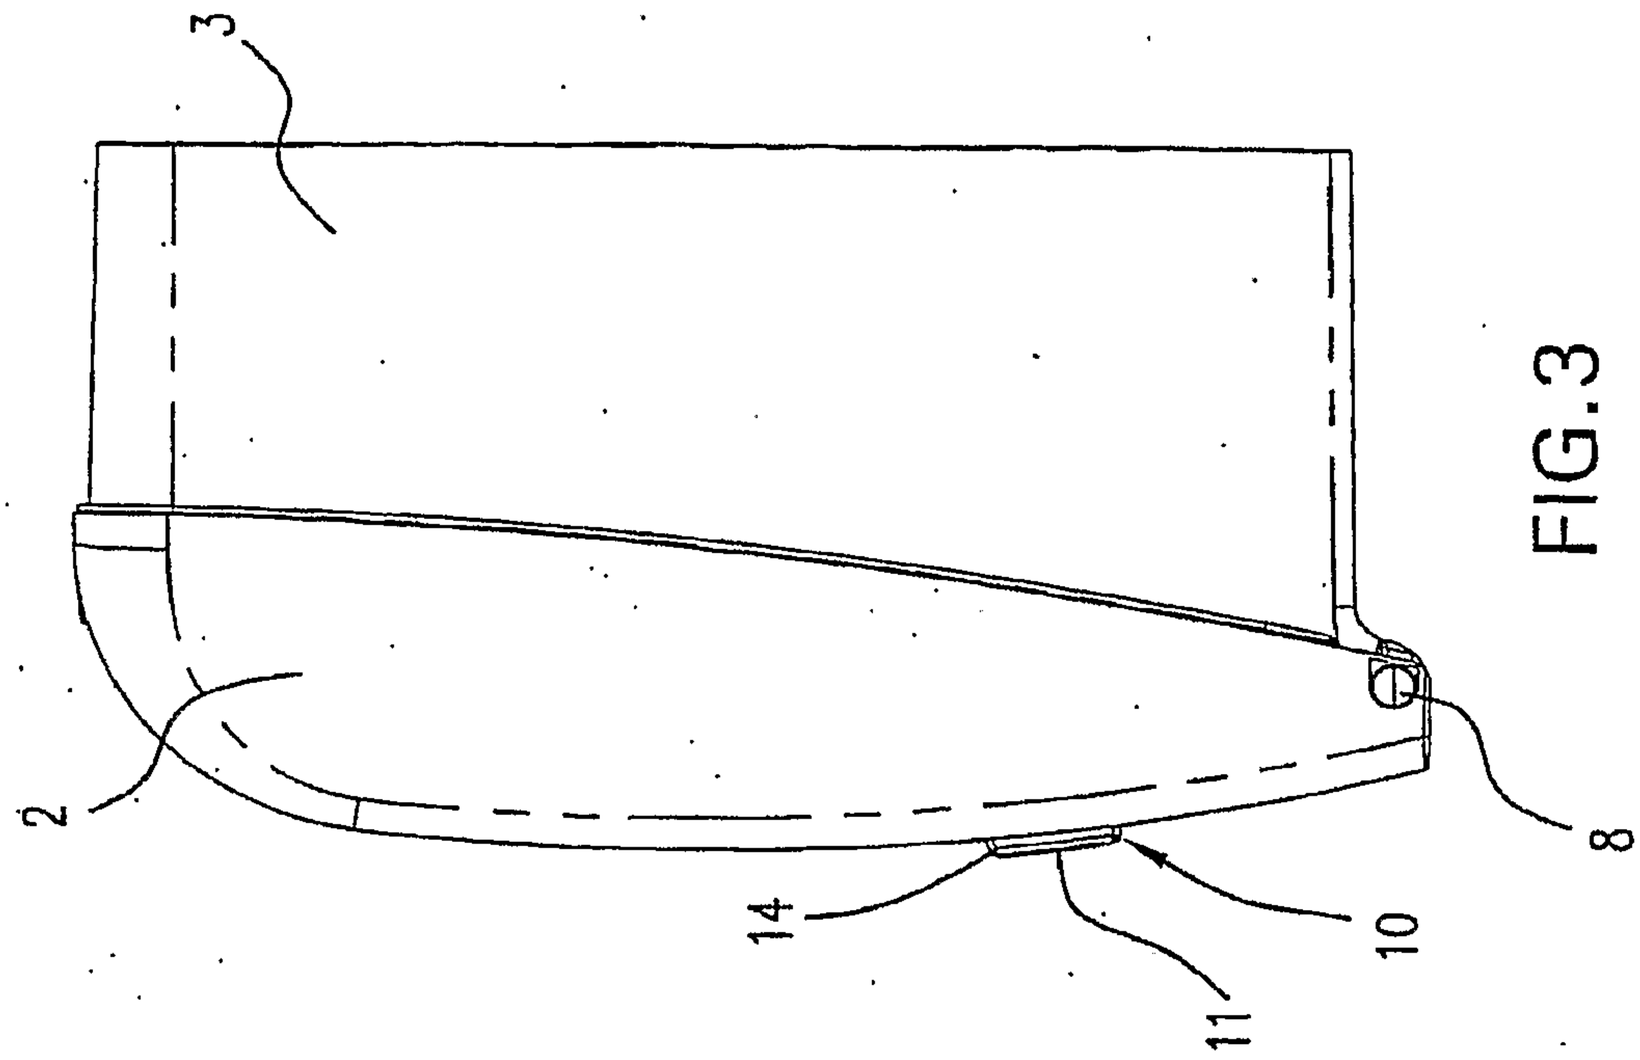


FIG.3

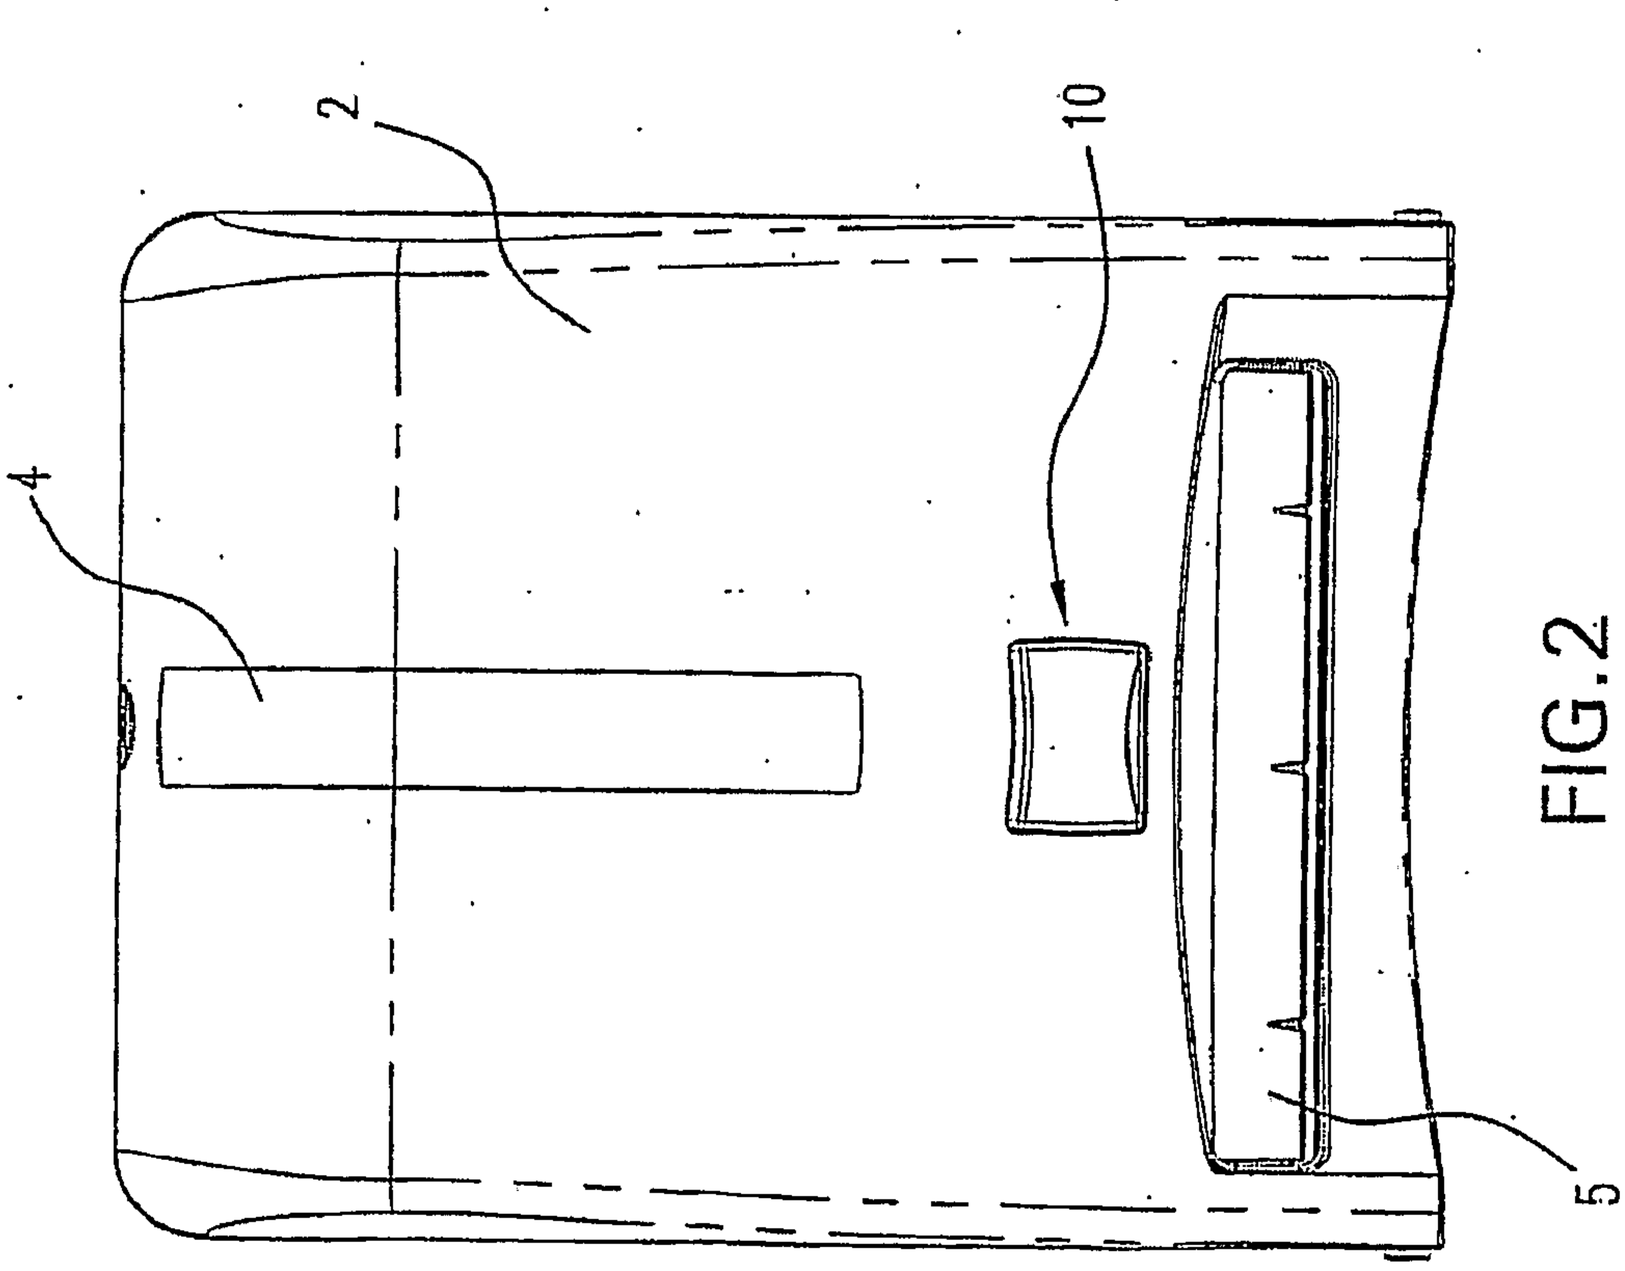


FIG.2

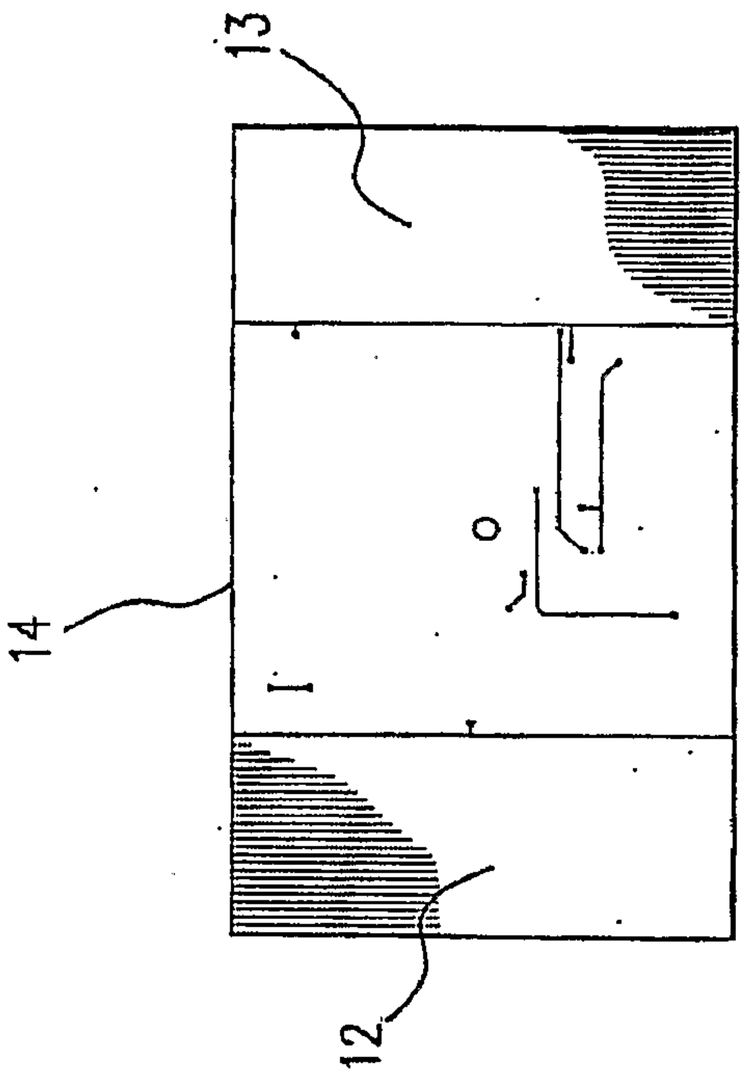


FIG.6

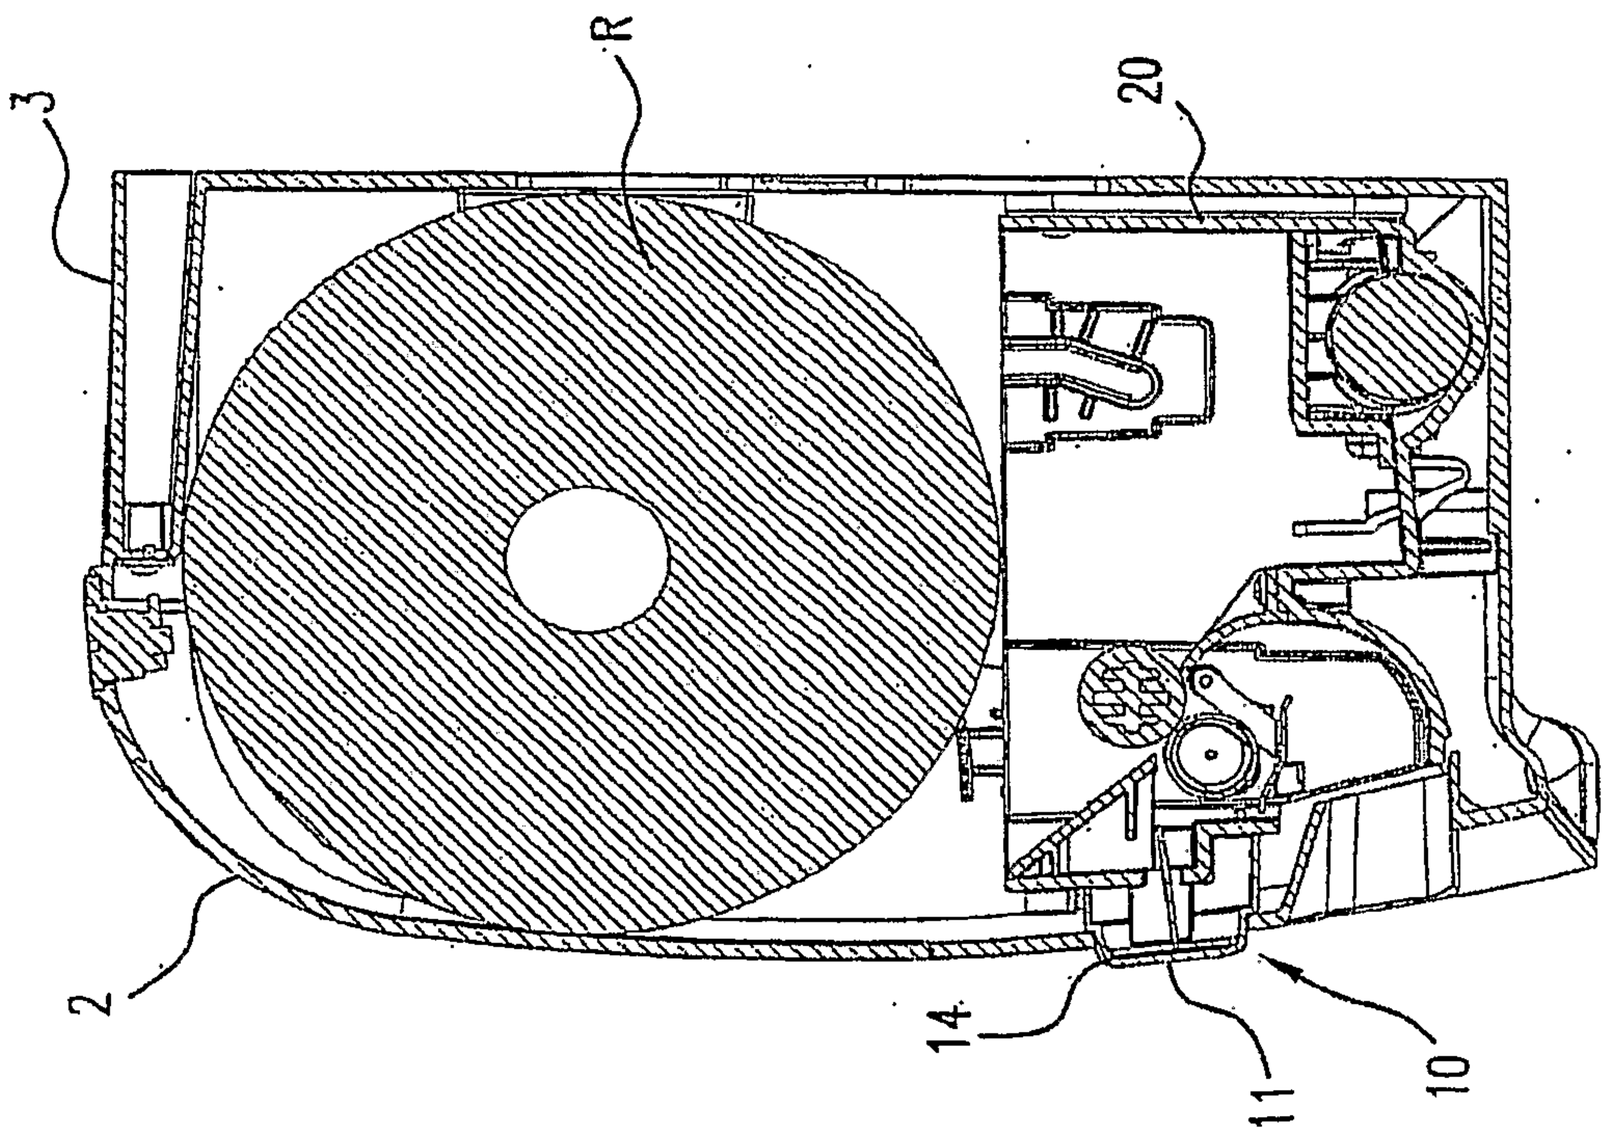


FIG.4

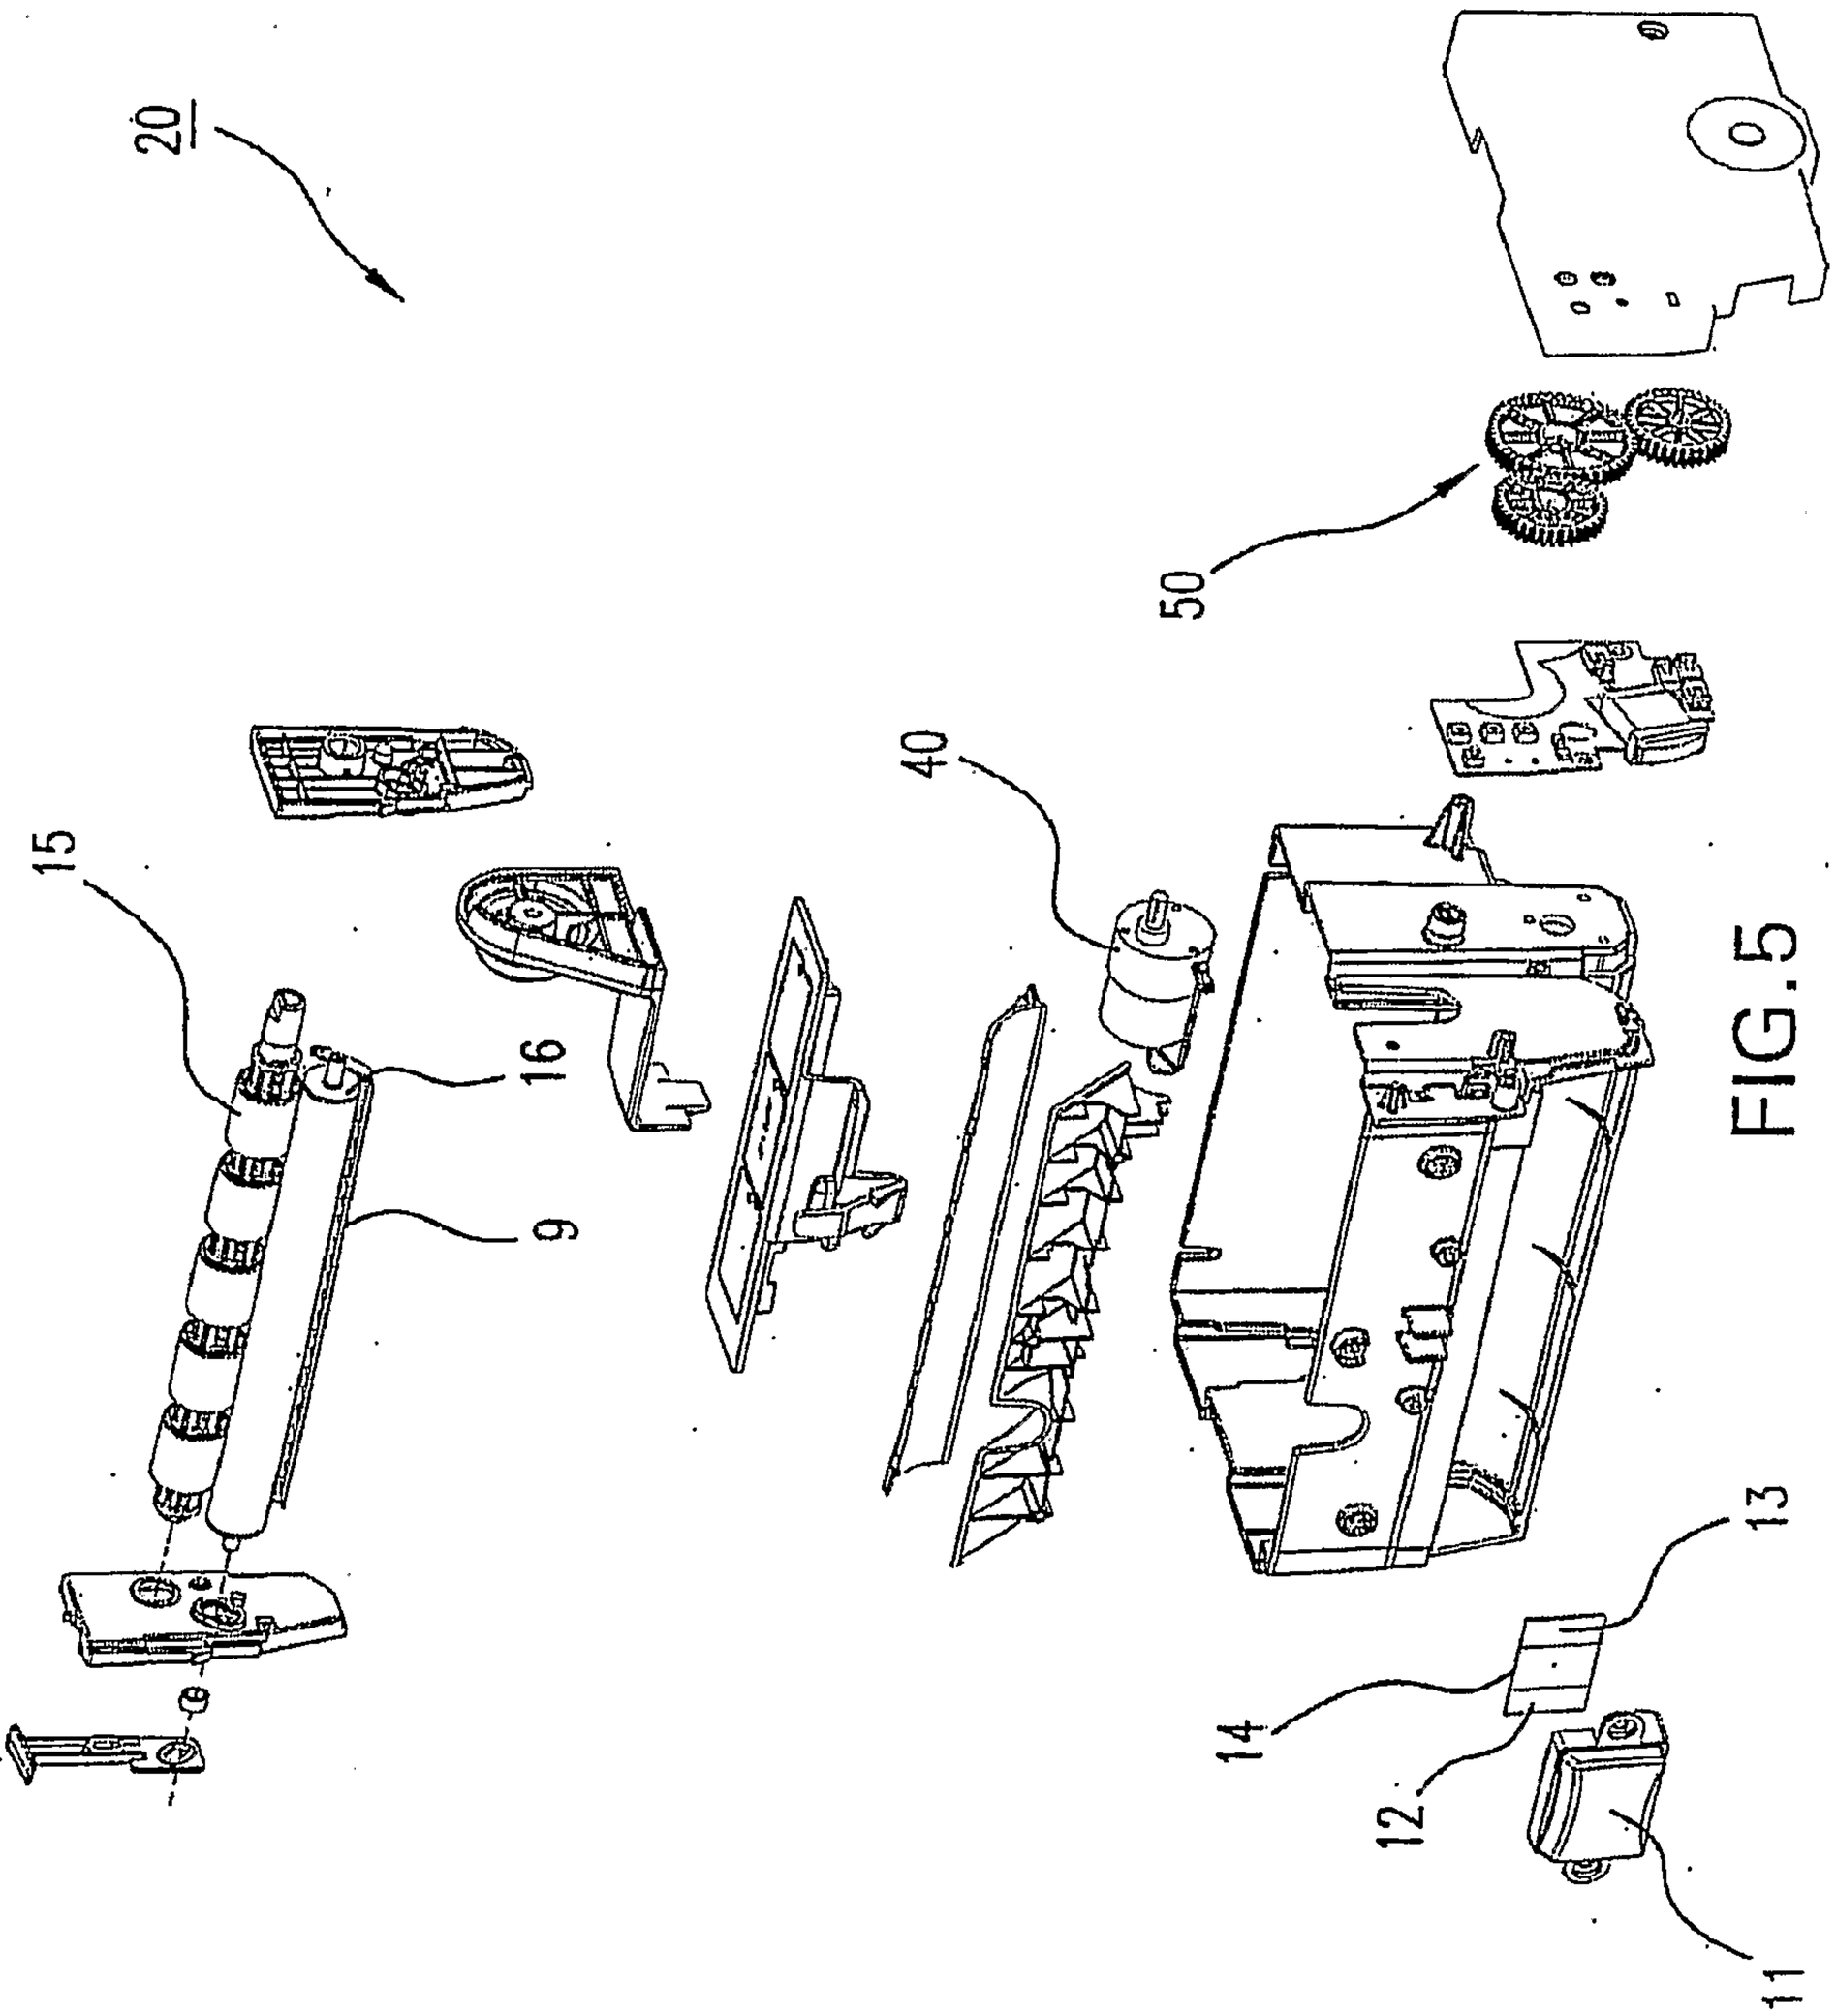
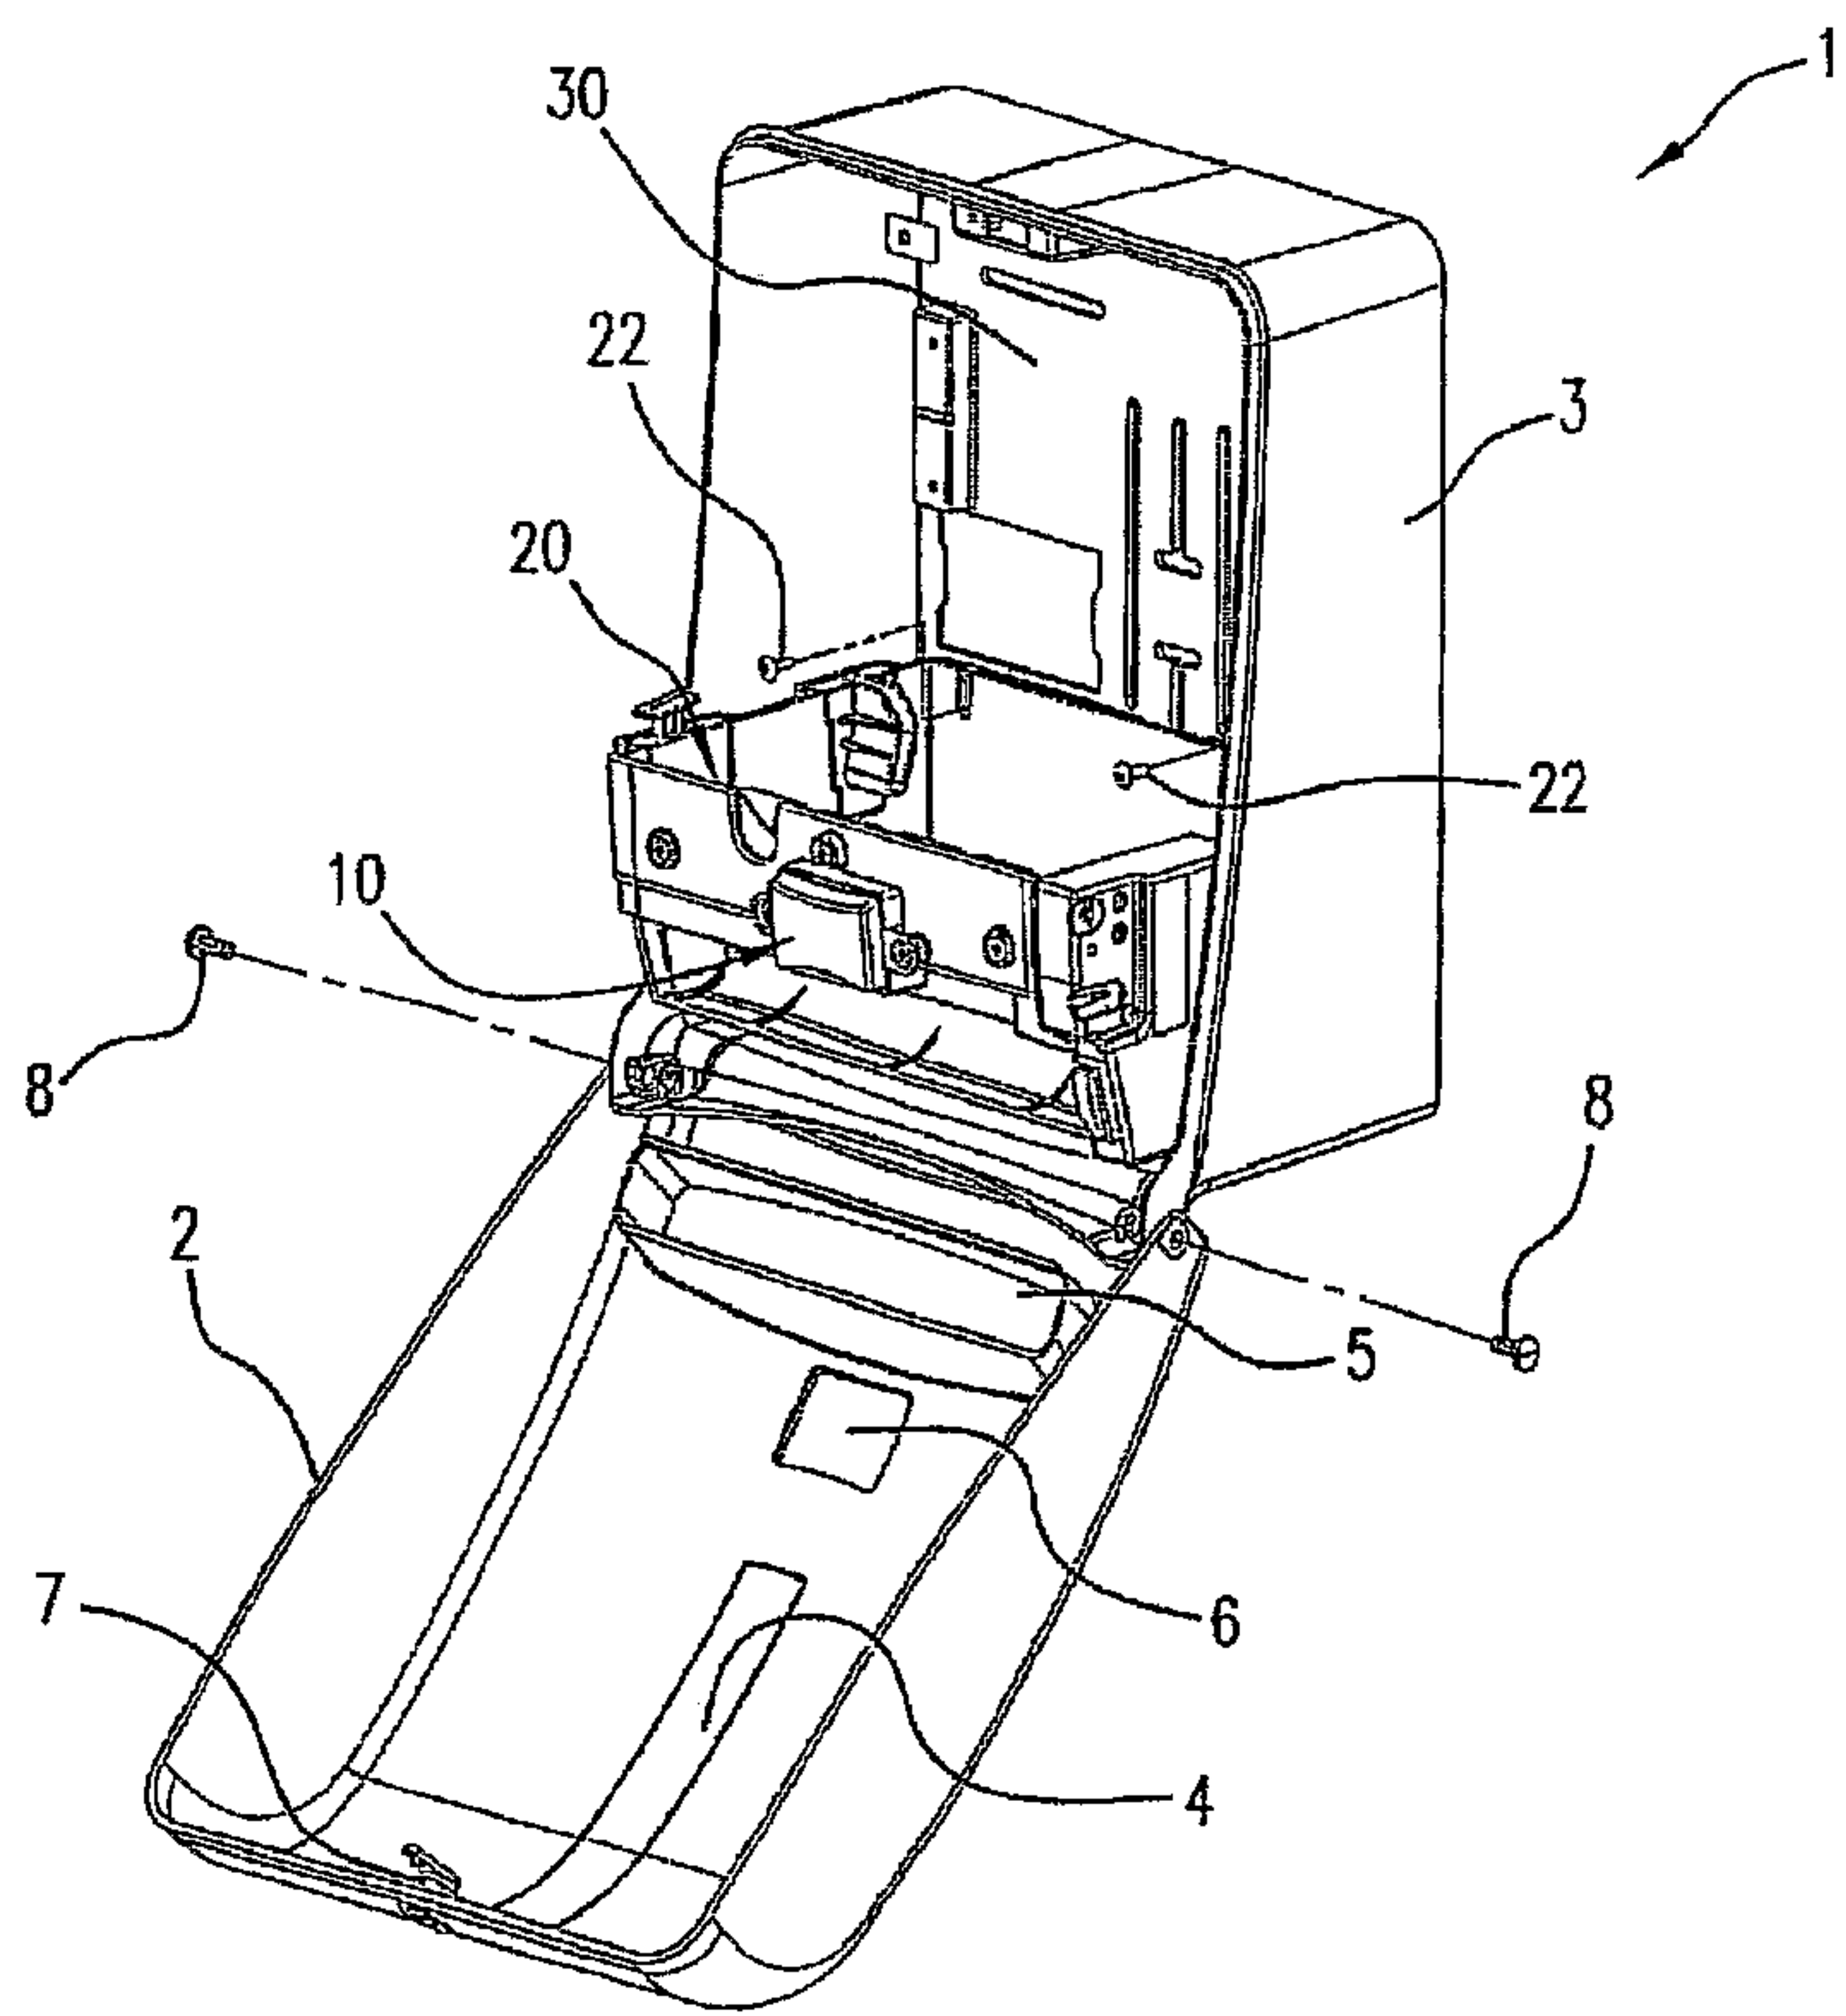


FIG.5


1
30
22
3
20
22
10
8
8
2
5
7
6
4