




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>H01Q 1/38</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 99/17400</b> (43) International Publication Date: 8 April 1999 (08.04.99)</p>
<p>(21) International Application Number: PCT/SE98/01677 (22) International Filing Date: 18 September 1998 (18.09.98) (30) Priority Data: 9703586-9 1 October 1997 (01.10.97) SE (71) Applicant (for all designated States except US): ALLGON AB [SE/SE]; P.O. Box 500, S-184 25 Åkersberga (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): PETERSSON, John [SE/SE]; Ljusterögatan 3, II, S-116 42 Stockholm (SE). JONSSON, Stefan [SE/SE]; Studievägen 2, S-182 74 Stocksund (SE). (74) Agents: MODIN, Jan et al.; Axel Ehner's Patentbyrå AB, P.O. Box 10316, S-100 55 Stockholm (SE).</p>		<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>

(54) Title: METHOD OF PRODUCING AN ANTENNA ELEMENT ASSEMBLY

(57) Abstract

A method of producing an antenna element assembly is disclosed. The antenna element assembly (4) includes a rigid dielectric support member (1) carrying at least one radiating patch (2), the antenna element assembly being intended to be mounted onto an antenna device for transmitting and/or receiving microwave radiation. According to the invention, parasitic elements (3a, 3b) as well as the radiating patches (2) are formed onto the rigid support member by applying a conductive liquid in a screen printing process.

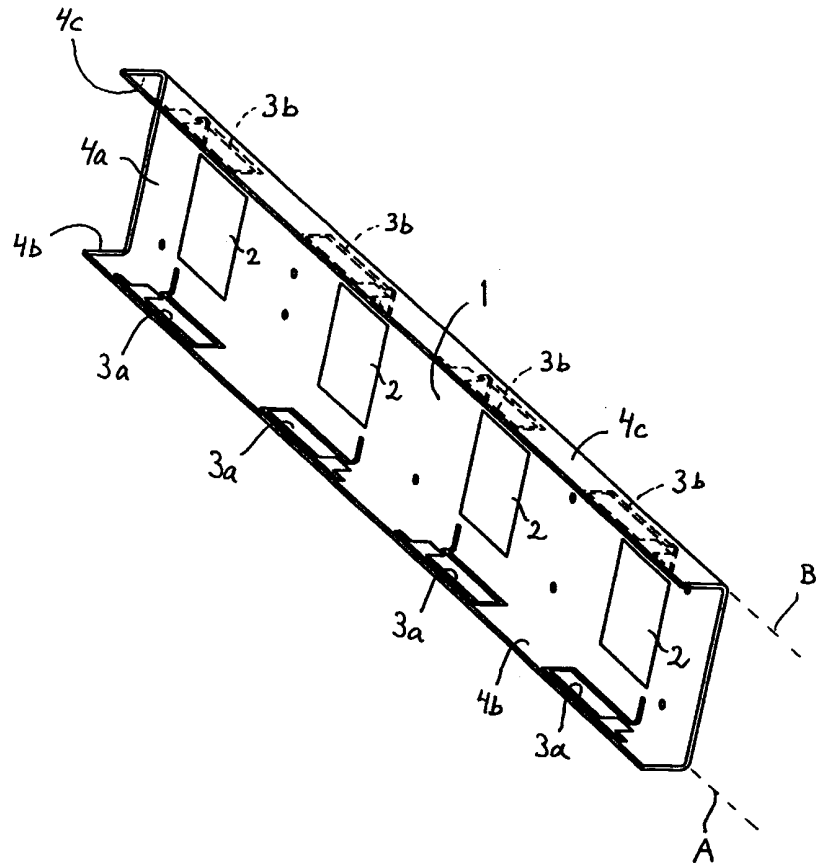

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

<b>AL</b>	Albania	<b>ES</b>	Spain	<b>LS</b>	Lesotho	<b>SI</b>	Slovenia
<b>AM</b>	Armenia	<b>FI</b>	Finland	<b>LT</b>	Lithuania	<b>SK</b>	Slovakia
<b>AT</b>	Austria	<b>FR</b>	France	<b>LU</b>	Luxembourg	<b>SN</b>	Senegal
<b>AU</b>	Australia	<b>GA</b>	Gabon	<b>LV</b>	Latvia	<b>SZ</b>	Swaziland
<b>AZ</b>	Azerbaijan	<b>GB</b>	United Kingdom	<b>MC</b>	Monaco	<b>TD</b>	Chad
<b>BA</b>	Bosnia and Herzegovina	<b>GE</b>	Georgia	<b>MD</b>	Republic of Moldova	<b>TG</b>	Togo
<b>BB</b>	Barbados	<b>GH</b>	Ghana	<b>MG</b>	Madagascar	<b>TJ</b>	Tajikistan
<b>BE</b>	Belgium	<b>GN</b>	Guinea	<b>MK</b>	The former Yugoslav Republic of Macedonia	<b>TM</b>	Turkmenistan
<b>BF</b>	Burkina Faso	<b>GR</b>	Greece	<b>ML</b>	Mali	<b>TR</b>	Turkey
<b>BG</b>	Bulgaria	<b>HU</b>	Hungary	<b>MN</b>	Mongolia	<b>TT</b>	Trinidad and Tobago
<b>BJ</b>	Benin	<b>IE</b>	Ireland	<b>MR</b>	Mauritania	<b>UA</b>	Ukraine
<b>BR</b>	Brazil	<b>IL</b>	Israel	<b>MW</b>	Malawi	<b>UG</b>	Uganda
<b>BY</b>	Belarus	<b>IS</b>	Iceland	<b>MX</b>	Mexico	<b>US</b>	United States of America
<b>CA</b>	Canada	<b>IT</b>	Italy	<b>NE</b>	Niger	<b>UZ</b>	Uzbekistan
<b>CF</b>	Central African Republic	<b>JP</b>	Japan	<b>NL</b>	Netherlands	<b>VN</b>	Viet Nam
<b>CG</b>	Congo	<b>KE</b>	Kenya	<b>NO</b>	Norway	<b>YU</b>	Yugoslavia
<b>CH</b>	Switzerland	<b>KG</b>	Kyrgyzstan	<b>NZ</b>	New Zealand	<b>ZW</b>	Zimbabwe
<b>CI</b>	Côte d'Ivoire	<b>KP</b>	Democratic People's Republic of Korea	<b>PL</b>	Poland		
<b>CM</b>	Cameroon	<b>KR</b>	Republic of Korea	<b>PT</b>	Portugal		
<b>CN</b>	China	<b>KZ</b>	Kazakistan	<b>RO</b>	Romania		
<b>CU</b>	Cuba	<b>LC</b>	Saint Lucia	<b>RU</b>	Russian Federation		
<b>CZ</b>	Czech Republic	<b>LI</b>	Liechtenstein	<b>SD</b>	Sudan		
<b>DE</b>	Germany	<b>LK</b>	Sri Lanka	<b>SE</b>	Sweden		
<b>DK</b>	Denmark	<b>LR</b>	Liberia	<b>SG</b>	Singapore		
<b>EE</b>	Estonia						

**METHOD OF PRODUCING AN ANTENNA ELEMENT ASSEMBLY**

The present invention relates to a method of producing an antenna device for transmitting and/or receiving dual polarized electromagnetic radiation, in particular in the microwave region, in two orthogonal channels, said antenna device including a rigid, dielectric support member carrying a row of radiating patches and parasitic elements being arranged on two opposite lateral sides of said row of radiating patches so as to maintain a high degree of isolation between said two orthogonal channels. The invention also relates to an antenna device, produced by the method.

In recent years, new methods have been developed to form thin metallic layers to be used as antenna elements or other electrical circuit components, in particular by applying a conductive liquid, sometimes referred to as a conductive paint or ink, onto a substrate or support member. Compare e.g. the U.S. patent specification 5566441 (British Technology Group Ltd.) or the published PCT document WO 97/14157 (IMG Group Ltd.).

Normally, such antennas or other circuit components are directly connected to electrical terminals for conductively feeding electrical energy to the antenna element or the corresponding component.

In contrast, the present invention concerns a method of producing an antenna device with a row of radiating patches, without conductive feed terminals, but cooperating with a feed network having a row of feed elements located at a distance from but in registry with the radiating patches, a general object being to control in an optimal way the performance and radiating characteristics of the radiating patches.

A more specific object is to provide a production method and an antenna device being capable of transferring dual polarized

electromagnetic waves while maintaining a high degree of isolation between the dual polarized electromagnetic waves, which constitute the two orthogonal channels.

5 According to the invention, these objects are achieved by applying a conductive liquid onto the rigid support member so as to form, upon being solidified, said radiating patches as well as said parasitic elements in a predetermined geometrical pattern. Preferably, the patches and the parasitic elements are  
10 formed on the same side of the rigid support member. By using conventional screen printing processes, e.g. a silk screen process, the geometrical pattern can be made very exact in a relatively simple manner, whereby extremely good radiation characteristics, in particular a high degree of isolation  
15 between the two orthogonal channels, can be obtained.

Advantageously, the patches and the parasitic elements are formed in a planar geometrical pattern, whereby the screen printing process is facilitated. In case the support member and  
20 the geometrical pattern should have a three-dimensional shape, such a shape is preferably obtained by bending the support member in a controlled way upon forming the geometrical pattern in a planar configuration. In a preferred embodiment, the support member is bent along two mutually parallel bending  
25 lines so as to form a central planar portion carrying the patches and two lateral side portions standing at an angle from the central planar portion, each of the lateral side portions carrying parasitic elements or portions thereof. If the parasitic elements extend across a bending line, the geo-  
30 metrical pattern is preferably formed on the inside of the bent support member. In this way, undue stretching of the thin parasitic elements can be avoided.

The invention will now be explained below with reference to the  
35 appended drawings illustrating a preferred embodiment of the invention.

Figure 1 shows a rectangular, planar support member with a geometrical pattern printed thereon;

figure 2 shows the support member of figure 1 in a perspective view upon being bent along the side portions thereof; and

figure 3 illustrates the basic parts of an antenna device including an antenna element assembly as shown in figure 2.

10 In figure 1, there is shown a rectangular, rigid support member 1 made of dielectric material, e.g. a plastic sheet of a shape-permanent plastic material, such as polycarbonate, or a composite substrate, such as epoxi-fibre glass or the like. In any case, the material of the support member should be relatively rigid and non-deformable when being used in an antenna device for outdoor use.

According to the invention, radiating patches 2 and parasitic elements 3a, 3b are formed onto the support member 1 by applying a conductive liquid onto the support member 1, preferably by a screen printing process. Upon being solidified, the patches 2 and the parasitic elements 3a, 3b will form electrically conductive elements constituted by a thin layer and forming a predetermined geometrical pattern. Nowadays, such conductive liquids, also denoted a conductive paint or a conductive ink, are commercially available from various suppliers, e.g. a conductive, silver based coating sold by SPRAYLAT, Mount Vernon, New York, USA, the material being designated as series 599-B 3564. The conductive liquid is preferably applied by a well-known screen printing process, but other printing processes may be used as well. The important feature is to secure well-defined edges of the metallic elements with tolerances in the order of 0.1 mm or less.

35 In this way, it is possible to obtain the required characteristics of the patches 2 which cooperate with the adjoining parasitic elements 3a, 3b during use of an antenna device

including an antenna element assembly 4' (figure 1) or 4 (figure 2). By the well-defined edges of the printed metallic elements, the problems of intermodulation products of the signals are substantially eliminated.

5

The use of parasitic elements in the vicinity of antenna patches has been suggested previously in the pending Swedish patent applications 9700401-4 and 9702786-5, in particular with parasitic elements surrounding each patch at least on two opposite lateral sides thereof and also including the space between and including two parallel planes being defined by a ground plane layer and the antenna patches, respectively, each such parasitic element comprising at least one elongated, longitudinal portion extending along an associated one of the opposite lateral sides of the respective antenna patch. Accordingly, the present invention concerns primarily the method of applying such patches and parasitic elements rather than the particular configuration or structure as such.

Of course, when using a screen printing process, e.g. a silk-screen process, the process is easier to carry out if the substrate or support member is planar, as illustrated in figure 1.

In case the support member 1 and the finished antenna element assembly, including the patches 2 and the parasitic elements 3a, 3b, should have a three-dimensional shape, the support member 1 can preferably be deformed by bending in a separate step after completing the screen printing process.

Thus, in order to obtain a support member 4 as shown in figure 2, the support member 1 is bent, subsequent to the forming of the patches 2 and the parasitic elements 3a, 3b, along two mutually parallel bending lines A and B which are parallel also to the respective longitudinal edges of the rectangular sheet 1.

35

Thus, the longitudinal edge portion including the parasitic elements 3a is bent upwards in figure 1 along the bending line A, and the opposite longitudinal edge portion containing the parasitic element 3b is likewise bent upwards along the bending line B. In this way, there is formed a central planar portion 4a carrying the centrally located patches 2, and two lateral side portions 4b and 4c, respectively, which extend, as seen in cross-section at an angle, normally approximately at a right angle from the central planar portion 4a, each of the lateral side portions 4b, 4c carrying the respective parasitic elements 3a, 3b.

Preferably, the bending is performed such that the two lateral side portions 4b, 4c are oriented in the same general direction as the direction towards which the geometrical pattern 2, 3a faces. In other words, upon bending, the geometrical pattern including the patches 2 and parasitic elements 3a, 3b, is located on the inside of the antenna element assembly.

In figure 3, there is shown the basic components of an antenna device including an antenna element assembly 4 as shown in figure 2. Of course, however, the antenna element assembly 4 has been turned around in figure 3, so that the patches 2, located on the inside of the antenna element assembly 4, are facing the structure shown to the left in figure 3.

The latter structure includes a ground plane layer 5 of an electrically conducting material and having a number of cross-shaped apertures 6a, 6b arranged in a longitudinal row in registry with the antenna patches 2. On each side of the ground plane layer 5 there is a dielectric layer 7 and 8, respectively, each provided with a feed network having feed elements 7a and 8b for feeding microwave energy from the respective feed network, via the aperture slots 6a and 6b, respectively, to the radiating patches 2, from which a microwave beam is transmitted in a well-defined lobe from the front side of the antenna (to the right in figure 3).

As is known *per se*, the feed elements 7a and 8b are fork-like and cooperate exclusively with a respective one of the two orthogonal apertures 6a, 6b so as to generate dual polarized  
5 microwaves being radiated from the patches 2. As is also known *per se*, the parasitic elements 3a, 3b will enhance the isolation between the two orthogonal channels.

The method, the antenna element assembly and the antenna device  
10 according to the invention may be modified by those skilled in the art. For example, it is possible to print the patches 2 and the parasitic elements 3a, 3b on opposite side of the support member 1. However, of course, it is preferable to apply these elements on the same side in a single step of the printing  
15 process.

The support member 1 may be planar. Alternatively the bent lateral side portions may stand obliquely from the central planar portion, and other three-dimensional shapes of the  
20 antenna device are also possible.



**CLAIMS**

1. A method of producing an antenna device (4, 5, 7, 8) for transmitting and/or receiving dual polarized  
5 electromagnetic radiation, in particular in the microwave region, in two orthogonal channels, said antenna device including a rigid, dielectric support member (1) carrying a row of radiating patches (2) and parasitic elements being arranged on two opposite lateral sides of said row of radiating patches  
10 (2) so as to maintain a high degree of isolation between said two orthogonal channels, said method being c h a r a c t e - r i z e d by the step of applying a conductive liquid onto the support member (1) so as to form, upon being solidified, said row of radiating patches as well as said parasitic elements  
15 (3a, 3b) in a predetermined geometrical pattern.
2. A method as defined in claim 1, wherein the edges of said radiating patches (2) and said parasitic elements (3a, 3b) are well-defined with tolerances in the order of 0,1 mm or  
20 less.
3. A method as defined in claim 1, wherein said row of radiating patches (2) and said parasitic elements (3a, 3b) are formed on the same side of said rigid support member (1).  
25
4. A method as defined in claim 3, wherein said row of radiating patches and said parasitic elements (3a, 3b) are formed in a planar geometrical pattern onto said rigid support member (1).  
30
5. A method as defined in claim 4, wherein, upon forming said planar geometrical pattern, said support member is bent along two mutually parallel bending lines (A, B) so as to form a central planar portion carrying said row of radiating patches  
35 (2) and two lateral side portions standing at an angle from said central planar portion, each of said lateral side portions

carrying at least a portion of said parasitic elements (3a, 3b).

6. A method as defined in claim 5, wherein a portion of  
5 said parasitic elements (3a, 3b) extends across each bending  
line (A, B), said geometrical pattern being formed on the  
inside of said bent support member (4).

7. A method as defined in any one of the preceding  
10 claims, wherein said conductive liquid is applied onto said  
rigid support member by a screen printing process.

8. An antenna device (4, 5, 7, 8) for transmitting  
and/or receiving dual polarized electromagnetic radiation, in  
15 particular in the microwave region, in two orthogonal channels,  
said antenna device including a rigid, dielectric support  
member (1) carrying a row of radiating patches (2) and  
parasitic elements being arranged on two opposite lateral sides  
of said row of radiating patches (2) so as to maintain a high  
20 degree of isolation between said two orthogonal channels,  
c h a r a c t e r i z e d i n that said row of radiating  
patches (2) as well as said parasitic elements (3a, 3b) are  
formed by a conductive liquid applied onto said support  
member (1) and being solidified in a predetermined geometrical  
25 pattern.

9. An antenna device as defined in claim 7, wherein said  
support member (1) includes a central planar portion carrying  
said row of radiating patches (2) and two lateral side  
30 portions, which extend, as seen in cross-section from said  
central portion, substantially at the same angle and which  
carry at least a portion of said parasitic elements (3a, 3b).

10. An antenna device as defined in claim 8, further  
35 comprising a ground plane layer (5) of electrically conducting  
material and a feed network (7, 8) having a row of feed  
elements (7a, 8b) located in registry with said row of

radiating patches (2), each feed element including two feed element portions (7a, 8b) adapted to transfer electromagnetic energy in said two orthogonal channels.

- 5 11. An antenna device as defined in claims 9 and 10, wherein the free edges of said lateral side portions are located adjacent to opposite side edge portions of said ground plane layer (5).

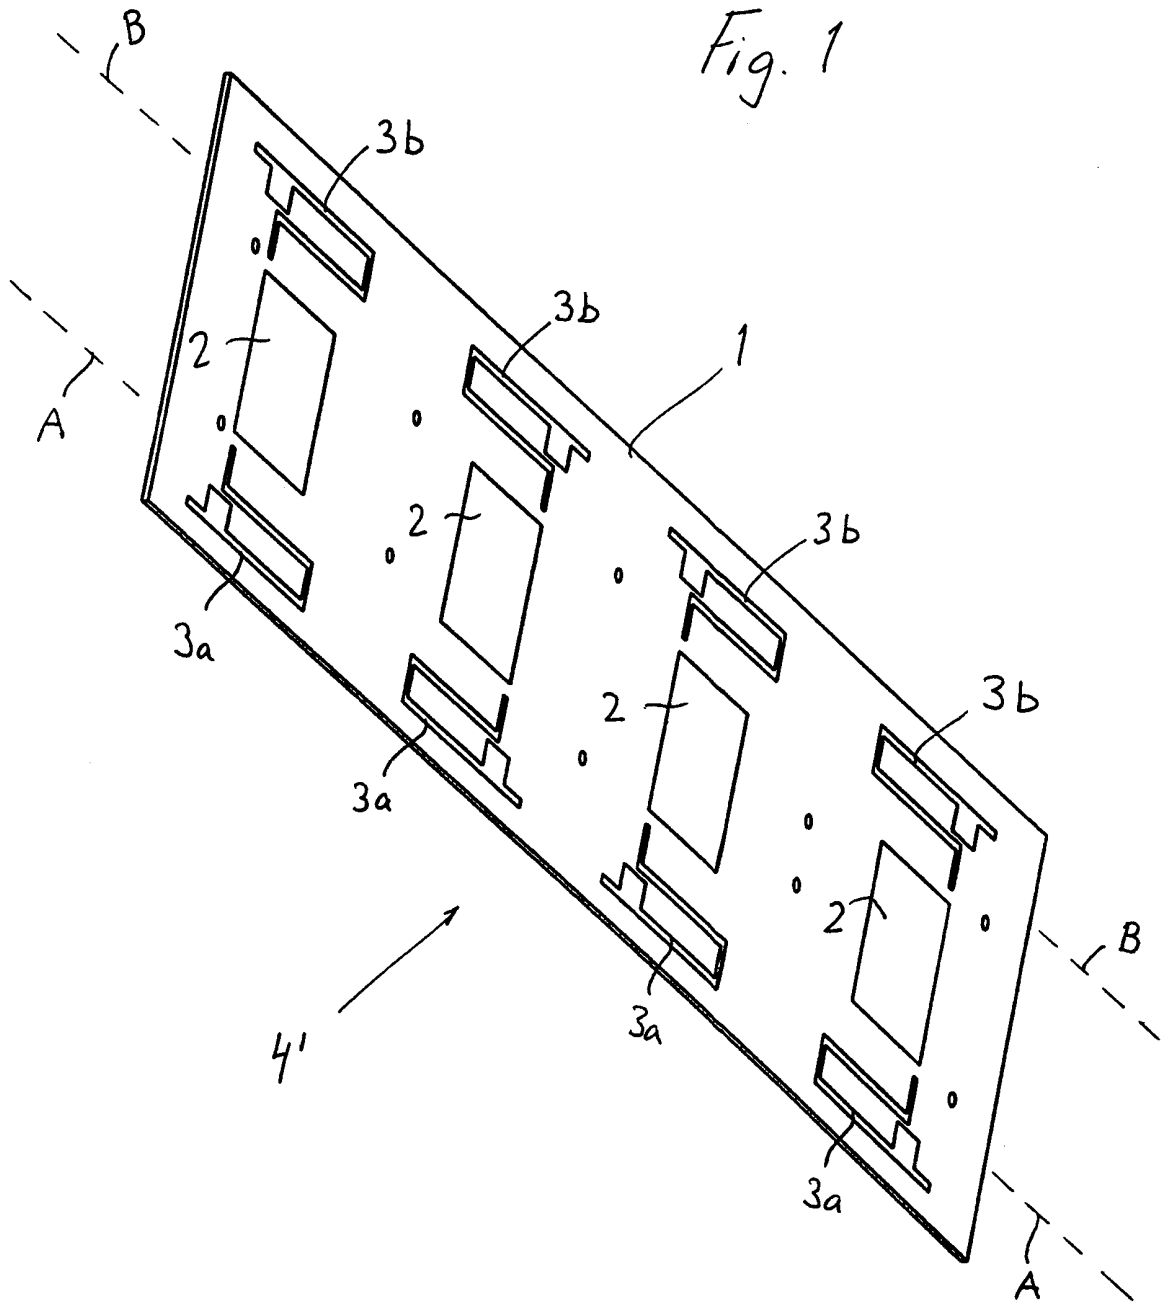
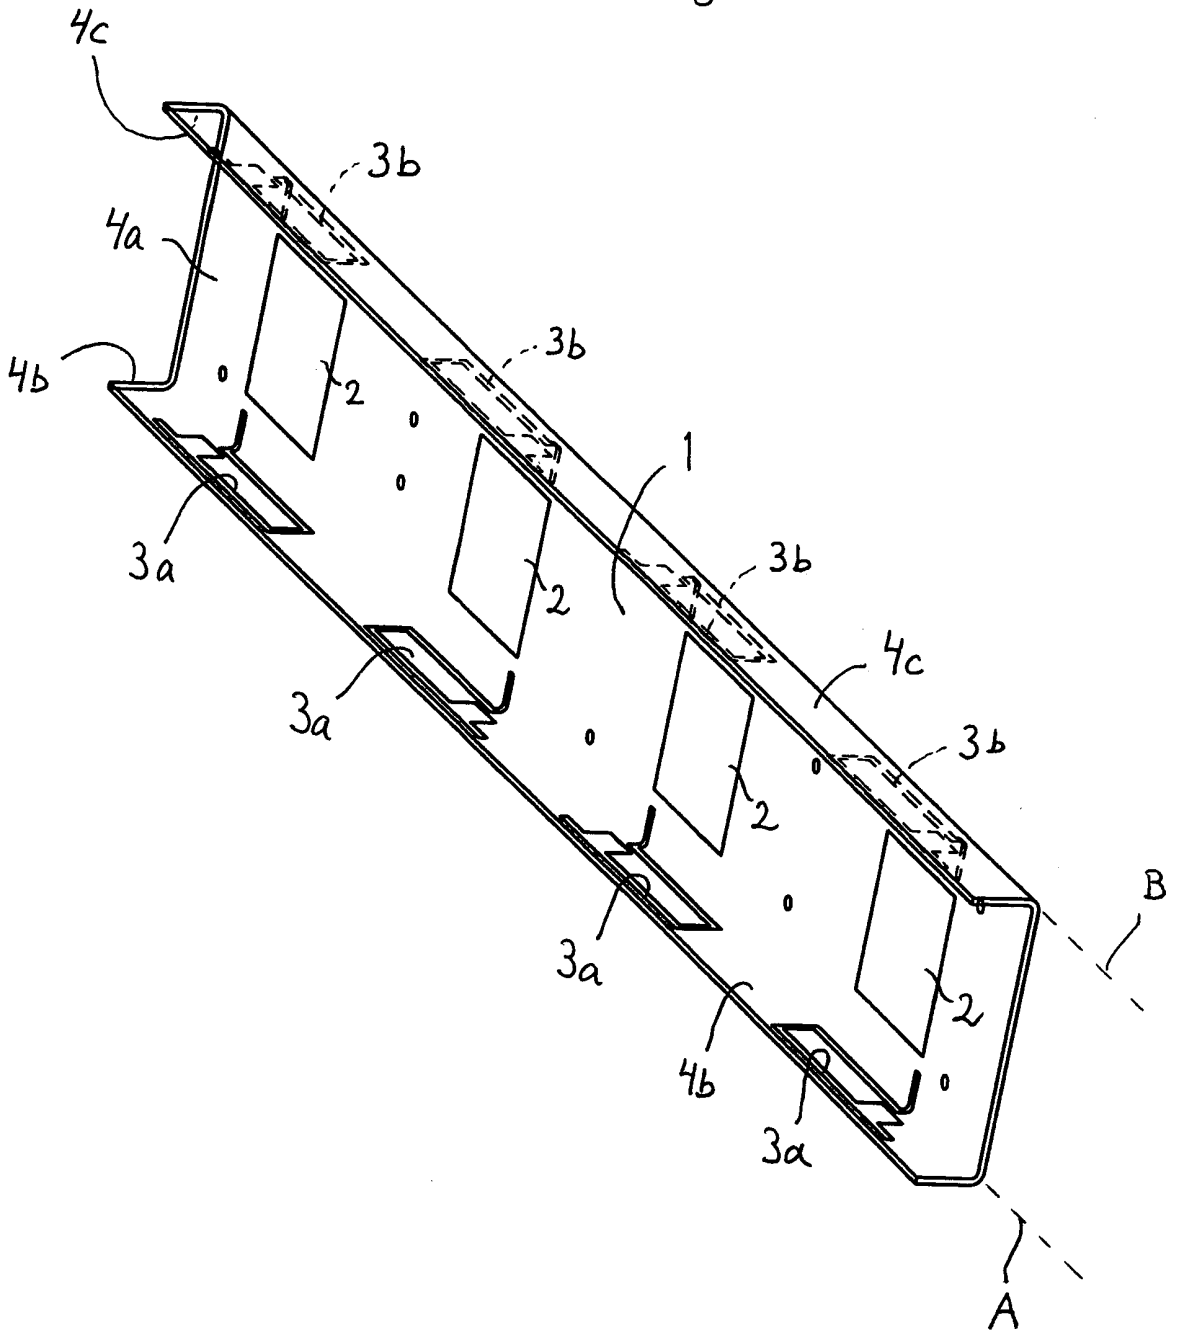


Fig. 2



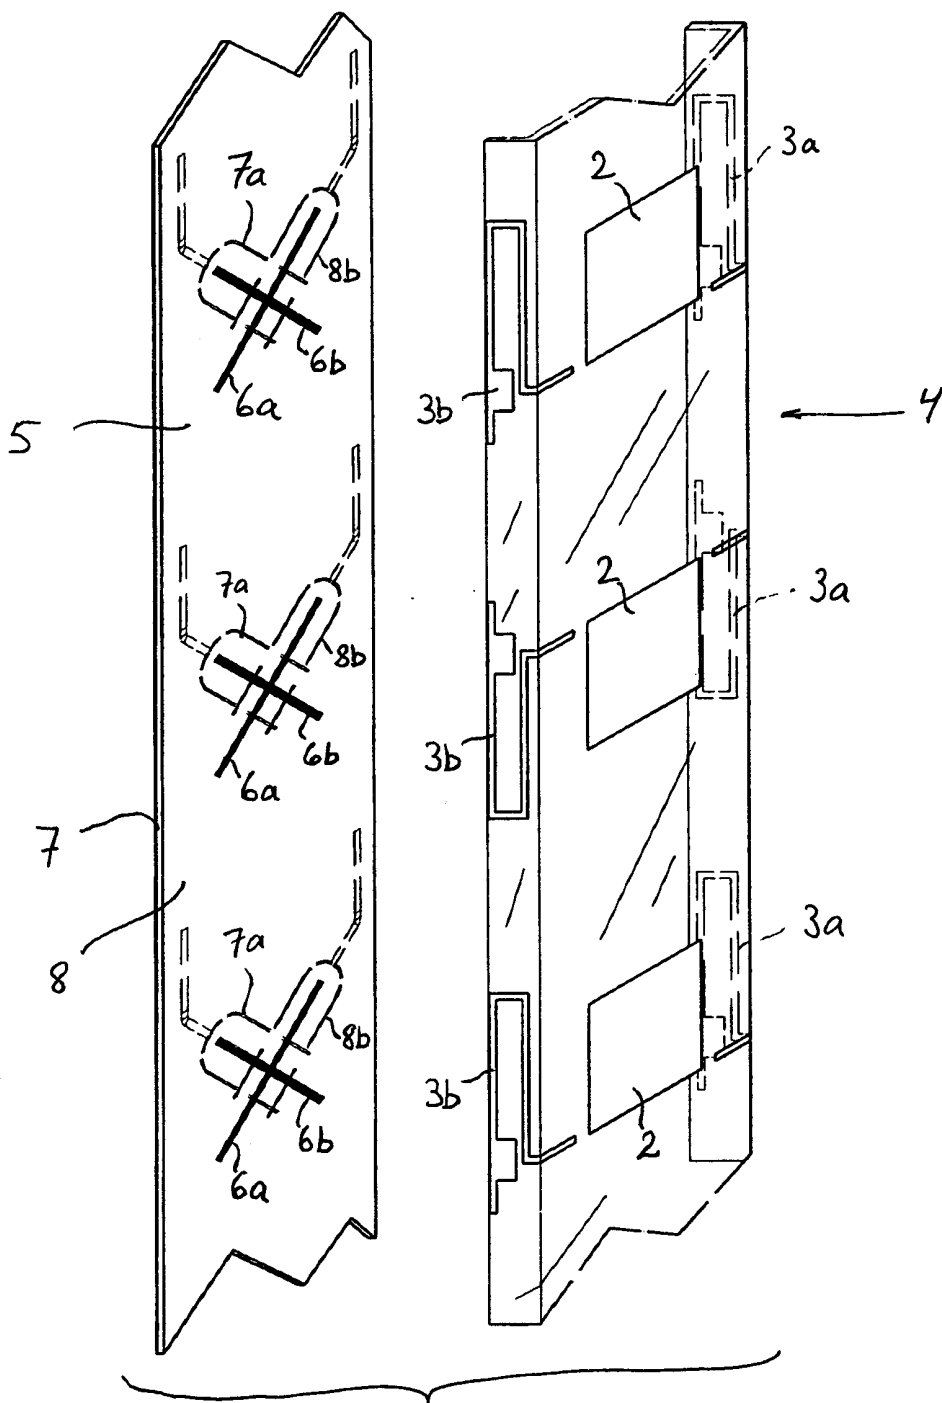


Fig. 3

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/01677

A. CLASSIFICATION OF SUBJECT MATTER		
<b>IPC6: H01Q 1/38</b> According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
<b>IPC6: H01Q</b>		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
<b>SE,DK,FI,NO classes as above</b>		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5355143 A (JEAN F. ZÜRCHER ET AL), 11 October 1994 (11.10.94), abstract  --	1-11
A	US 5008681 A (NUNZIO M. CAVALLARO ET AL), 16 April 1991 (16.04.91), abstract  --	1-11
A	US 5566441 A (MICHAEL J.C. MARSH ET AL), 22 October 1996 (22.10.96), cited in the application  --	1-11
A	WO 9714157 A1 (IMG GROUP LIMITED), 17 April 1997 (17.04.97), cited in the application  -- -----	1-11
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
1 March 1999		02 -03- 1998
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer  Rune Bengtsson Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

Information on patent family members

02/02/99

International application No.

PCT/SE 98/01677

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5355143 A	11/10/94	AT 158898 T	15/10/97
		CA 2061254 A	07/09/92
		DE 59208933 D	00/00/00
		EP 0502818 A,B	09/09/92
		SE 0502818 T3	
		JP 4354402 A	08/12/92
US 5008681 A	16/04/91	DE 69020215 D,T	29/02/96
		EP 0391634 A,B	10/10/90
US 5566441 A	22/10/96	EP 0615285 A	14/09/94
		JP 7022831 A	24/01/95
		ZA 9401671 A	12/10/94
WO 9714157 A1	17/04/97	CA 2224236 A	17/04/97
		EP 0857348 A	12/08/98
		US 5763058 A	09/06/98