



(22) **Date de dépôt/Filing Date:** 2016/06/27

(41) **Mise à la disp. pub./Open to Public Insp.:** 2016/12/30

(30) **Priorité/Priority:** 2015/06/30 (US14/788,627)

(51) **Cl.Int./Int.Cl.** **A61B 18/14** (2006.01),  
**A61M 25/00** (2006.01), A61B 5/05 (2006.01)


(71) **Demandeur/Applicant:**  
BIOSENSE WEBSTER (ISRAEL) LTD., IL

(72) **Inventeurs/Inventors:**  
WU, STEVEN, US;  
MIN, SUNGWO, US

(74) **Agent:** NORTON ROSE FULBRIGHT CANADA  
LLP/S.E.N.C.R.L., S.R.L.

(54) **Titre : CATHETER COMPORTANT UN ASSEMBLAGE D'ELECTRODES FERME DOTE DE SUPPORTS ARTICULES DE LONGUEUR UNIFORME**

(54) **Title: CATHETER HAVING CLOSED ELECTRODE ASSEMBLY WITH SPINES OF UNIFORM LENGTH**

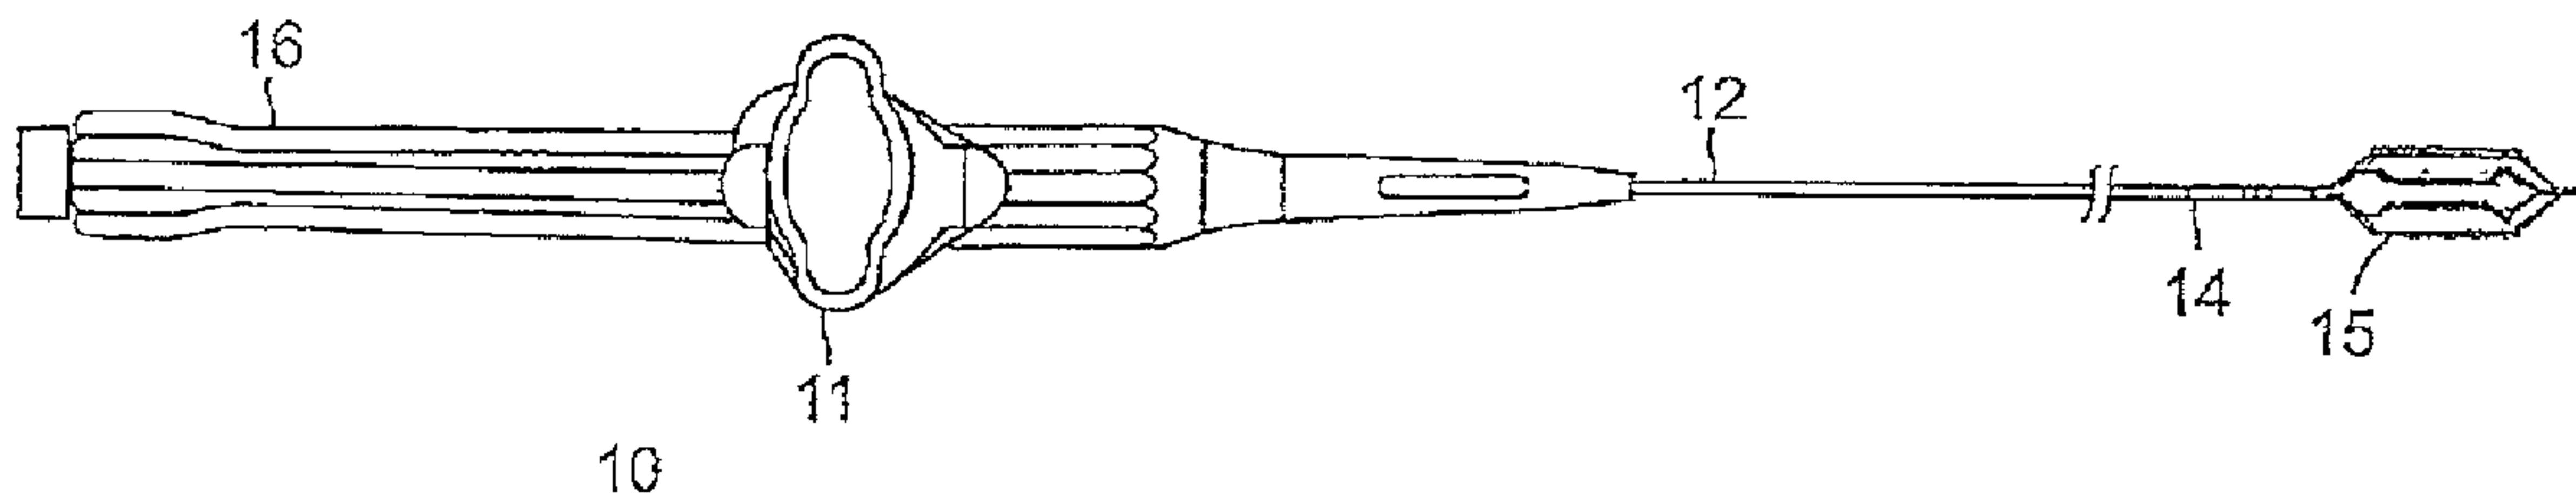

(57) **Abrégé/Abstract:**

A catheter comprising an elongated catheter body, and an electrode assembly distal of the catheter body, the assembly comprising a plurality of spines, wherein each spine has a distal end that is connected to the distal end of at least one other spine, wherein each spine has an electrode-carrying portion, the electrode-carrying portions of all spines of the assembly being in a single common plane, and wherein all spines of the assembly have a uniform exposed total length.

1

## ABSTRACT

5 A catheter comprising an elongated catheter body, and an electrode assembly distal of  
the catheter body, the assembly comprising a plurality of spines, wherein each spine has a distal  
end that is connected to the distal end of at least one other spine, wherein each spine has an  
electrode-carrying portion, the electrode-carrying portions of all spines of the assembly being  
in a single common plane, and wherein all spines of the assembly have a uniform exposed total  
length.

10

15

20

25

1

## CATHETER HAVING CLOSED ELECTRODE ASSEMBLY WITH SPINES OF UNIFORM LENGTH

5

### FIELD OF INVENTION

[0001] This invention relates to catheters, in particular, intravascular catheters for tissue diagnostics and ablation.

10

### BACKGROUND

15

[0002] Cardiac arrhythmia, such as atrial fibrillation, occurs when regions of cardiac tissue abnormally conduct electric signals to adjacent tissue, thereby disrupting the normal cardiac cycle and causing asynchronous rhythm. Important sources of undesired signals are located in the tissue region, for example, one of the atria or one of the ventricles. Regardless of the sources, unwanted signals are conducted elsewhere through heart tissue where they can initiate or continue arrhythmia.

20

[0003] Procedures for treating arrhythmia include surgically disrupting the origin of the signals causing the arrhythmia, as well as disrupting the conducting pathway for such signals. More recently, it has been found that by mapping the electrical properties of the endocardium and the heart volume, and selectively ablating cardiac tissue by application of energy, it is possible to cease or modify the propagation of unwanted electrical signals from one portion of the heart to another. The ablation process destroys the unwanted electrical pathways by formation of non-conducting lesions.

25

[0004] In this two-step procedure--mapping followed by ablation--electrical activity at points in the heart is typically sensed and measured by advancing a catheter containing one or more electrical sensors into the heart, and acquiring data at a multiplicity of points. These data are then utilized to select the target areas at which ablation is to be performed.

1

[0005] For greater mapping resolution, it is desirable for a mapping catheter to provide very high density signal maps through the use of a multitude of electrodes sensing electrical activity within a small area, for example, about a square centimeter. For mapping within an atria or a ventricle (for example, an apex of a ventricle), it is desirable for an electrode assembly to collect larger amounts of data signals within shorter time spans. It is also desirable for such an electrode assembly to be adaptable to different tissue surfaces, for example, flat, curved, irregular or nonplanar surface tissue, yet remain in a predetermined configuration where electrode spatial relationships are generally maintained during sensing and mapping. With more complex electrode geometries, it is further desirable that the electrode assembly be readily collapsible to be advanced through a guiding sheath.

#### SUMMARY OF THE INVENTION

[0006] The present invention includes a catheter having a distal electrode assembly or array that is readily collapsible despite a complicated geometry. In some embodiments, the catheter of the present invention includes an elongated catheter body, and an electrode assembly distal of the catheter body, the assembly comprising a plurality of spines, wherein each spine has a distal end that is connected to the distal end of at least one other spine, wherein each spine has an electrode-carrying portion, the electrode-carrying portions of all spines of the assembly being in a single common plane, and wherein all spines of the assembly have a uniform exposed total length.

[0007] In more detailed embodiments, the electrode-carrying portions are linear, wherein the electrode-carrying portions may be parallel with each other.

[0008] In more detailed embodiments, the electrode-carrying portions are parallel with a longitudinal axis of the catheter.



1

[0009] In more detailed embodiments, the array has longitudinal symmetry, wherein each spine may have a counterpart spine.

5 [0010] In more detailed embodiments, each spine has at least a divergent proximal portion and/or each spine has at least a convergent distal portion.

[0011] In more detailed embodiments, at least one spine has a divergent proximal portion and a convergent proximal portion that is distal of the divergent proximal portion.

10 [0012] In more detailed embodiments, at least one spine has a convergent distal portion and a divergent distal portion that is proximal of the convergent distal portion.

[0013] In more detailed embodiments, the plurality of spines ranges between about two and eight, and more preferably between about three and six.

#### BRIEF DESCRIPTION OF THE DRAWINGS

15 [0014] These and other features and advantages of the present invention will be better understood by reference to the following detailed description when considered in conjunction with the accompanying drawings wherein:

[0015] FIG. 1 is a perspective view of a catheter of the present invention, in accordance with some embodiments.

20 [0016] FIG. 2A is a side cross-sectional view of the catheter of FIG. 1, including a junction between a catheter body and a deflection section, taken along a first diameter.

[0017] FIG. 2B is a side cross-sectional view of the catheter of FIG. 1, including the junction of FIG. 2A, taken along a second diameter generally perpendicular to the first diameter.

25 [0018] FIG. 2C is an end cross-sectional view of the deflection section of FIGS. 2A and 2B, taken along line C—C.

1

[0019] FIG. 3A is a side cross-sectional view of the catheter of FIG. 1, including a junction between the deflection section and a distal electrode assembly, taken along a first diameter.

5 [0020] FIG. 3B is a side cross-sectional view of the junction of FIG. 3A, taken along a second diameter generally perpendicular to the first diameter.

[0021] FIG. 3C is an end cross-sectional view of the deflection section of FIGS. 3A and 3B, taken along line C--C.

10 [0022] FIG. 3D is an end cross-sectional view of the junction of FIG. 3A, taken along line D—D.

[0023] FIG. 4 is a perspective view of a junction between the deflection section and the distal electrode assembly, with parts broken away.

[0024] FIG. 5A is a perspective view of a distal electrode assembly of FIG. 1.

15 [0025] FIG. 5B is an end cross-sectional view of a ring electrode mounted on a spine of FIG. 5A, taken along line B—B.

[0026] FIG. 5C is a perspective view of spine supports and mounting stem of the distal electrode assembly of FIG. 5A.

[0027] FIG. 5D is a side view of the spine supports and mounting stem of FIG. 5C.

20 [0028] FIG. 5E is a top view of two spines of an electrode array, in accordance with one embodiment of the present invention.

[0029] FIG. 6A is a perspective view of an irrigated ring electrode mounted on a spine, in accordance with one embodiment.

[0030] FIG. 6B is a side cross-sectional view of the irrigated ring electrode of FIG. 6A, taken along line A--A.

25 [0031] FIG. 6C is an end cross-sectional view of the irrigated ring electrode of FIG. 6B, taken along line B—B.



1

## DETAILED DESCRIPTION OF THE INVENTION

5 [0032] As shown in FIG. 1, the catheter 10 comprises an elongated catheter body 12, an intermediate deflection section 14, a distal electrode assembly or array 15 with a plurality of spines 25, and a deflection control handle 16 attached to the proximal end of the catheter body 12. In accordance with a feature of the present invention, the distal electrode array 15 includes multiple spine supports that enable the spines to be mounted to the distal end of the catheter in a spatially efficient manner that accommodates more complex spine geometries while improving electrode-to-tissue contact and improves manufacturability of the catheter.

10 [0033] With reference to FIGS. 2A and 2B, the catheter body 12 comprises an elongated tubular construction having a single, axial or central lumen 18. The catheter body 12 is flexible, i.e., bendable, but substantially non-compressible along its length. The catheter body 12 can be of any suitable construction and made of any suitable material. In some  
15 embodiments, the catheter body 12 comprises an outer wall 20 made of polyurethane or PEBAX. The outer wall 20 comprises an imbedded braided mesh of stainless steel or the like to increase torsional stiffness of the catheter body 12 so that, when the control handle 16 is rotated, the intermediate section 14 of the catheter 10 rotates in a corresponding manner.

20 [0034] The outer diameter of the catheter body 12 is not critical. Likewise, the thickness of the outer wall 20 is not critical, but is thin enough so that the central lumen 18 can accommodate a puller wire, one or more lead wires, and any other desired wires, cables or tubes. If desired, the inner surface of the outer wall 20 is lined with a stiffening tube 22 to provide improved torsional stability..

25 [0035] As shown in FIGS. 2A, 2B and 2C, the intermediate section 14 comprises a shorter section of tubing 19 having multiple lumens, for example, four off-axis lumens 31, 32, 33 and 34. The first lumen 31 carries a plurality of lead wires 40S for ring electrodes 37 mounted on the array 15. The second lumen 32 carries a first puller wire 24. The third lumen 33 carries a

1

1  
cable 36 for an electromagnetic position sensor 42 and a plurality of lead wires 40D and 40P  
for distal and proximal ring electrodes 38D and 38P carried on the catheter proximally of the  
5 distal electrode array 15. The fourth lumen 34 (for example, diametrically opposite of the  
second lumen 32 in the illustrated embodiment) carries a second puller wire 26. The tubing 19  
is made of a suitable non-toxic material that is preferably more flexible than the catheter body  
12. One suitable material for the tubing 19 is braided polyurethane, i.e., polyurethane with an  
embedded mesh of braided stainless steel or the like. The size of each lumen is not critical, but  
10 is sufficient to house the lead wires, puller wires, the cable and any other components.

[0036] The useful length of the catheter, i.e., that portion that can be inserted into the body  
excluding the distal electrode array 15, can vary as desired. Preferably the useful length ranges  
from about 110 cm to about 120 cm. The length of the intermediate section 14 is a relatively  
smaller portion of the useful length, and preferably ranges from about 3.5 cm to about 10 cm,  
15 more preferably from about 5 cm to about 6.5 cm.

[0037] A means for attaching the catheter body 12 to the intermediate section 14 is  
illustrated in FIGS. 2A and 2B. The proximal end of the intermediate section 14 comprises an  
outer circumferential notch 27 that receives the inner surface of the catheter body 12. The  
intermediate section 14 and catheter body 12 are attached by glue or the like.

20 [0038] If desired, a spacer (not shown) can be located within the catheter body between the  
distal end of the stiffening tube (if provided) and the proximal end of the intermediate section.  
The spacer provides a transition in flexibility at the junction of the catheter body and  
intermediate section, which allows this junction to bend smoothly without folding or kinking. A  
catheter having such a spacer is described in U.S. Pat. No. 5,964,757, the disclosure of which is  
25 incorporated herein by reference.

[0039] As shown in FIGS. 3A and 3B, the distal electrode array 15 includes a mounting  
member or stem 46 in the form of a short tubing mounted on a distal end of the tubing 19 of the



1

intermediate section 14. It is understood that the stem may be mounted onto the distal end of the catheter body 12 where the catheter includes no deflection section. The stem 46 has a central lumen 48 to house various components. The intermediate section 14 and stem 46 are attached by glue or the like. The stem 46 may be constructed of any suitable material, including nitinol.

[0040] As shown in FIG. 4, the stem 46 houses various components, including, for example, the electromagnetic position sensor 42, and a distal anchor for the puller wires 24 and 26. In the disclosed embodiment, the distal anchor includes one or more washers, for example, a distal washer 50D and a proximal washer 50P, each of which has a plurality of matching axial through-holes that allow passage of components between the deflection section 14 and the stem 46 while maintaining axial alignment of these components relative to the longitudinal axis 95 of the catheter 10. As shown in FIGS. 3D and 4, the through-holes include holes 54 and 56 that are axially aligned with the second and fourth lumens 32 and 34 of the tubing 19, respectively, to receive a distal end of puller wires 24 and 26, respectively. It is understood that the puller wires 24 and 26 may actually form a single tensile member with a distal U-bend section that passes through the holes 54 and 56. With tension on the washers 50D and 50P exerted by the U-bend section of the puller wires 24 and 26, the washers firmly and fixedly abut against the distal end of the tubing 19 of the deflection section 14 to distally anchor the U-bend section.

[0041] As shown in FIGS. 3D and 4, each washer also includes through-hole 58 which is axially aligned with the first lumen 31 and allows passage of the lead wires 40S from the deflection section 14 and into the lumen 48 of the stem 46. Each washer further includes through-hole 57 which is axially aligned with the third lumen 33 and allows passage of the sensor cable 36 from the deflection section 14 into lumen 48 of the stem 46 where the electromagnetic position sensor 42 is housed. The lead wire 40D also passes through the hole 57 to enter the lumen 48 for attachment to the distal ring electrode 38D carried on the outer

1

surface of the stem 46 via an opening (not shown) formed in the side wall of the stem 46 through which a distal end of the lead wire 40D is welded or otherwise attached to the distal ring electrode 38D, as known in the art. Carried on the outer surface of the tubing 19 near the distal end of the intermediate deflection section 14, a proximal ring electrode 38P is connected to lead wire 40P via an opening 87 (FIG. 3B) formed in the side wall of the tubing 19 that provides communication between the third lumen 33 and outside of the tubing 19. The distal end of the lead wire is welded or otherwise attached to the proximal ring electrode 38P as known in the art.

[0042] The distal electrode array 15 extends from a distal end of the tubing 19 of the deflection section 14 (or a distal end of the catheter body 12 where the catheter is without a deflection section). As shown in the embodiment of FIG. 5A, the array 15 includes a plurality of elongated spines 25, each of whose distal end 25T is joined to a distal end 25T of at least another spine 25. Accordingly, the array 15 has a closed configuration in that the array is without any spine whose distal end is free and unconnected to another spine. In some embodiments, each spine 25 of the array 15 has at least one proximal portion 25PD that is divergent from a longitudinal axis 95 and at least one distal portion 25DC that is convergent toward the longitudinal axis 95. The array 15 also includes selected spines with at least one proximal portion 25PC that is convergent toward the longitudinal axis 95 that is distal of the divergent proximal portion 25PD, and at least one distal portion 25DD that is divergent from the longitudinal axis 95 that is proximal of the convergent distal portion 25DC. The plurality of spines may range between about two and eight, more preferably, between about four and six.

[0043] In some embodiments, the array 15 is longitudinally symmetrical in that each spine 25 has an opposing mirror counterpart across the longitudinal axis 95, with which its distal end 25T is connected to the distal end 25T of its counterpart.

[0044] In some embodiments, each spine has an electrode-carrying portion distal of the



1

proximal portion 25PD on which one or more ring electrodes 37 are mounted. In some  
embodiments, the plurality of ring electrodes 37 per spine may range between about 6 and 12,  
5 preferably about 6 and 9, and more preferably about 8. In some embodiments, these electrode-  
carrying portions are linear, extending parallel with each other and/or with the longitudinal axis  
95. In some embodiments, these electrode-carrying portions are also all lying in a single  
common plane, even where the proximal portions 25PD are not lying in the single common  
plane. In some embodiments, these electrode-carrying portions are uniformly separated  
10 laterally by a predetermined distance.

[0045] Each spine 25 includes a shape-memory member 26 and a surrounding  
nonconductive tubing or covering 64. The covering 64 has a central lumen 65 through which  
the shape-memory 26 extends along with lead wires 40S for ring electrodes 37, as shown in  
FIG. 5B. The covering 64 extends the length of the exposed portion of spine 25, from distal of  
15 the stem 46 to the distal tip end of the spine.

[0046] In some embodiments, a total exposed length of each spine of the array 15 is equal  
or uniform. For example, as shown in FIG. 5E, spines X and Y of an array have equal total  
exposed lengths  $X_T$  and  $Y_T$ , where  $X_T = Y_T$ , each defined as follows. Notably, lengths X5 and  
Y8 are exposed lengths, measured distal of the stem 46 to exclude any portion extending inside  
20 the stem 46.

$$X_T = X1 + X2 + X3 + X4 + X5 \quad (\text{Eqn. 1})$$

$$Y_T = Y1 + Y2 + Y3 + Y4 + Y5 + Y6 + Y7 + Y8 \quad (\text{Eqn. 2})$$

25 [0047] Advantageously, an array with spines having equal exposed total lengths readily  
collapses into an elongated arrangement that can be more easily fed through a guiding sheath.  
The longitudinal symmetry of the array also facilitates the array collapsing into an elongated



1

arrangement.

5 [0048] In some embodiments, the shape-memory supports 26 and the stem 46 are made of a material having shape-memory, i.e., that can be temporarily straightened or bent out of its original shape upon exertion of a force and is capable of substantially returning to its original shape in the absence or removal of the force. One suitable material for the support member is a nickel/titanium alloy. Such alloys typically comprise about 55% nickel and 45% titanium, but may comprise from about 54% to about 57% nickel with the balance being titanium. A 10 nickel/titanium alloy is nitinol, which has excellent shape memory, together with ductility, strength, corrosion resistance, electrical resistivity and temperature stability. The spine supports may be formed from a sheet material which is, for example, die cut or laser cut into the configuration of the base and the spines. The non-conductive covering 64 can be made of any suitable material, and is preferably made of a biocompatible plastic such as polyurethane or 15 PEBAX.

[0049] At the junction of distal electrode array 15 and the stem 46, the non-conductive covering 64 of each spine 25 may be attached and sealed at its proximal end to the stem 46 by polyurethane or the like.

20 [0050] For each spine 25, one or more ring electrodes 37 are mounted over the covering 64. Proximal of the array 15, the lead wires 40S for the ring electrodes 37 extend through a protective polytube 68. The lead wires 40S diverge near the distal end of the polytube 68, and extend toward their respective spine 25, into the lumen 65 of the respective nonconductive covering 64. As shown in FIG. 5B, each lead wire 40S is connected to its respective ring electrode 37 via a respective opening 69 formed in the side wall of the covering 64 through 25 which a distal end of the lead wire reaches outside of the covering 64 and is welded or otherwise attached to its ring electrode 37.

[0051] In other embodiments, irrigated ring electrodes 37I are carried on the spines 25, as

1

shown in FIGS. 6A, 6B and 6C. The spines 25 is covered by a multi-lumened tubing 80 having, for example, a first lumen 81 for the shape-memory member 26, a second lumen 82 for lead wires 40S, and a third lumen 83 for passing irrigation fluid via a passage 88 formed in the sidewall of the tubing 80 to annular space gap G between outer wall of the tubing 80 and side wall of the ring electrode 37I which are formed with fluid ports 85.

5

10

[0052] The proximal ends of the lead wires 40S, 40D and 40P for the spine loop ring electrodes 37, and for the distal and proximal ring electrodes 38D and 38P, respectively, are electrically connected to a suitable connector (not shown) in the distal end of the control handle 16, which is connected to a source of ablation energy, e.g., RF energy, as is known in the art. The lead wires 40S, 40D and 40P extend through the central lumen 18 of the catheter body 12 (FIG. 2B). The lead wires 40S extend through the first lumen 31 of the tubing 19 of the intermediate section 14, and the lead wires 40D and 40P extend through the third lumen 33 of the tubing 19 (FIGS. 2C and 3C). Passing through the holes 58 in the washers 50D and 50P, the lead wires 40S extend through the polytube 68 which protects them from being damaged by the hole 58 (FIG. 3D).

15

20

[0053] In the depicted embodiment, the lead wires 40S extending through the central lumen 18 of the catheter body 12 and the first lumen 31 in the deflection section 14 may be enclosed within a protective sheath 94 to prevent contact with other components in the catheter. The protective sheath can be made of any suitable material, preferably polyimide. As would be recognized by one skilled in the art, the protective sheath can be eliminated if desired.

25

[0054] The ring electrodes 37, 37I and 38D and 38P are made of any suitable solid conductive material, such as platinum or gold, preferably a combination of platinum and iridium, and mounted onto the non-conductive cover 64 and the stem 46 with glue or the like. Alternatively, the ring electrodes can be formed by coating the non-conductive cover 64 and



1

stem 46 with an electrically conducting material, like platinum, gold and/or iridium. The coating can be applied using sputtering, ion beam deposition or an equivalent technique.

5 [0055] In some embodiments, each ring electrode 37 carried on the spines 25 is relatively short, having a length ranging from about 0.4 mm to about 0.75 mm. Moreover, the electrodes may be arranged in pairs, where two electrodes of a pair are spaced more closely to each other than they are to other pairs of electrodes. The closely-spaced electrode pairs allow for more accurate detection of near field pulmonary vein potential versus far field atrial signals, which is  
10 very useful when trying to treat atrial fibrillation. Specifically, the near field pulmonary vein potentials are very small signals whereas the atria, located very close to the pulmonary vein, provides much larger signals. Accordingly, even when the mapping array is placed in the region of a pulmonary vein, it can be difficult for the physician to determine whether the signal is a small, close potential (from the pulmonary vein) or a larger, farther potential (from the  
15 atria). Closely-spaced bipole electrodes permit the physician to more accurately determine whether he is looking at a close signal or a far signal. Accordingly, by having closely-spaced electrodes, one is able to target exactly the locations of myocardial tissue that have pulmonary vein potentials and therefore allows the clinician to deliver therapy to the specific tissue. Moreover, the closely-spaced electrodes allow the physician to determine the exact anatomical  
20 location of the ostium/ostia by the electrical signal.

[0056] In some embodiments, a proximal electromagnetic position sensor 42 is housed in the lumen of the stem (FIG. 4). A sensor cable 36 extends from a proximal end of the position sensor 42, and through the hole 57 of the washers 50 (FIG. 3D), the third lumen 33 of the tubing 19 of the deflection section 14 (FIG. 2C), and the central lumen 18 of the catheter body  
25 12 (FIG. 2B). The cable 36 is attached to a PC board in the control handle 16, as known in the art. In some embodiments, one or more distal electromagnetic position sensors may be housed in the array, for example, in one or more distal portions of the array. Sensor cables 36D may



1

extend through the lumen 65 of spine covering 64 (FIG. 5B) or a fourth lumen 84 of the tubing 80 (FIG. 6B).

5 [0057] As shown in FIGS. 2A and 2C, the puller wires 24 and 26 (whether as two separate tensile members or parts of a single tensile member) are provided for bi-directional deflection of the intermediate section 14. The puller wires 24 and 26 are actuated by mechanisms in the control handle 16 that are responsive to a thumb control knob or a deflection control knob 11. Suitable control handles are disclosed in U.S. Patent Nos. 6,123,699; 6,171,277; 6,183,435; 10 6,183,463; 6,198,974; 6,210,407 and 6,267,746, the entire disclosures of which are incorporated herein by reference.

[0058] The puller wires 24 and 26 extend through the central lumen 18 of the catheter body 12 (FIG. 2A) and through the second and fourth lumens 32 and 34, respectively, of the tubing 19 of the deflection section 14 (FIG. 2C). As shown in FIGS. 3A and 3C, they extend through 15 holes 54 and 56, respectively of the washers 50. Where the puller wires are part of a single tensile member, the single tensile member has a U-bend 24/26U (FIG. 3A) at the distal face of the distal washer 50D which anchors the distal ends of the puller wires. In that regard, the U-bend extends through a short protective tubing 70 to protect the puller wires from the holes 54 and 56. Alternatively, where the puller wires are separate tensile members, their distal ends 20 may be anchored via T-bars, as known in the art and described in, for example, U.S. Patent No. 8,603,069, the entire content of which is incorporated herein by reference. In any case, the puller wires 24 and 26 are made of any suitable metal, such as stainless steel or Nitinol, and each is preferably coated with TEFLON or the like. The coating imparts lubricity to the puller wires. The puller wires preferably have a diameter ranging from about 0.006 to about 0.010 25 inch.

[0059] A compression coil 66 is situated within the central lumen 18 of the catheter body 12 in surrounding relation to each puller wire 24, as shown in FIG. 2B. Each compression coil

1

66 extends from the proximal end of the catheter body 12 to the proximal end of the intermediate section 14. The compression coils 66 are made of any suitable metal, preferably stainless steel. Each compression coil 66 is tightly wound on itself to provide flexibility, i.e., bending, but to resist compression. The inner diameter of the compression coil 66 is preferably slightly larger than the diameter of its puller wire. The Teflon coating on each puller wire allows it to slide freely within its compression coil.

5

10

**[0060]** The compression coil 66 is anchored at its proximal end to the outer wall 20 of the catheter body 12 by a proximal glue joint (not shown) and at its distal end to the intermediate section 14 by a distal glue joint 92. Both glue joints may comprise polyurethane glue or the like. The glue may be applied by means of a syringe or the like through a hole made the sidewalls of the catheter body 12 and the tubing 19. Such a hole may be formed, for example, by a needle or the like that punctures the sidewalls which are heated sufficiently to form a permanent hole. The glue is then introduced through the hole to the outer surface of the compression coil 66 and wicks around the outer circumference to form a glue joint about the entire circumference of the compression coil.

15

20

**[0061]** Within the second and fourth lumens 32 and 34 of the intermediate section 14, each puller wire 24 and 26 extends through a plastic, preferably Teflon, puller wire sheath 39 (FIGS. 2A and 2C), which prevents the puller wires from cutting into the wall of the tubing 19 of the deflection section 14 when the deflection section 14 is deflected.

25

**[0062]** In some embodiments, the ring electrodes 38D and 38P proximal of the array 15 serve as reference electrodes for visualization of the catheter on a 3-D mapping system, such as CARTO.RTM 3 SYSTEM available from Biosense Webster, Inc., which automatically locates the EM sensor 42, processes reference location values from electrodes 38D and 38P, which are at a constant location from the EM sensor(s) and determines the location of the electrodes 37 and 37I and visualizes the remainder of the electrode array 15.

1

[0063] The preceding description has been presented with reference to presently preferred  
embodiments of the invention. Workers skilled in the art and technology to which this  
5 invention pertains will appreciate that alterations and changes in the described structure may be  
practiced without meaningfully departing from the principal, spirit and scope of this invention.  
As understood by one of ordinary skill in the art, the drawings are not necessarily to scale.  
Also, different features of different embodiments may be combined as needed or appropriate.  
Moreover, the catheters described herein may be configured to apply various energy forms,  
10 including microwave, laser, RF and/or cryogens. Accordingly, the foregoing description  
should not be read as pertaining only to the precise structures described and illustrated in the  
accompanying drawings, but rather should be read consistent with and as support to the  
following claims which are to have their fullest and fair scope.

15

20

25



1

## CLAIMS

5

What is claimed is:

10

1. A catheter comprising:  
an elongated catheter body; and  
an electrode assembly distal of the catheter body, the assembly comprising a plurality of  
spines,

wherein each spine has a distal end that is connected to the distal end of at least one  
other spine,

wherein each spine has an electrode-carrying portion, the electrode-carrying portions of  
all spines of the assembly being in a single common plane, and

15

wherein all spines of the assembly have a uniform exposed total length.

2. The catheter of claim 1, wherein the electrode-carrying portions are linear.

3. The catheter of claim 2, wherein the electrode-carrying portions are parallel with  
each other.

20

4. The catheter of claim 2, wherein the electrode-carrying portions are parallel with a  
longitudinal axis of the catheter.

25

5. The catheter of 1, wherein the array has longitudinal symmetry.

6. The catheter of claim 1, wherein each spine has a mirror counterpart spine.

1

7. The catheter of claim 1, wherein each spine has at least a divergent proximal portion.

5

8. The catheter of claim 1, wherein each spine has at least a convergent distal portion.

9. The catheter of claim 1, wherein at least one spine has a divergent proximal portion and a convergent proximal portion that is distal of the divergent proximal portion.

10

10. The catheter of claim 1, wherein at least one spine has a convergent distal portion and a divergent distal portion that is proximal of the convergent distal portion.

11. The catheter of claim 1, wherein each spine has a nonconductive covering.

15

12. The catheter of claim 1, wherein each spine has at least one ring electrode.

13. The catheter of claim 1, wherein each spine has at least one irrigated ring electrode.

20

14. The catheter of claim 1, wherein the plurality of spines ranges between about two and eight.

15. The catheter of claim 1, wherein the plurality of spines ranges between about three and six.

25

1/11

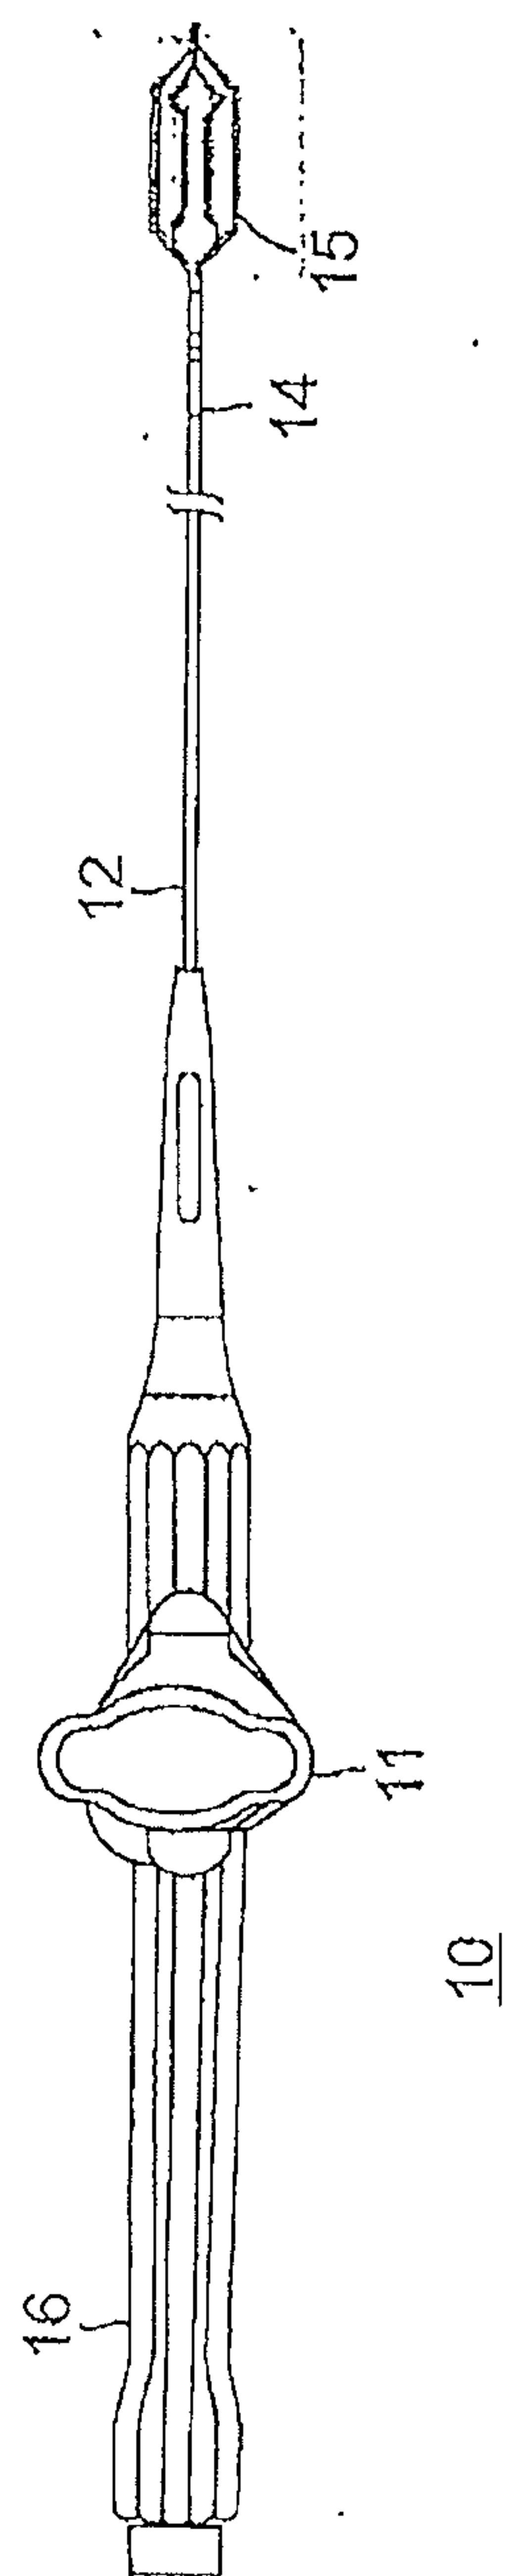


FIG. 1



2/11

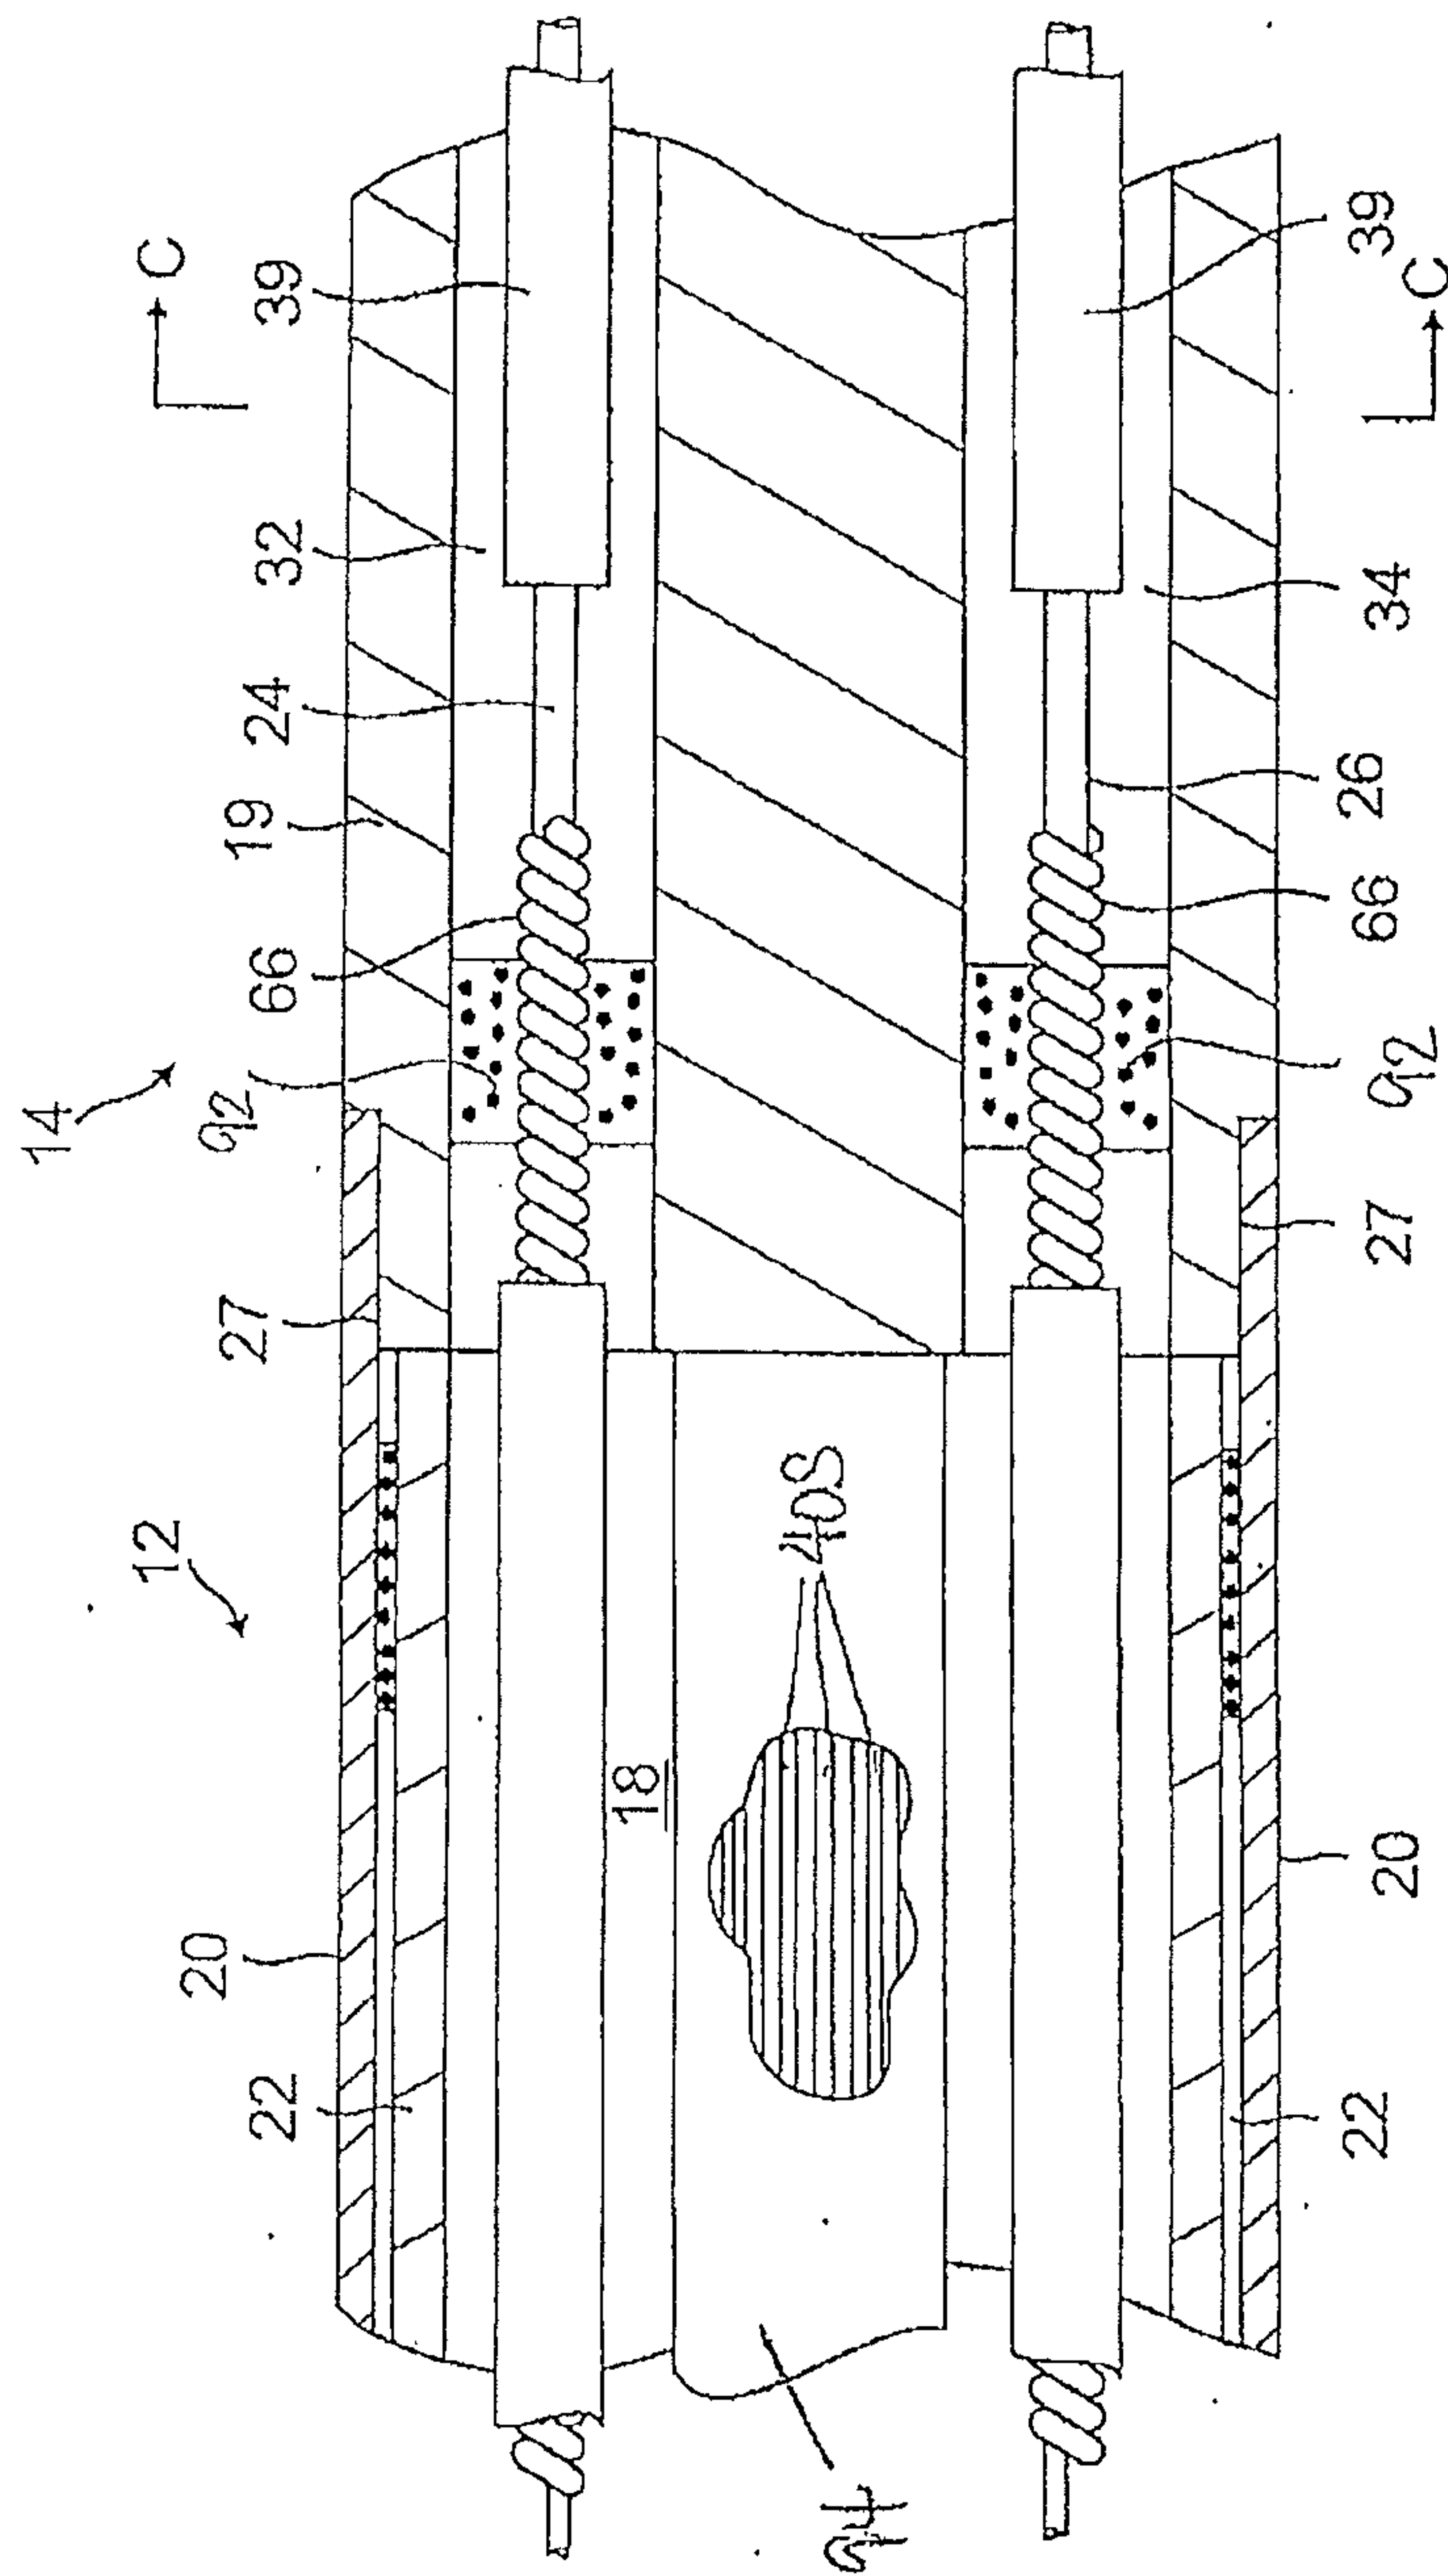


FIG. 2A

3/11

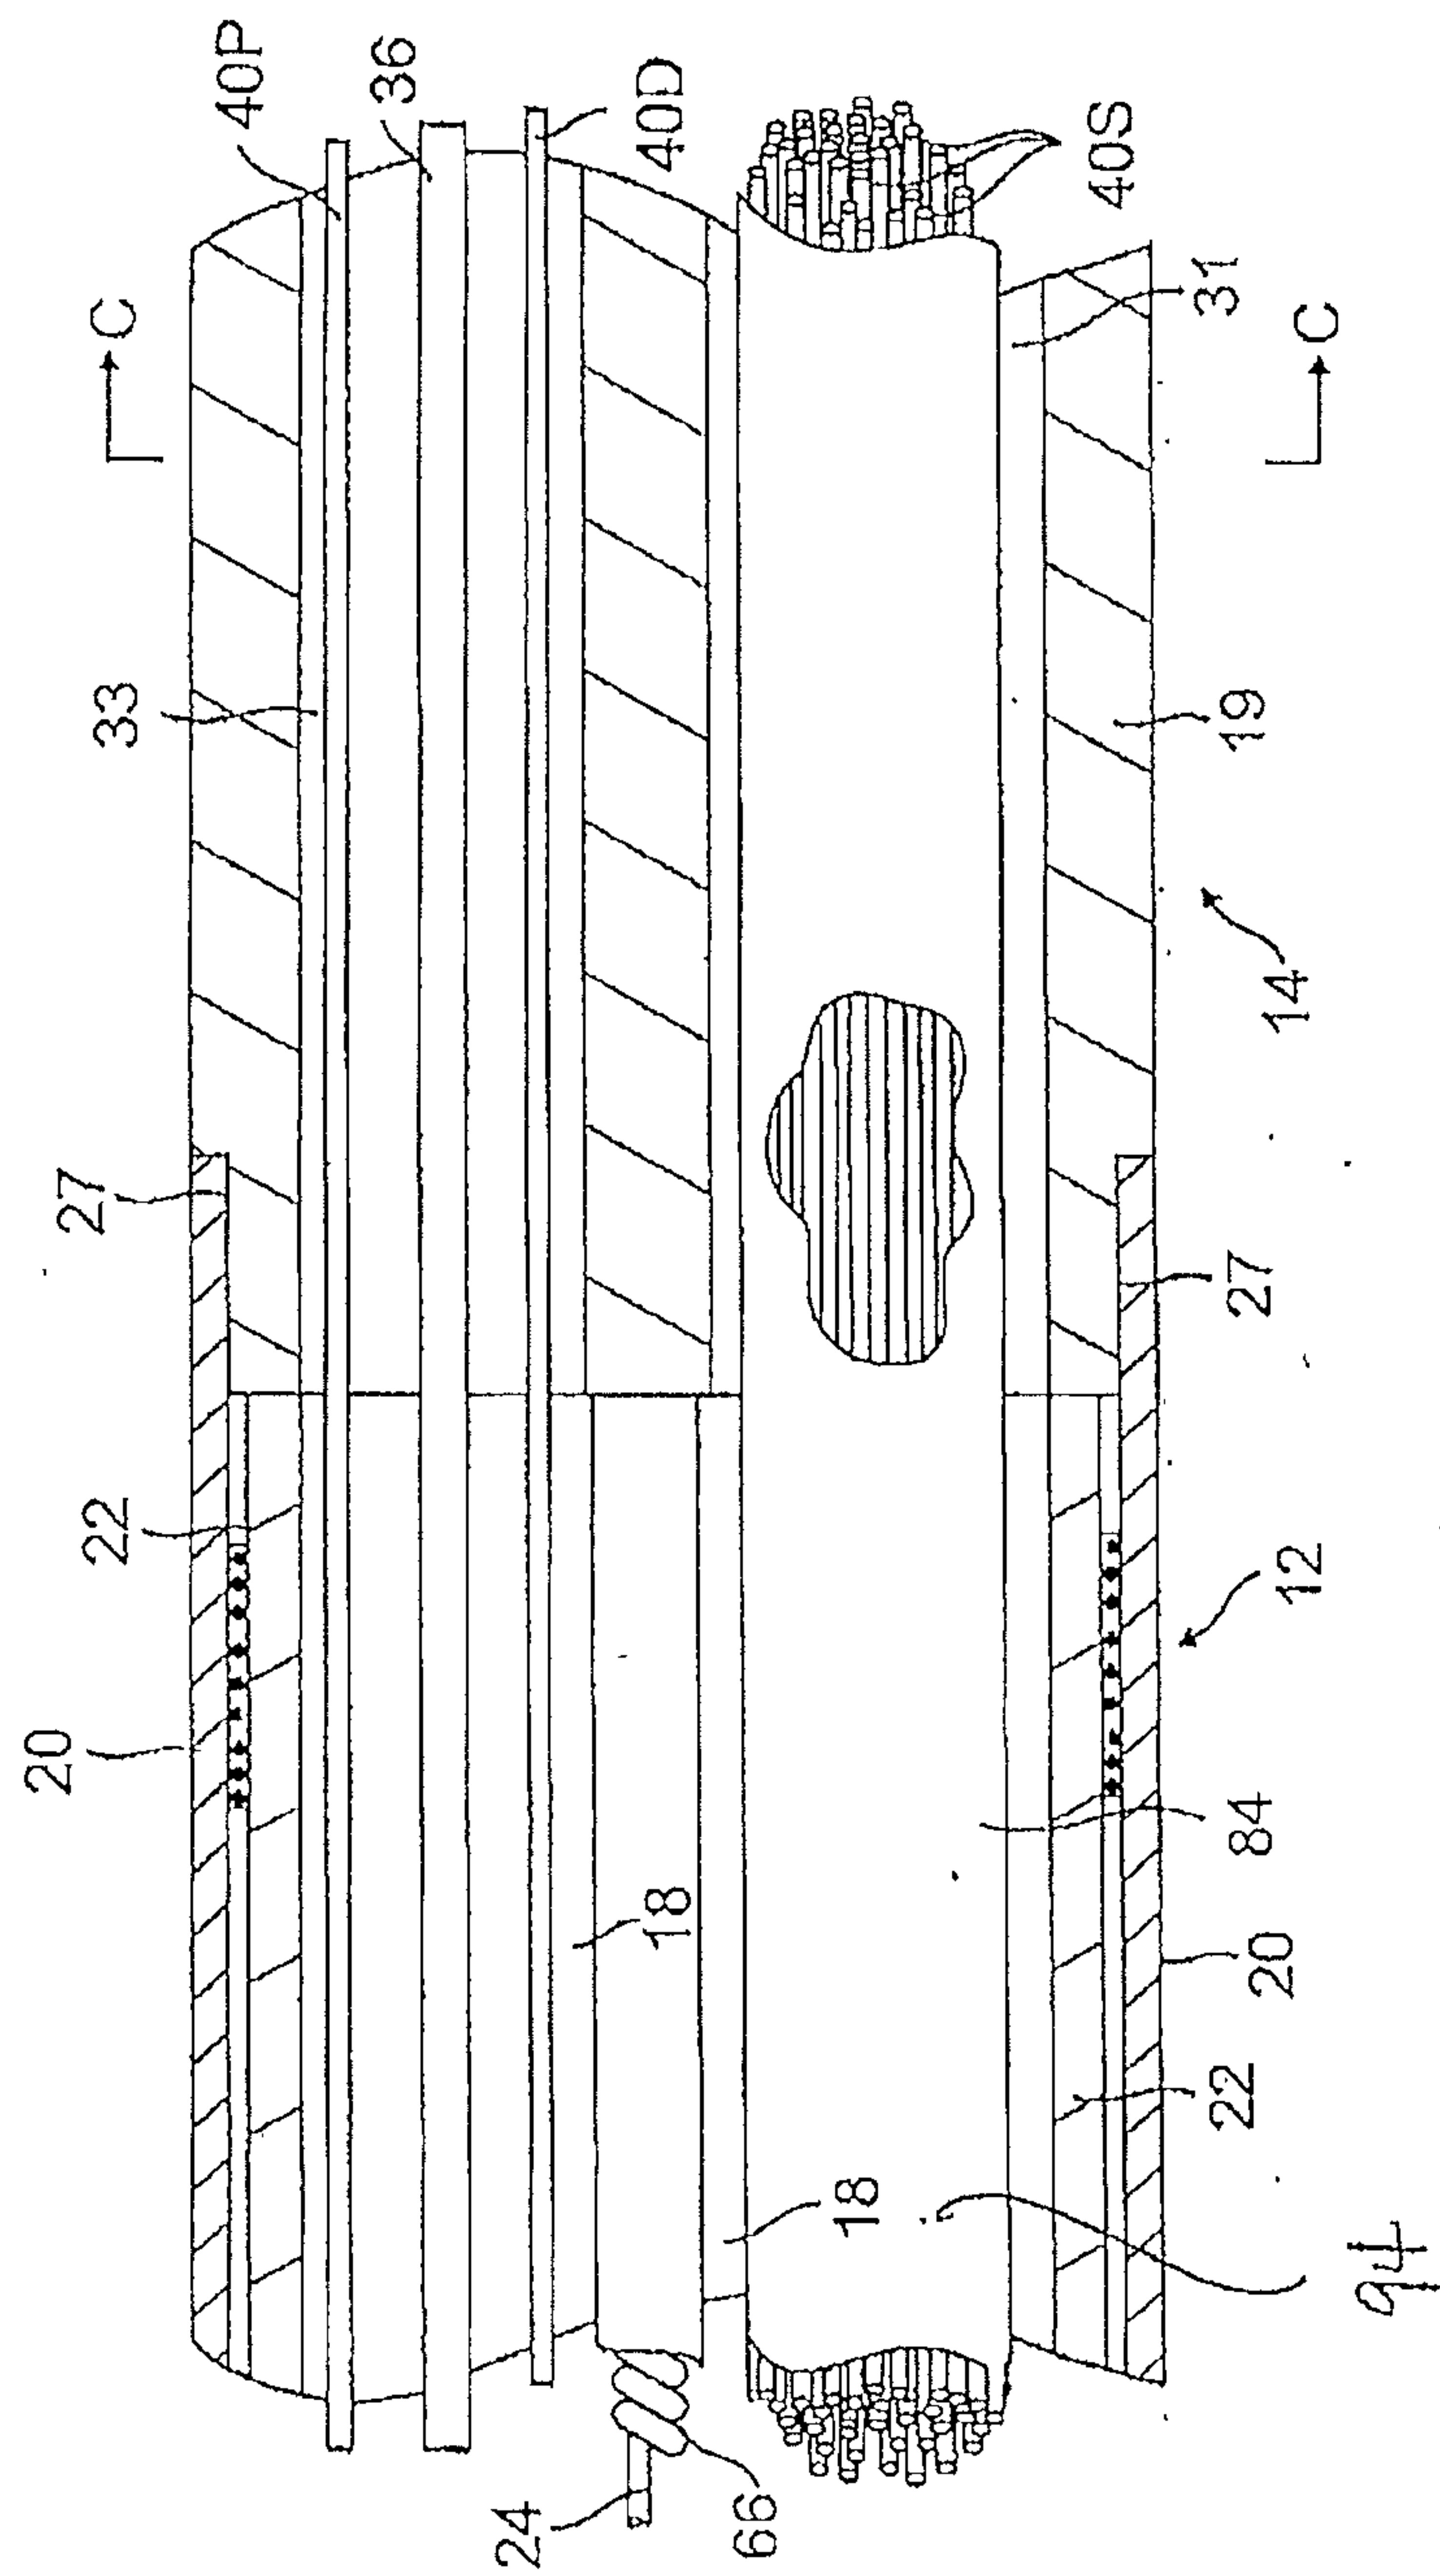


FIG. 2B

4/11

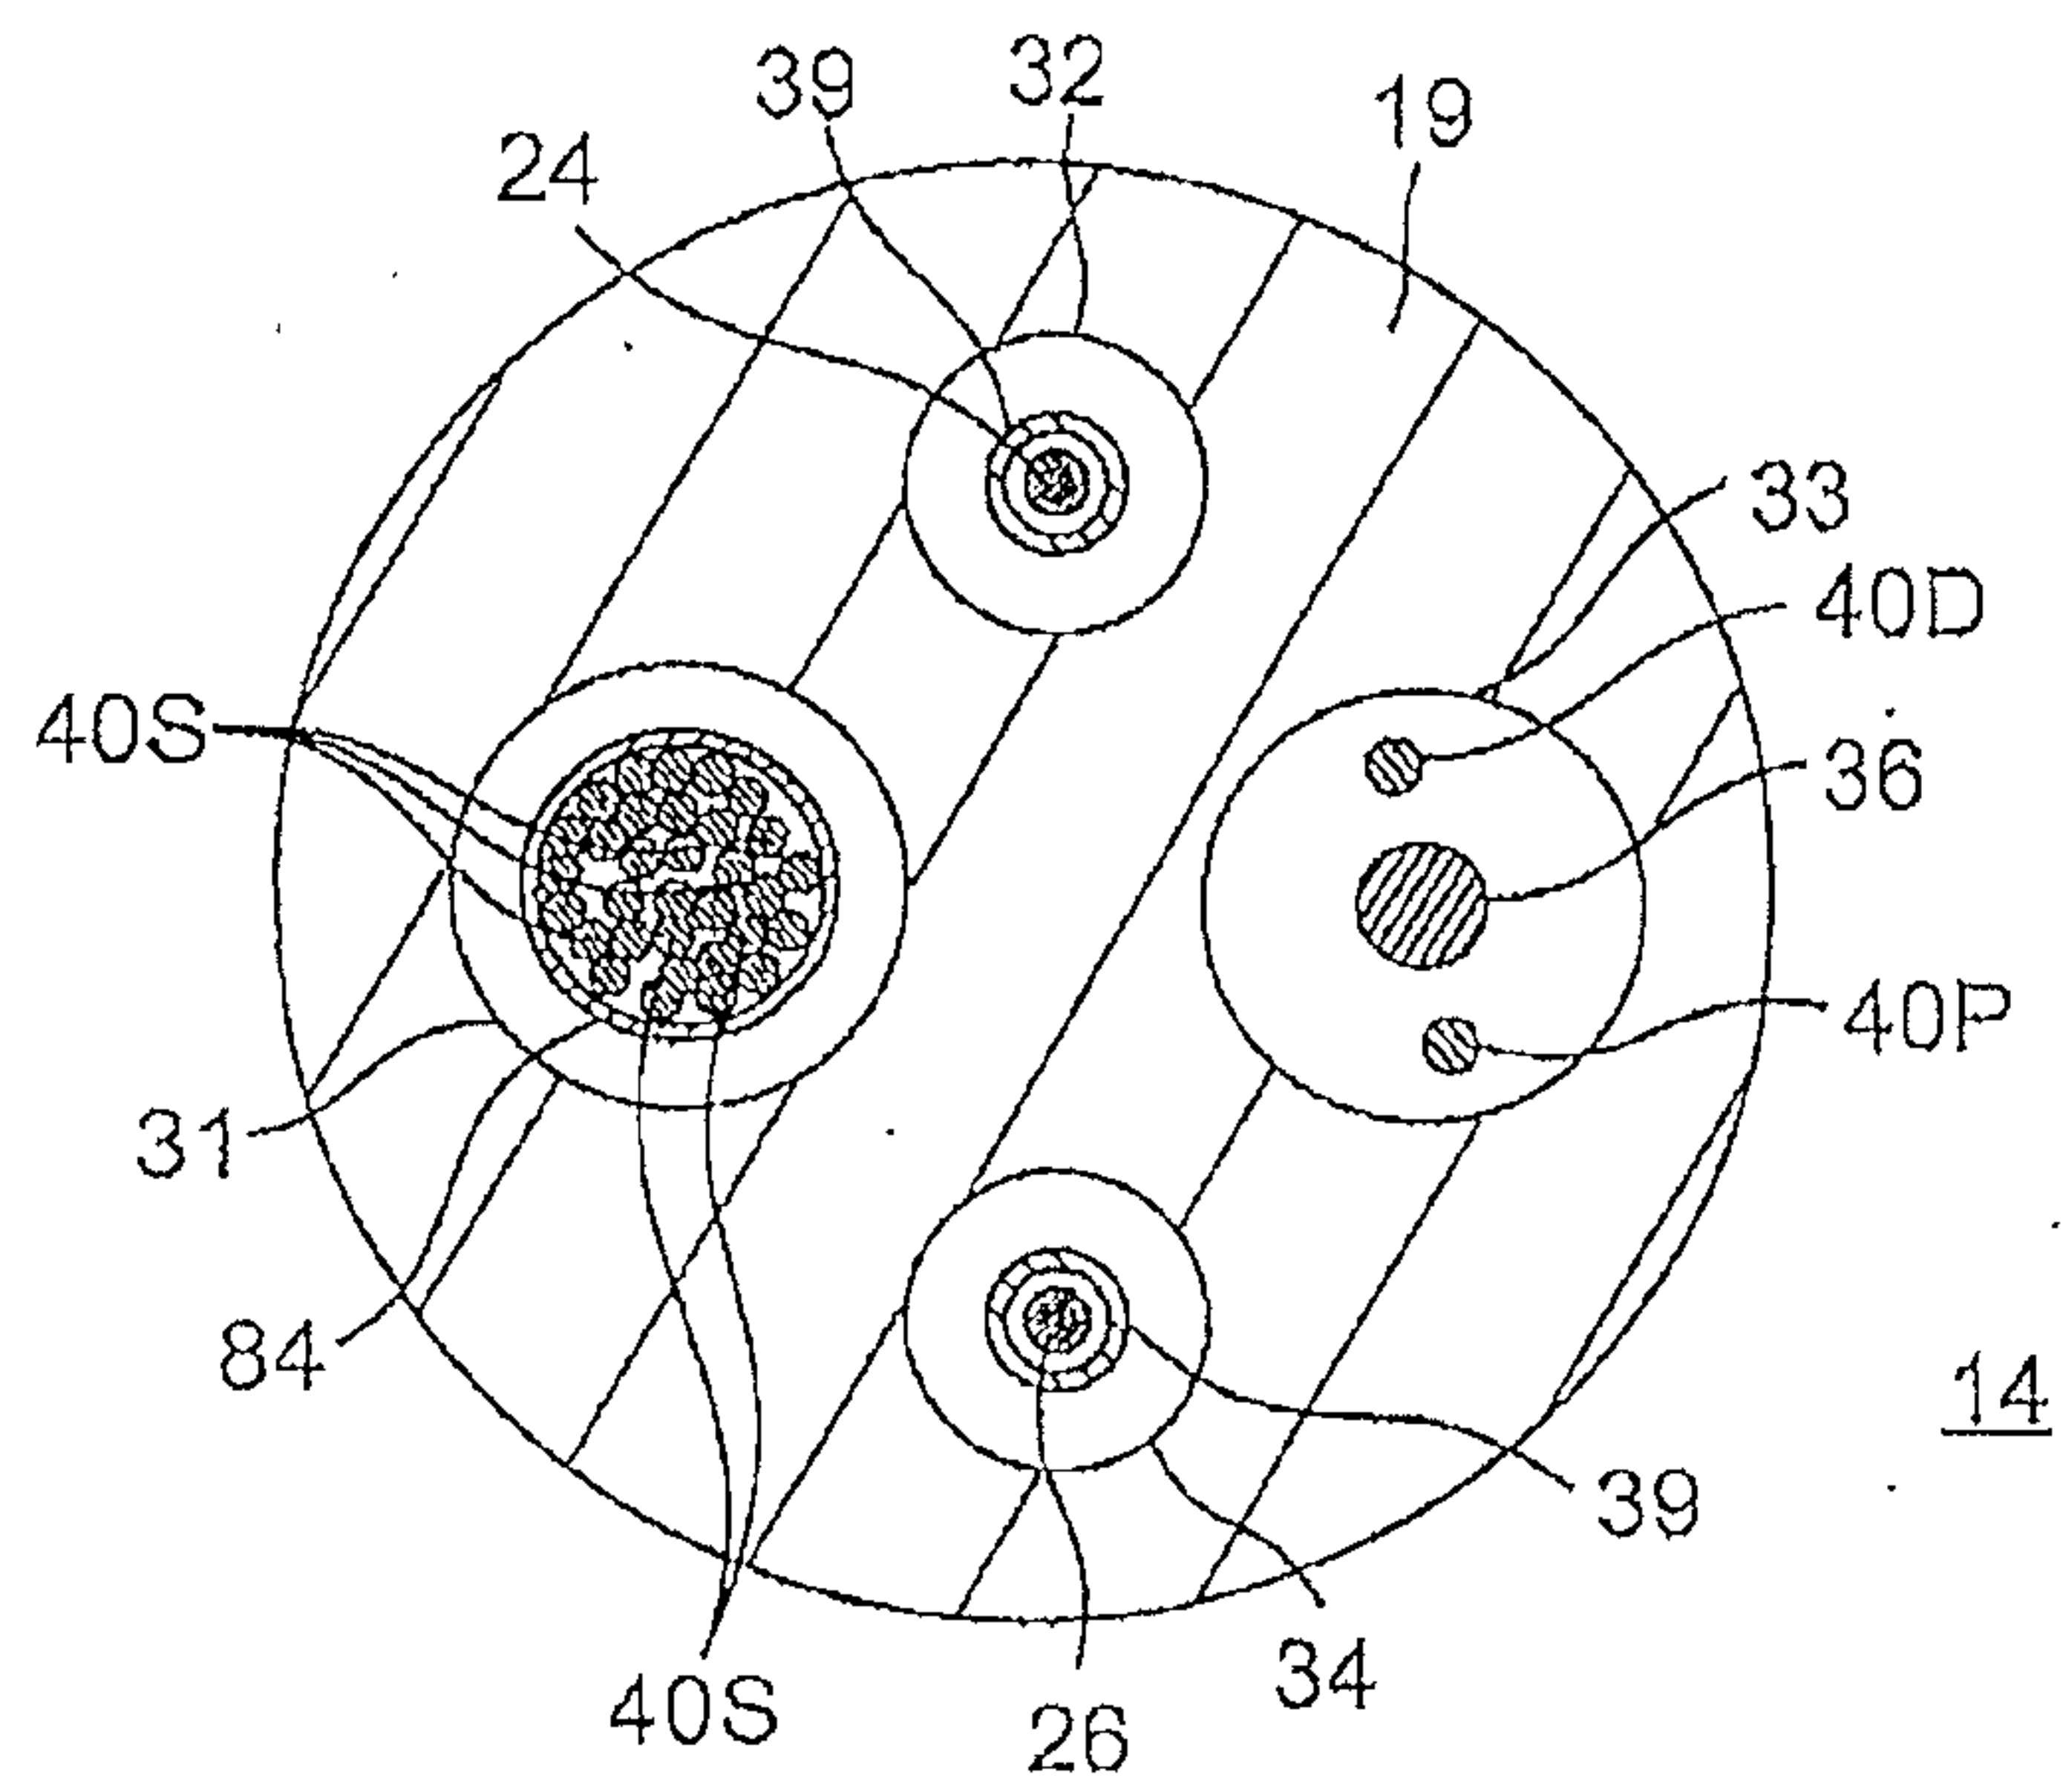


FIG. 2C



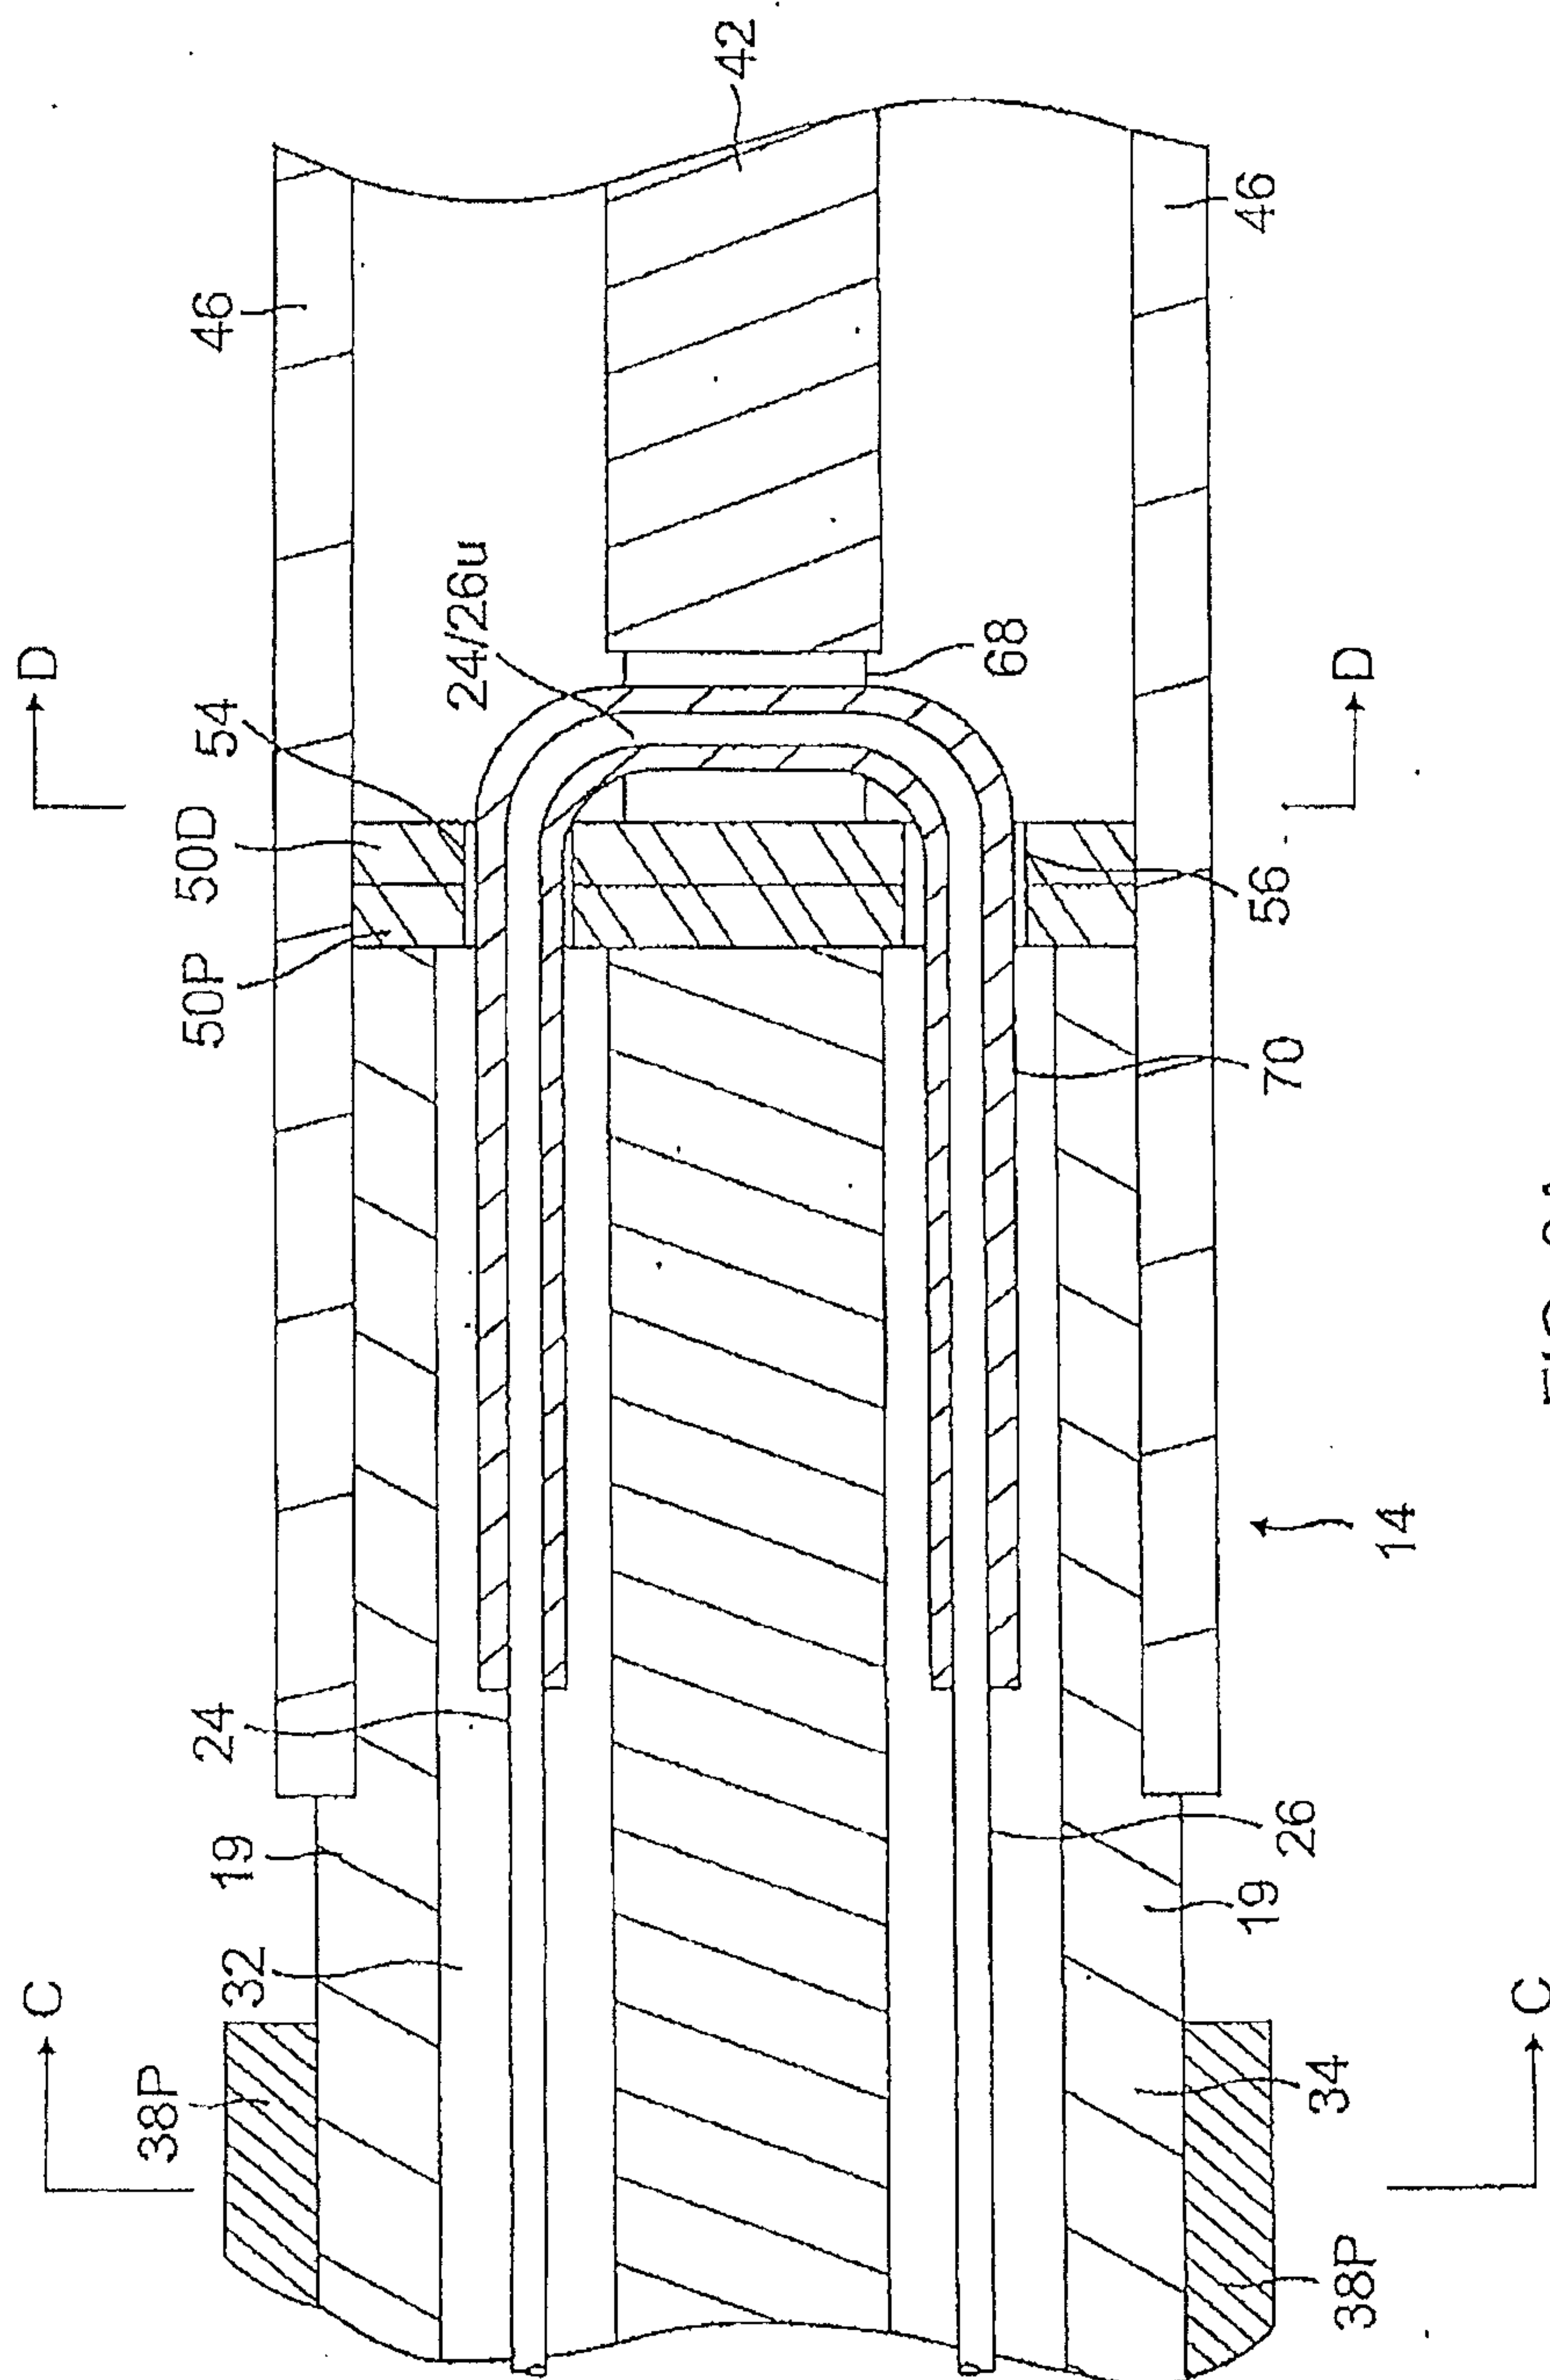


FIG. 3A

6/11

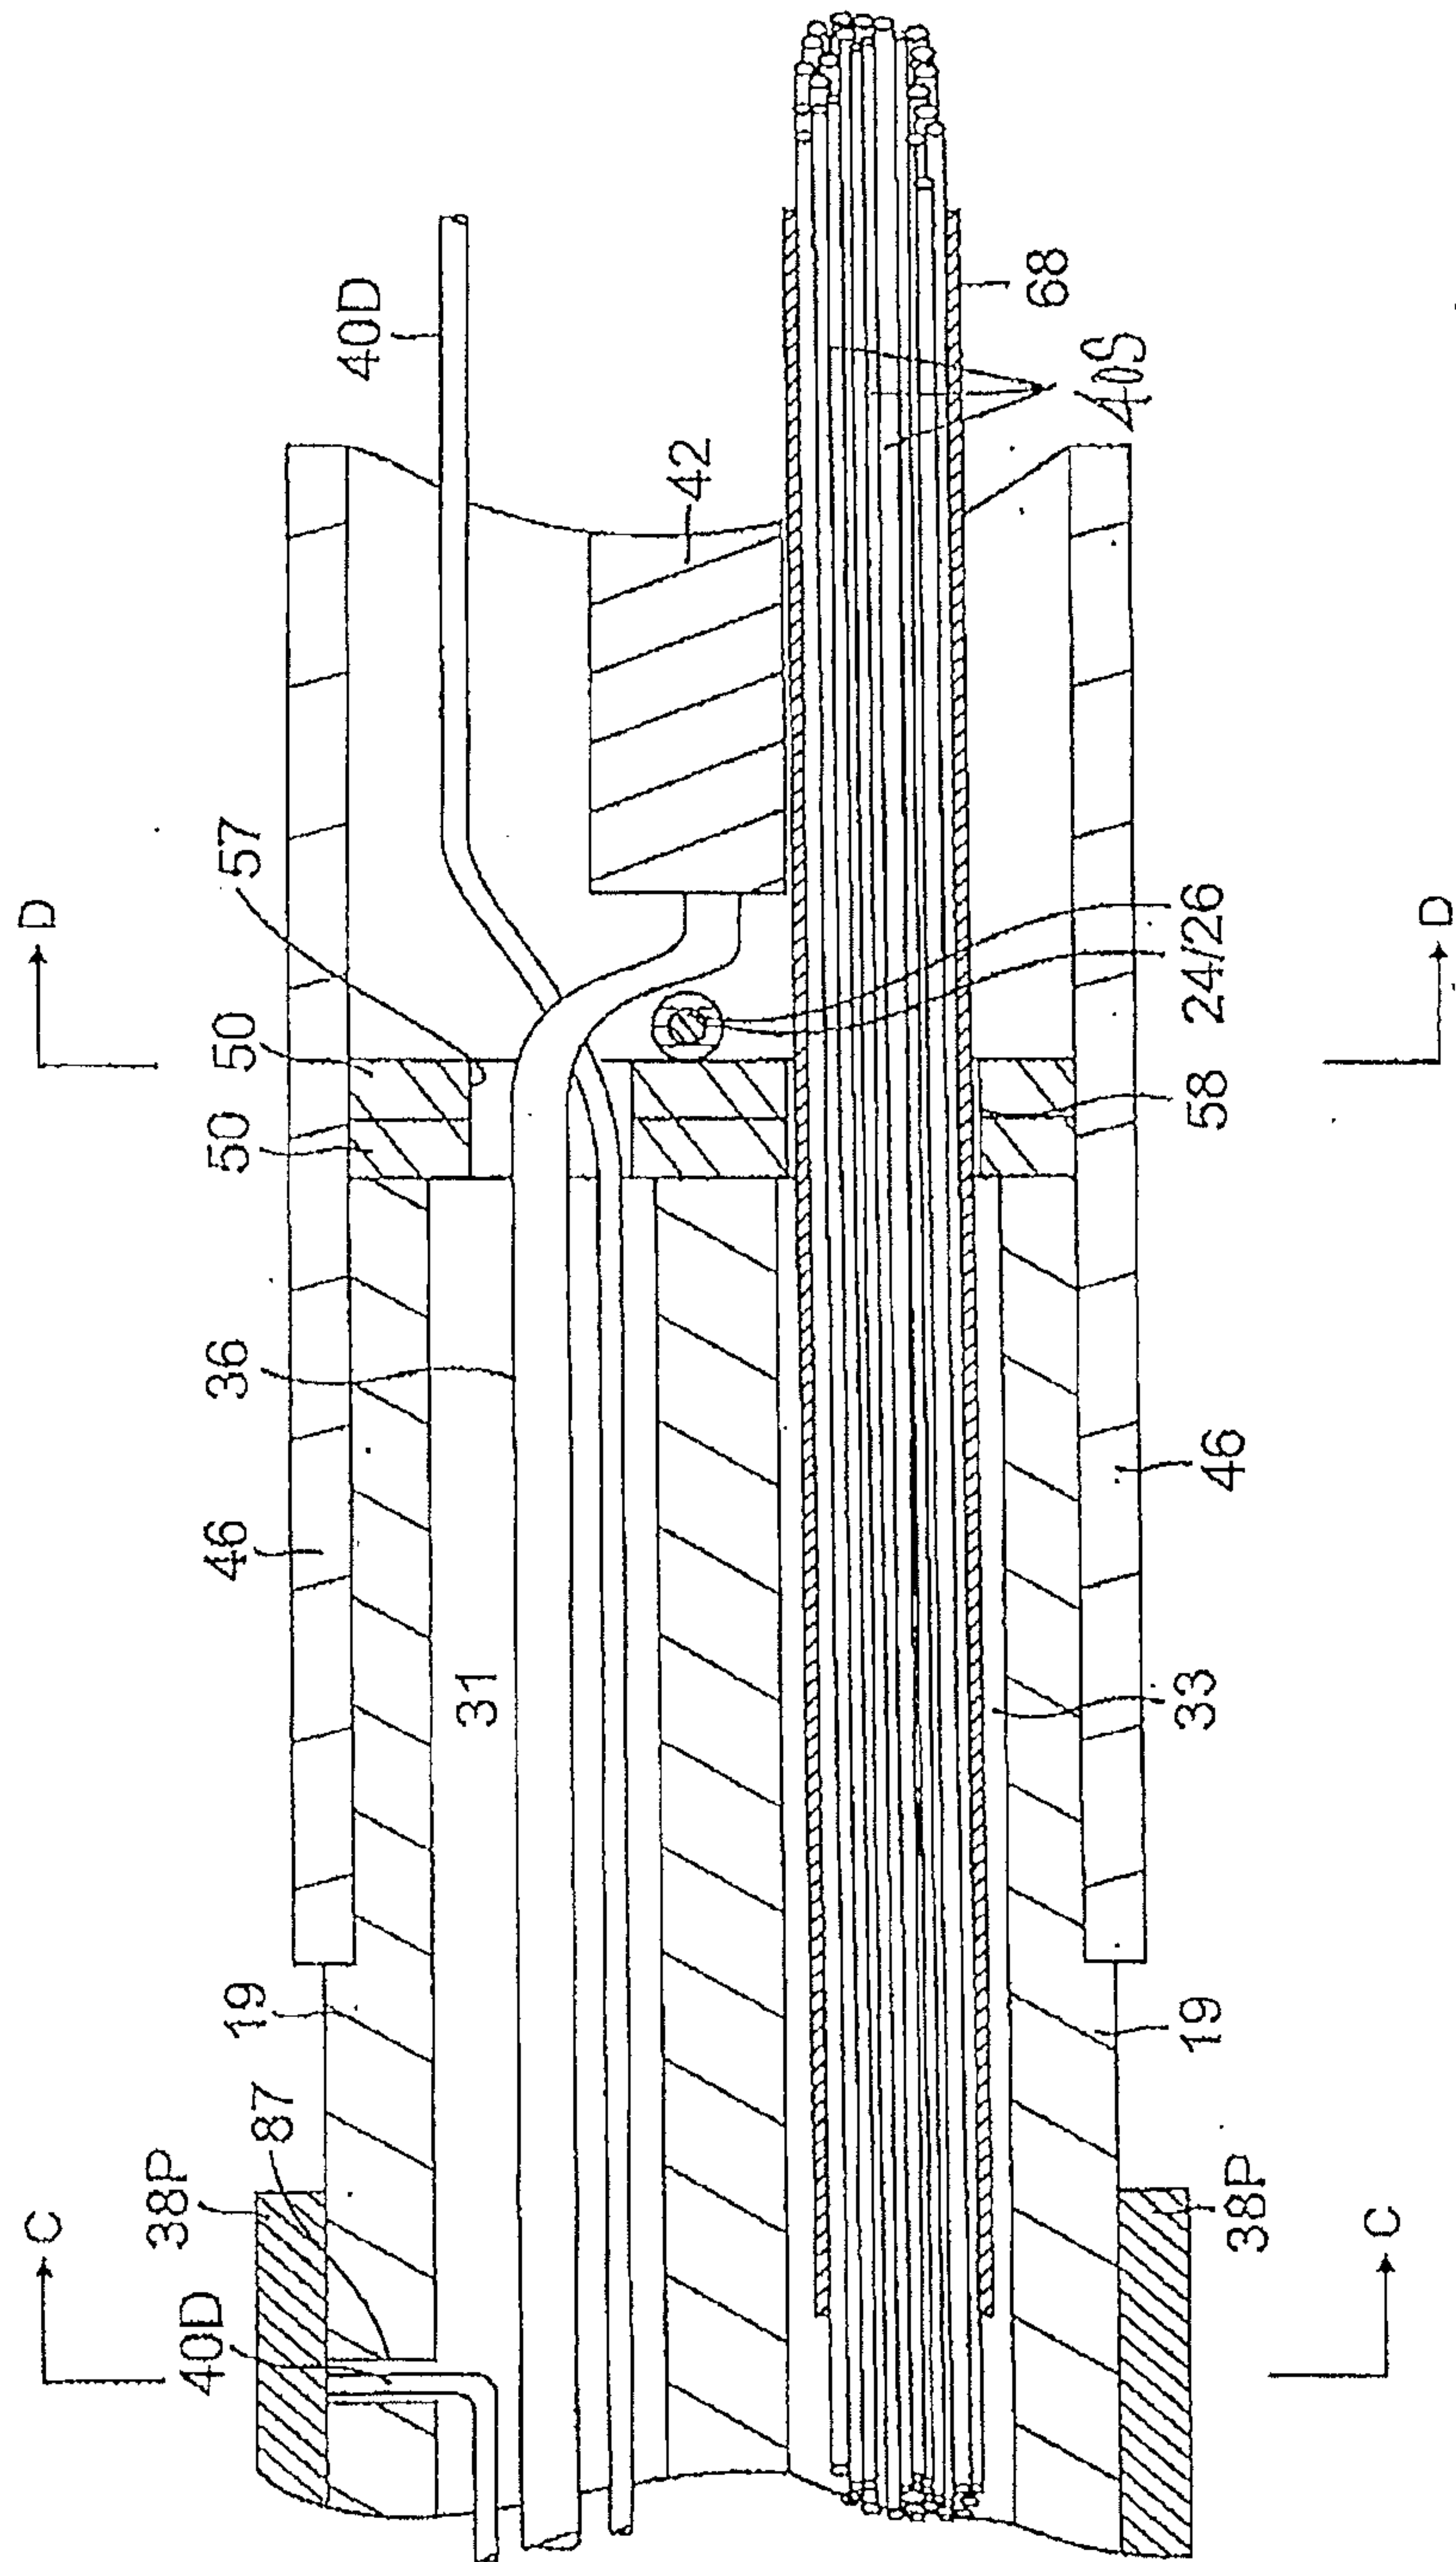


FIG. 3B

7/11

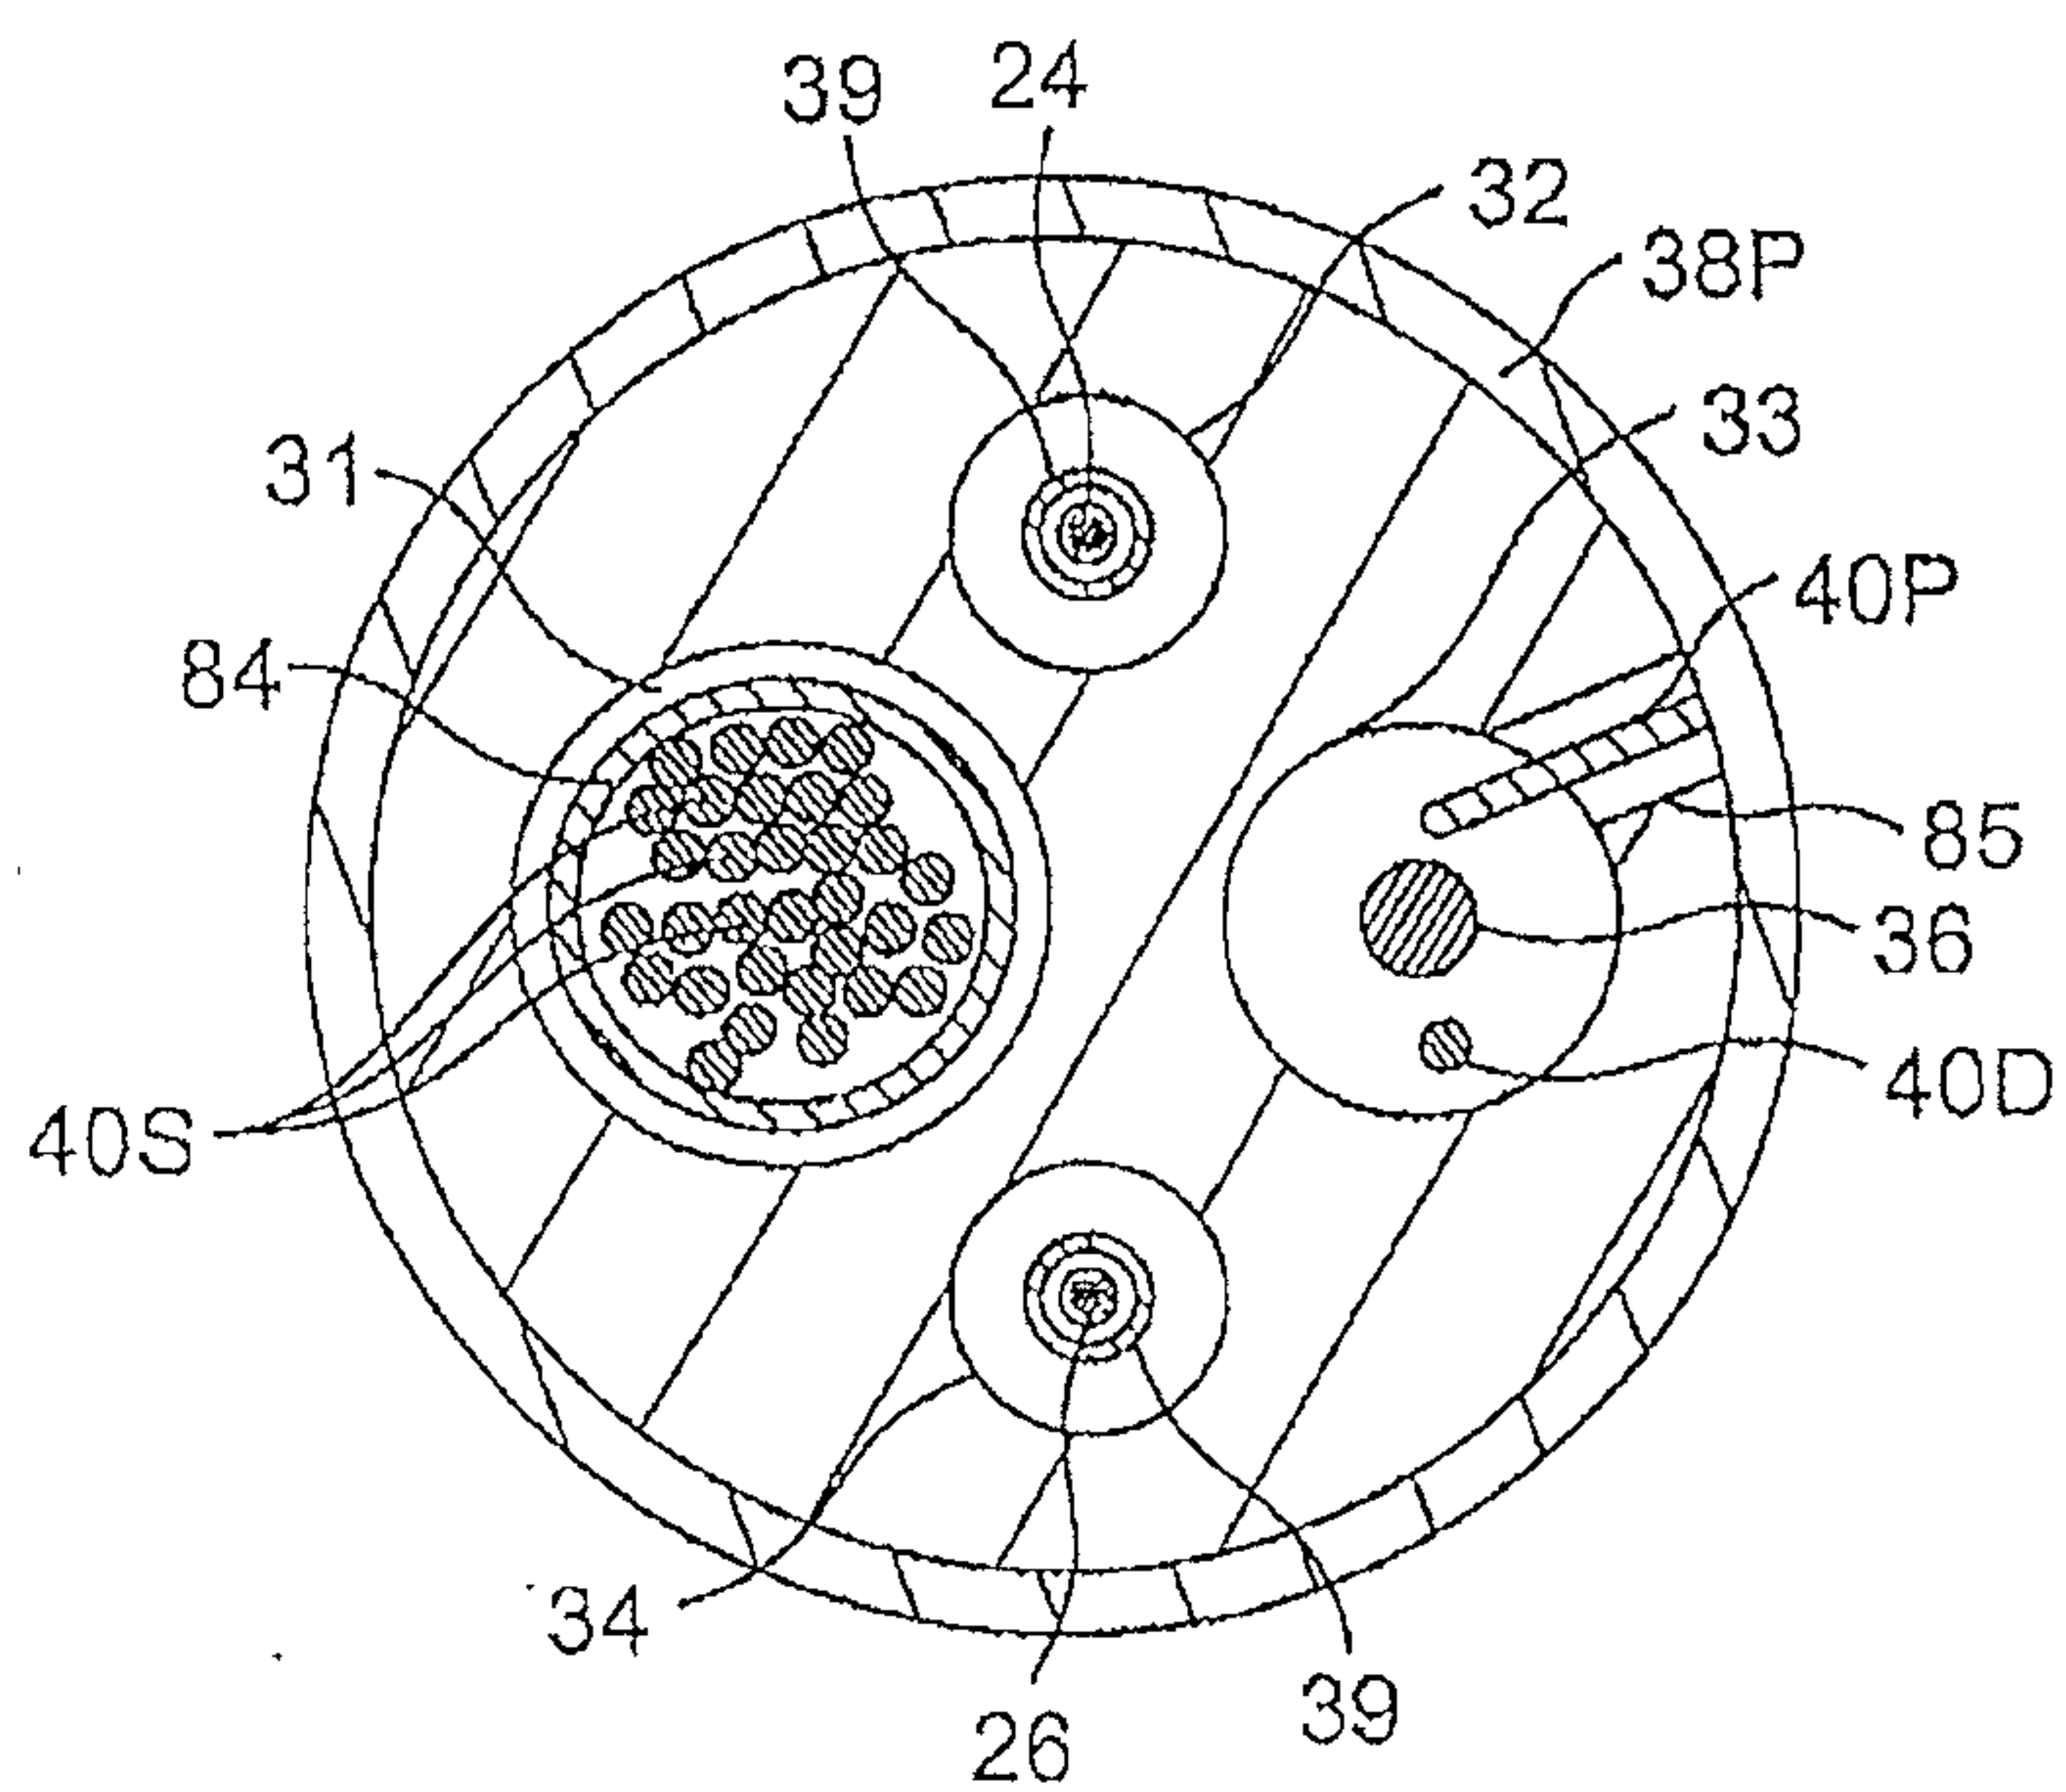


FIG. 3C


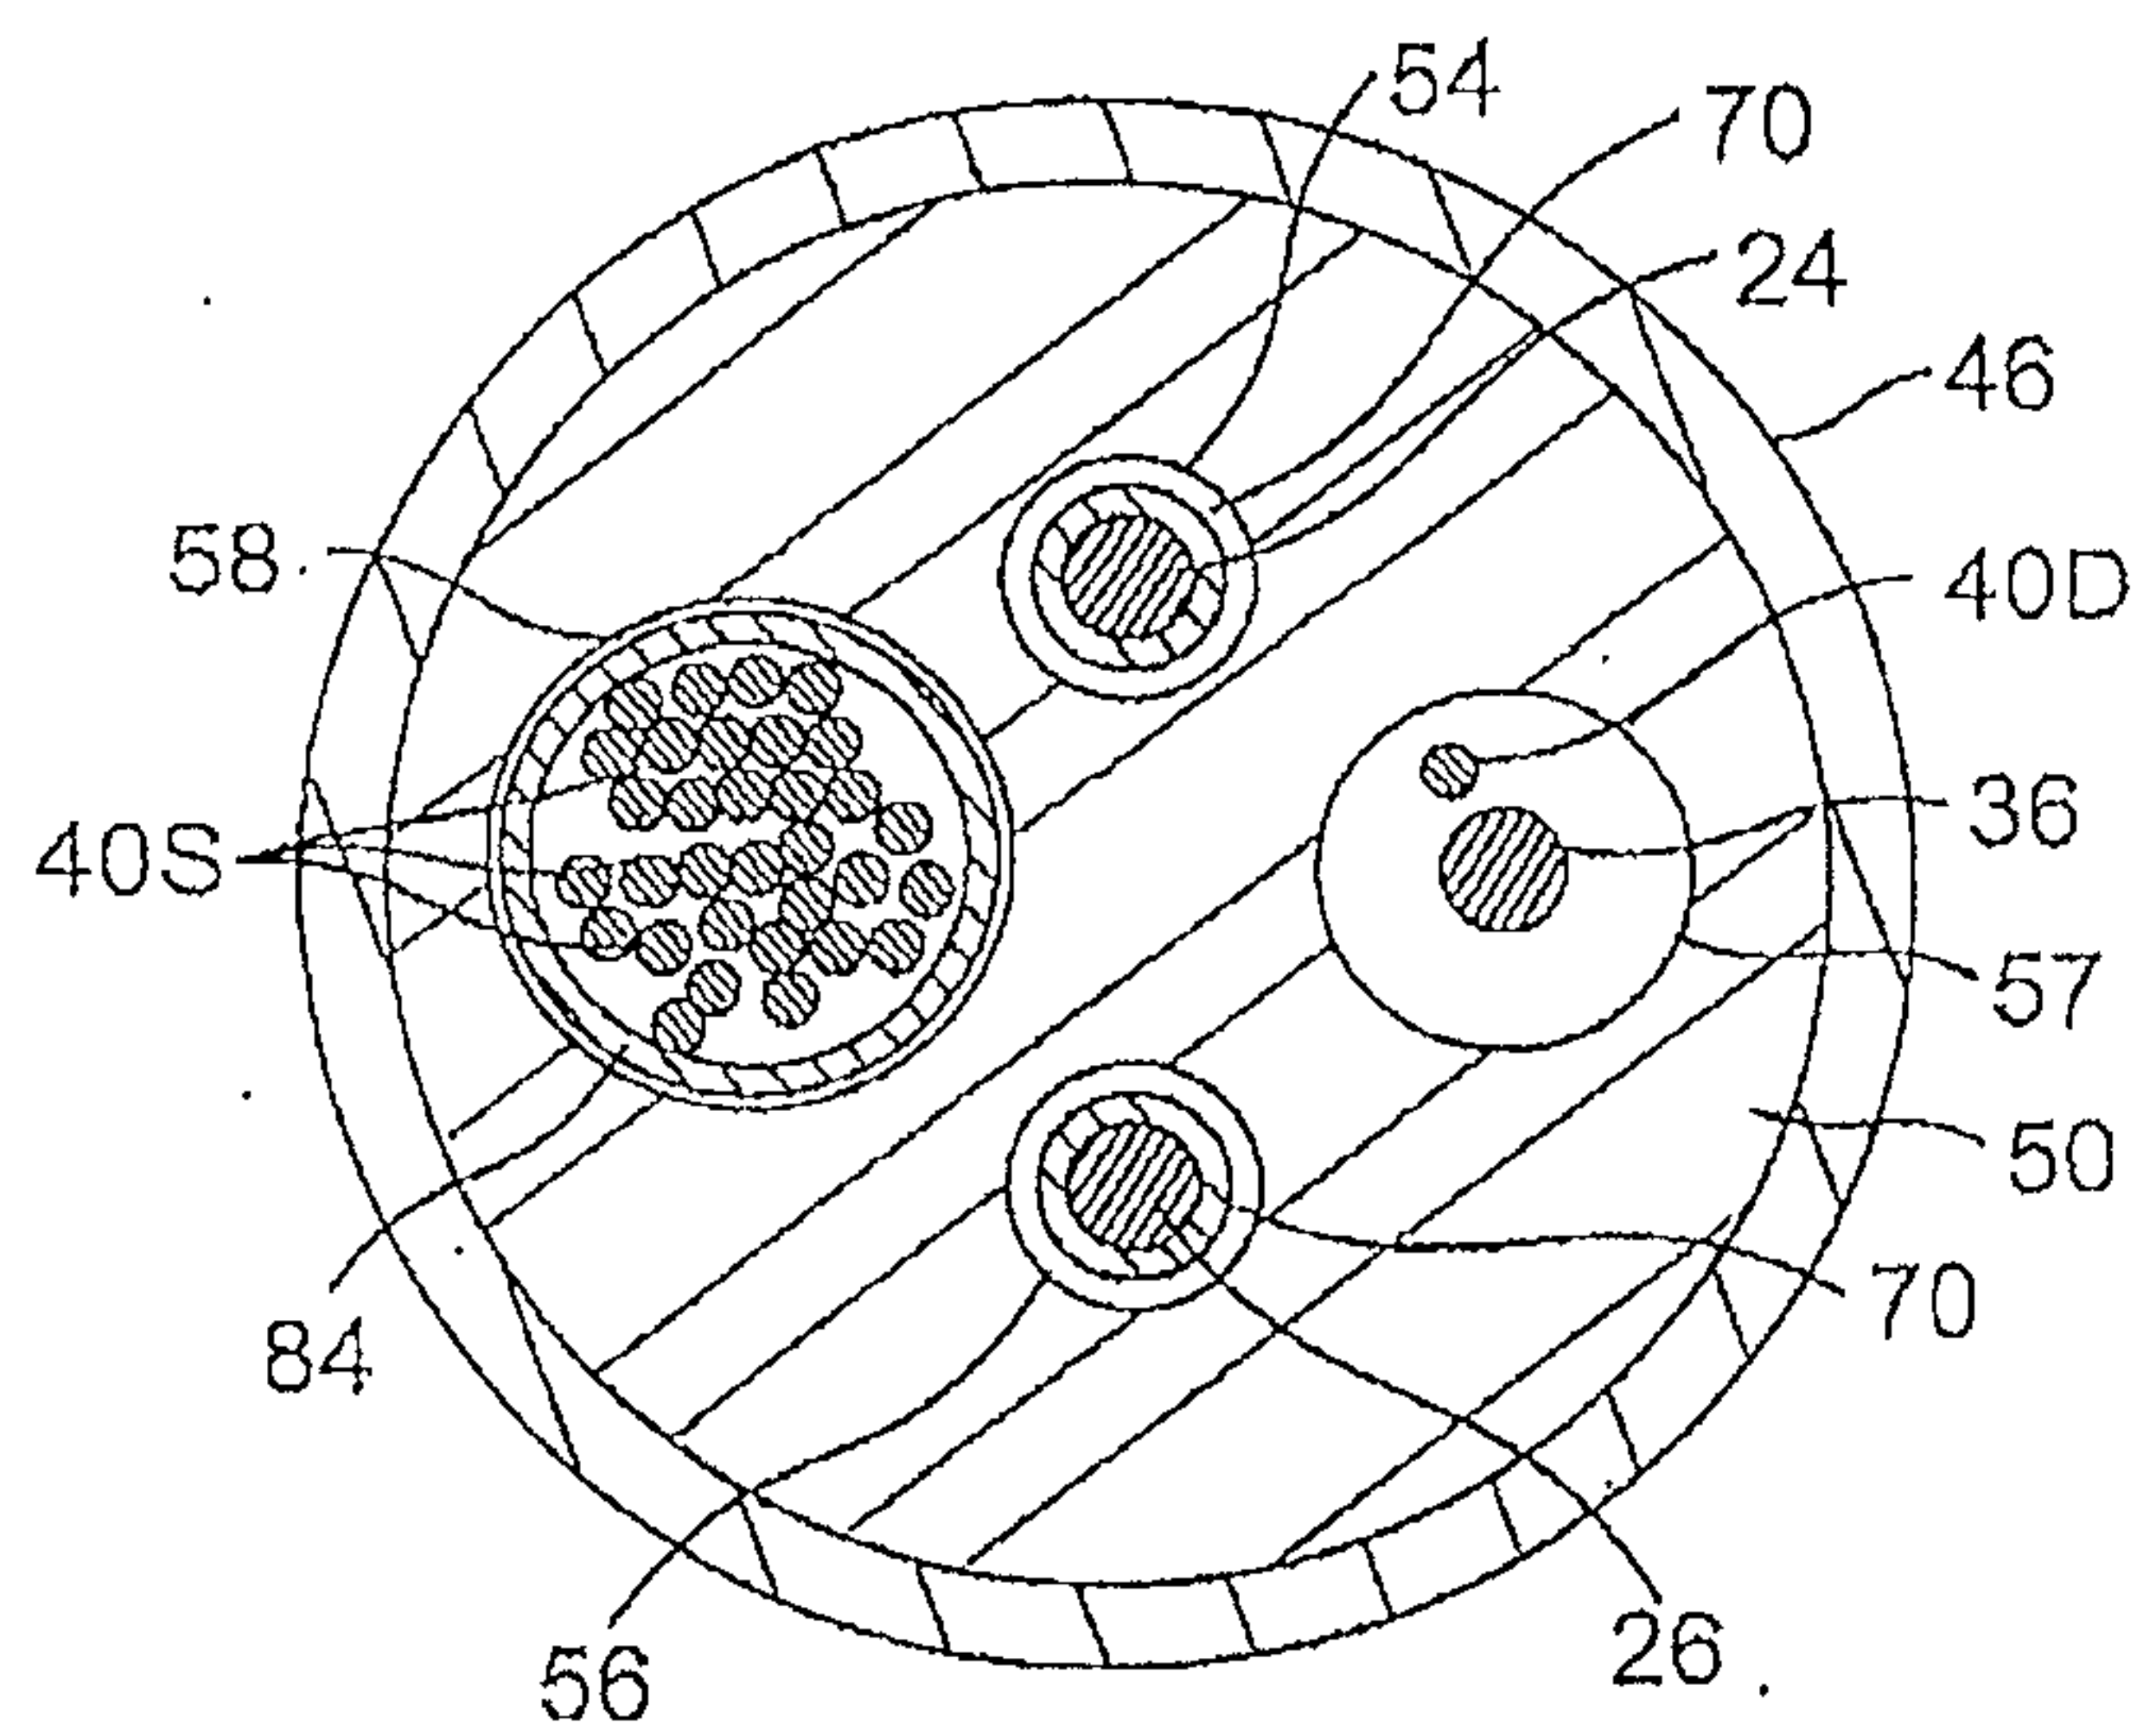



FIG. 3D



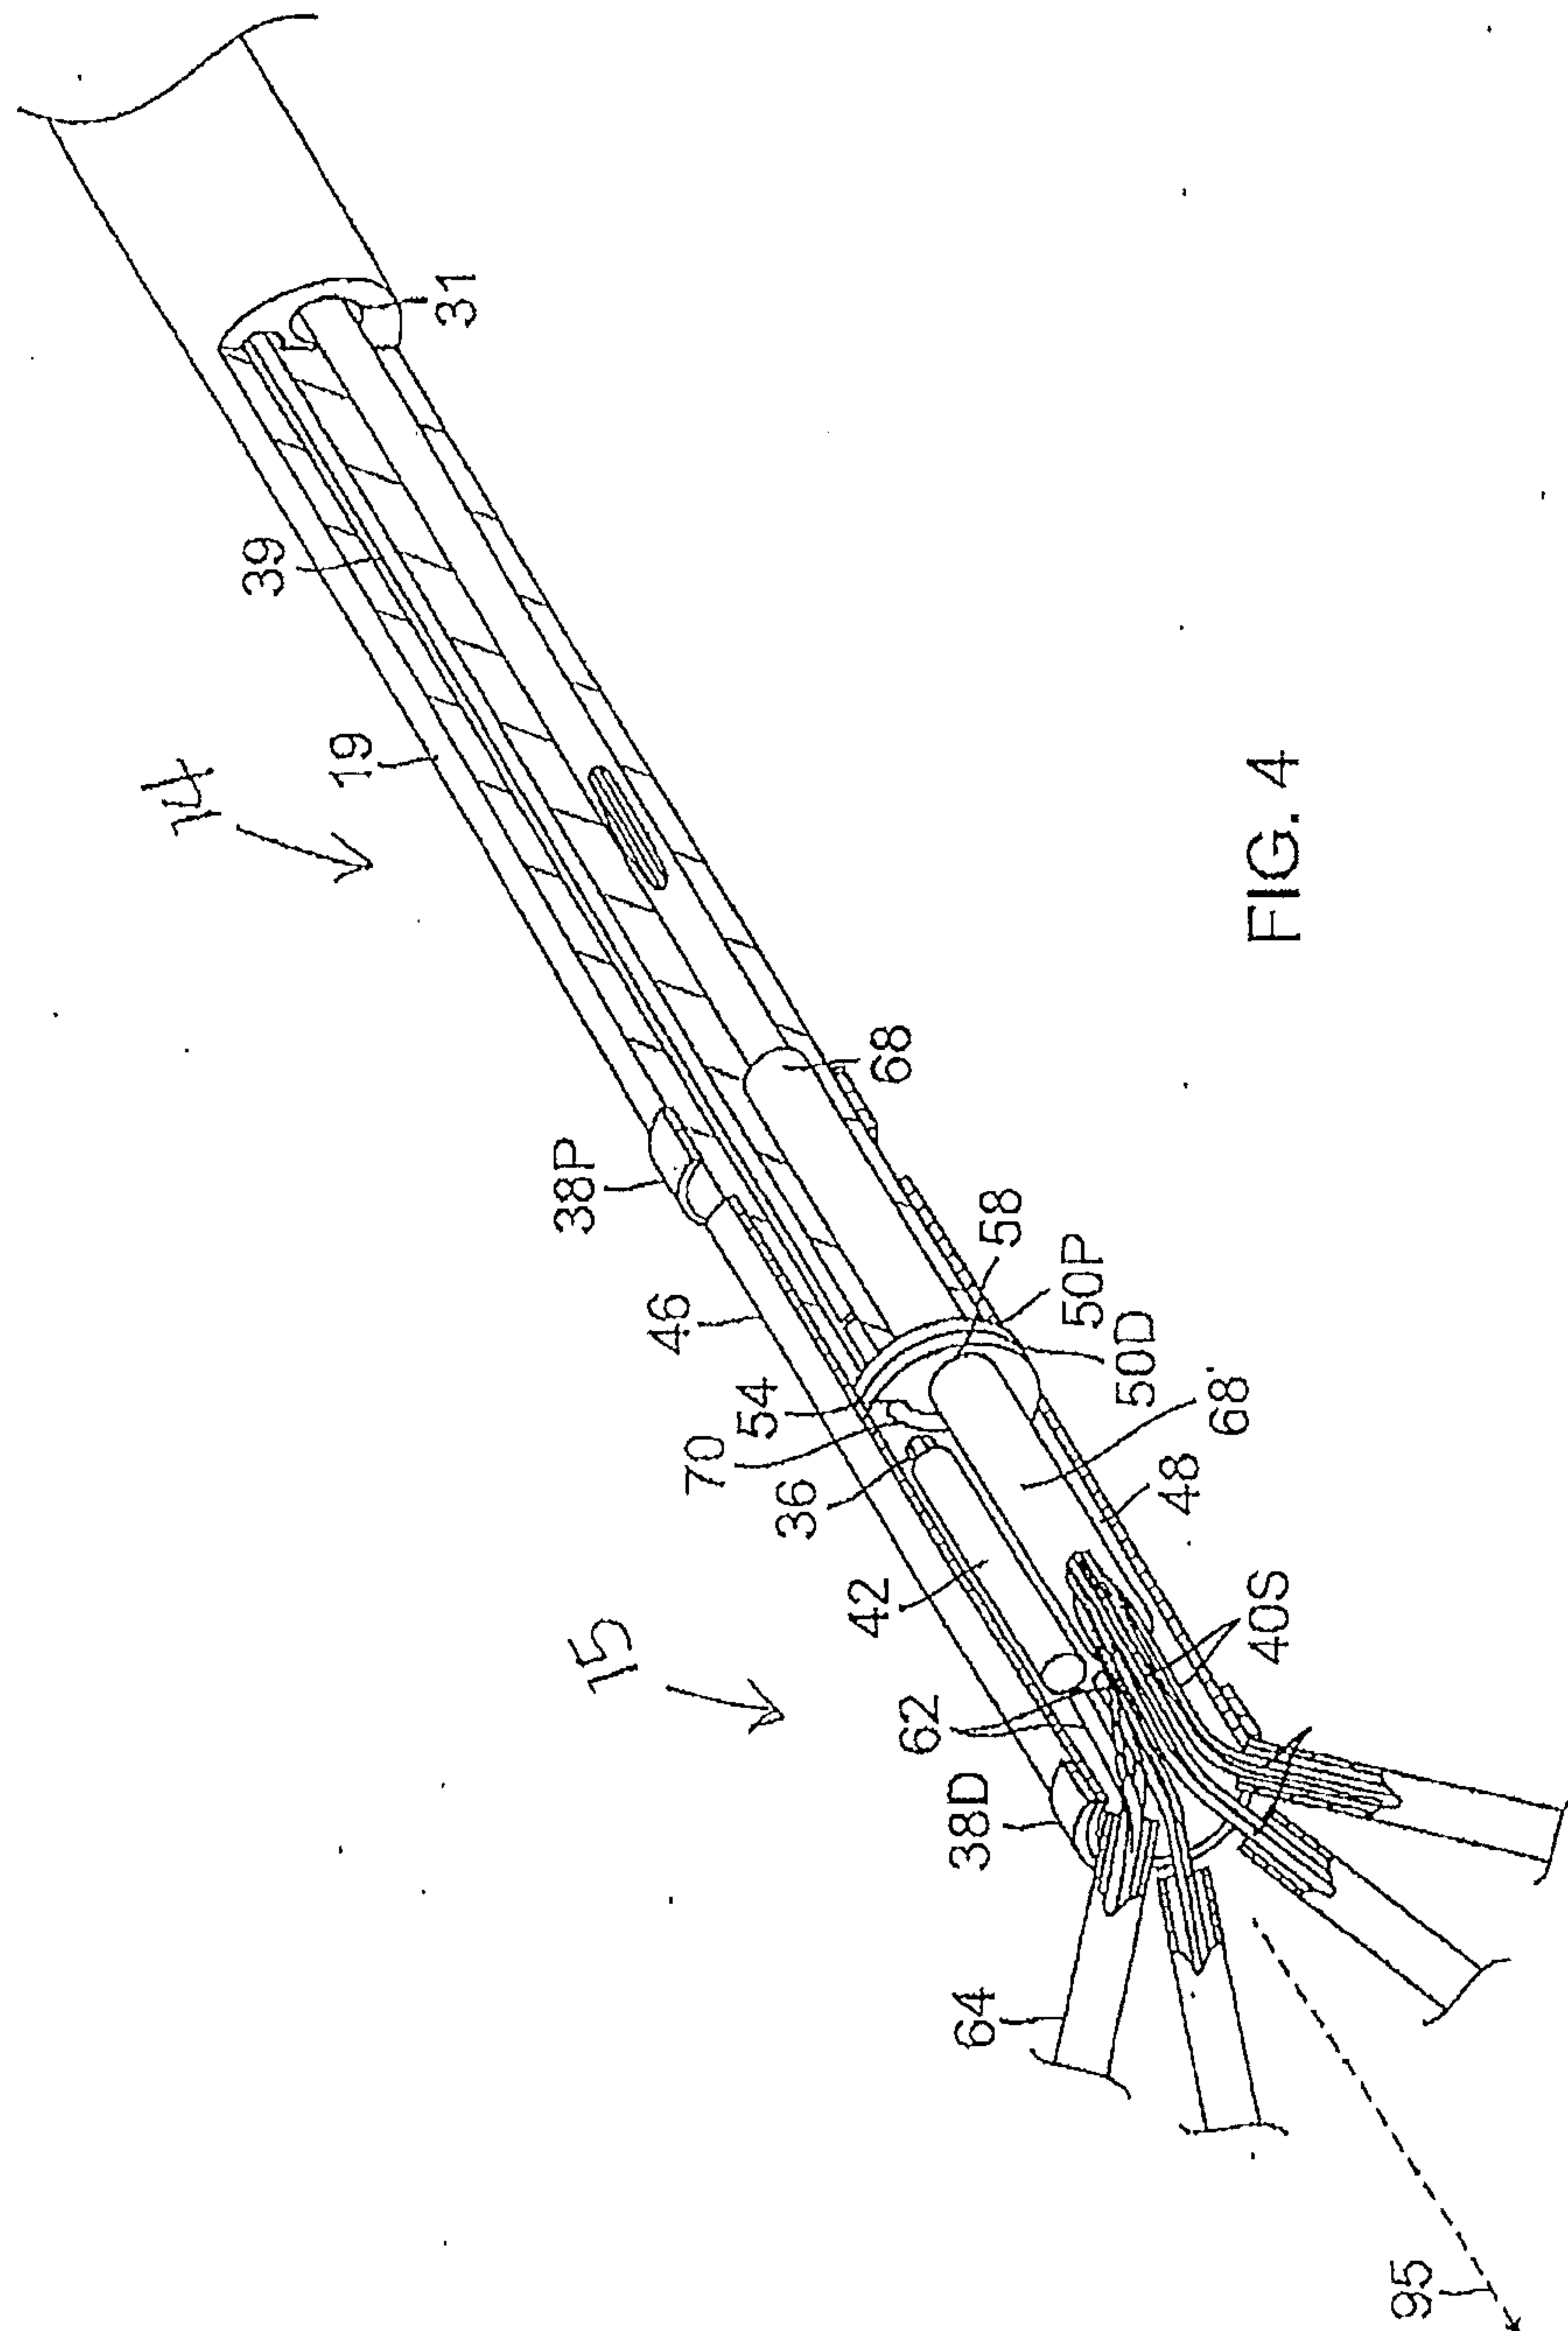


45

9/11

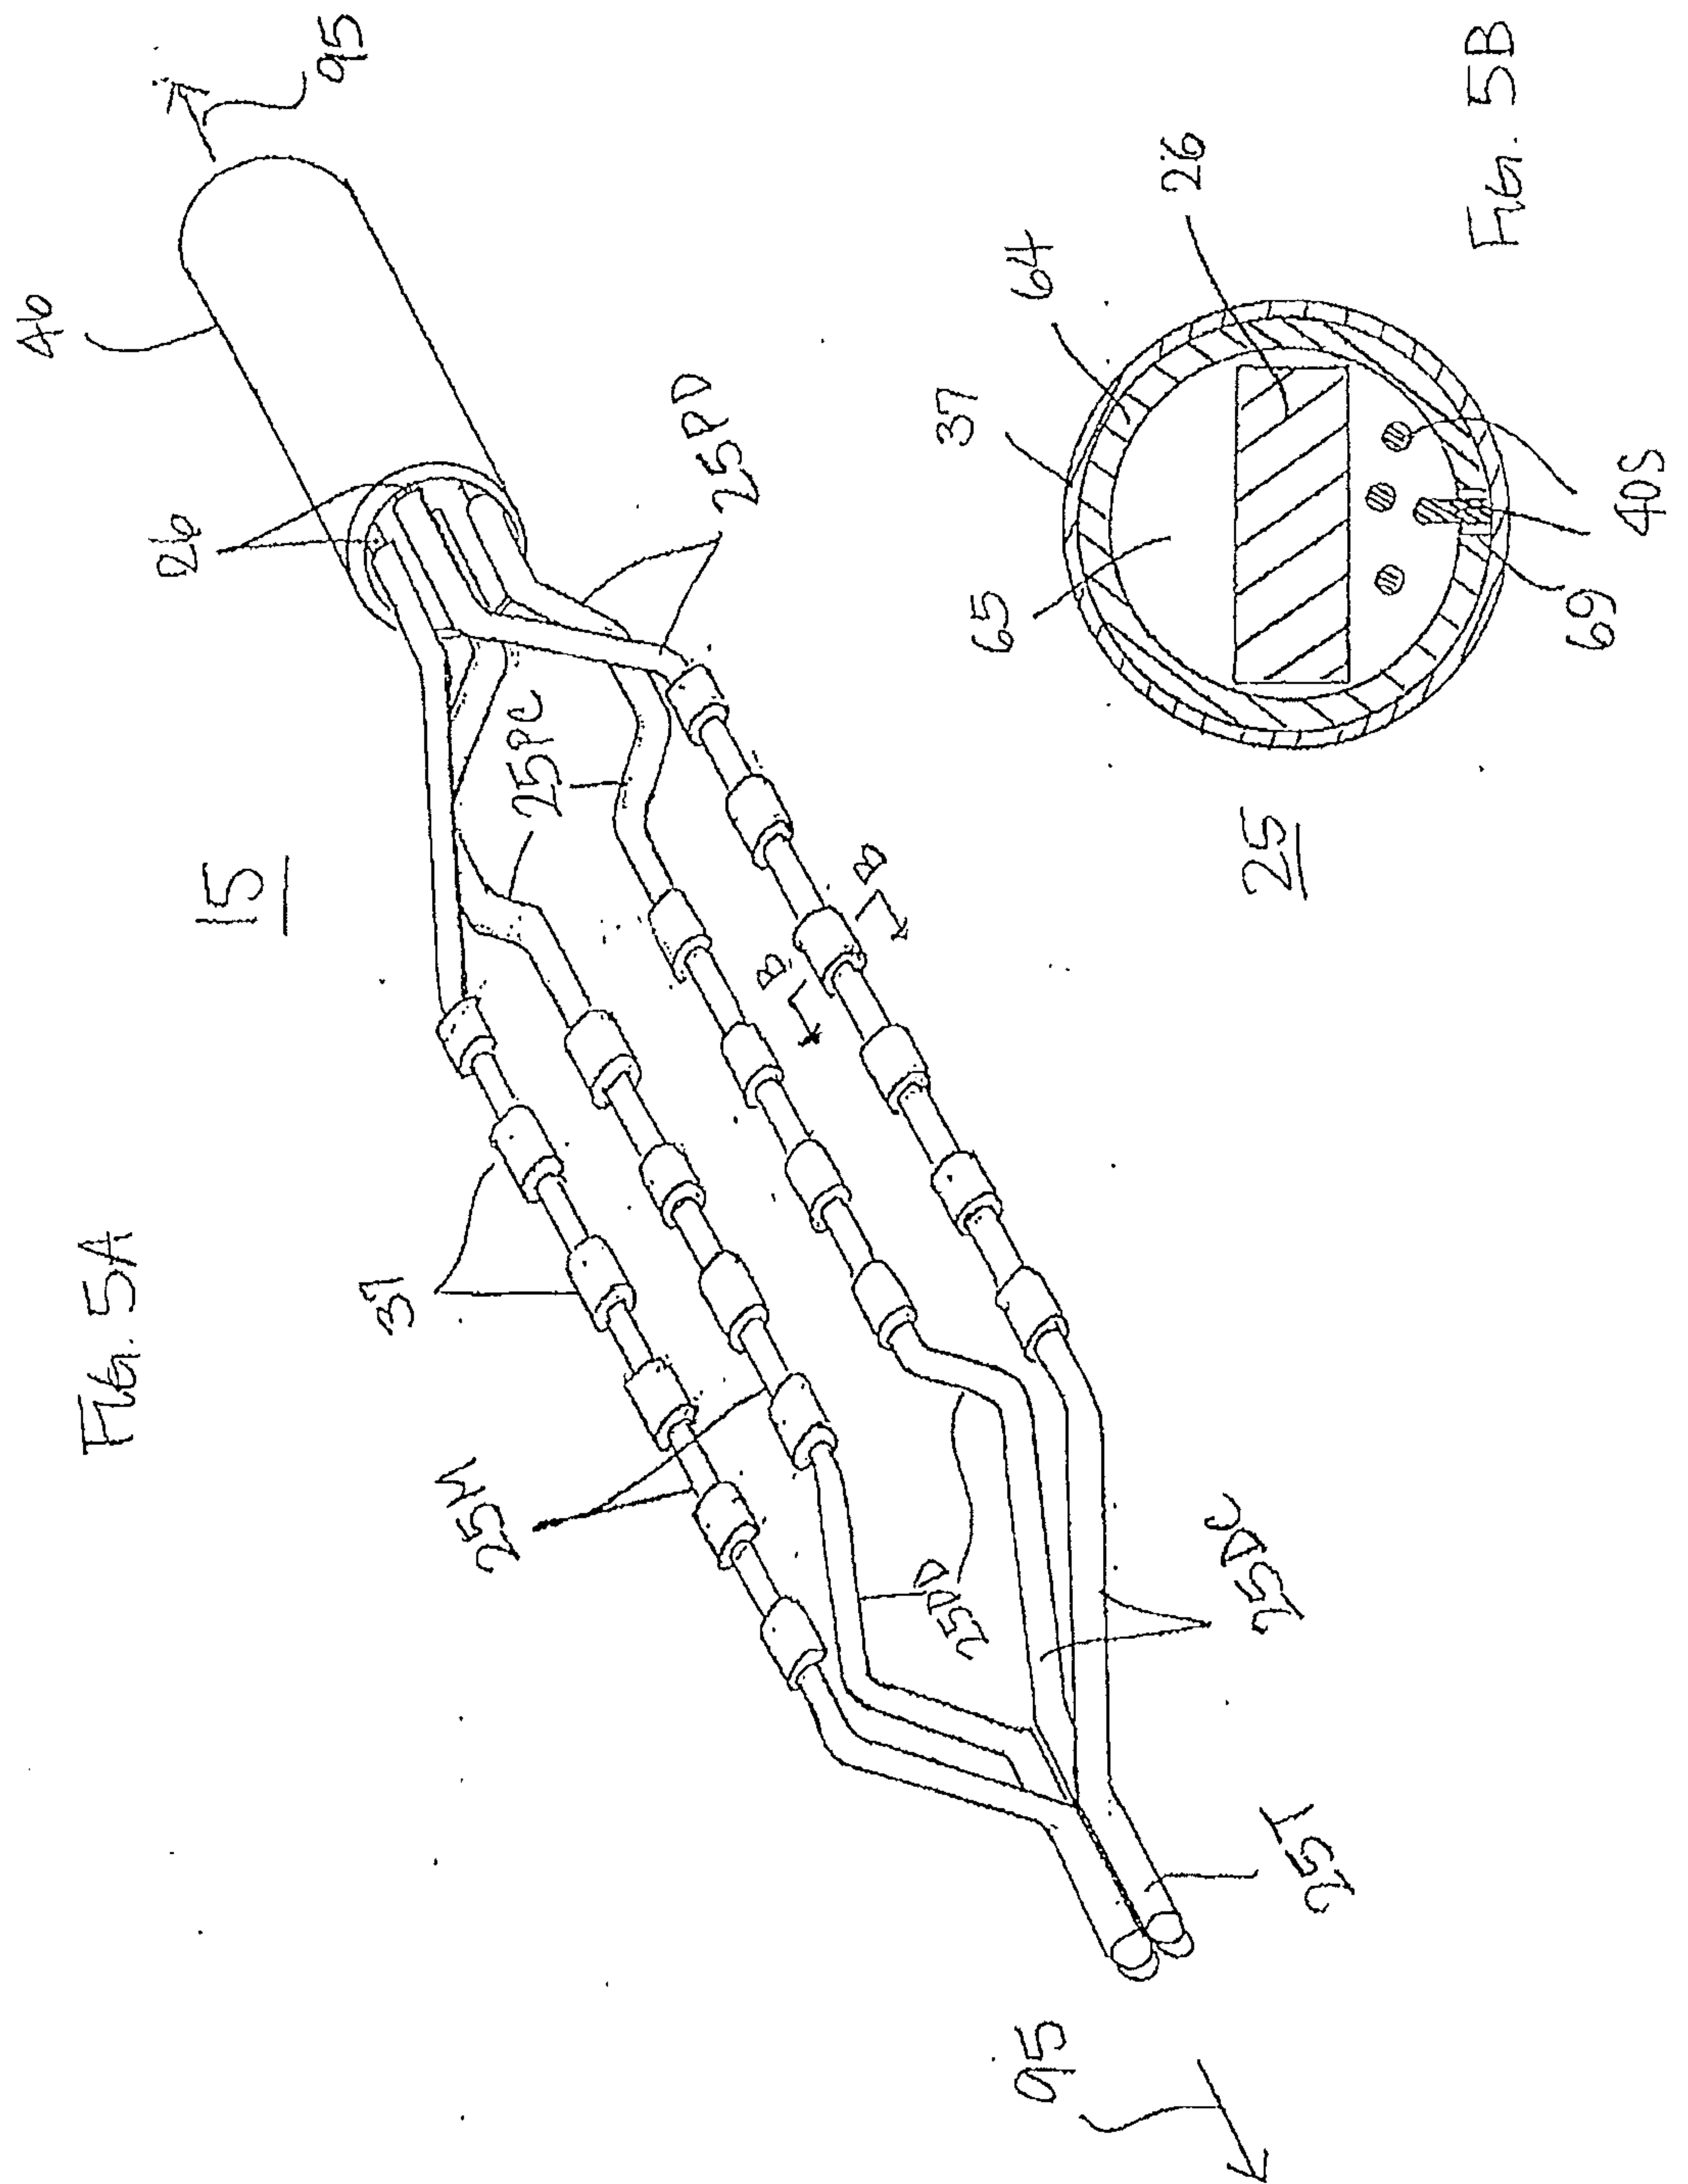

10/11

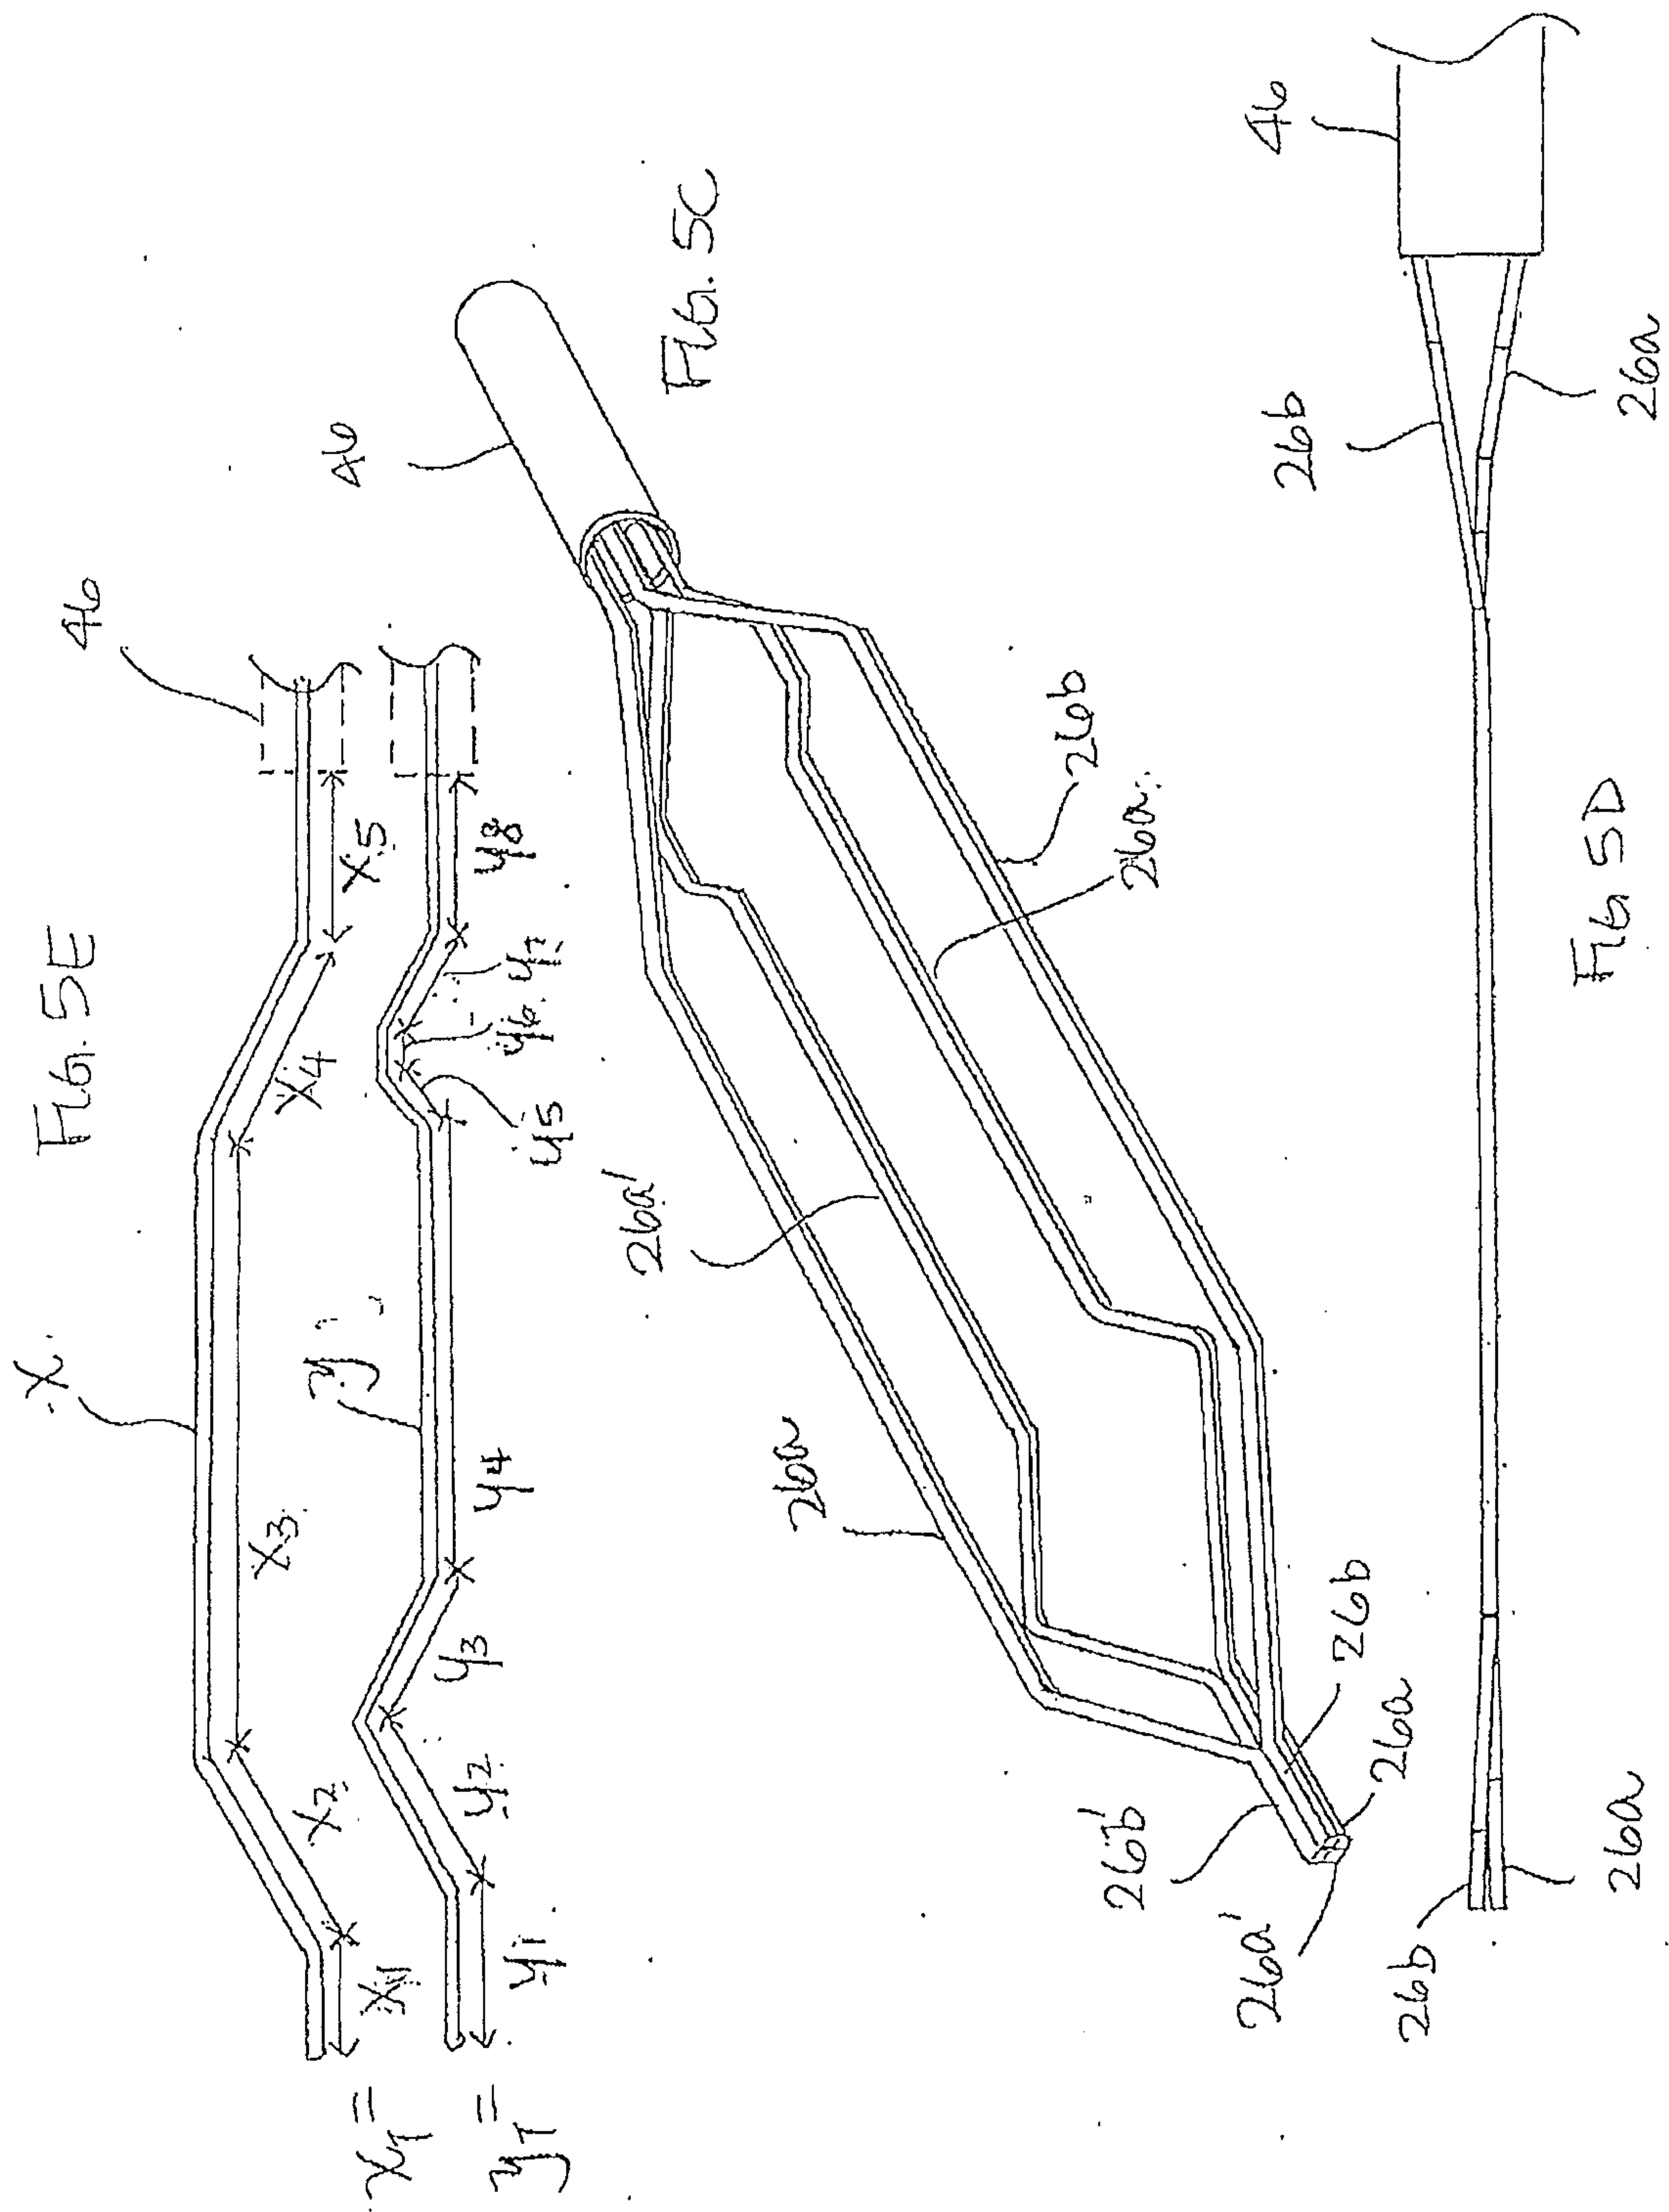



11/11

