



(22) Date de dépôt/Filing Date: 2006/05/01

(41) Mise à la disp. pub./Open to Public Insp.: 2006/11/09

(45) Date de délivrance/Issue Date: 2012/10/16

(30) Priorité/Priority: 2005/05/09 (EPEP05103804.0)

(51) Cl.Int./Int.Cl. *H04W 72/10* (2009.01),
H04W 36/36 (2009.01)


(72) Inventeurs/Inventors:
HOSSAIN, ASIF, CA;
XUE, HAO, CA;
CHAUDRY, SHAHID, CA;
ZHAO, WEN, CA

(73) Propriétaire/Owner:
RESEARCH IN MOTION LIMITED, CA

(74) Agent: MOFFAT & CO.

(54) Titre : METHODE ET APPAREIL DE SELECTION DE MODE DE BALAYAGE DURANT UN ETAT DE TRAFIC EVDO

(54) Title: METHOD AND APPARATUS FOR SCAN MODE SELECTION DURING AN EVDO TRAFFIC STATE

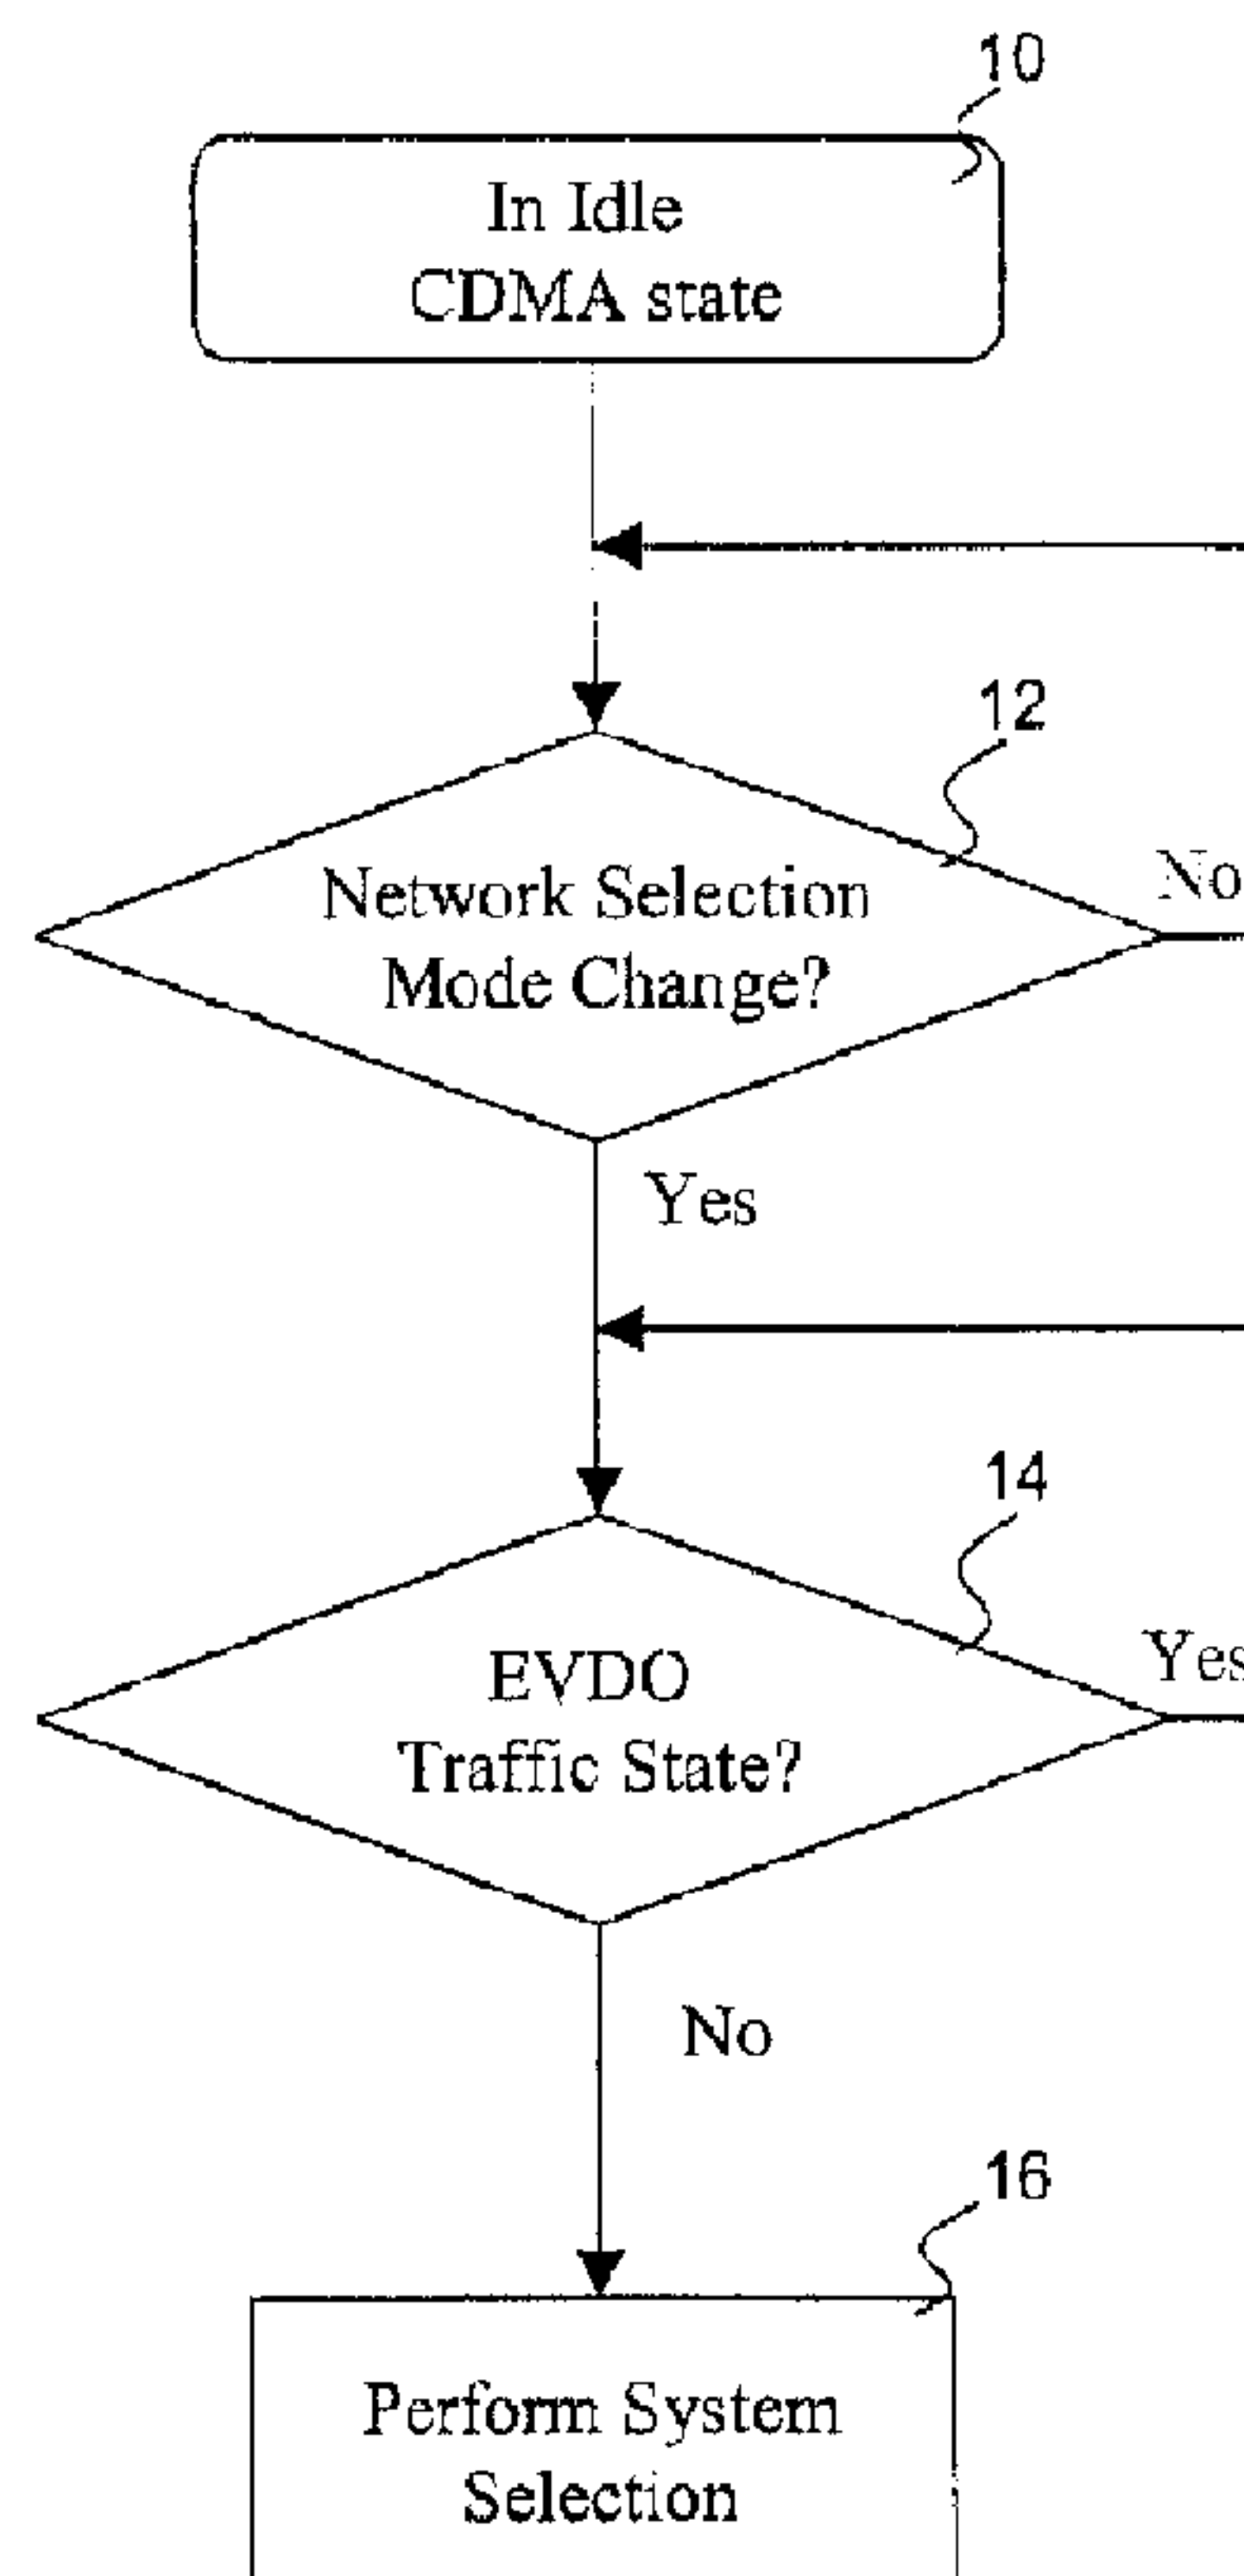

(57) Abrégé/Abstract:

A method and apparatus for user data traffic handling for an EVDO enabled hybrid mode mobile device, the method having the steps of: blocking a system selection at the mobile device until no EVDO traffic state exists, the blocking step includes either monitoring whether a user changes a scan mode on the mobile device; and if the user changes the scan mode, checking whether the mobile device is in an EVDO traffic state; and if yes delaying a system selection until the EVDO traffic state is ended, or monitoring whether a user is in an EVDO traffic state, and if yes, preventing a user from accessing a scan mode menu on the mobile device.



ABSTRACT

A method and apparatus for user data traffic handling for an EVDO enabled hybrid mode mobile device, the method having the steps of: blocking a system selection at the mobile device until no EVDO traffic state exists, the blocking step includes either monitoring whether a user changes a scan mode on the mobile device; and if the user changes the scan mode, checking whether the mobile device is in an EVDO traffic state; and if yes delaying a system selection until the EVDO traffic state is ended, or monitoring whether a user is in an EVDO traffic state, and if yes, preventing a user from accessing a scan mode menu on the mobile device.

METHOD AND APPARATUS FOR SCAN MODE SELECTION DURING AN EVDO TRAFFIC STATE

FIELD OF THE APPLICATION

[0001] The present application relates to the optimization of a data device in a hybrid EVDO and CDMA2000 network, and in particular when the mobile device is in an EVDO traffic state.

BACKGROUND

[0002] The CDMA 1x/EVDO mobile system is a hybrid system that has evolved from the CDMA2000 system. EVDO stands for Evolution Data Only or Data Optimized and as suggested by this, is a data only system. One advantage of EVDO systems is that, it allows a high transfer rate for data. Another advantage of 1xEVDO System operating in hybrid mode is the ability to receive circuit switched services, such as voice calls, even during active data session in EVDO System.

[0003] A mobile device operating in 1x/EVDO hybrid mode will first acquire the CDMA 1x system, and once this system has been acquired and is in an idle state the mobile device will then try to acquire the EVDO system. The CDMA 1x system will always have precedence over the EVDO system according to the current design.

[0004] Since the main advantage of hybrid mode is the ability to receive circuit switched mobile terminated calls, by design, when the CDMA system is dropped for any reason, the EVDO system will also be dropped and the mobile station will immediately try to establish a new CDMA 1x connection.

[0005] On current mobile devices, a user has the option of changing the scan mode (alternatively called the network selection mode). The scan mode determines which systems the mobile device can connect to and dictates the device's System Determination Algorithm. Various options include the home network only, which prevents roaming charges, and various analog and digital options as will be known to those skilled in the art. Scan modes can be changed, for example, to avoid roaming charges when a home network can be acquired.

[0006] A side effect of changing the scan mode on current mobile devices is that they immediately drop the current CDMA network and search for a new network according to the System Determination algorithm as per the selected scan mode. In the hybrid mode that includes an EVDO connection, if the mobile device drops the CDMA 1x connection, the EVDO connection is also dropped. The problem is that when the mobile device has an EVDO traffic channel acquired and is downloading data, dropping the EVDO connection undesirably disrupts the user's download by dropping the data channel.

SUMMARY

[0007] The present application provides for a method and apparatus to prevent a scan mode change when an EVDO traffic channel is established. Specifically, the present system and method provide for a check when a scan mode change is made to determine whether the device is in an EVDO traffic state. If the device is in an EVDO traffic state, the mobile device waits until the EVDO traffic state ends at which point the system selection occurs. Alternatively, the device could prevent the user from changing the scan mode by hiding the scan mode selection menu when the mobile device is in an EVDO traffic state.

[0008] As will be appreciated by those skilled in the art, keeping the EVDO traffic state open until the data transaction is complete will prevent any delay in the data transaction and also save network resources since the EVDO connection would need to be re-established and any lost packets due to the dropping of the EVDO channel would have to be re-transmitted. Since a user likely pays for each packet that is transmitted, this will also save the user costs. Other advantages will be appreciated by those skilled in the art.

[0009] The present application therefore provides a method for user data traffic handling for an EVDO enabled hybrid mode mobile device, the method comprising the steps of: blocking a system selection at the mobile device until no EVDO traffic state exists.

[0010] The present application further provides an EVDO enabled hybrid mode mobile device characterized by: means for blocking a system selection at the mobile device until no EVDO traffic state exists.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The present apparatus and method will be better understood with reference to the drawings in which:

Figure 1 is a flow chart of a preferred method for ensuring that system selection does not drop an EVDO traffic channel;

Figure 2 is a flow chart of an alternative embodiment of the method for ensuring that the EVDO traffic channel is not dropped when performing network selection mode changes;

Figure 3 is an alternative flow chart of a method for ensuring that the EVDO traffic channel is not dropped by hiding the network selection menu during an EVDO traffic state;

Figure 4 is a simplified block diagram showing various components within a CDMA 1x/EVDO network; and

Figure 5 is a block diagram of an exemplary mobile device that can be used with the present application.

DETAILED DESCRIPTION

[0012] A mobile device user can change the scan mode (network selection mode) generally by using a menu on the mobile device. The scan mode can be set to various options and can be, for example, set to home only, which only allows the mobile device to connect with the home network; digital only, which allows the device to connect to cellular or PCS networks using CDMA and/or EVDO; auto A which allows the device to connect to a portion of the digital cellular network; auto B which allows the mobile device to connect to another portion of the digital cellular network; analog, which only allows only analog connections; automatic, which allows the device connect to any network; and other networks which are known to those skilled in the art. The present application is not meant to be limited to the selection of any specific scan mode, nor is the list of various scan modes outlined exhaustive.

[0013] A consequence of the user changing the scan mode is the dropping of the current network that the mobile device is in..

[0014] As indicated above, when in a hybrid mode, the mobile device gives precedence to the CDMA (code division multiple access) 1x network. The CDMA 1x network is generally used for voice and SMS (short message service) services when in the hybrid network, whereas the EVDO network is generally used for data services. The mobile device gives precedence to voice services, having the effect that voice calls are not routed to a voice mailbox if the user is downloading data at that time.

[0015] A consequence of giving the CDMA network the higher priority is that if the CDMA 1x network is lost, the mobile device will also drop the EVDO system in order to re-acquire the CDMA network. As will be appreciated, if the user therefore changes a scan mode option, the mobile device drops the current CDMA 1x network to acquire a network according to the selected scan mode. By default dropping the EVDO network results in wasted network resources, wasted mobile battery resources, and possibly misses critical information that the user needs to know immediately.

[0016] Reference is now made to **Figure 1**. A better solution than the above would be to prevent the mobile device from performing a system selection until the data download is complete. As illustrated in **Figure 1**, the mobile device needs to be in CDMA 1x idle state for the method of **Figure 1** to proceed. As will be appreciated by those skilled in the art, if the mobile device is not in an 1x idle state then there will either be no data being downloaded since the active CDMA state will pre-empt the data download, or if no CDMA1x network is connected then the mobile device will be attempting to acquire a CDMA 1x network and will have no EVDO network established in that case.

[0017] If the mobile device is in CDMA 1x idle state **10** the mobile device can monitor whether a network selection mode (scan mode) change is being attempted. This is illustrated in **Figure 1** as step **12**. Step **12**, as illustrated, shows the mobile device

continuously checking for a network selection mode change and if no change is made the step loops back on itself. As would be appreciated by those skilled in the art, this could be implemented using various means including the use of interrupts if the network selection mode changes and CPU resources do not need to continuously be checking whether the network selection mode change is occurring.

[0018] If the mobile device detects in step **12** that a network selection mode change is occurring the mobile device proceeds to step **14**. In step **14** the mobile device checks whether it is currently in an EVDO traffic state. If it is in an EVDO traffic state, the mobile device will stay in step **14** until the traffic state ends thus preventing the dropping of the current CDMA 1x network due to the network selection mode change before the data download occurs.

[0019] Once the EVDO traffic state has ended and thus the complete download has occurred, the mobile device proceeds to step **16** in which a system selection is performed. As indicated above, the system selection performance requires the dropping of the current CDMA network and thus the EVDO network and the re-acquiring of both.

In an alternative embodiment, instead of monitoring whether a network selection mode change has occurred in step **12** the mobile device instead could block the user from being able to perform a network selection mode change while an EVDO traffic state exists. Reference is now made to **Figure 2**.

[0020] **Figure 2** illustrates an alternative in which the mobile device is in a CDMA 1x idle state **10**. The mobile device, in step **22** monitors whether a user has accessed the network selection menu would allow them to change the scan mode. If step **22** determines that the user is attempting to change the scan mode the mobile device in step **24** can check whether the mobile device is in EVDO traffic state. If yes then the mobile device can proceed to step **26** in which an error message can be displayed to the user indicating that the user is currently in an EVDO traffic state and asks the user to try again. Alternatively, if in step **24** it is determined that there is no EVDO traffic state then the mobile device can allow the user to enter into the menu to

change the scan mode in step **28**. A further option in **Figure 2** is that if the EVDO is in a traffic state as determined by step **24** then the mobile device could prompt the user if they are sure that they want to enter into the scan mode selection and that data transfer could be lost if they do. The user would then have the option of dropping the CDMA and EVDO channel.

[0021] A further option is that the mobile device monitors whether it has entered into an EVDO traffic state. If the device enters a EVDO traffic state, the mobile device could hide the network selection menu completely, thus preventing the user from changing the scan mode. This is illustrated in Figure 3 in which if the device is in an Idle CDMA state 10 the device monitors whether the device enters an EVDO traffic state in step 32. If yes, the mobile device proceeds to step 34 in which it hides the network selection menu and then proceeds to step 36 in which it monitors whether the device has ended the EVDO traffic state.

[0022] Once the device has ended the EVDO traffic state, the mobile device proceeds to step 38 in which the network selection mode menu is again revealed and the mobile device goes back to step 32 to monitor when a traffic state is entered.

[0023] As will be appreciated by those skilled in the art, various options for the hiding of a network selection menu are available to a designer.

[0024] Reference is now made to **Figure 4**. **Figure 4** is a block diagram of an exemplary wireless data network in accordance with the present application and with which the various embodiments of the method of the instant application may cooperate. **Figure 4** shows a block diagram of a wireless data device **310** and exemplary CDMA 1x network **320**, an exemplary EVDO network **330**, a public switched telephone network (PSTN) **335**, a data network **340**, wireless gateway **342** and e-mail server **344** with which the instant techniques of this application may cooperate. The wireless data device **310** is preferably a two-way communication device having data and voice communication capabilities.

[0025] CDMA network **320** is comprised of a based transceiver station (BTS) **322** and a base station controller (BSC) **324**. Base station controller **324** communicates with a mobile switching centre **326** which as will be appreciated, is a circuit switched only component communicating with PSTN **335**. Base station controller **324** further communicates with a packet data serving node (PDSN) **328** which is a packet switched only component. PDSN **328** further communicates with IP network **340**.

[0026] EVDO network **330** contains an EVDO sector **332** which communicates with access node (AN) **334**. Since the EVDO network **330** is a data only network, access node **334** communicates only with PDSN **328** and not with any circuit switch components.

[0027] An authentication, authorization and accounting node **336** is associated with AN **334**, and a similar node **329** is associated with PDSN **328**.

[0028] Operationally, mobile device **310** communicates wirelessly with CDMA network **320** using BTS **322** and BSC **324** to gain access to the CDMA 1x network. As indicated above, the CDMA 1x network is given priority and the establishment of the CDMA network occurs prior to any EVDO network connection being established.

[0029] Mobile device **310** sends and receives both data and voice services through CDMA network **320** until an EVDO network connection with established. Base station controller **324** communicates with circuit switch services provided by MSC **326** such as voice and short message service (SMS) via PSTN **335**.

[0030] Prior to an EVDO connection being established, mobile device **310** further communicates wirelessly with BTS **322** and BSC **324** to gain access to packet data services provided by PDSN **328**, such as e-mail, wireless application protocol (WAP) and other data services via data network **340**. Such services are provided through wireless gateway **342** and servers such as e-mail server **344**.

[0031] Once a network connection is established with CDMA 1x network **320** and the mobile device enters CDMA 1x idle state, wireless device **310** establishes a connection with EVDO network **330**. This is done through EVDO sector **332** and AN **334**. In this way, mobile device **310** gains access to packet data services provided by

PDSN **328** using EVDO network **330**. Subsequent to the establishment of an EVDO network connection with mobile device **310**, CDMA network **320** is used to provide circuit switched services such as voice and SMS while EVDO network **330** is used to provide packet data services such as e-mail and WAP.

[0032] As will be appreciated by those skilled in the art, wireless device **310** can include voice communication means such as a headpiece **350** or a user can communicate directly into the wireless device **310**.

[0033] A further advantage of the present system is that due to high transfer rates associated with EVDO networks, wireless device **310** can be used as a wireless modem and be connected through various means such as a USB or other serial port, or by short range wireless communications with a computer **354**. Computer **354** can then gain access to data network **340** through EVDO network **330** using mobile device **310** as the modem.

[0034] Reference is now made to **Figure 5**. **Figure 5** is a block diagram illustrating a mobile station apt to be used with preferred embodiments of the apparatus and method of the present application. Mobile station **400** is preferably a two-way wireless communication device having at least voice and data communication capabilities. Mobile station **400** preferably has the capability to communicate with other computer systems on the Internet. Depending on the exact functionality provided, the wireless device may be referred to as a data messaging device, a two-way pager, a wireless e-mail device, a cellular telephone with data messaging capabilities, a wireless Internet appliance, or a data communication device, as examples.

[0035] Where mobile station **400** is enabled for two-way communication, it will incorporate a communication subsystem **411**, including both a receiver **412** and a transmitter **414**, as well as associated components such as one or more, preferably embedded or internal, antenna elements **416** and **418**, local oscillators (LOs) **413**, and a processing module such as a digital signal processor (DSP) **420**. As will be apparent to those skilled in the field of communications, the particular design of the communication subsystem **411** will be dependent upon the communication network

in which the device is intended to operate. For example, mobile station **400** may include a communication subsystem **411** designed to operate within the CDMA 1x/EVDO hybrid system.

[0036] Network access requirements will also vary depending upon the type of network **419**. In some CDMA networks network access is associated with a subscriber or user of mobile station **400**. A CDMA mobile station may require a removable user identity module (RUIM) or a subscriber identity module (SIM) card in order to operate on a CDMA network. . The SIM/RUIM interface **444** is normally similar to a card-slot into which a SIM/RUIM card can be inserted and ejected like a diskette or PCMCIA card. The SIM/RUIM card can have approximately 64K of memory and hold many key configuration **451**, and other information **453** such as identification, and subscriber related information.

[0037] When required network registration or activation procedures have been completed, mobile station **400** may send and receive communication signals over the network **419**. As illustrated in **Figure 5**, network **19** can consist of multiple base stations communicating with the mobile device. For example, in a hybrid CDMA 1x EVDO system, a CDMA base station and an EVDO base station communicate with the mobile station and the mobile station is connected to both simultaneously. The EVDO and CDMA 1x base stations use different paging slots to communicate with the mobile device.

[0038] Signals received by antenna **416** through communication network **419** are input to receiver **412**, which may perform such common receiver functions as signal amplification, frequency down conversion, filtering, channel selection and the like, and in the example system shown in **Figure 5**, analog to digital (A/D) conversion. A/D conversion of a received signal allows more complex communication functions such as demodulation and decoding to be performed in the DSP **420**. In a similar manner, signals to be transmitted are processed, including modulation and encoding for example, by DSP **420** and input to transmitter **414** for digital to analog conversion, frequency up conversion, filtering, amplification and transmission over the communication network **419** via antenna **418**. DSP **420** not only processes

communication signals, but also provides for receiver and transmitter control. For example, the gains applied to communication signals in receiver **412** and transmitter **414** may be adaptively controlled through automatic gain control algorithms implemented in DSP **420**.

[0039] Mobile station **400** preferably includes a microprocessor **438** which controls the overall operation of the device. Communication functions, including at least data and voice communications, are performed through communication subsystem **411**. Microprocessor **438** also interacts with further device subsystems such as the display **422**, flash memory **424**, random access memory (RAM) **426**, auxiliary input/output (I/O) subsystems **428**, serial port **430**, two or more keyboards or keypads **432**, speaker **434**, microphone **436**, other communication subsystem **440** such as a short-range communications subsystem and any other device subsystems generally designated as **442**. Serial port **430** could include a USB port or other port known to those in the art.

[0040] Some of the subsystems shown in **Figure 5** perform communication-related functions, whereas other subsystems may provide “resident” or on-device functions. Notably, some subsystems, such as keyboard **432** and display **422**, for example, may be used for both communication-related functions, such as entering a text message for transmission over a communication network, and device-resident functions such as a calculator or task list.

[0041] Operating system software used by the microprocessor **438** is preferably stored in a persistent store such as flash memory **424**, which may instead be a read-only memory (ROM) or similar storage element (not shown). Those skilled in the art will appreciate that the operating system, specific device applications, or parts thereof, may be temporarily loaded into a volatile memory such as RAM **426**. Received communication signals may also be stored in RAM **426**.

[0042] As shown, flash memory **424** can be segregated into different areas for both computer programs **458** and program data storage **450**, **452**, **454** and **456**. These different storage types indicate that each program can allocate a portion of flash

memory **424** for their own data storage requirements. Microprocessor **438**, in addition to its operating system functions, preferably enables execution of software applications on the mobile station. A predetermined set of applications that control basic operations, including at least data and voice communication applications for example, will normally be installed on mobile station **400** during manufacturing. A preferred software application may be a personal information manager (PIM) application having the ability to organize and manage data items relating to the user of the mobile station such as, but not limited to, e-mail, calendar events, voice mails, appointments, and task items. Naturally, one or more memory stores would be available on the mobile station to facilitate storage of PIM data items. Such PIM application would preferably have the ability to send and receive data items, via the wireless network **419**. In a preferred embodiment, the PIM data items are seamlessly integrated, synchronized and updated, via the wireless network **419**, with the mobile station user's corresponding data items stored or associated with a host computer system. Further applications may also be loaded onto the mobile station **400** through the network **419**, an auxiliary I/O subsystem **428**, serial port **430**, short-range communications subsystem **440** or any other suitable subsystem **442**, and installed by a user in the RAM **426** or preferably a non-volatile store (not shown) for execution by the microprocessor **438**. Such flexibility in application installation increases the functionality of the device and may provide enhanced on-device functions, communication-related functions, or both. For example, secure communication applications may enable electronic commerce functions and other such financial transactions to be performed using the mobile station **400**.

[0043] In a data communication mode, a received signal such as a text message or web page download will be processed by the communication subsystem **411** and input to the microprocessor **438**, which preferably further processes the received signal for output to the display **422**, or alternatively to an auxiliary I/O device **428**. A user of mobile station **400** may also compose data items such as email messages for example, using the keyboard **432**, which is preferably a complete alphanumeric keyboard or telephone-type keypad, in conjunction with the display **422** and possibly an auxiliary I/O device **428**. Such composed items may then be transmitted over a communication network through the communication subsystem **411**.

[0044] For voice communications, overall operation of mobile station **400** is similar, except that received signals would preferably be output to a speaker **434** and signals for transmission would be generated by a microphone **436**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on mobile station **400**. Although voice or audio signal output is preferably accomplished primarily through the speaker **434**, display **422** may also be used to provide an indication of the identity of a calling party, the duration of a voice call, or other voice call related information for example.

[0045] Serial port **430** in **Figure 5**, would normally be implemented in a personal digital assistant (PDA)-type mobile station for which synchronization with a user's desktop computer (not shown) may be desirable, but is an optional device component. Such a port **430** would enable a user to set preferences through an external device or software application and would extend the capabilities of mobile station **400** by providing for information or software downloads to mobile station **400** other than through a wireless communication network. The alternate download path may for example be used to load an encryption key onto the device through a direct and thus reliable and trusted connection to thereby enable secure device communication. As will be appreciated by those skilled in the art, serial port **430** can further be used to connect the mobile device to a computer to act as a modem. A modem unit **460** interacts with a driver **462** in a computer **464** to allow data transfer through the mobile device. With EVDO networks, a high rate of data transfer can be achieved using the mobile device **400** as the modem. Depending on the interface provided by driver **462**, unit **460** could be an IP routing module. Further, driver **462** could provide either a modem interface or alternatively an IP interface to computer **464**. As will be appreciated by those skilled in the art, the combination of driver **462** and unit **460** must provide a communication interface for computer **430** to be enabled for communications originated and/or terminated at computer **430**.

[0046] Other communications subsystems **440**, such as a short-range communications subsystem, is a further optional component which may provide for communication between mobile station **400** and different systems or devices, which

need not necessarily be similar devices. For example, the subsystem **440** may include an infrared device and associated circuits and components or a Bluetooth™ communication module to provide for communication with similarly enabled systems and devices.

[0047] Advantageously, communications originating and/or terminating at computer **464** benefit from the techniques of this application as module **460** preferably uses the techniques taught herein in a manner that is transparent to computer **464**.

[0048] The embodiments described herein are examples of structures, systems or methods having elements corresponding to elements of the techniques of this application. This written description may enable those skilled in the art to make and use embodiments having alternative elements that likewise correspond to the elements of the techniques of this application. The intended scope of the techniques of this application thus includes other structures, systems or methods that do not differ from the techniques of this application as described herein, and further includes other structures, systems or methods with insubstantial differences from the techniques of this application as described herein.

Claims:

1. A method for user data traffic handling for an EVDO enabled hybrid mode mobile device, the method comprising the steps of:
 - 5 blocking a system selection at the mobile device until no EVDO traffic state exists, said blocking step including monitoring whether a scan mode is changed on the mobile device; and
 - if the scan mode is changed, checking whether the mobile device is in an EVDO traffic state; and if yes
 - 10 delaying a system selection until the EVDO traffic state is ended.
2. The method of claim 1, wherein the blocking step further comprises the step of:
 - hiding a network selection menu when the mobile device is in an EVDO
 - 15 traffic state.
3. The method of any one of claims 1 or 2, wherein the mobile device performs a system selection once the EVDO traffic state ends.
- 20 4. A method for user data traffic handling for an EVDO enabled hybrid mode mobile device, the method comprising the steps of:
 - blocking a system selection at the mobile device until no EVDO traffic state exists, said blocking step including monitoring whether the mobile device is in an EVDO traffic state, and if yes, preventing
 - 25 access to a scan mode menu on the mobile device.
5. The method of claim 4, wherein the blocking step further comprises the step of:
 - prompting a user to determine whether the mobile device should prevent
 - 30 the user from accessing the scan mode menu.
6. The method of any one of claims 4 or 5, wherein the blocking step further comprises the step of:

hiding a network selection menu when the mobile device is in an EVDO traffic state.

7. The method of any one of claims 4 to 6, wherein the mobile device
5 performs a system selection once the EVDO traffic state ends.

8. An EVDO enabled hybrid mode mobile device comprising:
means for blocking a system selection at the mobile device until no
EVDO traffic state exists, said means for blocking including:
10 means for monitoring whether a user changes a scan mode on the
mobile device;
means for checking whether the mobile device is in an EVDO
traffic state; and
means for delaying a system selection, the means for delaying
15 the system selection being arranged to delay system selection if
the means for monitoring whether the user changes the scan
mode detects that the user changed the scan mode and if the
means for checking finds the mobile device is in an EVDO traffic
state.

20
9. The mobile device of claim 8, wherein the means for blocking comprises
means for hiding a network selection menu, the means for hiding the network
selection menu being capable of hiding the network selection menu when the
mobile device is in an EVDO traffic state.

25
10. An EVDO enabled hybrid mode mobile device comprising:
means for blocking a system selection at the mobile device until no
EVDO traffic state exists, said means for blocking including:
means for monitoring whether a user is in an EVDO traffic state;
30 and
means for preventing a user from accessing a scan mode menu
on the mobile device if the means for monitoring detects the
mobile device is in an EVDO traffic state.

11. The mobile device of claim 10, further comprising:
means for prompting a user to determine whether the mobile device
should prevent the user from accessing the scan mode menu.

5

12. The mobile device of any one of claims 10 or 11, wherein the means for
blocking comprises means for hiding a network selection menu, the means for
hiding the network selection menu being capable of hiding the network selection
menu when the mobile device is in an EVDO traffic state.

10

1/5

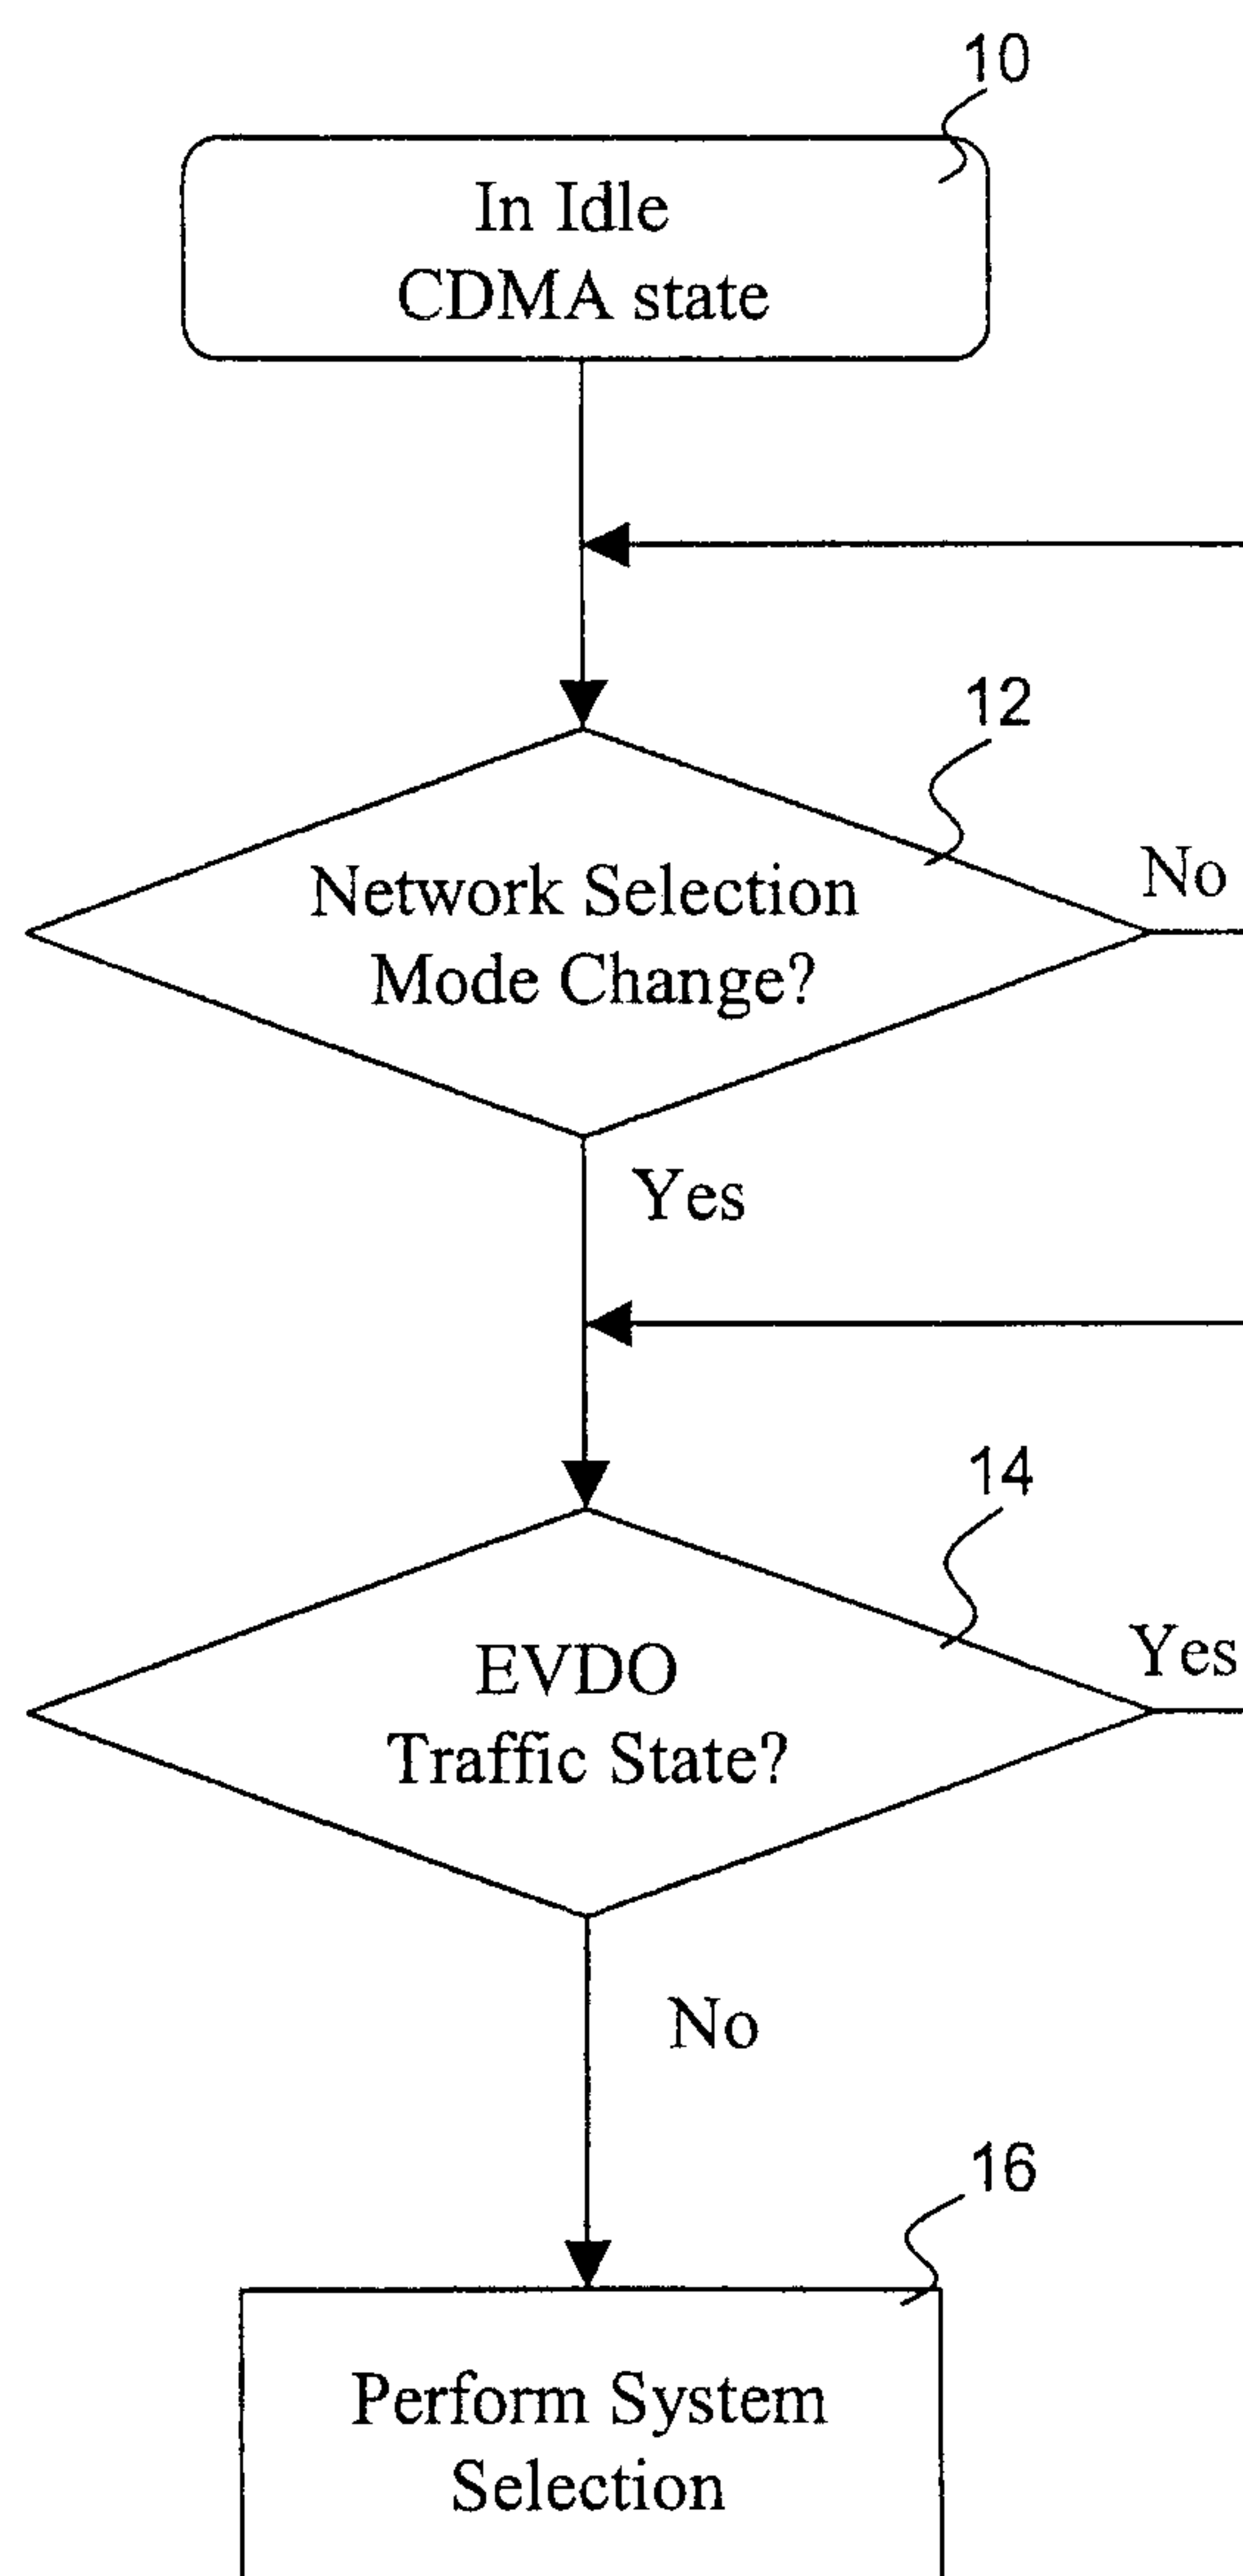


FIG. 1

2/5

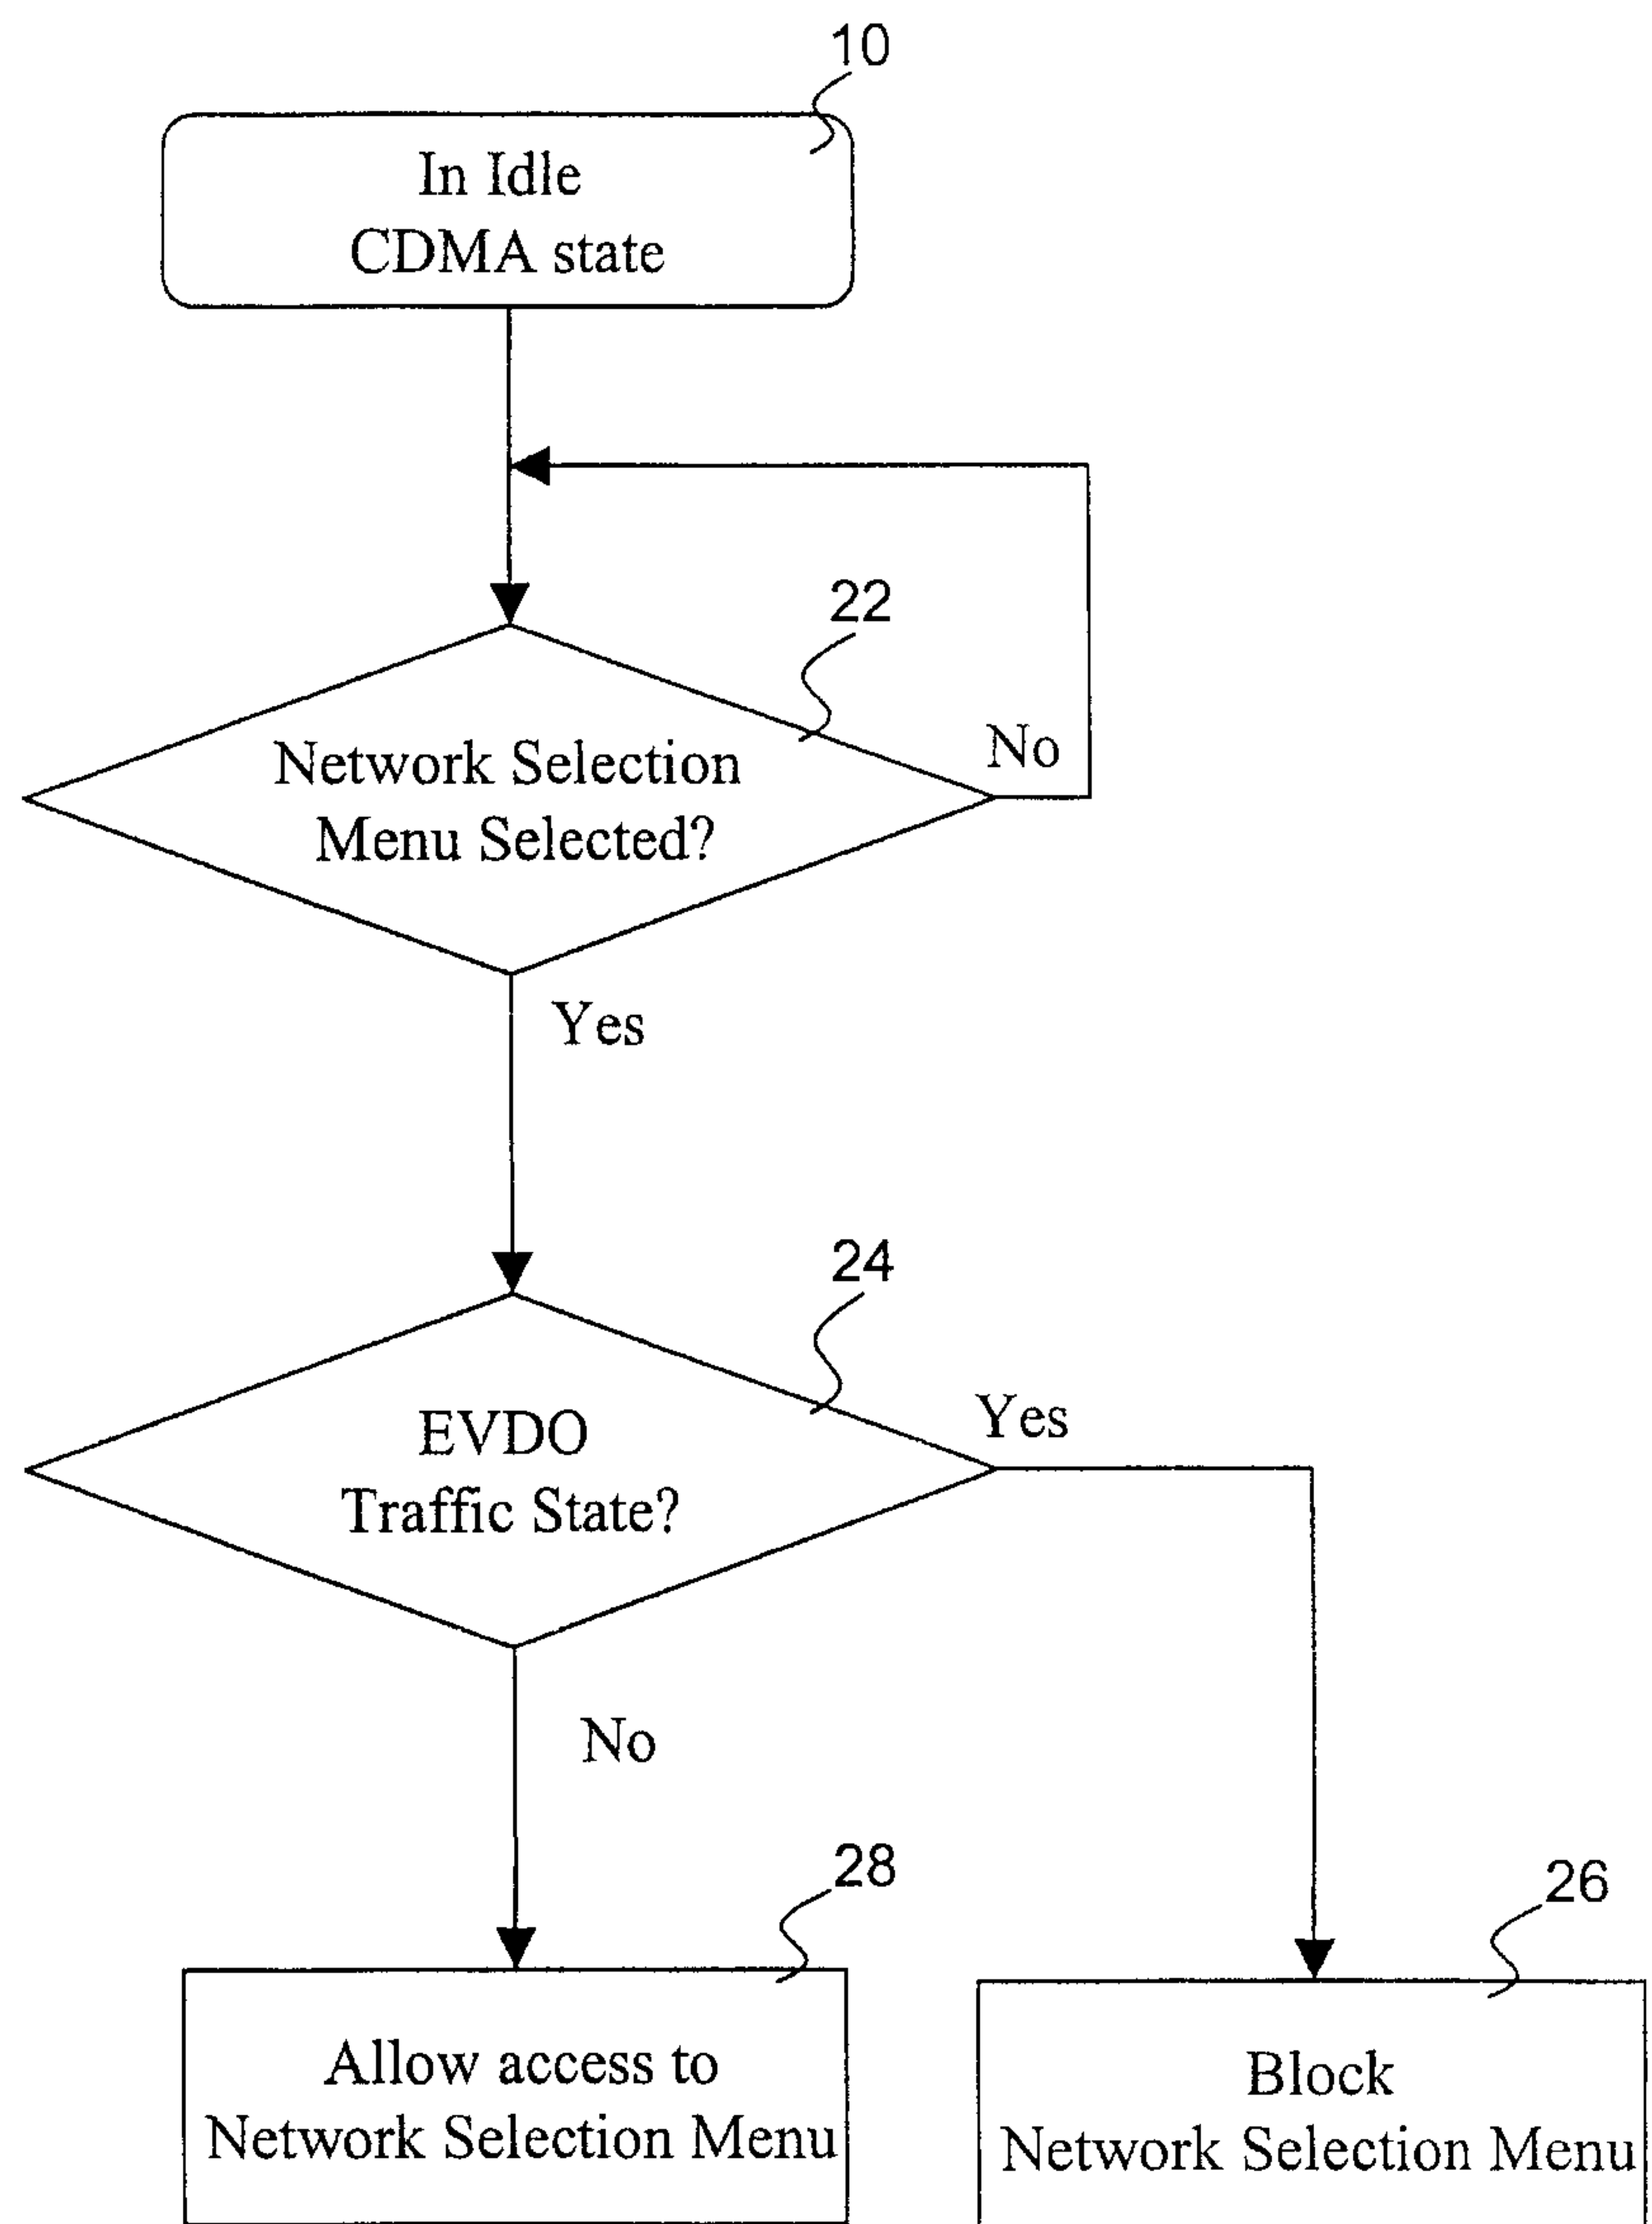


FIG. 2

3/5

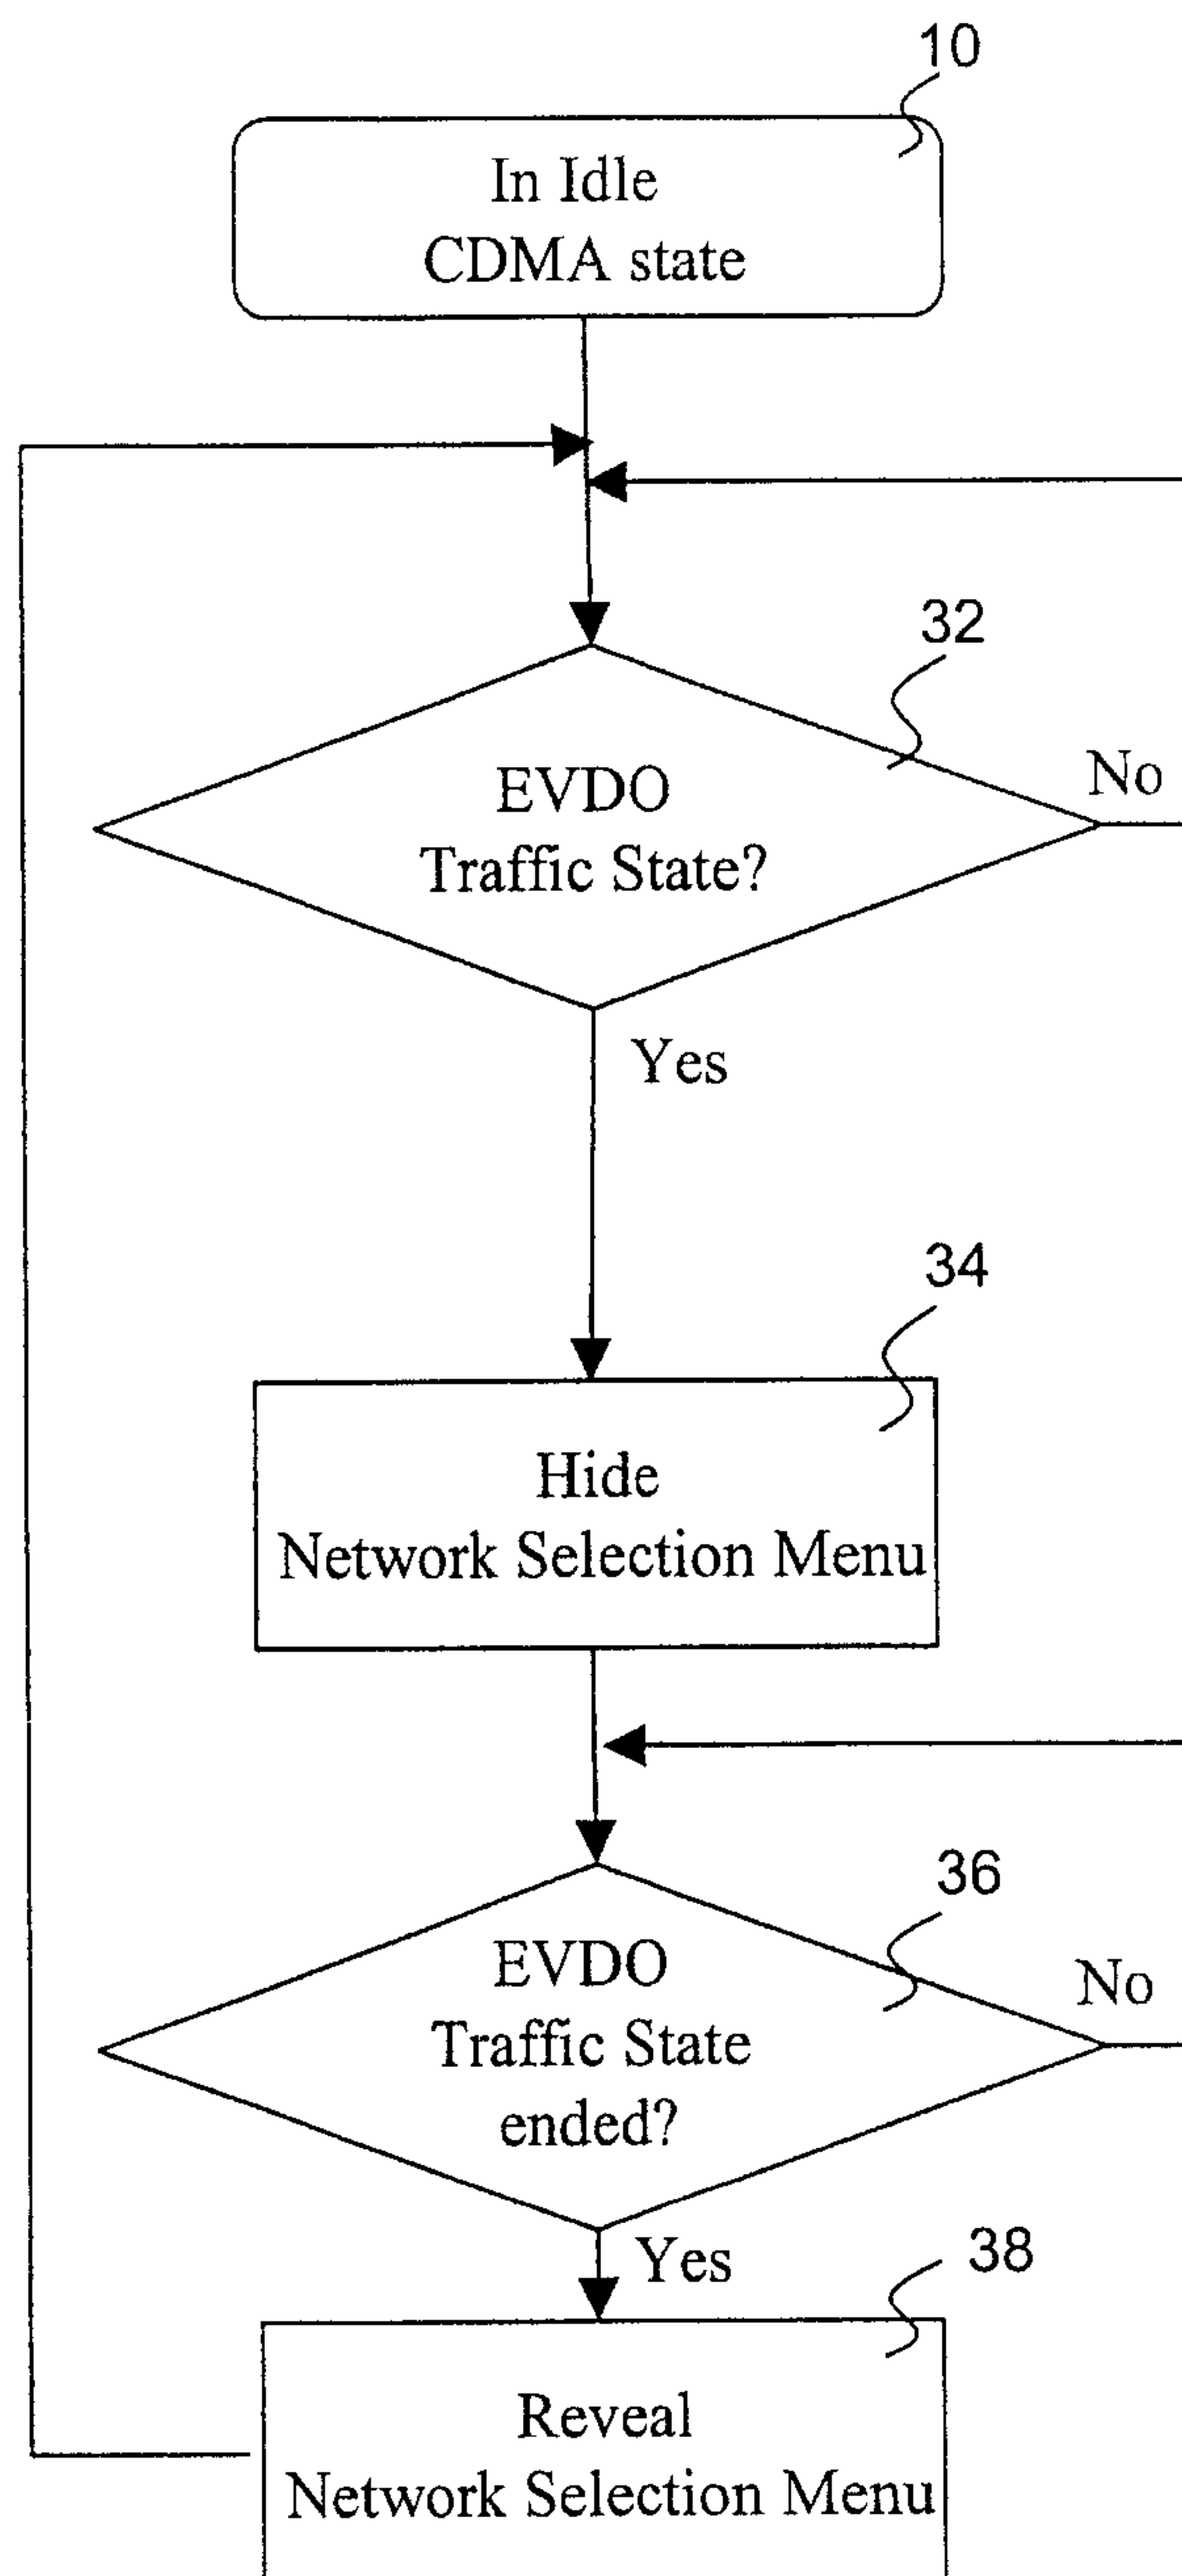


FIG. 3

4/5

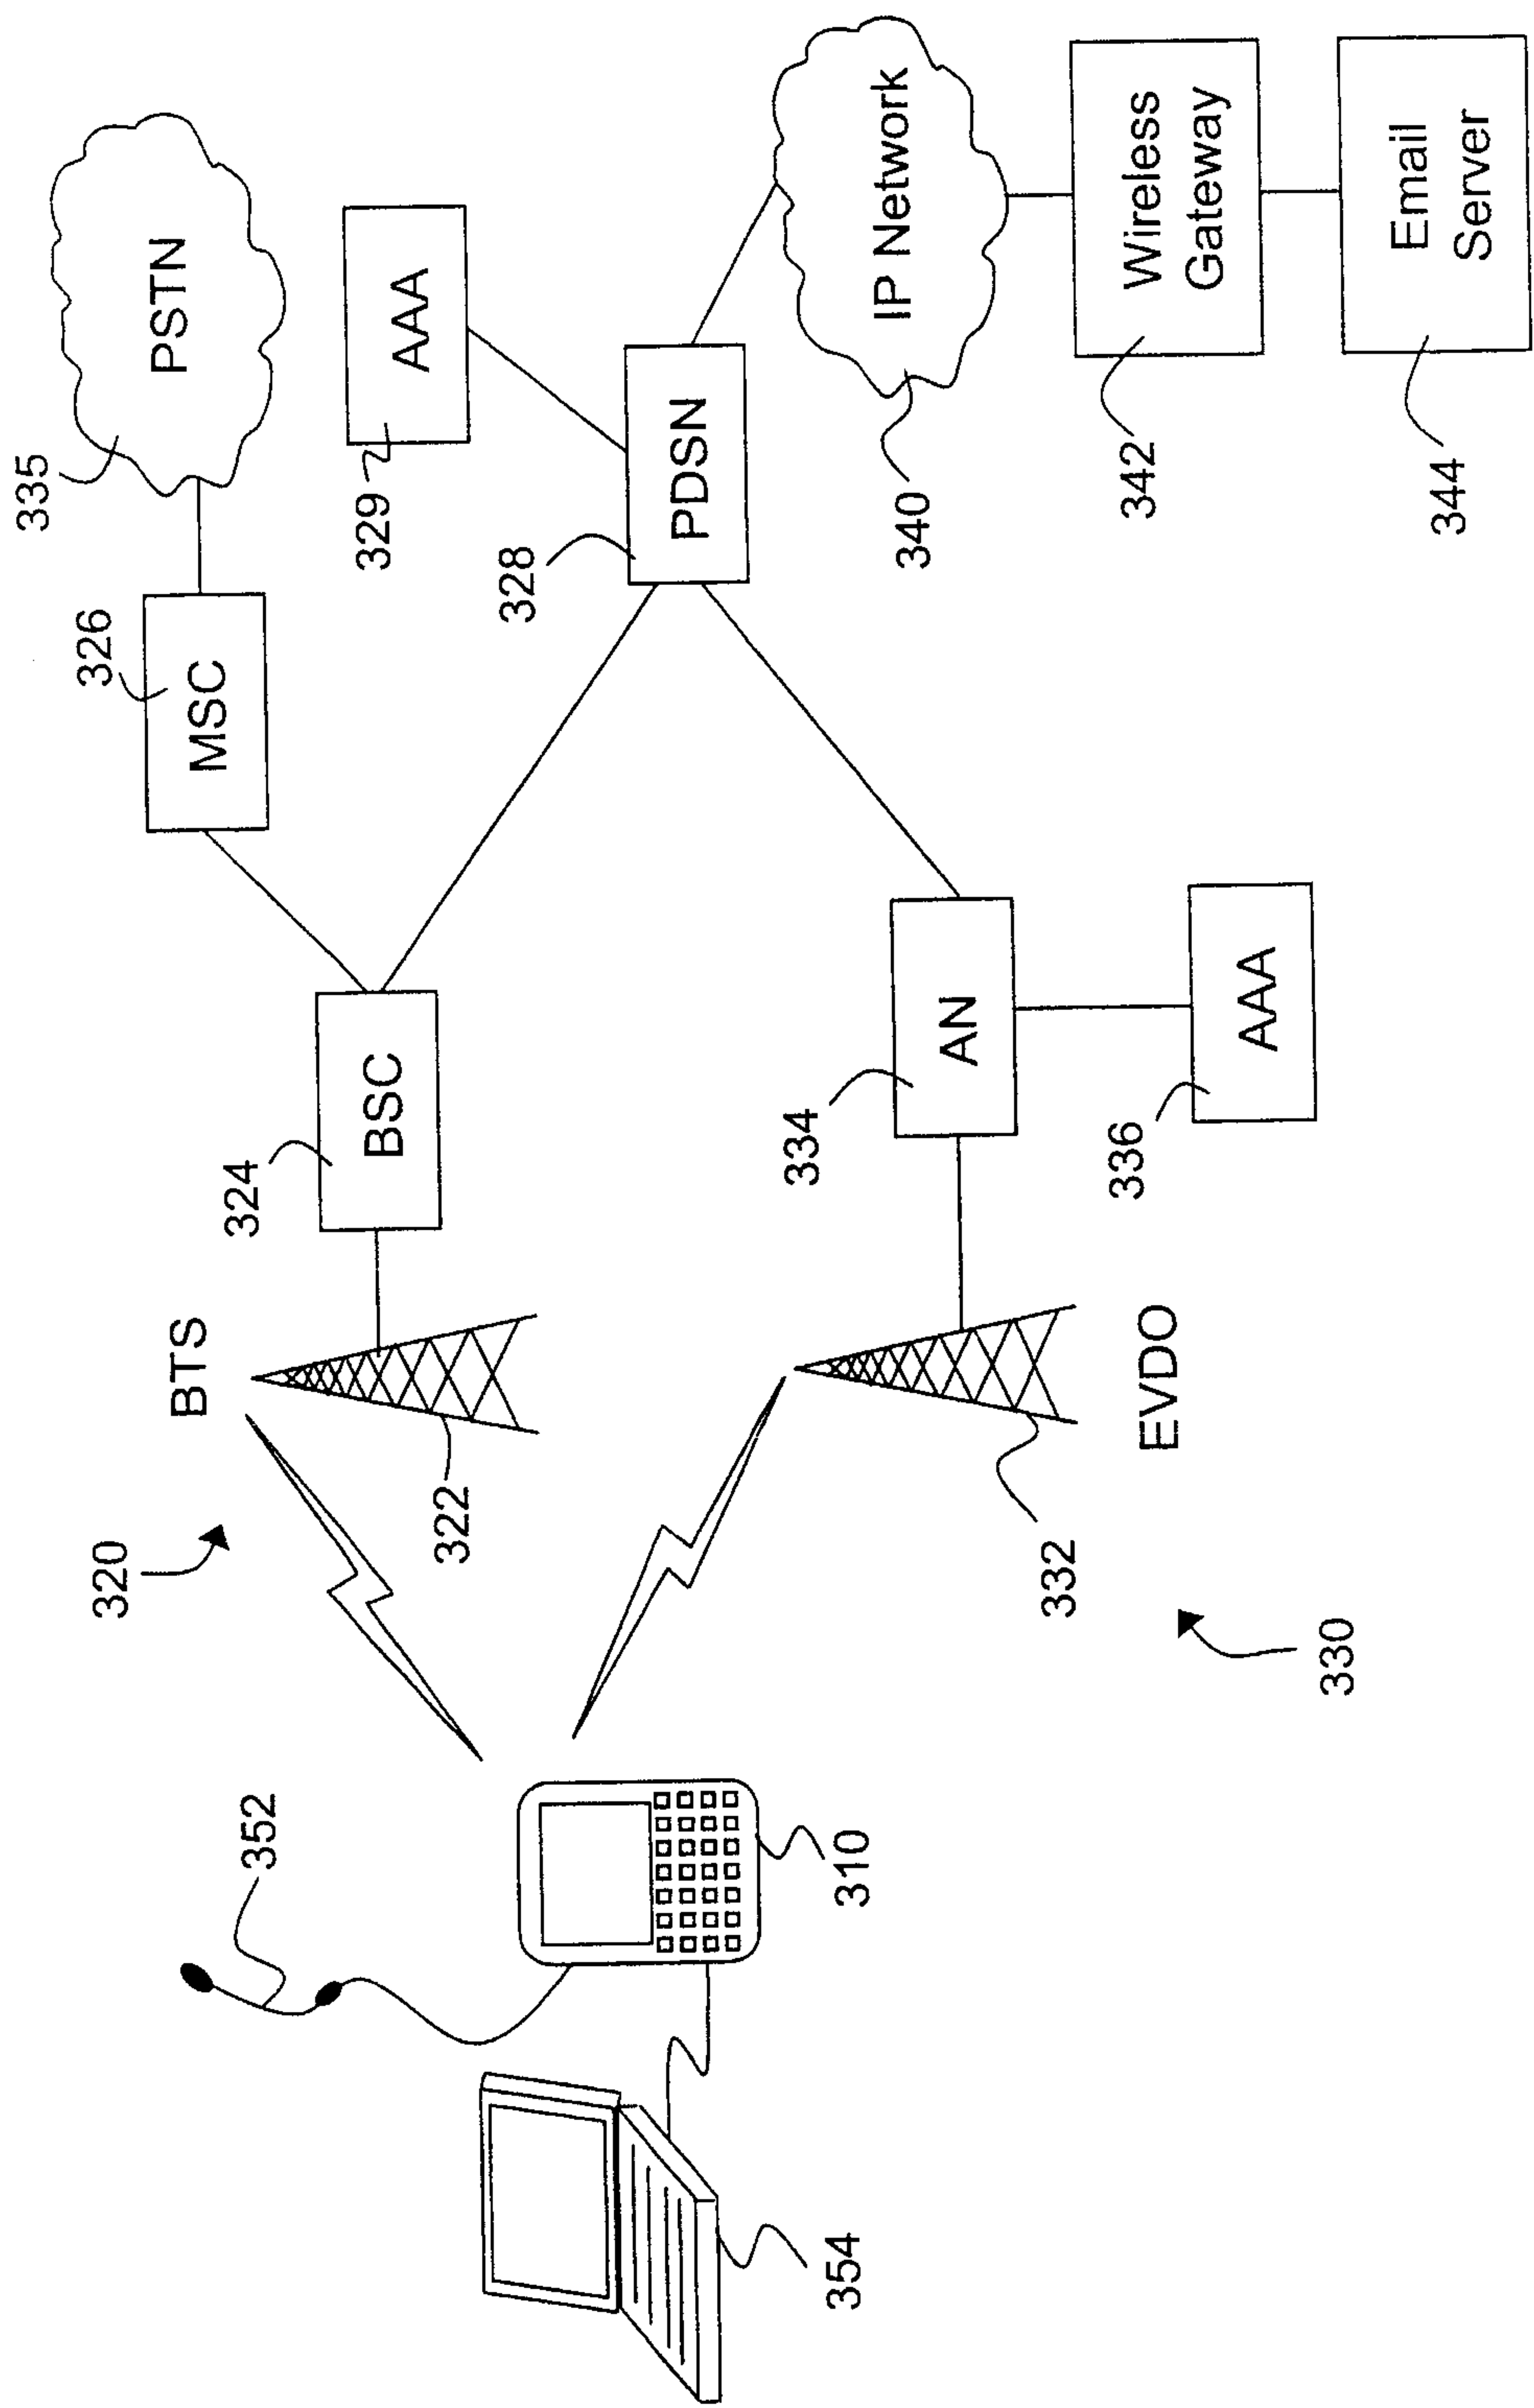


FIG. 4

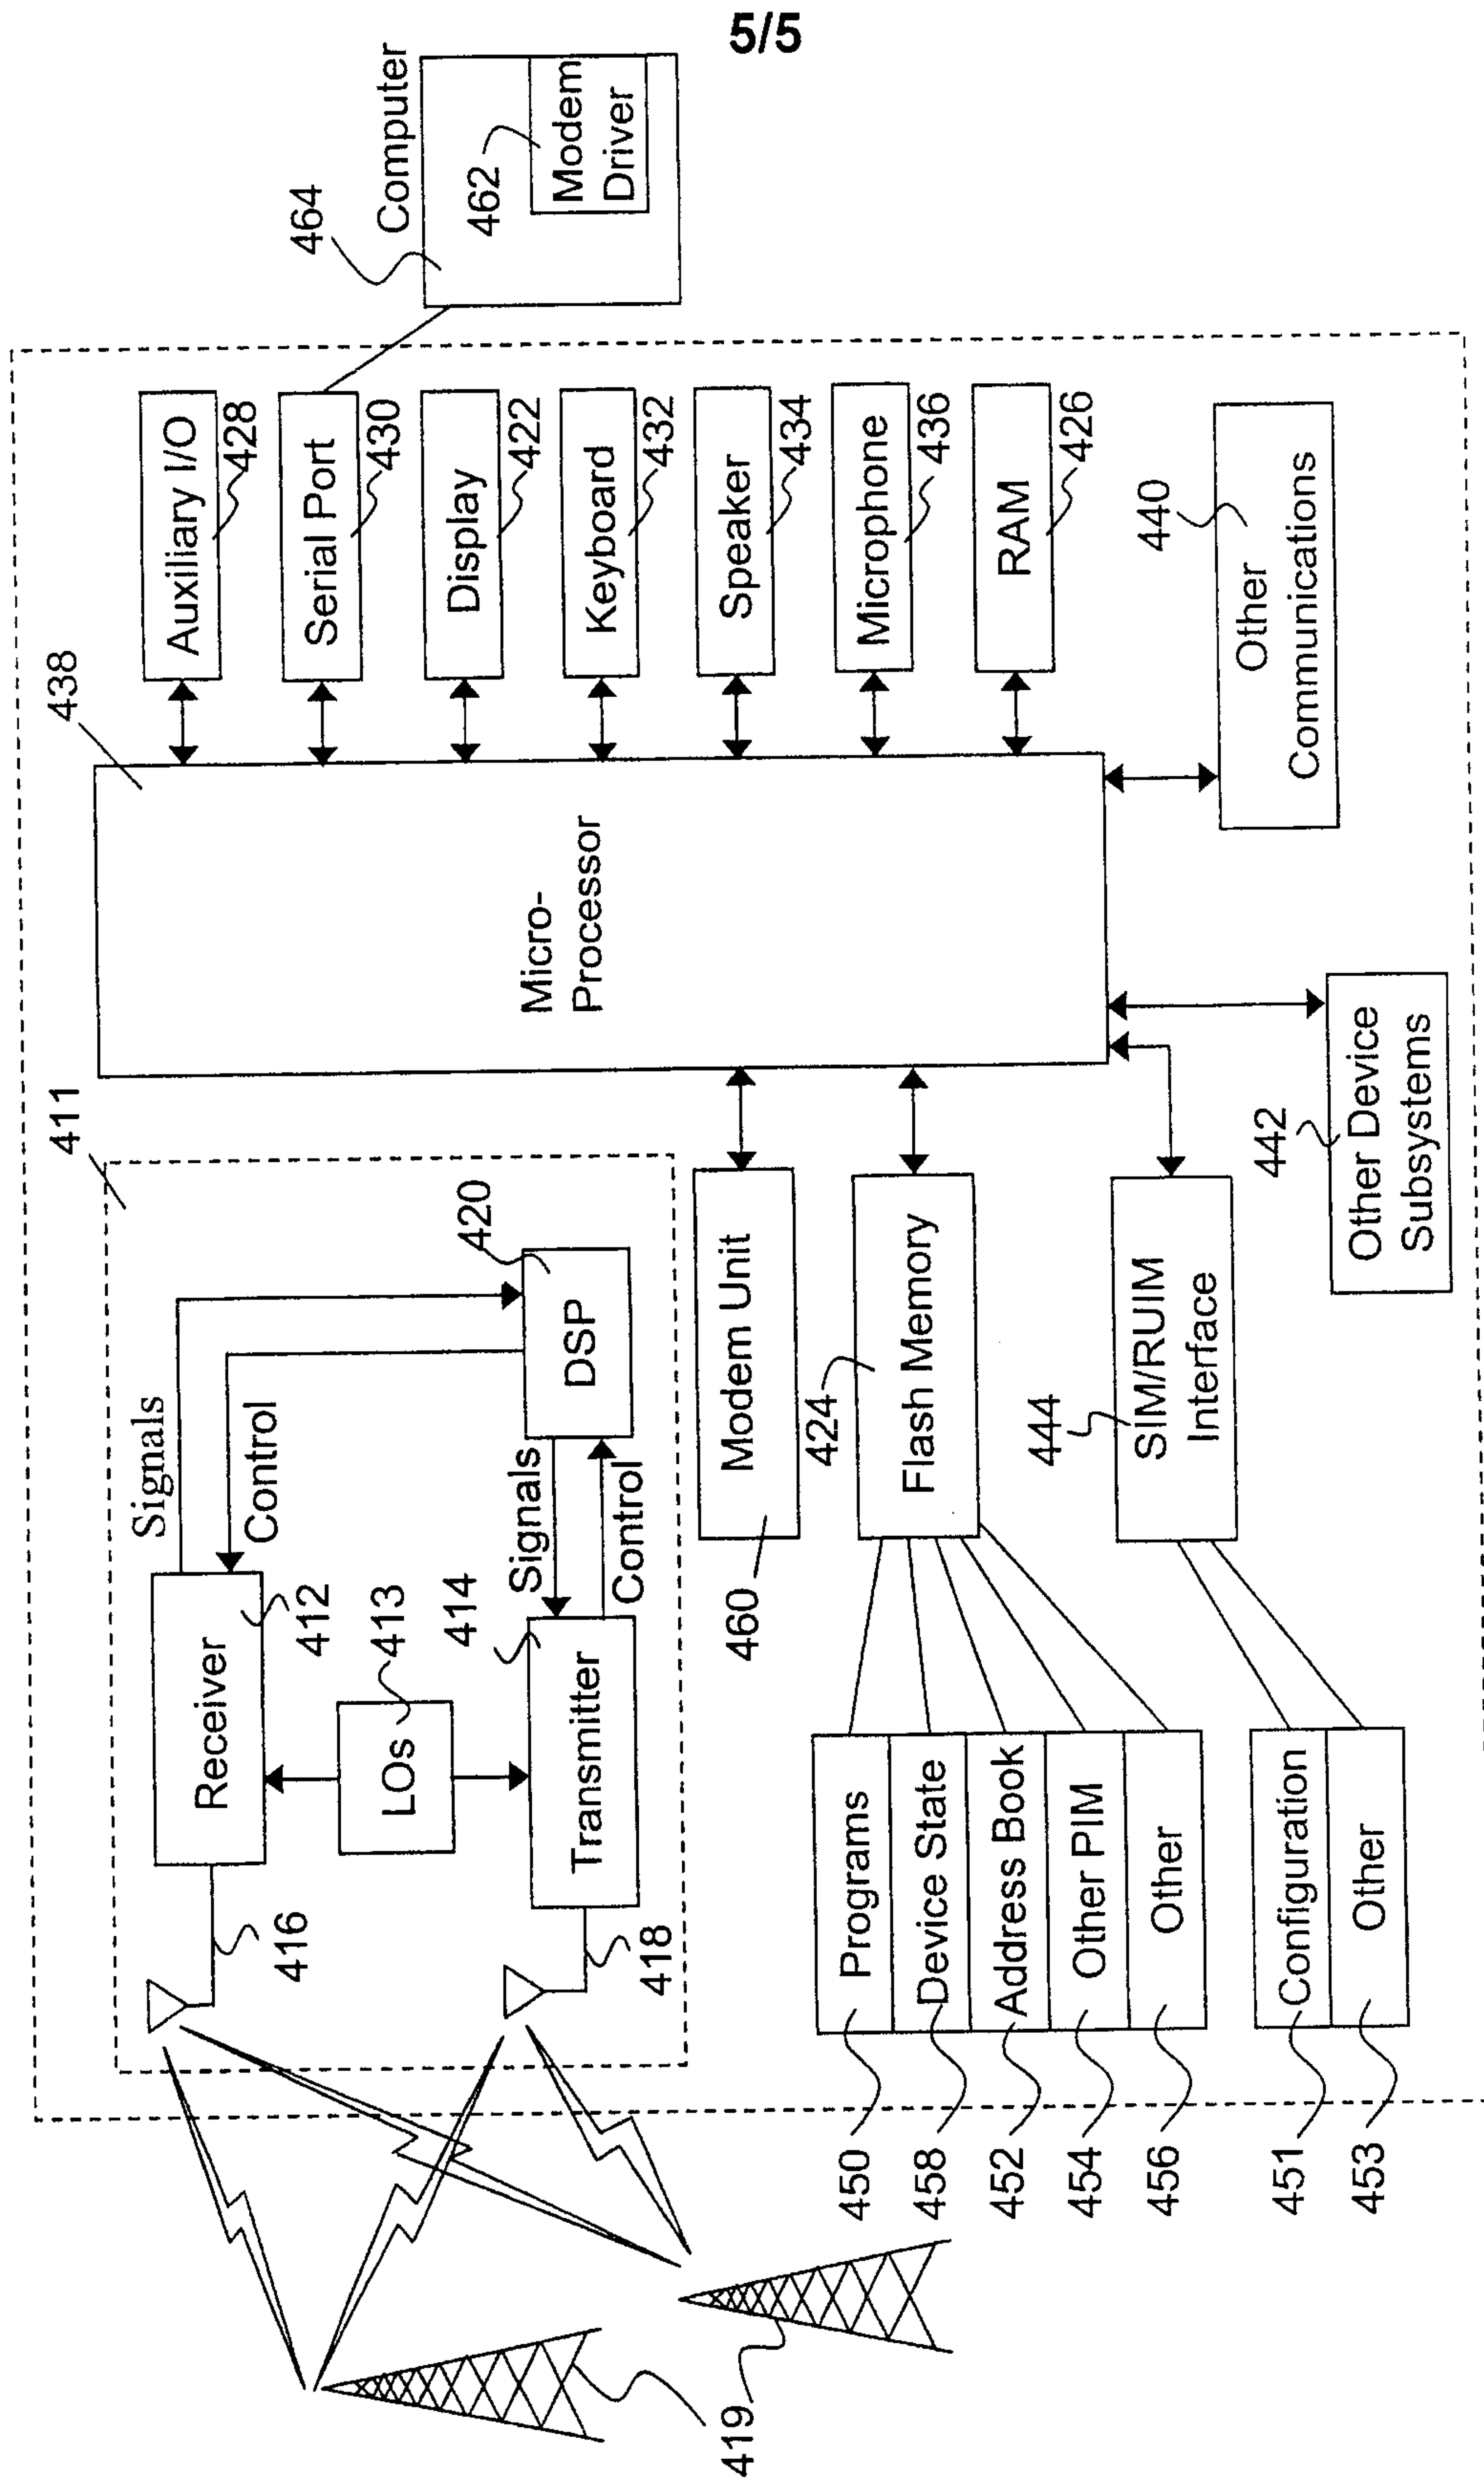


FIG. 5

