



EUROPEAN PATENT SPECIFICATION

Date of publication of patent specification :
19.04.95 Bulletin 95/16

Int. Cl.⁶ : **H01R 13/658**

Application number : **89312284.6**

Date of filing : **27.11.89**

Miniature circular din connector.

Priority : **22.11.89 US 440570**
25.11.88 US 275818
14.02.89 US 310979

Date of publication of application :
30.05.90 Bulletin 90/22

Publication of the grant of the patent :
19.04.95 Bulletin 95/16

Designated Contracting States :
DE FR GB IT

References cited :
EP-A- 0 118 168
DE-A- 2 733 634
DE-B- 1 515 850
US-A- 4 637 669

Proprietor : **MOLEX INCORPORATED**
2222 Wellington Court
Lisle Illinois 60532 (US)

Inventor : **Dixon, Daniel A.**
1532 E. Bailey Road
Naperville Illinois 60565 (US)
Inventor : **Lee, Hsin**
6 S, 001 Steeple Run Drive
Naperville Illinois 60540 (US)
Inventor : **Zielke, Henry**
265 Carnation Lane
Hoffmann Estates Illinois 60195 (US)
Inventor : **Mysiak, Eugene J.**
646 Jonquil
Lisle Illinois 60532 (US)
Inventor : **Brunker, David Lawrence**
2310 Weatherford Lane
Naperville Illinois 60565 (US)

Representative : **Greenwood, John David et al**
Graham Watt & Co.
Riverhead
Sevenoaks Kent TN13 2BN (GB)

EP 0 370 833 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

Miniature circular DIN connectors are employed with computers, audio equipment, video equipment and other electrical components to enable the connection of one such component to another. Miniature circular DIN connectors comprise a plurality of pin or socket terminals which are mounted in a nonconductive housing and which are electrically connected to conductive leads. One such DIN connector may be mounted to a panel or circuit board of an electrical component, with the terminals of the DIN connector being electrically connected to conductive areas on the panel or circuit board. A mating DIN connector may then be mounted to a cable, with the terminals thereof being electrically connected to conductive wire leads within the cable. Typically, the board mounted miniature circular DIN connectors will define receptacles with pin-receiving terminals therein, while the cable mounted DIN connectors define plugs with pin terminals therein. The cable may include a second DIN connector plug on its opposed end for electrical mating to a miniature circular DIN connector in a related electrical component. In this manner, for example, the keyboard or mouse of a personal computer may be joined to the central processing unit thereof. The number and arrangement of pins or sockets in the miniature circular DIN connector can vary, with most DIN connectors having between three and nine terminals therein. The particular arrangement of terminals in the DIN connector and the construction of the housings are intended to ensure polarized mating of the respective terminals.

The board mounted miniature circular DIN receptacles will include terminals having solder tails, surface mountable contacts or other such contact means for making electrical connection to appropriate conductive portions of the circuit board. The very high circuit density on the board requires extremely accurate positioning of the board contact means of each terminal to ensure that the circuits are properly completed by the DIN connector. This accuracy becomes both more difficult and more important as the circuit density increases and as the DIN connector size decreases.

Government agencies maintain strict EMI standards to ensure that electromagnetic energy generated by cables and electrical equipment does not interfere with other electrical equipment or telecommunications equipment. The United States Federal Communications Commission maintains rigid standards to control the levels of EMI.

DIN connectors may be a source or cause of EMI emission. Contacts within the connector may be a source from which EMI is emitted. DIN connectors are often mounted covering an opening in the shielding of the electronics for which the connector provides external connections. The DIN connector may allow EMI

from the electronics to pass through the connector opening if the connector is inadequately shielded. DIN connectors may cause the cable shielding of an attached cable to emit EMI if the shielding is not properly grounded through the DIN connector.

The circuit density in virtually all electrical components has dramatically increased in recent years due to a general reduction in the size of the components and/or an increase in the complexity of the circuitry. The greater circuit density has required correspondingly smaller electrical connectors of all sorts, including the miniature circular DIN connectors. Furthermore, the increased circuit density in the vicinity of electrical connectors has substantially reduced the options available for achieving certain functions such as controlling EMI. Additionally, the smaller electrical connectors required by the increased circuit densities have made it extremely difficult to provide socket terminals that can exert acceptable contact pressure while simultaneously exhibiting adequate resiliency after several connections and reconnections. In this regard, it should be realized that miniature circular DIN connectors used in currently marketed computers may define a cube of only approximately 1.25 cm square (0.50 inch square) within which 3-9 terminals and the necessary EMI shields are disposed. The 3-9 terminals within this 1.25 cm square (0.50 inch square) DIN connector may be required to exert normal mating contact forces of between 50-100 grams per contact, and may be required to perform satisfactorily after repeated mating and unmating operations.

An extremely effective miniature terminal that can be incorporated into a miniature circular DIN connector is disclosed in EP-A-0 363 170. EP-A-0 363 170, however, does not specifically address structures for dealing with EMI in miniature DIN connectors. Similarly, EP-A-0 363 170 does not address the difficulties associated with the secure and accurate disposition of terminals in a DIN connector.

The prior art does include attempts to provide EMI shielding for DIN connectors. For example, US-A-4,493,525 which issued to Hall et al on January 15, 1985 shows a DIN receptacle having an annular groove with a communicating recess which is adapted to receive a grounding spring for contacting the mating shield on a plug. No outer shield for the connector housing is provided in US-A- 4,493,525. However, in certain embodiments, a front shield extends entirely across the front face of the connector. All embodiments of the ground terminal and front shield disclosed in US-A- 4,493,525 electrically connect to the shield of a DIN plug by one or more cantilevered sheet metal contacts and connect to ground by contacts that extend exteriorly from the housing to the circuit board or chassis to which one surface of the connector is mounted. Structures very similar to those shown in certain embodiments of US-A- 4,493,525 are also shown in DE-B- 1,515,850 which was pub-

lished on January 2, 1970 and in DE-A- 2,733,634 which was published on February 8, 1979.

Another DIN connector which employs an EMI shield is shown in US-A- 4,637,669 which issued to Tajima on January 20, 1987. The connector of US-A- 4,637,669 includes a base which is mountable to a circuit board, panel or the like and a housing which is mountable to the base. The housing is constructed to loosely receive a plurality of conductive terminals at central locations therein, and is further provided with means for receiving an annular shield around portions of the housing in which the terminals are mounted. An annular sheet metal contact that is of open elliptical cross section is provided to engage the shield of a DIN plug, ensure a strong engaging force, and shield the terminals. The engaging force produced by the annular contact is due to deforming the opposing sheet metal sections of the annular contact by the plug shield. The DIN connector shown in US-A- 4,637,669 further includes an external shield which is electrically and mechanically connected to the annular internal contact of the connector. The external shield is constructed to extend across the top of the DIN connector housing, down two opposed side walls of the housing and into proximity to the circuit board. Both the annular contact and the external shield of US-A- 4,637,669 electrically connect to ground only by terminals extending from the base which is mountable to a circuit board. The three-sided external shield of US-A- 4,637,669 and the annular internal contact connected thereto are intended to function primarily as a single effective EMI shield.

Many DIN connectors with EMI shielding are constructed to provide the shield for EMI generated at the cable/DIN interface. It has now been found, however, that in many applications a greater amount of EMI is generated from the computer or other such electrical component to which the DIN connector is mounted. In many such situations, the EMI shield intended to shield the cable/DIN connector interface will actually function as an antenna that will generate rather than suppress the greater levels of EMI generated from the electrical component to which the DIN connector is mounted.

It is an object of the subject invention to provide an improved DIN connector.

US-A-4,637,669 discloses connector according to the preamble of claim 1. The present invention is characterised by the features of the characterising portion of claim 1.

SUMMARY OF THE INVENTION

The subject invention is directed in one aspect to a miniature circular DIN connector receptacle which may comprise a mating face for mating to a DIN connector plug and a board mounting face for mounting to a circuit board, panel or the like. The miniature DIN

connector may define a generally rectilinear structure comprises a nonconductive molded housing having a plurality of terminals mounted therein. The terminals mounted in the housing of the miniature DIN connector may comprise pin-receiving contact portions which are constructed to mate with corresponding pins on a DIN plug. In particular, the terminals may be elastically supported dual cantilever beam pin-receiving terminals as disclosed in co-pending Application Serial No. 225,001, and as described and illustrated further herein. Each terminal may comprise board contact means, such as solder tails, for extending to conductive portions of the circuit board. The housing may comprise channel means for positively positioning the board contact means of each respective terminal. The housing may further be constructed to permit connection between the external shield and the shield of the DIN connector plug.

An annular conductive EMI shield may be mounted in the housing to extend from the mating face of the connector and substantially surround the pin-receiving contact portions of the terminals therein. The annular internal EMI shield is constructed for electrically contacting a corresponding shield on a DIN plug to be mated with the subject miniature circular DIN connector. The annular internal shield may comprise means for engaging the shield of the DIN connector plug and thereby increasing the forces required for disconnection or unmating. The annular internal EMI shield comprises contact means for grounding the annular internal shield to the board on which the subject miniature circular DIN connector is mountable. The contact means for grounding the annular internal shield may further include ground contacts extending into recesses in the mating face of the housing and projecting from the mating face to contact a panel abutting the mating face of the connector. The annular internal shield may further be formed to include an opening permitting direct electrical connection between the external shield and the shield of a mateable DIN connector plug.

The miniature circular DIN connector of the subject invention may further comprise a nonconductive base which is engageable with the housing. The base may comprise aperture means for receiving the board contact means of the respective terminals which are to be electrically connected to conductive areas on a circuit board. The aperture means in the base may cooperate with the channel means of the housing for positively and accurately positioning the board contact means of each terminal. For example, the base may comprise an array of apertures into which solder tails of the terminals may be inserted. The base may further comprise guide means for guiding the housing into a proper position to ensure alignment of the solder tails or other such board contact means of the terminals with the apertures in the base. In particular, the base may comprise a generally upstanding back

wall against which portions of the housing may be slidably advanced. The base may also comprise resilient latch means for lockingly retaining the housing thereto. The latch means may comprise ramps which are operative to both guide the housing into proper alignment and to facilitate the deflection of the resilient latch means for subsequent locking engagement with the housing.

The miniature circular DIN connector further comprises an external EMI shield which may define the exterior surface for all of the DIN connector except the front mating face and the bottom board mounting face. In particular, the shield may be constructed to substantially cover the top, both opposed sides and the back of the miniature DIN connector. In this regard, the top of the miniature DIN connector is defined as the portion thereof opposite the board to which the miniature DIN connector is mounted. The back is defined as the portion thereof opposite the mating face of the miniature DIN connector into which a mating DIN plug connector is received. The opposed sides, therefore, extend substantially continuously between the mating and back faces of the miniature DIN connector. Thus, the external shield substantially defines the external surface area of the connector other than the mating and mounting faces. The external shield of the subject miniature DIN connector may be formed from a unitary piece metallic material. The external shield may include contact means for grounding the external shield to the board. The external shield may also include ground contacts extending into recesses in the mating face of the housing and projecting from the mating face to contact a panel abutting the mating face of the connector. The external shield is electrically connected to the shield of the DIN connector plug with which the subject miniature circular DIN connector is mated by a low impedance connection. In particular, the external shield may comprise deflectable connecting means which is disposed to be contacted by the shield of the DIN connector plug upon mating. The deflectable connecting means may be disposed to extend through apertures or slots in the housing and annular internal shield of the miniature circular DIN connector. Preferably, the deflectable contact means will contact the shield of the connector plug to form a large contact area and exert a significant force to form a low impedance electrical connection from the external shield to the shield of the DIN connector plug. The deflectable connecting means may comprise means for engaging the shield of the DIN connector plug to increase the forces required for disconnection or unmating.

Some ways of carrying out the present invention will now be described in detail by way of example with reference to drawings which show various specific embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded perspective view of a DIN connector of the subject invention.

FIG. 2 is a rear elevational view of the housing of the subject DIN connector.

FIG. 3 is a cross-sectional view taken along line 3-3 in FIG. 2.

FIG. 4 is a front elevational view of the base of the DIN connector.

FIG. 5 is a top plan view of the base.

FIG. 6 is a cross-sectional view taken along line 6-6 in FIG. 5.

FIG. 7 is a perspective view of the pin contact portion of a terminal for use in the DIN connector.

FIG. 8 is a side elevational view of an internal shield for the DIN connector.

FIG. 9 is a bottom plan view of the internal shield.

FIG. 10 is a front elevational view of an external shield of the subject DIN connector.

FIG. 11 is a side elevational view of the external shield.

FIG. 12 is a front elevational view of the assembled DIN connector.

FIG. 13 is a cross-sectional view taken along line 13-13 in FIG. 12.

FIG. 14 is a bottom plan view of the assembled DIN connector.

FIG. 15 is a side elevational view of the assembled DIN connector.

FIG. 16 is a partial cross-sectional view similar to FIG. 13 but showing alternate external and internal shields.

FIG. 17 is a cross-sectional view similar to FIG. 16 but showing a second alternate construction of the shield.

FIG. 18 is a cross-sectional view similar to FIGS. 16 and 17 but showing a third alternate construction for the shields.

FIG. 19 is a cross-sectional view of a fourth alternate construction for an external shield.

FIG. 20 is a side elevational view of an annular internal shield for use with the external shield depicted in FIG. 19.

FIG. 21 is a cross-sectional view similar to the views shown in FIGS. 16-18 but showing a fifth alternate embodiment of the external shield with means on the external shield for engaging the shield of a DIN connector plug.

FIG. 22 is a cross-sectional view similar to FIGS. 16, 17 and 18 but showing a fifth alternate construction for the shields.

FIG. 23 is a front elevation view of the external shield of the subject DIN connector including the construction of FIG. 22.

FIG. 24 is a cross-sectional view taken along line 2-2 in FIG. 23.

FIG. 25 is a perspective view of a housing having

recesses in the front face for external and internal shield ground contacts.

FIG. 26 is a perspective view of the external shield having ground contacts to extend into recesses in the front face of the housing.

FIG. 27 is a perspective view of the internal shield having ground contacts to extend into recesses in the front face of the housing.

FIG. 28 is an exploded perspective view of an internal annular shield as depicted in FIGS. 16-18 and a mateable DIN connector plug with means for enhancing interengagement forces.

DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

The miniature circular DIN connector receptacle 20 shown in Figs. 1 and 12-15 comprises a housing 22 which is unitarily molded from a nonconductive plastics material. The housing 22 comprises a plurality of through apertures for receiving the pin-receiving contact portions of electrically conductive terminals 24, and a corresponding plurality of channels for receiving the solder tails 25 of the terminals 24. The terminals 24 and the terminal receiving structures on the housing 22 are described and illustrated in detail below. It is to be understood that not all of the terminals 24 are depicted in Fig. 1. It also is to be understood that the respective solder tails 25 will be of different respective configurations.

The housing 22 also is constructed to receive a generally annular conductive internal shield 26 which is dimensioned to substantially surround the pin-receiving contact portions of the terminals 24, provide a ground reference contact for electrical signals, and provide appropriate EMI shielding at the interface between the terminals 24 of the miniature circular DIN connector 20 and the corresponding pin terminals of a mateable DIN plug (not shown). The annular internal shield 26 is provided with a ground contact 28 which permits the internal shield 26 to be grounded to a circuit board (not shown) on which the subject DIN connector 20 is mountable. The annular internal shield 26 has an open cross section which aligns with an aperture 55 of housing 22.

The housing 22 is lockingly engageable with a base 30 which is unitarily molded from a nonconductive plastic material which preferably, but not necessarily, is the same material from which the housing 22 is molded. As explained and illustrated further below, the base comprises an array of apertures extending therethrough for receiving and positively positioning the solder tails 25 of the terminals 24 through mounting apertures in the circuit board.

The miniature DIN connector 20 further comprises a conductive external shield 32 which surrounds four external sides of the assembled housing 22 and base 30 to provide further EMI shielding, and in par-

ticular shielding from EMI generated by the electrical component to which the miniature circular DIN connector 20 is mounted. The external shield 32 also provides an RF ground for the shield of a mateable DIN plug (not shown) to which the external shield is electrically connected by a low impedance contact 57. The external shield 32 comprises a contact 33 which permits the shield 32 to be grounded to the board. The internal shield 26 and the external shield 32 are not electrically or mechanically connected to one another. Rather, the internal and external shields 26 and 32 are separated by the housing 22 and base 30 to perform separate but supplementary shielding functions with separate grounds to the board.

The housing 22 is shown in greater detail in FIGS. 2 and 3. More particularly, the housing 22 comprises a rear terminal mounting face 34, a front mating face 35, a top 36, a bottom 37 and opposed sides 38 and 39. A plurality of terminal mounting apertures 40a-h extend entirely through the housing 22 from the rear face 34 thereof to the front mating face 35. Each mounting aperture 40a-h intersects the front mating face 35 of the housing 22 at a substantially circular mating aperture 42a-h having a tapered lead-in to facilitate the mating of a DIN plug with the miniature circular DIN connector 20. The rearward portion of the mounting apertures 40a-h are depicted in FIG. 2 as being of generally rectangular cross section. The rectangular cross-sectional configuration of the terminal mounting apertures 40 corresponds to the cross-sectional configuration of the terminals as shown in FIG. 1 and in greater detail in FIG. 7. Other configurations and dimensions for the terminal-receiving apertures 40a-h may be desired for terminals of other configurations. The apertures 40a-h include slots, such as slots 44b, e and g in FIG. 3 for receiving tabs on the terminals 24 for preventing vertical push-up of the terminals.

The rear face 34 of the housing 22 comprises a plurality of tail-receiving channels 46a-h which communicate respectively with the terminal-receiving apertures 40a-h. The channels 46a-h are dimensioned and located to receive and guide the solder tails 25 extending from the respective terminals 24 mounted in the apertures 40a-h. It will be understood that the terminals indicated generally by the numeral 24 will have respective solder tails 25 of dedicated lengths and configurations depending upon the particular channel 46a-h for which they are intended. As depicted in FIG. 2, the channels 46d, 46f, 46g and 46h may be at a first distance from the rear face 34 of approximately 0.051 cm (0.020 inch), while the channels 46a, 46b, 46c and 46e may be at a second distance from the rear face 34 of approximately 0.097 cm (0.038 inch). Thus, the different positions of the channels 46a-h enable the solder tails 25 of the terminals 24 to define two parallel spaced apart rows which may be selectively connected to electrically conduc-

tive areas on the printed circuit board. The alignment of the solder tails enabled by the channels 46a-h ensures positive positioning and alignment of the solder tails 25 relative to the sides 38 and 39 of the housing 22, thereby enabling the loading of terminals 24 into the housing 22 to be automated, and further enabling the mounting of the housing 22 to the base 30 to be readily automated. With this construction, the slots 44 will engage the tabs on the terminals 24, as explained below, to prevent top-to-bottom movement of the terminals 24 relative to the housing 22, while the channels 46 engage the tails 25 to prevent side-to-side movement.

The housing 22 further comprises a generally annular aperture 48 extending into the front face 35 thereof. The aperture 48 is dimensioned to slidably receive the internal annular shield 26. Aperture 55 of the housing extends from the top 36 of housing 22 to annular aperture 48. The opposed sides 38 and 39 of the housing 22 comprises locking ledges 50 and 52 for enabling locking engagement of the housing 22 to the base 30 as explained further below. The housing 22 further comprises a front flange 54 against which the external shield 32 will abut.

The base 30 of the miniature circular DIN connector 20 is further illustrated in FIGS. 4-6. More particularly, the base 30 comprises a bottom wall 56 for mounting generally adjacent a printed circuit board, panel or the like. The bottom wall 56 comprises stand-offs 58 to enable the major portion of the DIN connector 20 to be in slightly spaced relationship to the corresponding circuit board to permit the washing of flux.

The base 30 further comprises a rear wall 60 which facilitates the guiding of the housing 22 into a proper position, and which functions to insulate and protect the terminals 24 mounted in the housing 22. The rear wall 60 also functions to prevent front-to-rear movement of each terminal 24, thereby keeping each tail 25 in its associated channel 46 of the housing 22. Apertures 62a-h extend through the bottom wall 56 of the base 30 adjacent the rear wall 60 for receiving the solder tails 25 of the terminals 24 extending from the channels 46a-h in the housing 22. The apertures 62a-h each include tapered lead-ins to facilitate the alignment and guiding of the solder tails 25. The alignment of the solder tails 25 with the apertures 62a-h is further facilitated by the rear wall 60. The base 30 is further provided with deflectable latches 64 and 66 which are lockingly engageable respectively with the ledges 50 and 52 on the housing 22.

As noted above, the terminals 24 for mounting in the housing 22 include contact portions substantially as disclosed in EP-A-0 363 170. Briefly, the contact portion of the terminal 24 is illustrated in FIG. 7 and includes a front end 72 which would be positioned generally adjacent the front face 35 of the housing 22. A rear end 74 is not completely shown in FIG. 7, but would include the right angle solder tail 25 as shown

in FIG. 1, and further in FIGS. 11-14 below. The stamped and formed configuration of the solder tails would be selected to follow the configuration of the respective channels 46a-h in the housing 22. The rear end 74 further includes a tab 75 which is slidably receivable in the slots 44 of the housing 22 to prevent top-to-bottom movement of the terminal 24 relative to the housing 22.

The terminal 24, as shown in FIG. 7, includes a bight portion 80 and a pair of spaced apart upstanding legs 82 and 84. Cantilevered contact beams 86 and 88 extend forwardly from the legs 82 and 84 respectively toward the front end 72 of the terminal 24. The contact beams 86 and 88 are formed to define spaced apart inwardly directed convex contact surfaces 90 and 92 which are resiliently biased away from one another upon insertion of a pin terminal therebetween. The forward ends of the contact beams 86 and 88 further comprise L-shaped linking members 94 and 96 respectively which extend generally perpendicularly from the cantilevered contact beams 86 and 88 respectively at the front end 72 of the terminal 24. A generally U-shaped resilient beam support 98 extends between and connects the linking members 94 and 96. The U-shaped resilient beam support member 98 includes a pair of arms 100 and 102 which extend unitarily from the linking members 94 and 96 respectively and a bight 104 which unitarily connects the arms 100 and 102. The beam support member 98 is effective to increase the elastic response range of each beam 86, 88 to a greater outer displacement, while providing greater normal contact forces against a pin inserted into the terminal 24. A more detailed description and discussion of the terminal 24 is provided in European Patent Application No. 89310135.2.

The internal shield 26 of the miniature circular DIN connector 20 is shown in greater detail in FIGS. 8 and 9. More particularly, the internal shield 26 comprises an outwardly flared entrance 106 which conforms generally to the configuration of the mounting aperture 48 in the housing 22. The internal shield 26 further includes a contact 28 extending therefrom for mounting to an appropriate ground on the circuit board. The contact 28 is dimensioned to fit through corresponding slots in both the housing 22 and the base 30. As shown most clearly in FIG. 9 the internal shield 26 further comprises locking tangs 110 and 112 extending from opposite sides thereof for locking engagement with corresponding portions of the generally annular aperture 48 in the housing 22 for receiving the internal shield 26.

The external shield 32 is depicted in greater detail in FIGS. 10 and 11. In particular, the external shield 32 is formed from a unitary piece of metallic material having a thickness of approximately 0.041 cm (0.016 inch). The external shield 32 comprises opposed generally parallel side walls 114 and 116, a top wall 118 extending unitarily between the side walls 114 and

116 and generally perpendicular thereto and opposed coplanar back wall portions 120 and 122 which extend unitarily from the side walls 114 and 116 respectively and generally orthogonal thereto. The external shield 32 further comprises the low impedance plug shield contact, generally designated 57 in Figure 1, extending from top 118. Specific embodiments of plug shield contact 57 for achieving low impedance contact with a plug shield of a DIN connector plug are particularly described below. The external shield 32 further comprises contacts 124 and 33 which extend respectively from the side walls 114 and 116 to enable grounding of the external shield 32 to the board on which the miniature circular DIN connector 20 is mounted. The external shield 32 also includes locking detents 128-134 which extend from the side walls 114 and 116 as shown in FIGS. 10 and 11 and which are engageable with corresponding portions of the housing 22 to prevent top to bottom and front to rear movement of the external shield 32 relative to the housing 22 as explained below.

The miniature circular DIN connector 20 is shown in exploded form in FIG. 1, and in its assembled form in FIGS. 12-15. The miniature circular DIN connector 20 may be assembled by first inserting the terminals 24a-h into the apertures 40a-h respectively in the housing 22. The solder tails 25a-h on the respective terminals 24a-h may be bent prior to insertion into the apertures 40a-h, or may alternatively be bent as part of the insertion process. A plurality of the terminals 24a-h may be gang loaded with a terminal loading apparatus. The loading of the terminals 24a-h into the apertures 40a-h is such that the solder tails 25a-h thereof are positioned respectively in the channels 46a-h. The terminals 24a-h further include tabs 75 which are engageable in the tab-receiving slots 44a-h of the respective apertures 40a-h to prevent relative movement of the terminals 24a-h toward or away from the bottom 37 of the housing 22. Thus, each solder tail 25a-h is prevented from significant lateral movement by the corresponding channels 46a-h and is prevented from movement toward or away from the bottom 37 of the housing 22 by the engagement of the tabs in the corresponding slots 41 of the apertures 40a-h respectively. As shown in FIGS. 12 and 13, the opposed convex contact surfaces 90 and 92 of terminals 24a-h are in general alignment with the apertures 42a-h in the housing for receiving the pin terminals of a DIN plug (not shown) mated with the connector 20.

The assembly of the miniature circular DIN connector 20 may proceed by urging the annular internal shield 26 into the annular aperture 48 of the housing 22; however, the internal shield 26 may be mounted as the last step of the assembly of miniature circular DIN connector 20. The subassembly comprising the housing 22, the terminals 24a-h and the internal shield 26 may be mounted to the base 30 such that

the solder tails 25a-h of the terminals 24a-h respectively are inserted into the corresponding apertures 62a-h of the base 30. Proper alignment of the solder tails 25a-h relative to the apertures 62a-h in the base 30 is achieved by both the flared lead-ins to the apertures 62a-h and by the guiding function carried out by the rear wall 60 of the base 30. The solder tails 25a-h are retained laterally stationary relative to the housing 22 by the respective channels 46a-h, thereby ensuring accurate mounting to the base 30. The movement of the housing 22 toward the base 30 causes the latches 64 and 66 to be deflected away from one another. Upon complete seating of the base 22 in the housing 30, the latches 64 and 66 will resiliently return to their unbiased condition and engage the locking ledges 50 and 52 respectively of the housing 22.

The external shield 32 is engaged over the assembled housing 22 and base 30 which separate the internal and external shields 26 and 32 from one another. More particularly, the side walls 114 and 116 of the external shield 32 will generally abut the sides 38 and 39 of the housing 22 and corresponding sides of the base 30. The top wall 118 of the external shield 32 will engage the top 36 of the housing 22, while the rear walls 120 and 122 of the external shield 32 will engage and enclose the rear wall 60 of the base 30. Plug shield contact 57 will extend through housing aperture 55 and between the ends of annular shield 26 so that contact 57 is separated from annular shield 26. The external shield 32 extends beyond the bottom wall 56 of the base 30 and generally to the standoffs 58 thereof. Thus, the external shield 32 will approximately abut the board to which the miniature circular DIN connector 20 is mounted along three sides of the DIN connector 20. Top to bottom retention of the external shield 32 on the housing 22 will be achieved by detents 128 and 130 engaging corresponding recesses in the housing 22. Similarly, front to back movement of the external shield 32 relative to the housing 22 and base 30 is achieved by the detents 132 and 134 respectively.

The assembled miniature circular DIN connector 20 can be mounted to a circuit board (not shown) such that the positively positioned solder tails 25a-h are inserted through corresponding apertures in the circuit board and are electrically connected to specified conductive portions of the circuit board. The contact 28 extending from the internal shield 26 is appropriately grounded to the circuit board. Similarly, the contacts 124 and 33 of the external shield 32 are appropriately grounded to the board. However, the internal shield 26 and the external shield 32 are not electrically connected to one another within DIN connector 20.

External shield 32 of DIN connector 20 acts to suppress EMI emissions by providing shielding for emissions from within the connector and providing shielding which would prevent emission through an aperture in a shield adjacent to mounting face 35. DIN

connectors often provide connection to electronics which are contained in a shielded enclosure. When mounted adjacent to a hole in the shield, external shield 32 of DIN connector 20 acts to prevent EMI emissions from the electronics from emitting through the aperture.

The cable connected to a DIN connector plug (not shown) which is mated with the miniature circular DIN connector 20 may become a source of EMI emissions. To avoid such emissions, a low impedance ground connection is achieved by providing a minimum path direct connection between the plug and the external shield of the DIN connector. Effective versions of this direct minimum path connection between the external shield 32 and the DIN connector plug are described in the following paragraphs and are illustrated in FIGS. 16-24. The construction of the embodiments set forth in FIGS. 16-24 can best be appreciated by initially referring to FIG. 1 above. In particular, with reference to FIG. 1, it will be noted that the annular internal shield 26 shown therein is provided with a longitudinally extending slot 27 at generally the top portion of the internal shield 26. The slot 27 can comprise up to about one-third the circumference of the internal shield 26. The embodiments of the invention depicted in FIGS. 16-24 comprise the annular external shield 26 as illustrated in FIG. 1 with the longitudinally extending slot 27 adjacent the top thereof. The specific embodiments of aperture 55 and contact 57 depicted in Figures 16 through 24 are described in detail below.

With reference to FIG. 16, a miniature circular DIN connector 220 is depicted with a housing 222 having a top wall 236. The top wall 236 is provided with a centrally disposed aperture 237 substantially aligned with the slot 27 in the internal shield 26. The miniature circular DIN connector 220 of FIG. 16 further comprises an external shield 232 having a top wall 218. The top wall 218 is stamped and formed to define a deflectable contact 238 which extends through the aperture 237 in the housing 222 and through the slot 27 in the internal shield 26. The length and angular alignment of the deflectable contact 238 is selected to ensure that the contact 238 provides a direct minimum path connection between the external shield 232 and the shield of a DIN connector plug (not shown) when the plug is mated with the miniature circular DIN connector 220.

FIG. 17 shows another alternate miniature circular DIN connector identified generally by the numeral 320. The DIN connector 320 includes a housing 322 having a top wall 336 with an aperture or slot 337 formed therein. The aperture or slot 337 formed in the housing 322 is longer than the comparable aperture 237 depicted in FIG. 16 above. The DIN connector 320 further comprises an external shield 332 with a top wall 318 having a deflectable contact 338 cantilevered from a rearward location 340 on the external shield 332, and toward the front of the external shield

332. The forward portion of the deflectable contact 338 is bent into the slot 27 of the annular internal shield 26 to define a contact surface 342 which will engage the shield of the DIN connector plug when the plug is mated with the miniature circular DIN connector 320. The bent configuration of the contact surface 342 of the deflectable contact 338 is intended to assure a smooth entry of the DIN connector plug into the miniature circular DIN connector 320. The FIG. 17 configuration can achieve a higher contact force than the FIG. 16 configuration and further provides a greater external shielding surface. In particular, the initial deflection of the contact 338 will urge the end 344 of the contact beam 338 into contact with the top wall 318 of the external shield 332. Further insertion of the DIN connector plug will require some deflection substantially about the contact point 342, thereby achieving the high normal contact force. This interaction between the deflectable contact 338 and the shield of the mateable DIN connector plug will effectively and desirably increase the force required for disconnection or unmating. It will be appreciated that this construction also achieves a substantially minimal path length between the external shield 332 and the shield of the DIN connector plug, with the minimum path length being defined between contact surfaces 342 and 344 of the deflectable contact 338. The miniature circular DIN connector 420 shown in FIG. 18 includes a housing 422 similar to the housings depicted in FIGS. 16 and 17. More particularly, the housing 422 includes a top wall 436 having an aperture 437 formed centrally therein. The external shield 432 includes a top wall 418 having a contact 438 extending unitarily from the front 440 of the external shield 432. The contact 438 is disposed to extend into the slot 27 formed in the annular internal shield 26 for directly contacting the shield of the mateable DIN connector plug (not shown). The deflectable contact 438 is formed to define a plug contact surface 442 and a shield contact surface 444. For the reasons explained in the preceding paragraph, high contact forces can be developed between the deflectable contact 438 and the shield of the mateable DIN connector plug. These high contact forces can achieve the desirable effect of increasing the forces required for unmating. Additionally, the construction of the contact 438 depicted in FIG. 18 achieves a substantially minimal path length between the external shield 432 and the shield of the DIN connector plug.

FIGS. 19 and 20 show still a further embodiment for achieving direct connection between the external shield and the shield of the mateable DIN connector plug. In particular, FIG. 19 shows an external shield 532 having a top wall 518 and a rear wall 536. A deflectable contact 538 is cantilevered from location 540 on the rear wall 536 and extends forwardly to a contact surface 542 for engaging the shield of the DIN connector plug. The contact 538 is formed to define

a second contact surface 544 for contacting the top wall 518 of the external shield 532. As with the previously described embodiments, the deflectable contact 538 will achieve high contact forces against the DIN connector plug and will achieve a minimum path length between the top wall 518 of the external shield 532 and the shield of the DIN connector plug. It will be appreciated that the shield of the DIN connector plug can be appropriately deformed by a dimple, or the like, to define means for engaging the contact surface 542 for further increasing the required disengagement force for unmating a DIN connector plug from the miniature circular DIN connector employing the external shield 532. To incorporate the external shield 532, the housing of the miniature circular DIN connector 20 will require a slot in the top wall extending from the rear of the housing. Additionally, an annular internal shield 526, as depicted in FIG. 20, may be required with an enlarged slot 527 at least adjacent the rearward portions thereof. The slot 527 at the rear of the annular internal shield 526 will be dimensioned to permit the deflectable contact 538 to pass directly into contact with the shield of a mateable DIN connector plug.

FIG. 21 shows still a further embodiment of the miniature circular DIN connector identified generally by the numeral 620. In particular, the housing 622 of the DIN connector 620 comprises a top wall 636 having an aperture 637 which is centrally disposed and spaced from both the front and rear of the housing 622. The external shield 632 includes a top wall 618 having a central portion which is deformed to define a deflectable contact 638 which extends through the aperture 637 and through the slot 27 in the annular internal shield 26. The deflectable contact 638 defines a contact surface 642 for engaging the shield of a mateable DIN connector plug. The contact surface 642 may be defined by an engaging surface 644 for engaging corresponding structure on the mateable DIN connector plug to increase the disengagement force required for unmating. It will be appreciated that the embodiment of the external shield 63 depicted in FIG. 21 provides a substantially minimum path between the external shield 63 and the mateable DIN connector plug. Additionally, the deflectable contact 638 is formed without discontinuities in the external shield 632, thereby maintaining a substantially maximum surface area for the external shield 632.

Figures 22, 23, and 24 show a still further embodiment of the miniature circular DIN connector identified generally by the numeral 820. In particular, the housing 822 of the DIN connector 820 comprises a top wall 836 having an aperture 837 centrally disposed and spaced from both the front and rear of the housing 822. The external shield 832 includes a top wall 818 having a continuous depression that defines a very stiff dimple contact 838 extending from the top 818 of the shield 832 through the slot 27 in the annular

internal shield 26. The dimple contact 838 has a central contact surface 842 extending within the slot 27 of the internal shield 26 without contacting internal shield 26. The contact surface 842 has a substantial length distal from external shield 832 and extending along the axial direction of internal shield 26.

As illustrated by Figure 23, the dimple contact 838 has a substantially U-shaped cross-section in the plane parallel to the front mounting face 35, and that contact surface 842 is substantially flat in a plane parallel to the axis of the internal shield 26. As illustrated by Figures 23 and 24, all sides of the dimple contact 838 are short extensions from the top of the shield 818. The contact dimple 838 is consequently very stiff and substantially all vertical deflection of the dimple contact 838 due to insertion of a DIN connector plug will be a result of deflection of the top wall 818. A high normal contact force between the dimple contact 838 and the shield of a DIN plug inserted in the connector results from this configuration.

Figures 25, 26, and 27 show the housing 900, external shield 930, and internal shield 960 of a still further embodiment of the miniature circular DIN connector. As shown in these figures, this embodiment of the DIN connector has external shield extensions 932, 934 and internal shield extensions 962, 964 that extend into front face recesses 902, 904, 906, and 908 respectively. Two such recesses 906, 908 extend from the internal shield aperture 910 into the front face 912 of the housing 900, and the other two recesses 902, 904 extend from the sides and top of the housing 900 into the front face 912.

Referring now to Figure 26, the external shield 930 has external shield extensions 932, 934 extending into the front face recesses, 902, 904 respectively, in the front face 912 of the housing 900. As shown in Figure 27, the internal shield 960 has internal shield extensions 962 and 964 extending into the internal shield recesses, 906, 908 respectively, in the front face 912 of the housing 900. The internal shield extensions 962, 964 and external shield extensions 932, 934 extend about 0.0076 cm (0.003 inches) beyond the front face 912 of the housing 900. Preferably, the extensions 962, 964, 932, 934 abut and electrically contact a conductive grounding chassis panel (not shown) within which the DIN connector is mounted. The internal 960 and external 930 shields of this embodiment of the miniature circular DIN connector therefore may be grounded through contacts 966, 936 and 938 or, alternatively or in addition if desired, through contact with the conductive chassis panel by extensions 962, 964, 932 and 934.

As noted above, it is often desirable to increase the force required for unmating to more positively prevent unintentional disengagement of the DIN connector plug from the miniature circular DIN connector described and illustrated above. Certain embodiments of the direct connection between the external shield

of the miniature circular DIN connector and the mateable DIN connector plug can increase the forces required for unmating. In alternate embodiments or variations of the above described embodiments, the mateable surfaces of the shield on the DIN connector plug and the annular internal shield of the miniature circular DIN connector can be appropriately configured to increase the forces required for unmating. In particular, Fig. 28 shows a DIN connector plug 700 having a generally annular shield 702. The annular shield 702 is characterized by outwardly extending pimples 704 formed therein. The DIN connector plug is mateable with a corresponding miniature circular DIN connector as described and illustrated above. However, the mateable miniature circular DIN connector comprises an annular internal shield 726 having apertures 728 disposed and dimensioned to engage the pimples 704 on the DIN connector plug 700. The engagement of the pimples 704 with the apertures 728 will require increased unmating forces which will substantially prevent accidental unmating. Alternatively, the DIN connector plug could be provided with a pimple 706 disposed and dimensioned to engage the slots 730 which are formed in the annular internal shield 726. The slots 730 are stamped during the formation of locking means for lockingly mounting the internal shield 726 in its housing (not shown).

There has been described with reference to the drawings, miniature circular DIN connector receptacles including a housing having apertures for positively receiving and retaining electrical terminals therein. The housing is lockingly engageable with a base, which in turn is mountable to a circuit board. An internal shield is mountable in the housing to substantially surround the terminals therein, and is grounded to the circuit board or conductive chassis panel. An external shield surrounds four sides of the assembled DIN connector and is separately grounded to the circuit board, or to a conductive chassis panel. The external shield is directly connectable to the cable shield of a mateable DIN connector plug by a contact exerting a substantial force on the shield of the DIN connector plug over a substantial area to provide a low impedance connection to an RF ground. The connection of the external shield to the DIN connector plug is achieved through slots or apertures in the housing and the internal shield of the miniature circular DIN connector.

The miniature circular DIN connector can be manufactured with various different numbers of terminals mounted therein. The terminals illustrated and described above are extremely effective, but advantages of the miniature circular DIN connector can be achieved with other terminal designs. The contact extending between the external shield of the miniature circular DIN connector and the shield of the mateable DIN connector plug may take forms other than those illustrated herein.

The miniature circular DIN connector receptacles described with reference to the drawings have enhanced EMI shielding. They have a low impedance connection from the shielding contact of a plug inserted in a DIN connector to an RF ground. The connectors are effective in shielding EMI generated by both the cable/connector interface and by the electrical component to which the DIN connector is mounted. The connectors can be manufactured in a very small size while still providing acceptable contact forces and an ability to repeatedly connect and disconnect. The connectors accurately position the board contact means of the terminals therein. The external shield provided may substantially cover the external surface area of the connector. A direct electrical connection of low impedance is provided between the external shield of the connector and the shield of a mateable DIN connector plug inserted in the connector. Electrical ground connection for the shielding of the connector is provided via contacts on a surface of the connector.

Claims

1. A miniature circular DIN connector receptacle (20) for mounting to a circuit board and for receiving a DIN connector plug having a shield extending thereabout, said DIN connector receptacle (20) including:

a nonconductive housing (22) having a mating face (35) adapted to receive the connector plug, a bottom face (37), a plurality of further external faces (34,36,38,39), an internal shield aperture (48) adjacent said mating face (35) for receiving an internal shield (26) of said DIN receptacle (20) as well as a portion of the shield of the DIN plug;

a plurality of conductive terminals (24) mounted in said housing (22);

a conductive internal shield (26) mounted in said internal shield aperture (48) and including first contact means (28) for grounding said internal shield (26) to ground circuitry on the circuit board; and

a conductive external shield (32) having a plurality of walls (114,116,118,120,122) substantially surrounding a number of the further external faces (34,36,38,39) of said housing (22) and second contact means (33,124) for grounding said external shield (32) to ground circuitry on the circuit board, characterized in that:

said housing has a channel (237,337, 437,637) between one of said further external faces (236,336,436,636) and said internal shield aperture (48); and

said external shield (32) has third contact means (238,338,438,538,638,838) extending

through said channel (237,337,437,637) and into said internal shield aperture (48) for directly contacting said shield of the DIN plug when the plug is mated with the receptacle (20).

2. A miniature circular DIN connector as claimed in claim 1 wherein said internal shield aperture (48) extends generally around mating portions (86,88) of the conductive terminals (24) and said external shield (32) defines at least three external sides of the miniature circular DIN connector (20).
3. A miniature circular DIN connector as claimed in any preceding claim further including an insulative base (30) having an array of apertures (62a-h) extending there-through for receiving board contact portions (25) of the terminals (24), the base (30) being adapted to be mounted adjacent the circuit board and having means (64,66) for lockingly engaging the housing (22) to the base (30).
4. A miniature circular DIN connector as claimed in any preceding claim wherein the external shield (32) extends generally into proximity to the bottom face (37) of said housing (22), such that said external shield (32) extends generally into abutting relationship with a board to which said DIN connector (20) is mounted.
5. A miniature circular DIN connector as claimed in any preceding claim wherein said housing (22) is of generally rectangular parallelepipedic configuration and comprises a top wall (36) extending generally parallel to the bottom face (37) of said housing (22), a pair of opposed generally parallel side walls (38,39) and a back wall (34) extending generally parallel to the bottom face (37) of said housing (22), said external shield (32) generally conforming to the shape of said housing (22), and comprising a top wall (118), a pair of opposed generally parallel side walls (114,116) extending generally orthogonally from said top wall (118) and a back wall (120,122) extending generally orthogonally from said top wall (118) and side walls (114,116), said third contact means extending through the channel (55) in the housing (22) for contacting the shield of the DIN connector plug mated with the miniature DIN connector (20).
6. A miniature circular DIN connector as claimed in any preceding claim wherein said external shield (32) and said internal shield (26) are electrically and mechanically separate from one another prior to mounting on a circuit board.
7. A miniature circular DIN connector as claimed in any preceding claim wherein said external shield

(32) defines four external sides of said DIN connector (20), said DIN connector (20) comprising a receptacle of generally rectangular parallelepipedic configuration having a top (118), a bottom (37), opposed sides (114,116), a back (120, 122) and a mating face (35) for mating with a DIN connector plug, said external shield (32) substantially defining both opposed sides (114,116), the top (118) and the back (120,122) of said DIN connector (20).

8. A miniature circular DIN connector as claimed in any preceding claim wherein the third contact means (238) of said external shield comprises a deflectable contact arm (238) stamped from the portion of said external shield (32) adjacent the top (36) of said housing (22) and cantilevered therefrom into contact with the shield of the DIN connector plug mated with the miniature DIN connector (20).
9. A miniature circular DIN connector (20) as claimed in any preceding claim wherein those portions of said external shield surrounding the further external faces of the housing are substantially continuous, and wherein the third contact means (238) of said external shield (32) is a deflectable contact arm (238) cantilevered from the top (218) of said external shield (232).
10. A miniature circular DIN connector as claimed in any preceding claim wherein the third contact means (238,438) of the external shield (232) is cantilevered from a portion of the external shield (232,432) generally adjacent the front mating end (35) of the connector (20).
11. A miniature circular DIN connector as claimed in any one of claims 1 to 9 wherein the third contact means (338,342) of said external shield is cantilevered from a portion of the external shield (332) generally adjacent the back thereof.
12. A miniature circular DIN connector as claimed in any preceding claim wherein the third contact means (338,438,538) of the external shield (432) comprises means (344,444,544) which prevent, during engaging of the shield of the DIN connector plug, an easy resilient deformation of said third contact means, so to increase the forces required to unmate the DIN connector plug from the miniature DIN connector (20).
13. A miniature circular DIN connector as claimed in any preceding claim wherein said third contact means (838) includes a depression in the external shield (832) extending through the external shield aperture (27) and contacting a conductive

shield of a DIN plug to provide an electrical path from a conductive shield of a DIN plug to the external shield (852) of the DIN connector (20).

14. A miniature circular DIN connector as claimed in claim 13 wherein the depression has a substantially flat surface (842) penetrating the internal shield aperture (27) to contact a conductive shield of a DIN plug in the internal shield aperture (27) along a line of contact extending from the front end (35) of the housing (22), in the direction of the internal shield aperture (27).

15. A miniature circular DIN connector as claimed in any preceding claim wherein: (i)-the housing (900) includes at least an external shield recess (902,904) in the front end (912) of the housing extending from a side and top of the housing and (ii)-the external shield (930) includes at least a further contact means in the form of an external shield extension (932, 934) extending from the external shield into said external shield recess (902,904) and projecting outwardly from the front end (912) of the housing (900), whereby the external shield extension (932,934) may abut a panel adjacent the front end of the DIN connector.

16. A miniature circular DIN connector as claimed in claim 15 wherein: (i)-the housing (900) includes at least an internal shield recess (906,908) extending from the internal shield aperture (910) in the front end (912) of the housing (900), and (ii)-the internal shield (960) mounted in the internal shield aperture (910) has a slot aligned with the channel between one of the external faces and the internal shield aperture and at least an internal shield extension (962,964) extending into said internal shield recess (906,908) and projecting outwardly from the front end (35) of the housing (900).

17. A miniature circular DIN connector as claimed in claim 16 wherein: (i)-the housing (900) includes a second external shield recess in the front end of the housing extending from a side and to so of the housing, and (ii)-the external shield includes a second external shield extension extending from the external shield into said second external shield recess and projecting outwardly from the front end of the housing.

18. A miniature circular DIN connector as claimed in claim 17 wherein: (i)-the housing includes a second internal shield recess in the front end (912) of the housing extending from the internal shield aperture (910) in the front end of the housing, and (ii)-the internal shield includes a second internal shield extension extending into said second inter-

nal shield recess and projecting outwardly from the front end of the housing.

Patentansprüche

1. Miniatur-DIN-Rundverbindersteckdose (20) zur Anbringung an einer Leiterplatte und zur Aufnahme eines DIN-Verbindersteckers mit einer sich um diesen erstreckenden Abschirmung, wobei die DIN-Verbindersteckdose (20) versehen ist mit einem nichtleitenden Gehäuse (22) mit einer Kopplungsseite (35) zur Aufnahme des Verbindersteckers, einer Unterseite (37), einer Mehrzahl weiterer Außenseiten (34,36,38,39), einer Innenabschirmungsöffnung (48) angrenzend an die Kopplungsseite (35) zur Aufnahme einer Innenabschirmung (26) der DIN-Steckdose (20) sowie eines Bereiches der Abschirmung des DIN-Steckers,

einer Mehrzahl im Gehäuse (22) montierter leitender Anschlüsse (24),

einer leitenden Innenabschirmung (26), die in der Innenabschirmungsöffnung (48) angebracht ist und eine erste Kontakteinrichtung (28) zur Erdung der Innenabschirmung (26) an einem Erdstromkreis der Leiterplatte aufweist, und

einer leitenden Außenabschirmung (32) mit einer Mehrzahl von einer Anzahl der weiteren Außenseiten (34,36,38,39) des Gehäuses (22) im wesentlichen umgebenden Wänden (114,116,118,120,122) und einer zweiten Kontakteinrichtung (33,124) zum Erden der Außenabschirmung (32) an einem Erdstromkreis der Leiterplatte, dadurch gekennzeichnet, daß

das Gehäuse einen Kanal (237,337,437,637) zwischen einer der weiteren Außenseiten (236,336,436,636) und der Innenabschirmungsöffnung (48) aufweist und

die Außenabschirmung (32) eine dritte Kontakteinrichtung (238,338,438,538,638,838) besitzt, die sich durch den Kanal (237,337,437,637) hindurch und in die Innenabschirmungsöffnung (48) für eine direkte Kontaktierung der Abschirmung des DIN-Steckers, wenn der Stecker mit der Steckdose (20) gekoppelt ist, hin-erstreckt.

2. Miniatur-DIN-Rundverbinder nach Anspruch 1, bei dem sich die Innenabschirmungsöffnung (48) allgemein rundum die Kopplungsbereiche (86,88) der leitenden Anschlüsse (24) erstreckt und die Außenabschirmung (32) zumindest drei Außenseiten des Miniatur-DIN-Rundverbinders bildet.

3. Miniatur-DIN-Rundverbinder nach einem beliebigen vorhergehenden Anspruch, ferner mit einer Isolierbasis (30) mit einer Anordnung von sich

durch diese zur Aufnahme von Leiterplattenkontaktbereichen (25) der Anschlüsse (24) hindurcherstreckenden Öffnungen (62a-h), wobei die Basis (30) angrenzend an die Leiterplatte montierbar ist und eine Einrichtung (64,66) für einen Verriegelungseingriff des Gehäuses (22) mit der Basis (30) aufweist.

4. Miniatur-DIN-Rundverbinder nach einem beliebigen vorhergehenden Anspruch, bei dem sich die Außenabschirmung (32) allgemein nahe der Unterseite (37) des Gehäuses (22) erstreckt, derart, daß die Außenabschirmung (32) allgemein in einem Stoßverhältnis mit einer Leiterplatte verläuft, an der der DIN-Verbinder (20) montiert ist.

5. Miniatur-DIN-Rundverbinder nach einem beliebigen vorhergehenden Anspruch, bei dem das Gehäuse (22) eine rechteckige parallelepipedische Grundform besitzt und eine allgemein parallel zur Unterseite (37) des Gehäuses (22) verlaufende Oberwand (36), ein Paar gegenüberliegender allgemein paralleler Seitenwände (38,39) und eine allgemein parallel zur Unterseite (37) des Gehäuses (22) verlaufende Rückwand (34) aufweist, wobei die Außenabschirmung (32) allgemein der Form des Gehäuses (22) entspricht und eine Oberwand (118), ein Paar gegenüberliegender allgemein paralleler Seitenwände (114,116), die allgemein rechtwinklig zur Oberwand (118) verlaufen, und eine Rückwand (120,122), die allgemein rechtwinklig zur Oberwand (118) und zu den Seitenwänden (114,116) verläuft, umfaßt und wobei sich die dritte Kontakteinrichtung durch den Kanal (55) im Gehäuse (22) zur Kontaktierung der Abschirmung des mit dem Miniatur-DIN-Verbinder (20) gekoppelten DIN-Verbindersteckers hindurcherstreckt.

6. Miniatur-DIN-Rund-Verbinder nach einem beliebigen vorhergehenden Anspruch, bei dem die Außenabschirmung (32) und die Innenabschirmung (26) elektrisch und mechanisch voneinander vor der Montage an einer Leiterplatte getrennt sind.

7. Miniatur-DIN-Rundverbinder nach einem beliebigen vorhergehenden Anspruch, bei dem die Außenabschirmung (32) vier Außenseiten des DIN-Verbinders (20) bildet, der DIN-Verbinder (20) eine Steckdose von rechteckiger parallelepipedischer Grundform mit einer Oberseite (118), einer Unterseite (37), gegenüberliegenden Seiten (114,116), einer Rückseite (120,122) und einer Kopplungsseite (35) für eine Kopplung mit einem DIN-Verbinderstecker umfaßt und die Außenabschirmung (32) im wesentlichen beide gegenüberliegende Seiten (114,116), die Oberseite (118) und

die Rückseite (120,122) des DIN-Verbinders (20) bildet.

8. Miniatur-DIN-Rundverbinder nach einem beliebigen vorhergehenden Anspruch, bei dem die dritte Kontakteinrichtung (238) der Außenabschirmung einen verbiegbaren Kontaktarm (238) aufweist, der aus dem an die Oberseite (36) des Gehäuses (22) angrenzenden Bereich der Außenabschirmung (32) ausgestanzt ist und von dieser zum Kontakt mit der Abschirmung des mit dem Miniatur-DIN-Verbinder (20) gekoppelten DIN-Verbindersteckers vorkragt.

9. Miniatur-DIN-Rundverbinder (20) nach einem beliebigen vorhergehenden Anspruch, bei dem diejenigen Bereiche der Außenabschirmung, die die weiteren Außenseiten des Gehäuses umgeben, im wesentlichen fortlaufend sind, und bei dem die dritte Kontakteinrichtung (238) der Außenabschirmung (32) ein verbiegbarer Kontaktarm (238) ist, der von der Oberseite (218) der Außenabschirmung (232) vorkragt.

10. Miniatur-DIN-Rundverbinder nach einem beliebigen vorhergehenden Anspruch, bei dem die dritte Kontakteinrichtung (238,438) der Außenabschirmung (232) von einem allgemein an das vordere Kopplungsende (35) des Verbinders (20) angrenzenden Bereich der Außenabschirmung (232,432) vorkragt.

11. Miniatur-DIN-Rundverbinder nach einem der Ansprüche 1 bis 9, bei dem die dritte Kontakteinrichtung (338,342) der Außenabschirmung von einem Bereich der Außenabschirmung (332) vorkragt, der allgemein an deren Rückseite angrenzt.

12. Miniatur-DIN-Rundverbinder nach einem beliebigen vorhergehenden Anspruch, bei dem die dritte Kontakteinrichtung (338,438,538) der Außenabschirmung (432) eine Einrichtung (344,444,544) umfaßt, die beim Eingriff mit der Abschirmung des DIN-Verbindersteckers eine leichte elastische Verformung der dritten Kontakteinrichtung verhindert, um so die zum Entkoppeln des DIN-Verbindersteckers vom Miniatur-DIN-Verbinder (20) erforderlichen Kräfte zu erhöhen.

13. Miniatur-DIN-Rundverbinder nach einem beliebigen vorhergehenden Anspruch, bei dem die dritte Kontakteinrichtung (838) eine Eindrückung in der Außenabschirmung (832) aufweist, die sich durch die Außenabschirmungsöffnung (27) hindurcherstreckt und eine leitende Abschirmung eines DIN-Steckers kontaktiert, um einen Stromweg von einer leitenden Abschirmung eines DIN-

Steckers zu der Außenabschirmung (852) des DIN-Verbinders (20) zu bilden.

14. Miniatur-DIN-Rundverbinder nach Anspruch 13, bei dem die Eindrückung eine im wesentlichen ebenen, die Innenabschirmungsöffnung (27) durchdringende Oberfläche (842) für einen Kontakt mit einer leitenden Abschirmung eines DIN-Steckers in der Innenabschirmungsöffnung (27) entlang einer Kontaktlinie besitzt, die vom vorderen Ende (35) des Gehäuses (22) in Richtung der Innenabschirmungsöffnung (27) verläuft. 5 10
15. Miniatur-DIN-Rundverbinder nach einem beliebigen vorhergehenden Anspruch, bei dem (i) das Gehäuse (900) zumindest eine Außenabschirmungsausnehmung (902,904) im vorderen Ende (912) des Gehäuses aufweist, die von einer Seite und der Oberseite des Gehäuses ausgeht, und (ii) die Außenabschirmung (930) zumindest eine weitere Kontakteinrichtung in Form einer Außenabschirmungsverlängerung (932,934) aufweist, die sich von der Außenabschirmung in die Außenabschirmungsausnehmung (902,904) hinein erstreckt und vom vorderen Ende (912) des Gehäuses (900) nach außen vorsteht, wodurch die Außenabschirmungsverlängerung (932,934) an ein an das vordere Ende des DIN-Verbinders angrenzendes Paneel anstoßen kann. 15 20 25 30
16. Miniatur-DIN-Rundverbinder nach Anspruch 15, bei dem (i) das Gehäuse (900) zumindest eine Innenabschirmungsausnehmung (906,908) aufweist, die von der Innenabschirmungsöffnung (910) im vorderen Ende (912) des Gehäuses (900) ausgeht, und (ii) die in der Innenabschirmungsöffnung (910) montierte Innenabschirmung (960) einen mit dem Kanal zwischen einer der Außenseiten und der Innenabschirmungsöffnung fluchtenden Schlitz und zumindest eine Innenabschirmungsverlängerung (962,964) besitzt, die sich in die Innenabschirmungsausnehmung (906,908) hinein erstreckt und vom vorderen Ende (35) des Gehäuses (900) nach außen vorsteht. 35 40 45
17. Miniatur-DIN-Rundverbinder nach Anspruch 16, bei dem (i) das Gehäuse (900) eine zweite Außenabschirmungsausnehmung im vorderen Ende des Gehäuses aufweist, die von einer Seite und der Oberseite des Gehäuses ausgeht, und (ii) die Außenabschirmung eine zweite Außenabschirmungsverlängerung besitzt, die sich von der Außenabschirmung in die zweite Außenabschirmungsausnehmung hinein erstreckt und vom vorderen Ende des Gehäuses nach außen vorsteht. 50 55

18. Miniatur-DIN-Rundverbinder nach Anspruch 17, bei dem (i) das Gehäuse eine zweite Innenabschirmungsausnehmung im vorderen Ende (912) des Gehäuses aufweist, die von der Innenabschirmungsöffnung (910) im vorderen Ende des Gehäuses ausgeht, und (ii) die Innenabschirmung eine zweite Innenabschirmungsverlängerung besitzt, die sich in die zweite Innenabschirmungsausnehmung hinein erstreckt und vom vorderen Ende des Gehäuses nach außen vorsteht.

Revendications

1. Réceptacle de connecteur DIN circulaire miniature (20) destiné à être monté sur une carte de circuit et à recevoir un connecteur DIN mâle ayant un écran s'étendant autour de lui, ledit réceptacle de connecteur DIN (20) comprenant :
- un boîtier non conducteur (22) ayant une face de raccordement (35) conçue pour recevoir le connecteur mâle, une face de dessous (37), une pluralité d'autres faces externes (34, 36, 38, 39), une ouverture d'écran interne (48) adjacente à ladite face de raccordement (35) pour recevoir un écran interne (26) dudit réceptacle DIN (20) ainsi qu'une portion de l'écran du connecteur DIN mâle ;
 - une pluralité de bornes conductrices (24) montées dans ledit boîtier (22) ;
 - un écran interne conducteur (26) monté dans ladite ouverture d'écran interne (48) et comprenant des premiers moyens de contact (28) pour mettre à la masse ledit écran interne (26) en le reliant à un circuit de masse sur la carte de circuit ; et
 - un écran conducteur externe (32) ayant une pluralité de parois (114, 116, 118, 120, 122) entourant pratiquement un certain nombre des autres faces externes (34, 36, 38, 39) dudit boîtier (22) et des deuxièmes moyens de contact (33, 124) pour mettre à la masse ledit écran externe (32) en le reliant à un circuit de masse sur la carte de circuit, caractérisé en ce que :
 - ledit boîtier a un canal (237, 337, 437, 637) entre une desdites autres faces externes (34, 36, 38, 39) et ladite ouverture d'écran interne (48) ; et
 - ledit écran externe (32) a des troisièmes moyens de contact (238, 338, 438, 538, 638, 838) s'étendant à travers ledit canal (237, 337, 437, 637) et dans ladite ouverture d'écran interne (48) pour entrer directement en contact avec ledit écran du connecteur DIN mâle quand le connecteur est emboîté dans le réceptacle (20).
2. Connecteur DIN circulaire miniature selon la revendication 1, dans lequel ladite ouverture

- d'écran interne (48) s'étend sensiblement autour de portions de raccordement (86, 88) des bornes conductrices (24) et ledit écran externe (32) définit au moins trois côtés externes du connecteur DIN circulaire miniature (20).
3. Connecteur DIN circulaire miniature selon l'une quelconque des revendications précédentes, comprenant en outre une base isolante (30) ayant un réseau d'ouvertures (62a-h) s'étendant à travers elle pour recevoir des portions de contact de carte (25) des bornes (24), la base (30) étant conçue pour être montée de manière adjacente à la carte de circuit et ayant des moyens (64, 66) pour faire entrer en contact de verrouillage le boîtier (22) avec la base (30). 10
 4. Connecteur DIN circulaire miniature selon l'une quelconque des revendications précédentes, dans lequel l'écran externe (32) s'étend sensiblement jusqu'au voisinage de la face de dessous (37) dudit boîtier (22), de telle sorte que ledit écran externe (32) s'étende sensiblement en relation d'appui avec une carte sur laquelle ledit connecteur DIN (20) est monté. 15 20 25
 5. Connecteur DIN circulaire miniature selon l'une quelconque des revendications précédentes, dans lequel ledit boîtier (22) est d'une configuration générale rectangulaire et parallélépipédique et comprend une paroi de dessus (36) s'étendant de manière sensiblement parallèle à la face de dessous (37) dudit boîtier (22), une paire de parois latérales (38, 39) sensiblement opposées et une paroi arrière (34) s'étendant de manière sensiblement parallèle à la face de dessous (37) dudit boîtier (22), ledit écran externe (32) étant généralement en conformité avec la forme dudit boîtier (22) et comprenant une paroi de dessus (118), une paire de parois latérales (114, 116) sensiblement opposées s'étendant de manière sensiblement perpendiculaire à partir de ladite paroi de dessus (118) et une paroi arrière (120, 122) s'étendant de manière sensiblement perpendiculaire à partir de ladite paroi de dessus (118) et desdites parois latérales (114, 116), lesdits troisièmes moyens de contact s'étendant à travers le canal (55) dans le boîtier (22) pour entrer en contact avec l'écran du connecteur DIN mâle emboîté avec le connecteur DIN miniature (20). 30 35 40 45 50
 6. Connecteur DIN circulaire miniature selon l'une quelconque des revendications précédentes, dans lequel ledit écran externe (32) et ledit écran interne (26) sont séparés électriquement et mécaniquement l'un de l'autre avant un montage sur une carte de circuit. 55
 7. Connecteur DIN circulaire miniature selon l'une quelconque des revendications précédentes, dans lequel ledit écran externe (32) définit quatre faces latérales dudit connecteur DIN (20), ledit connecteur DIN (20) comprenant un réceptacle de configuration sensiblement rectangulaire et parallélépipédique ayant un dessus (118), un fond (37), des côtés opposés (114, 116), un arrière (120, 122) et une face de raccordement (35) pour un raccordement avec un connecteur DIN mâle, ledit écran externe (32) définissant pratiquement les deux côtés opposés (114, 116), le dessus (118) et l'arrière (120, 122) dudit connecteur DIN (20).
 8. Connecteur DIN circulaire miniature selon l'une quelconque des revendications précédentes, dans lequel les troisièmes moyens de contact (238) dudit écran externe comprennent un bras déformable de contact (238) estampé à partir de la portion dudit écran externe (32) adjacente au dessus (36) dudit boîtier (22) et étant en porte-à-faux à partir de lui pour entrer en contact avec l'écran du connecteur DIN mâle emboîté avec le connecteur DIN miniature (20).
 9. Connecteur DIN circulaire miniature (20) selon l'une quelconque des revendications précédentes, dans lequel les portions dudit écran externe entourant les autres faces externes du boîtier sont pratiquement continues, et dans lequel lesdits troisièmes moyens de contact (238) dudit écran externe (232) sont un bras déformable de contact (238) en porte-à-faux à partir du dessus dudit écran externe (232).
 10. Connecteur DIN circulaire miniature selon l'une quelconque des revendications précédentes, dans lequel les troisièmes moyens de contact (238, 438) de l'écran externe (232) sont en porte-à-faux à partir d'une portion de l'écran externe (232, 432) sensiblement adjacente à l'extrémité emboîtante avant (35) du connecteur (20).
 11. Connecteur DIN circulaire miniature selon l'une quelconque des revendications 1 à 9, dans lequel les troisièmes moyens de contact (238, 438) dudit écran externe sont en porte-à-faux à partir d'une portion de l'écran externe (332) sensiblement adjacente à son arrière.
 12. Connecteur DIN circulaire miniature selon l'une quelconque des revendications précédentes, dans lequel les troisièmes moyens de contact (338, 438, 538) de l'écran externe (432) comprennent des moyens (344, 444, 544) qui empêchent, pendant l'entrée en contact de l'écran du connecteur DIN mâle, une déformation

facile et souple desdits troisièmes moyens de contact, afin d'augmenter les forces nécessaires pour déboîter le connecteur DIN mâle d'avec le connecteur DIN miniature (20).

13. Connecteur DIN circulaire miniature selon l'une quelconque des revendications précédentes, dans lequel lesdits troisièmes moyens de contact (838) comprennent une dépression dans l'écran externe (832) s'étendant à travers l'ouverture d'écran externe (27) et entrant en contact avec un écran conducteur d'un connecteur DIN mâle pour fournir un trajet électrique depuis un écran conducteur d'un connecteur DIN mâle jusqu'à l'écran externe (832) du connecteur DIN (20).

14. Connecteur DIN circulaire miniature selon la revendication 13, dans lequel la dépression a une surface sensiblement plane (842) pénétrant dans l'ouverture d'écran interne (27) pour entrer en contact avec un écran conducteur d'une fiche DIN mâle dans l'ouverture d'écran interne (27) le long d'une ligne de contact s'étendant, depuis l'extrémité avant (35) du boîtier (22), dans la direction de l'ouverture d'écran interne (27).

15. Connecteur DIN circulaire miniature selon l'une quelconque des revendications précédentes, dans lequel :

- (i) le boîtier (900) comprend au moins un renforcement d'écran externe (902, 904) dans l'extrémité avant (912) du boîtier s'étendant depuis un côté et le dessus du boîtier, et
- (ii) l'écran externe (930) comprend au moins des moyens supplémentaires de contact ayant la forme d'une extension d'écran externe (932, 934) s'étendant à partir de l'écran externe dans ledit renforcement d'écran externe (902, 904) et faisant saillie vers l'extérieur depuis l'extrémité avant (912) du boîtier (900), ce qui permet ainsi à l'extension d'écran externe (932, 934) de s'appuyer sur un panneau adjacent à l'extrémité avant du connecteur DIN.

16. Connecteur DIN circulaire miniature selon la revendication 15, dans lequel :

- (i) le boîtier (900) comprend au moins un renforcement d'écran interne (906, 908) s'étendant depuis l'ouverture d'écran interne (910) dans l'extrémité avant (912) du boîtier (900), et
- (ii) l'écran interne (960) monté dans l'ouverture d'écran interne (910) a une fente alignée avec le canal entre une des faces externes et l'ouverture d'écran interne, et au moins une extension d'écran interne (962, 964) s'étendant dans ledit renforcement d'écran interne


(906, 908) et s'avancant vers l'extérieur depuis l'extrémité avant (35) du boîtier (900).



17. Connecteur DIN circulaire miniature selon la revendication 16, dans lequel :

- (i) le boîtier (900) comprend un deuxième renforcement d'écran externe dans l'extrémité avant du boîtier s'étendant depuis un côté et le dessus du boîtier, et
- (ii) l'écran externe comprend une deuxième extension d'écran externe s'étendant depuis l'écran externe dans ledit deuxième renforcement d'écran externe et faisant saillie vers l'extérieur depuis l'extrémité avant du boîtier.

18. Connecteur DIN circulaire miniature selon la revendication 17, dans lequel :

- (i) le boîtier comprend un deuxième renforcement d'écran interne dans l'extrémité avant (912) du boîtier s'étendant depuis l'ouverture d'écran interne (910) dans l'extrémité avant du boîtier, et
- (ii) l'écran interne comprend une deuxième extension d'écran interne s'étendant dans ledit deuxième renforcement d'écran interne et faisant saillie vers l'extérieur depuis l'extrémité avant du boîtier.

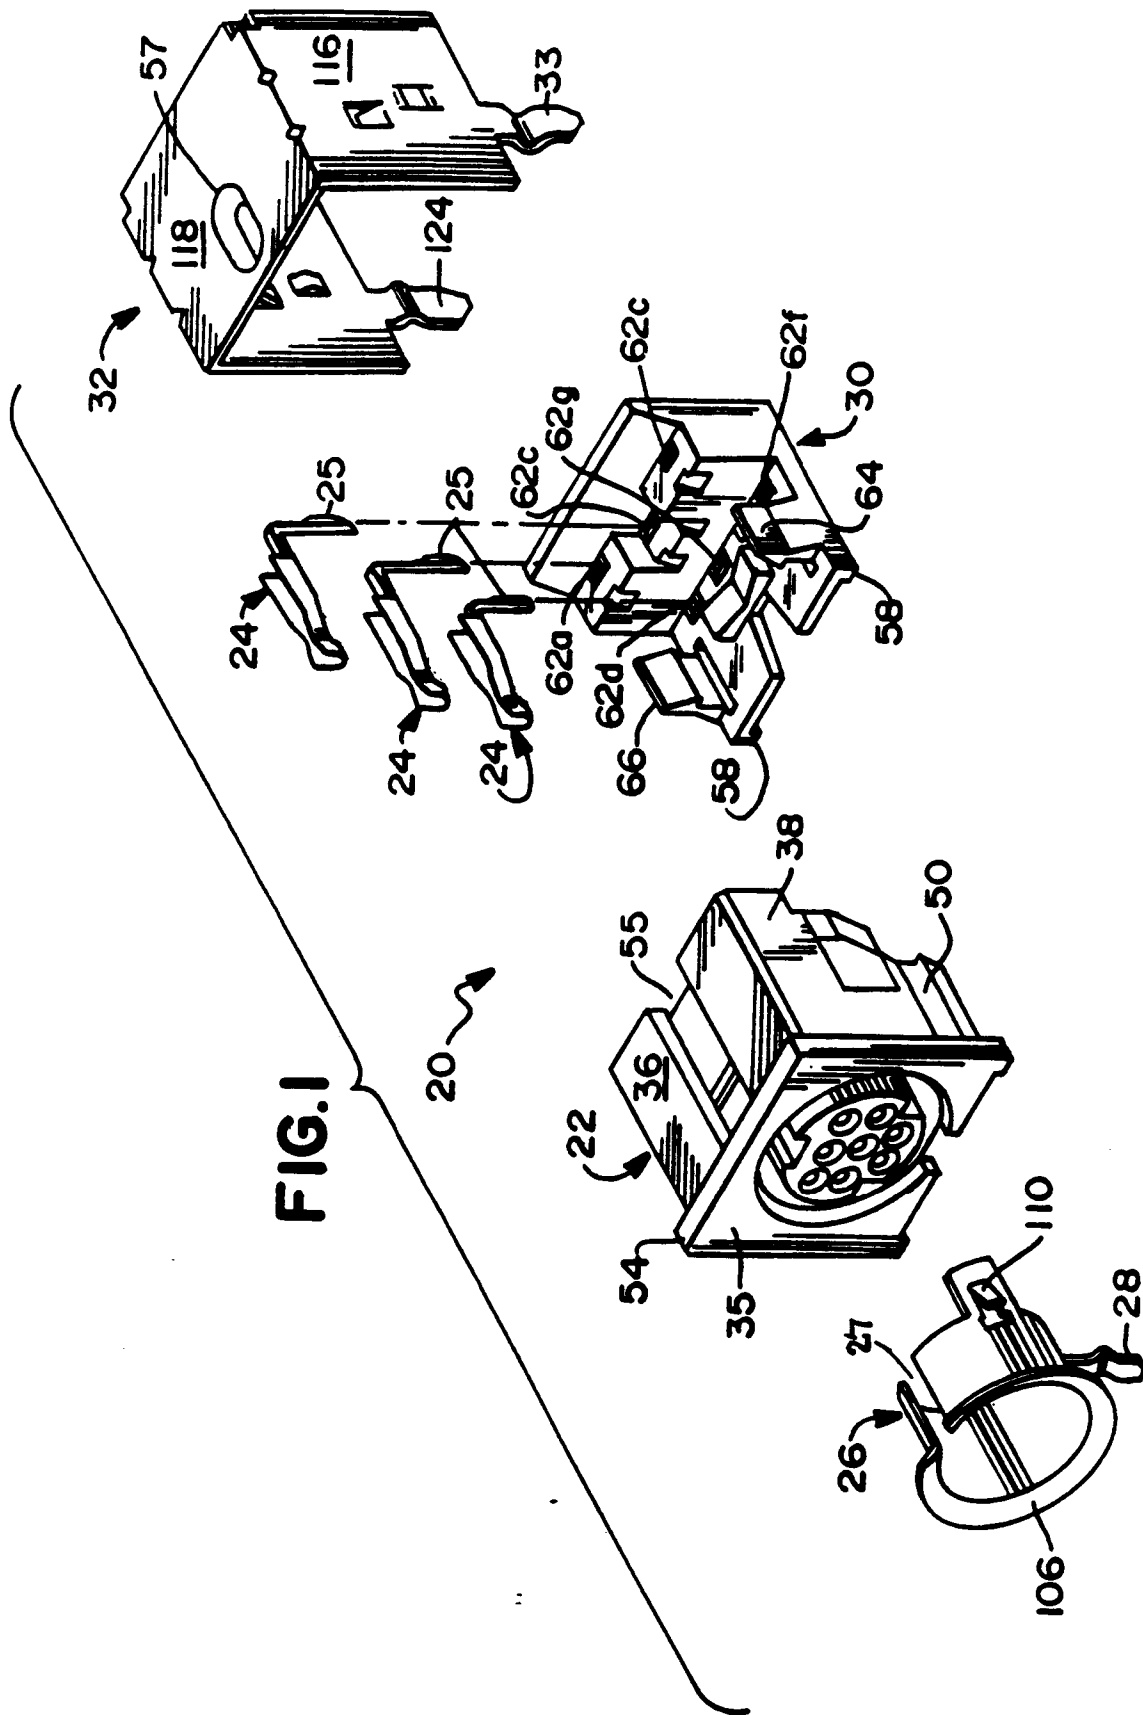

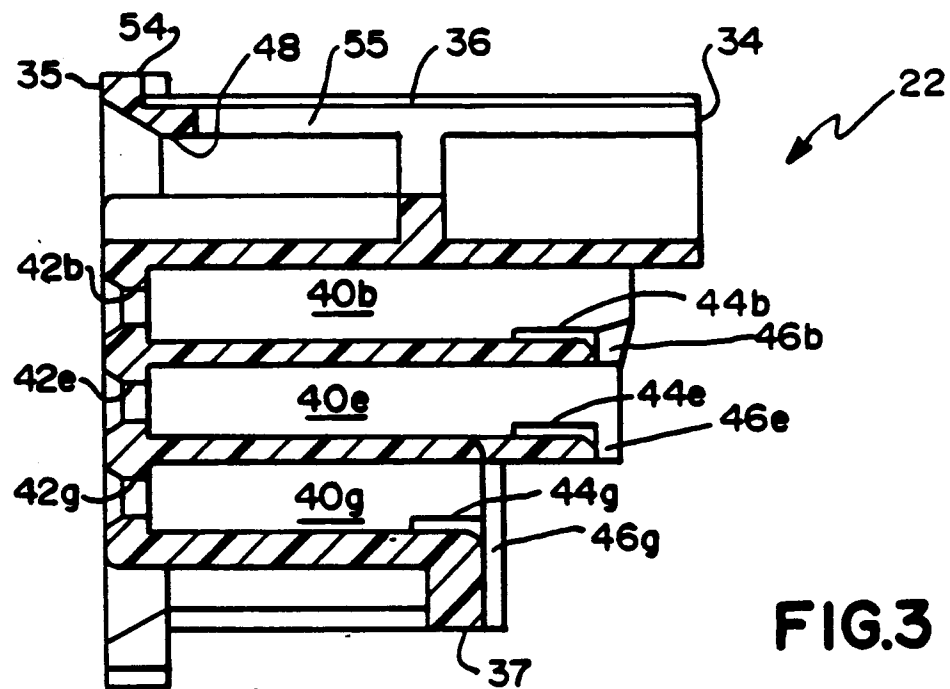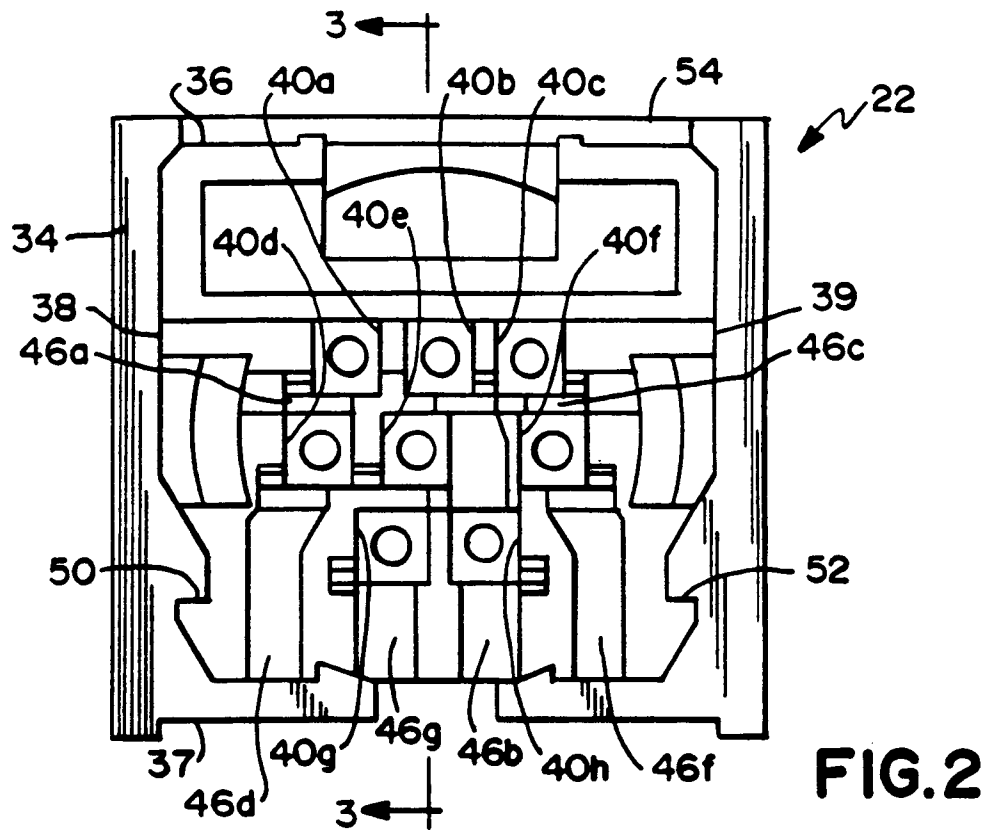

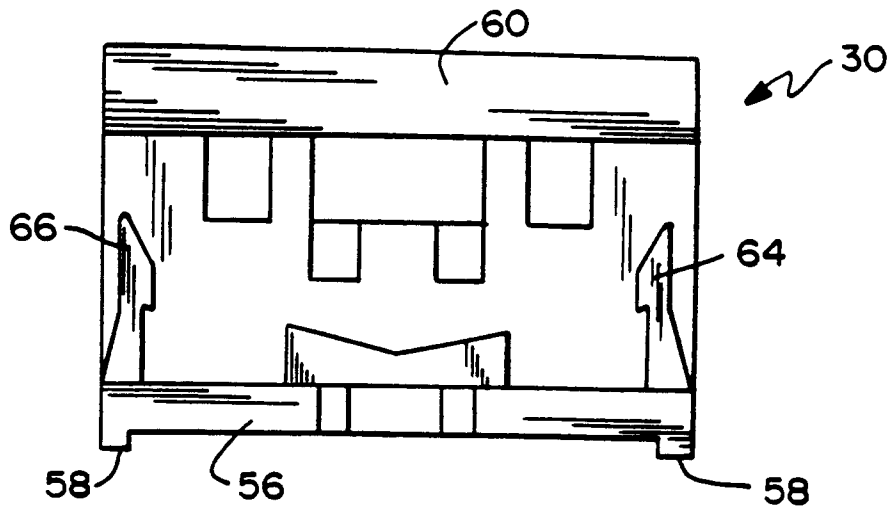


FIG. 4

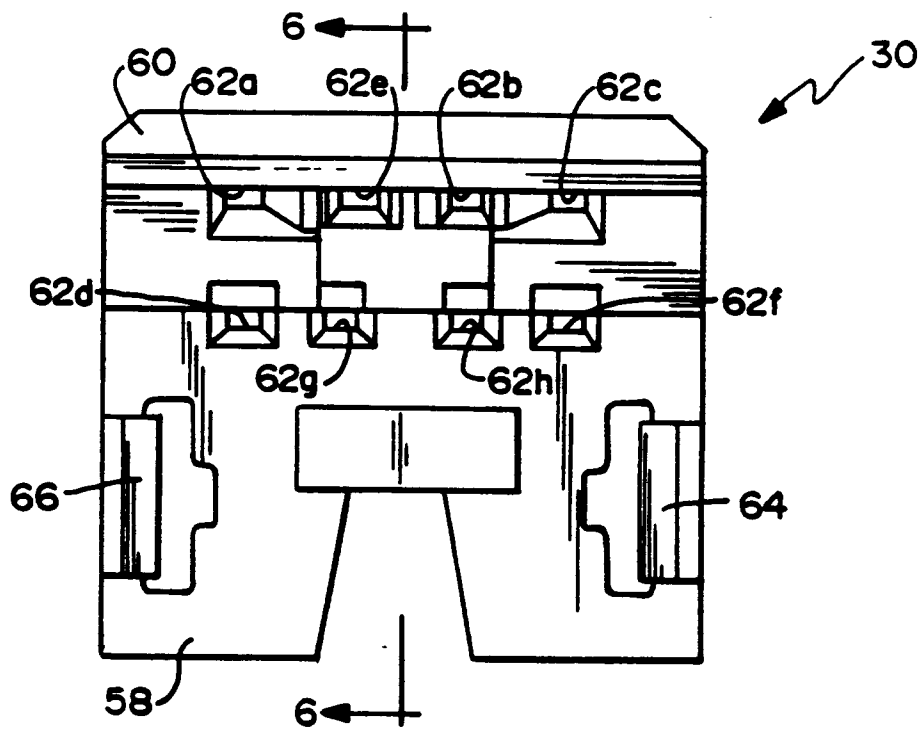


FIG. 5

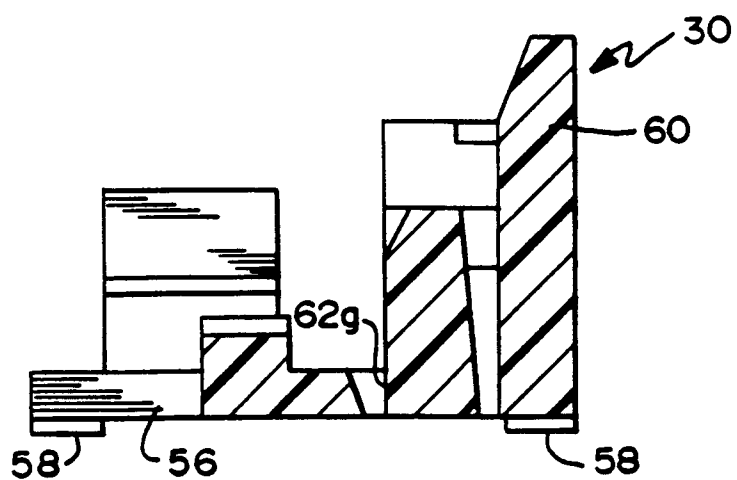


FIG. 6

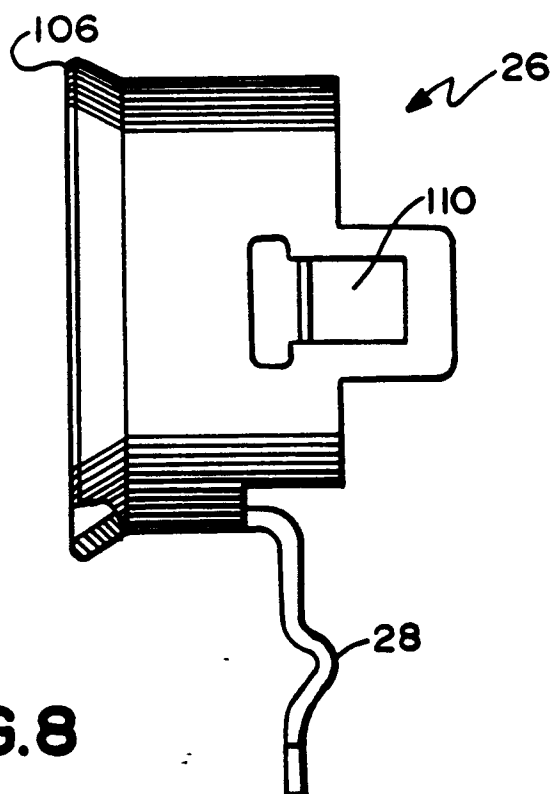
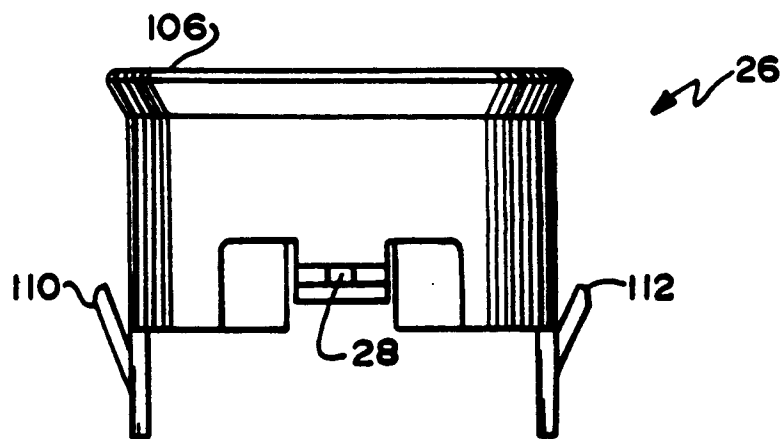
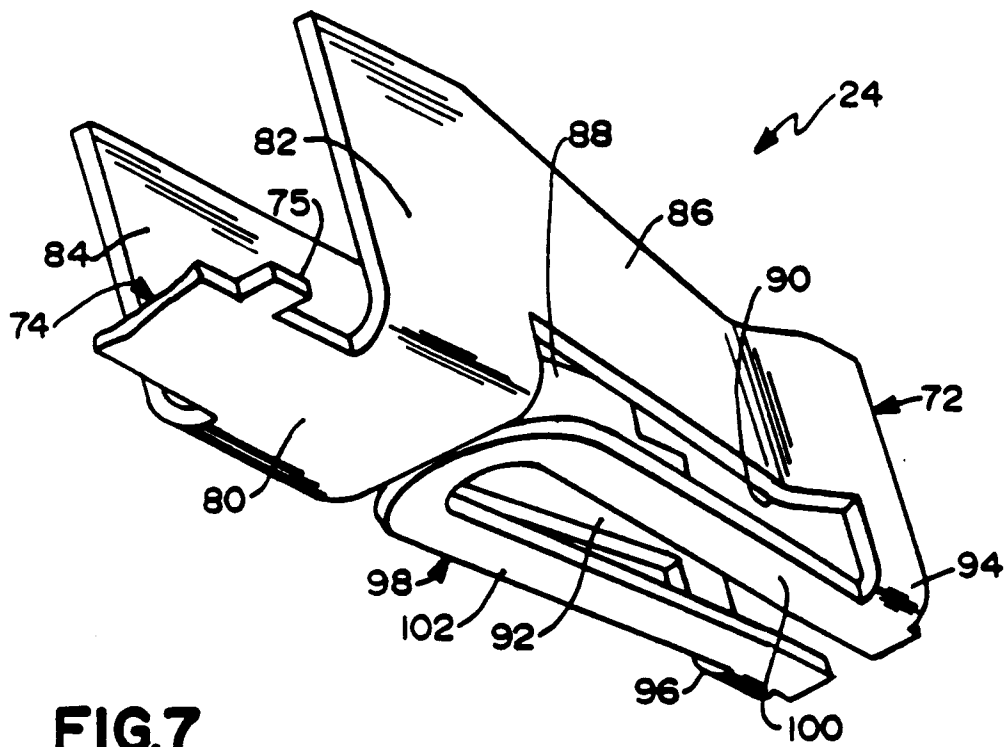
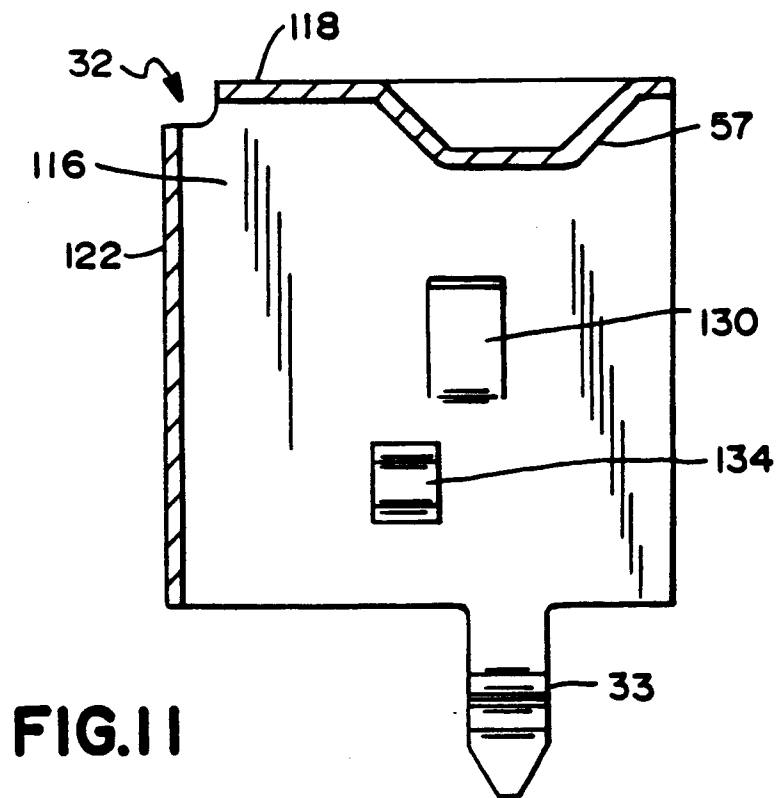
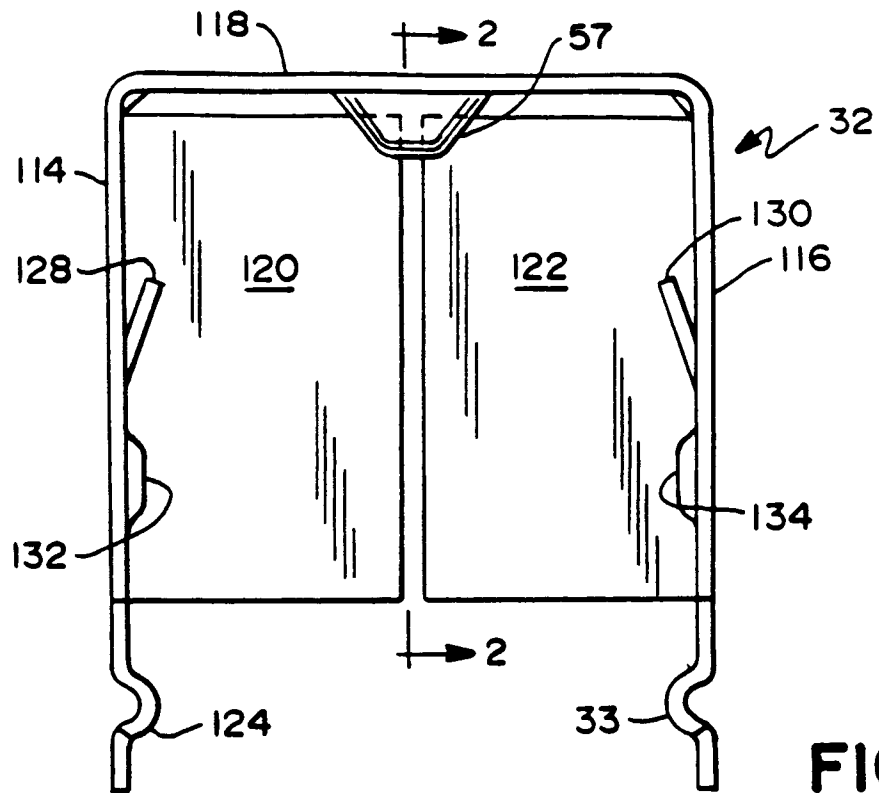


FIG. 8





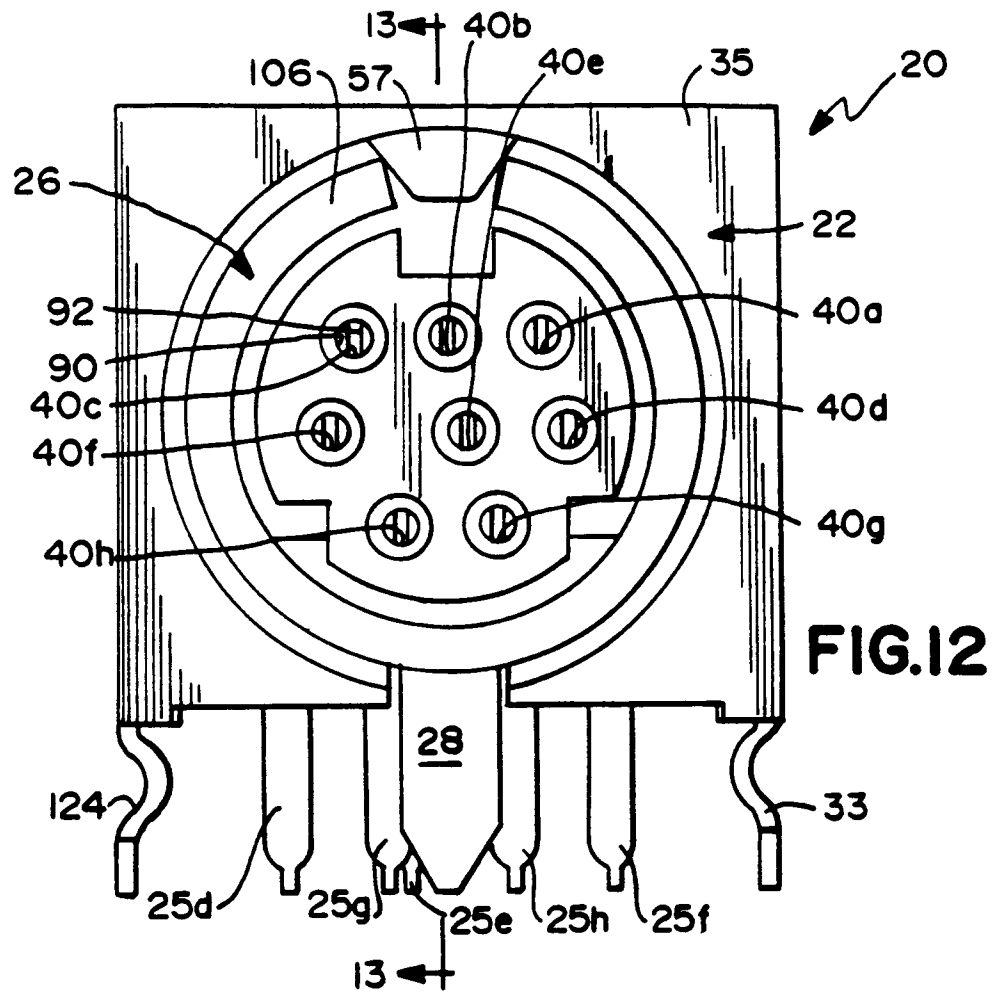


FIG. 12

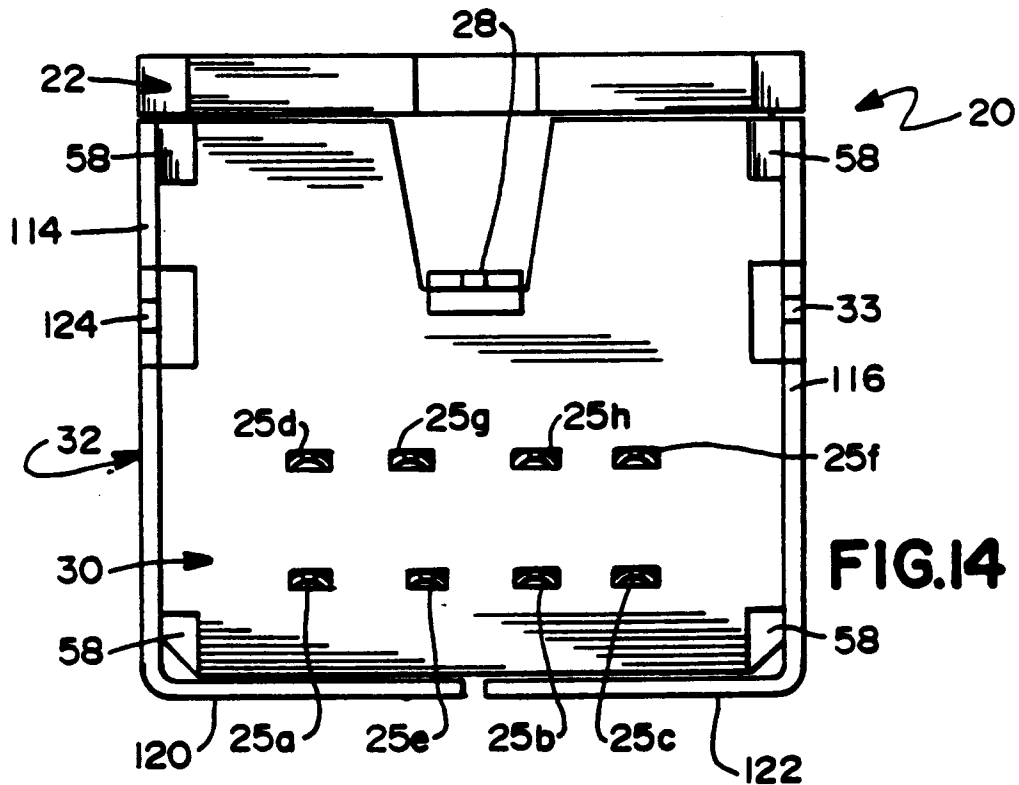
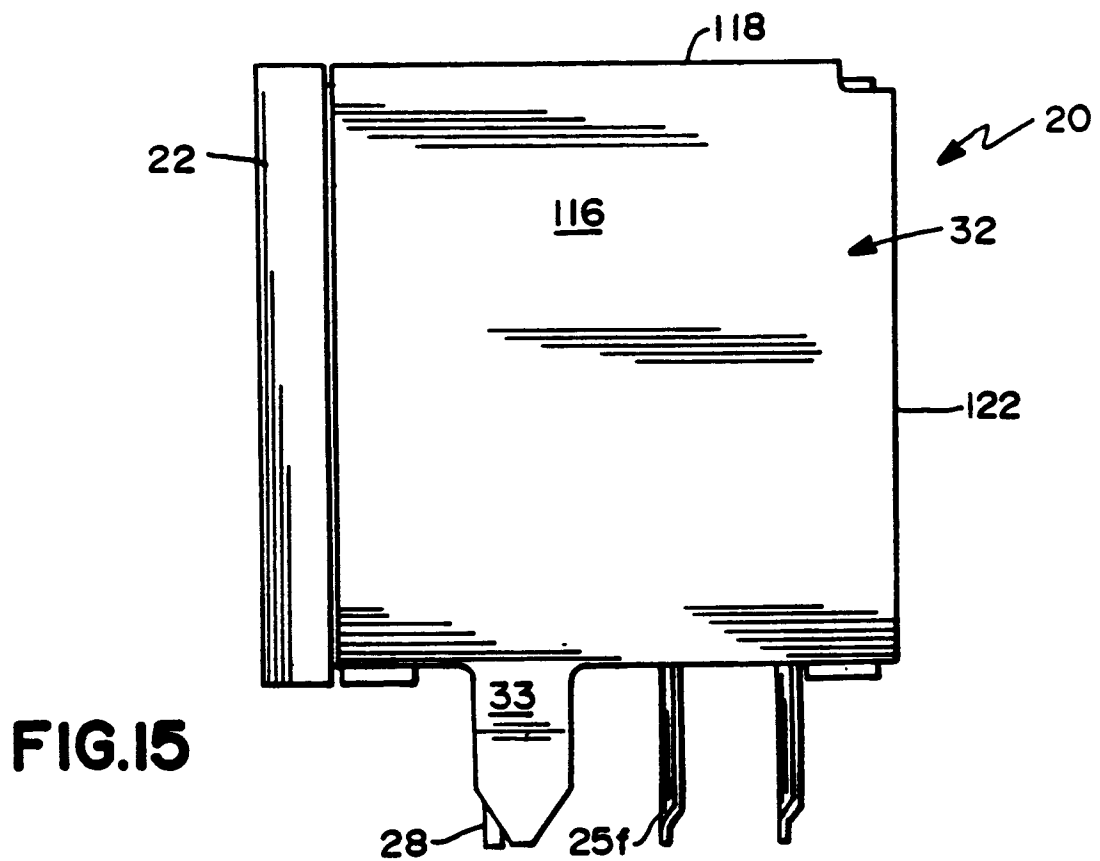
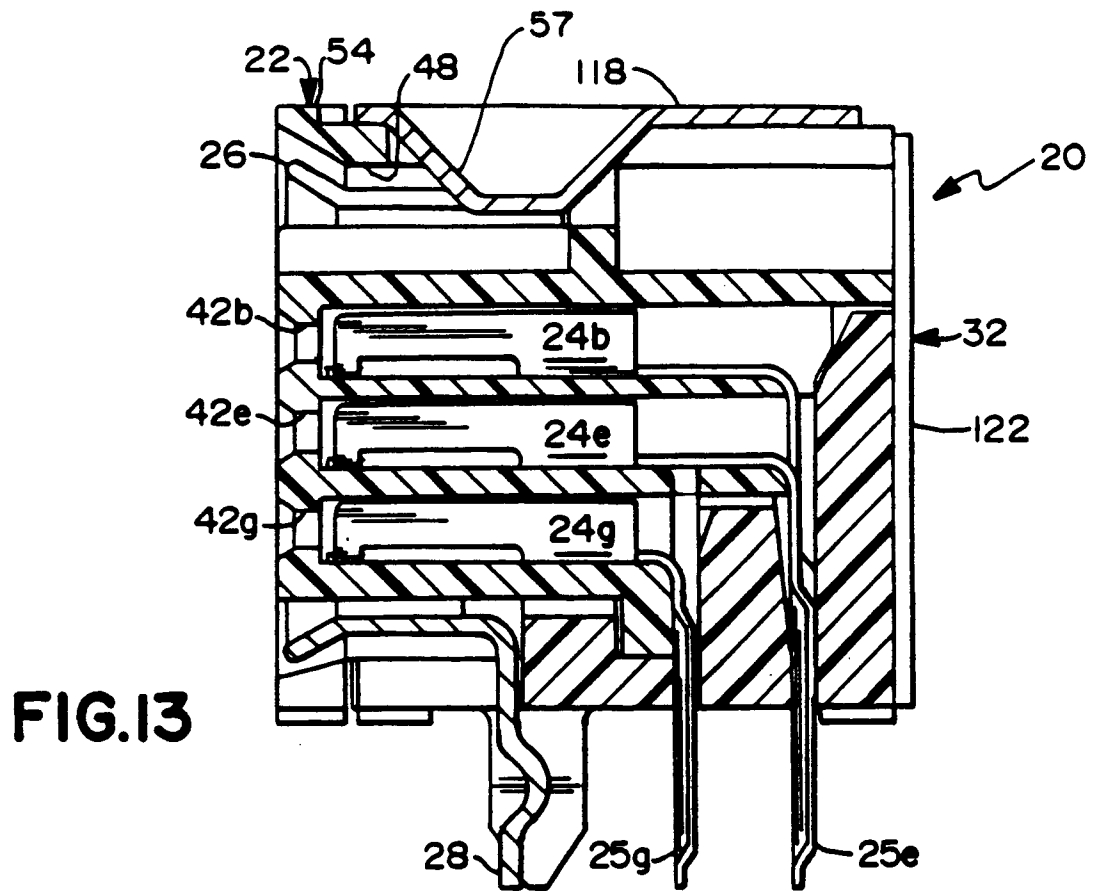


FIG. 14



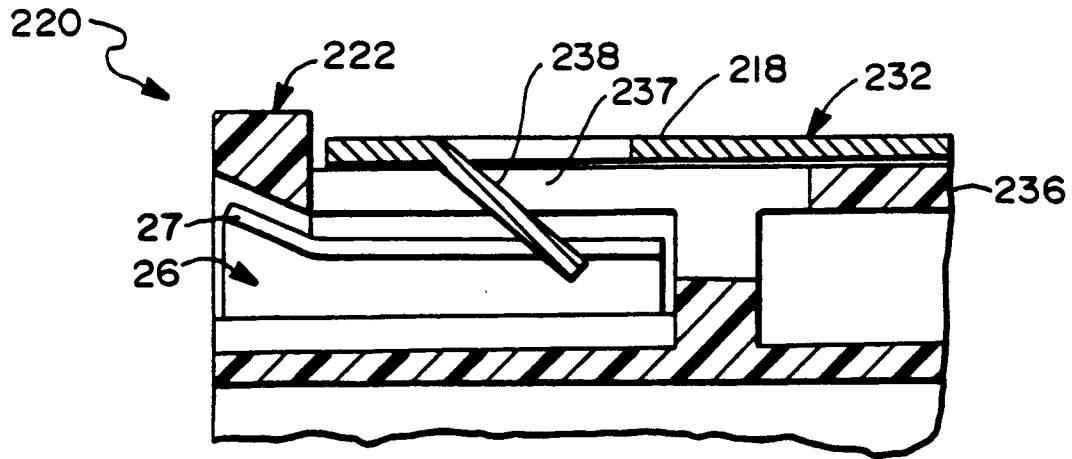


FIG.16

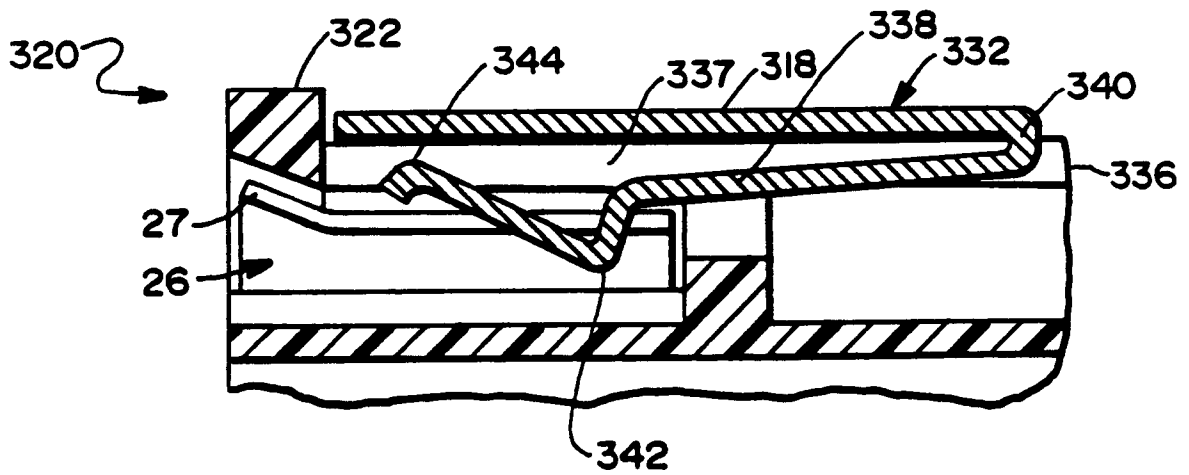


FIG.17

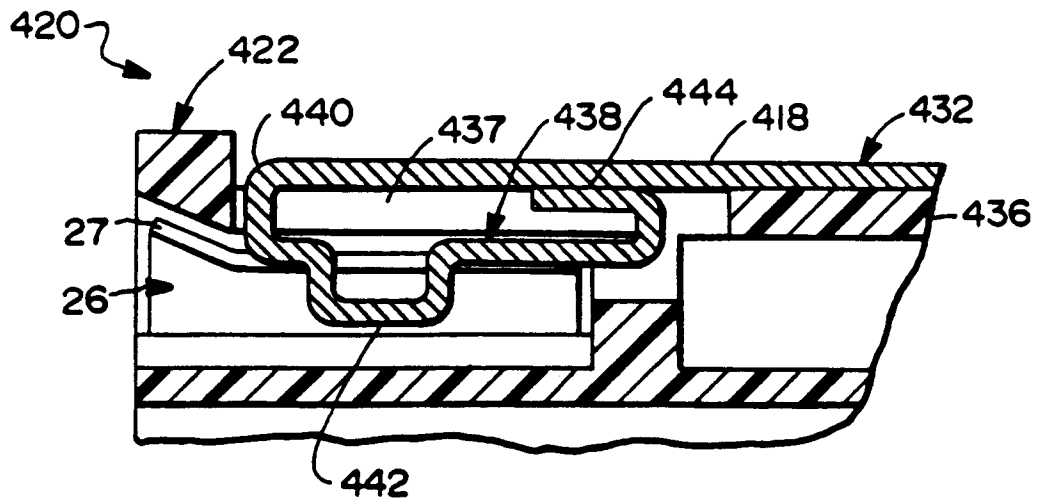


FIG. 18

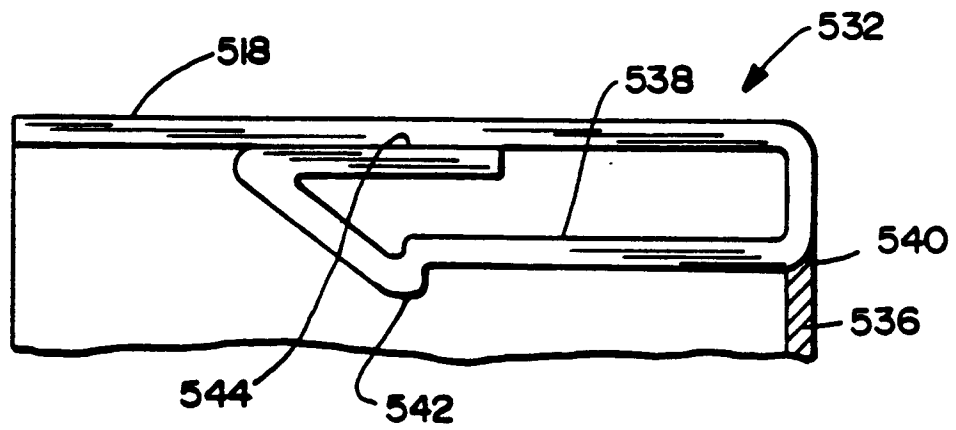


FIG. 19

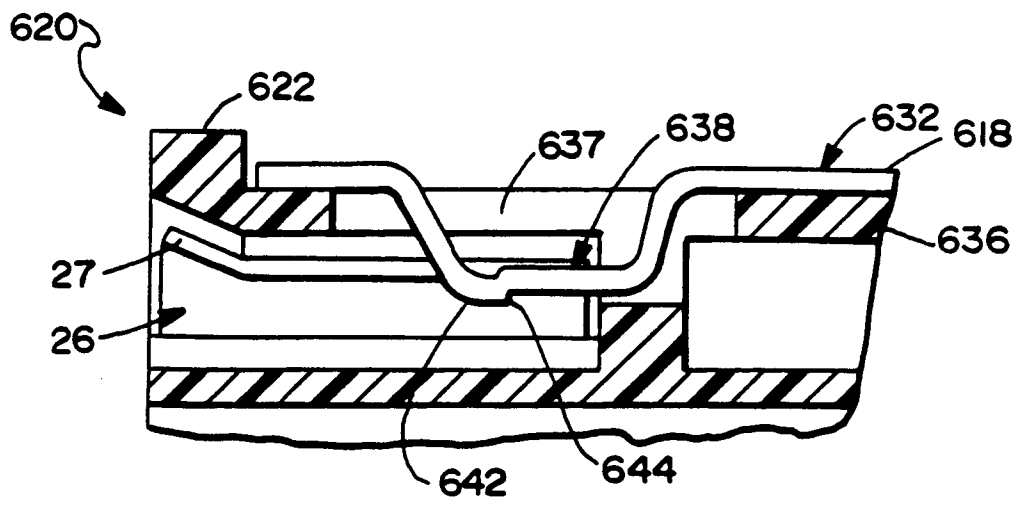


FIG. 21

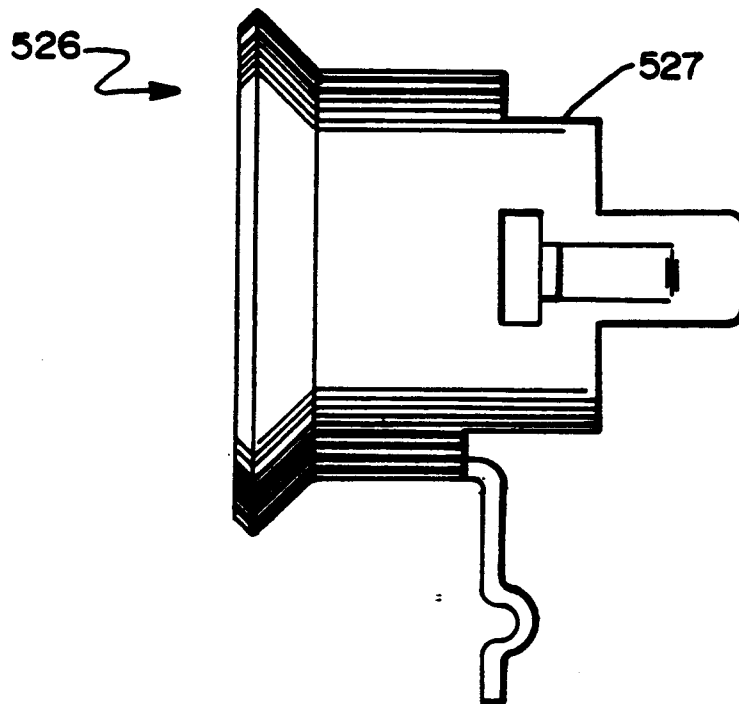


FIG. 20

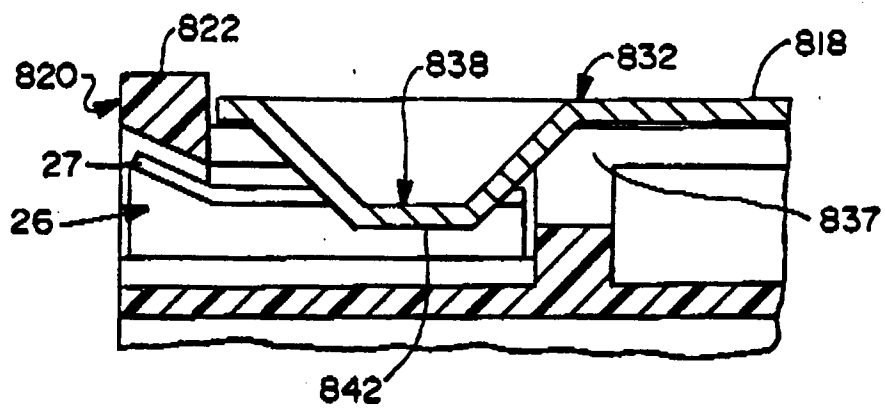


FIG.22

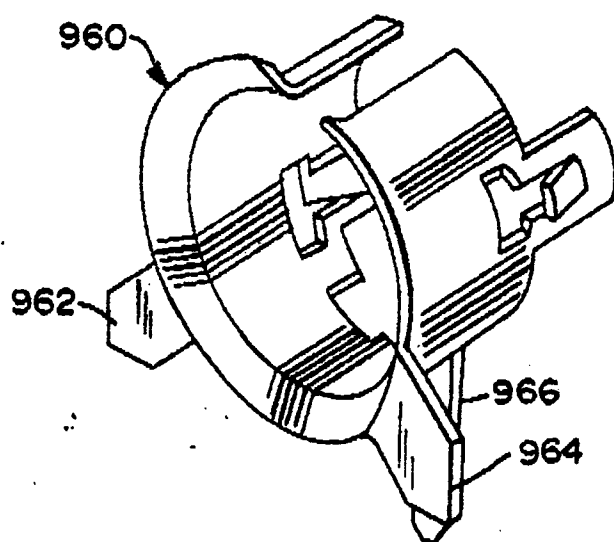


FIG.27

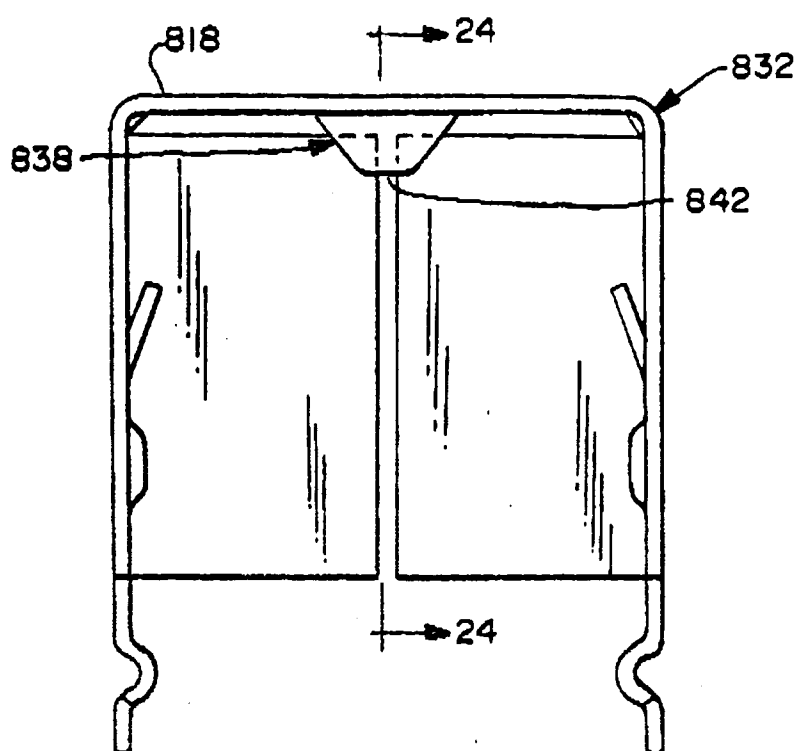


FIG. 23

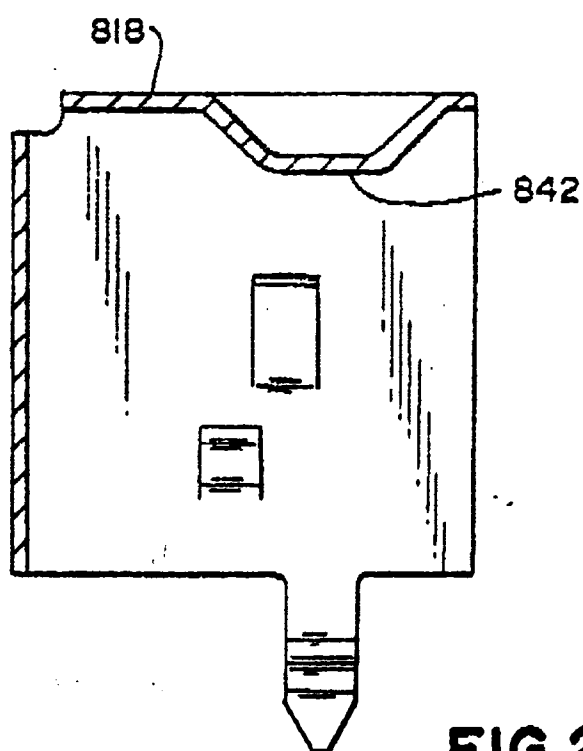


FIG. 24

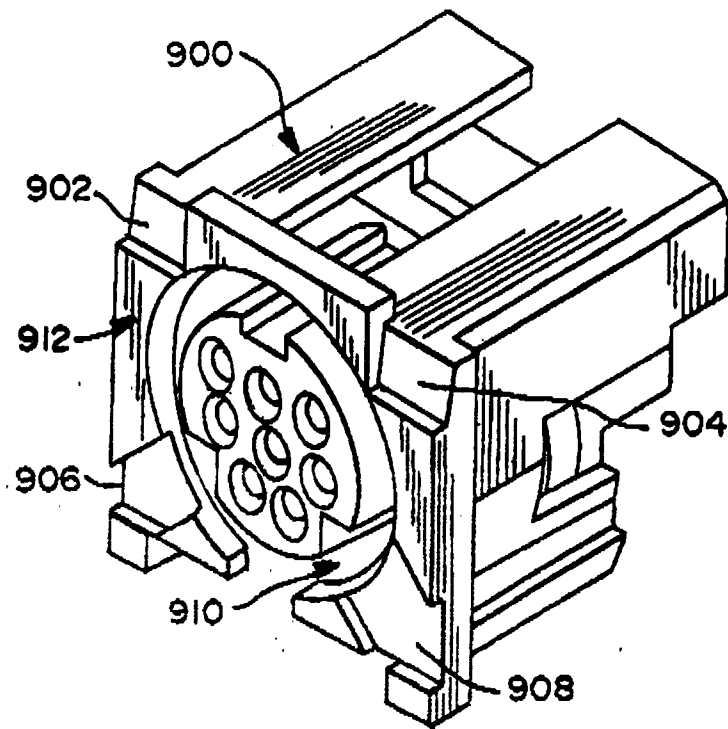


FIG. 25

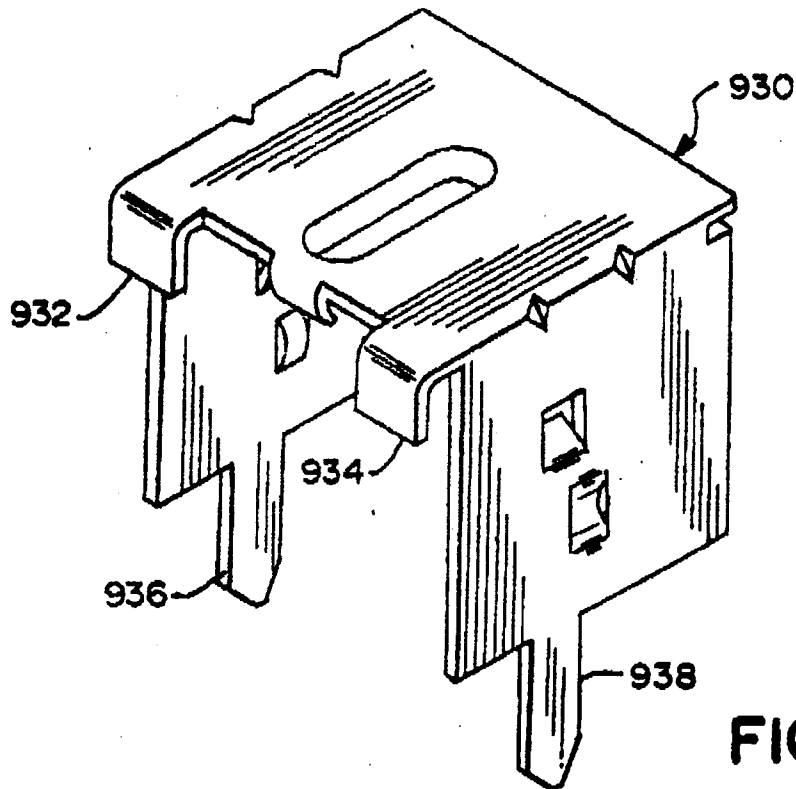


FIG. 26

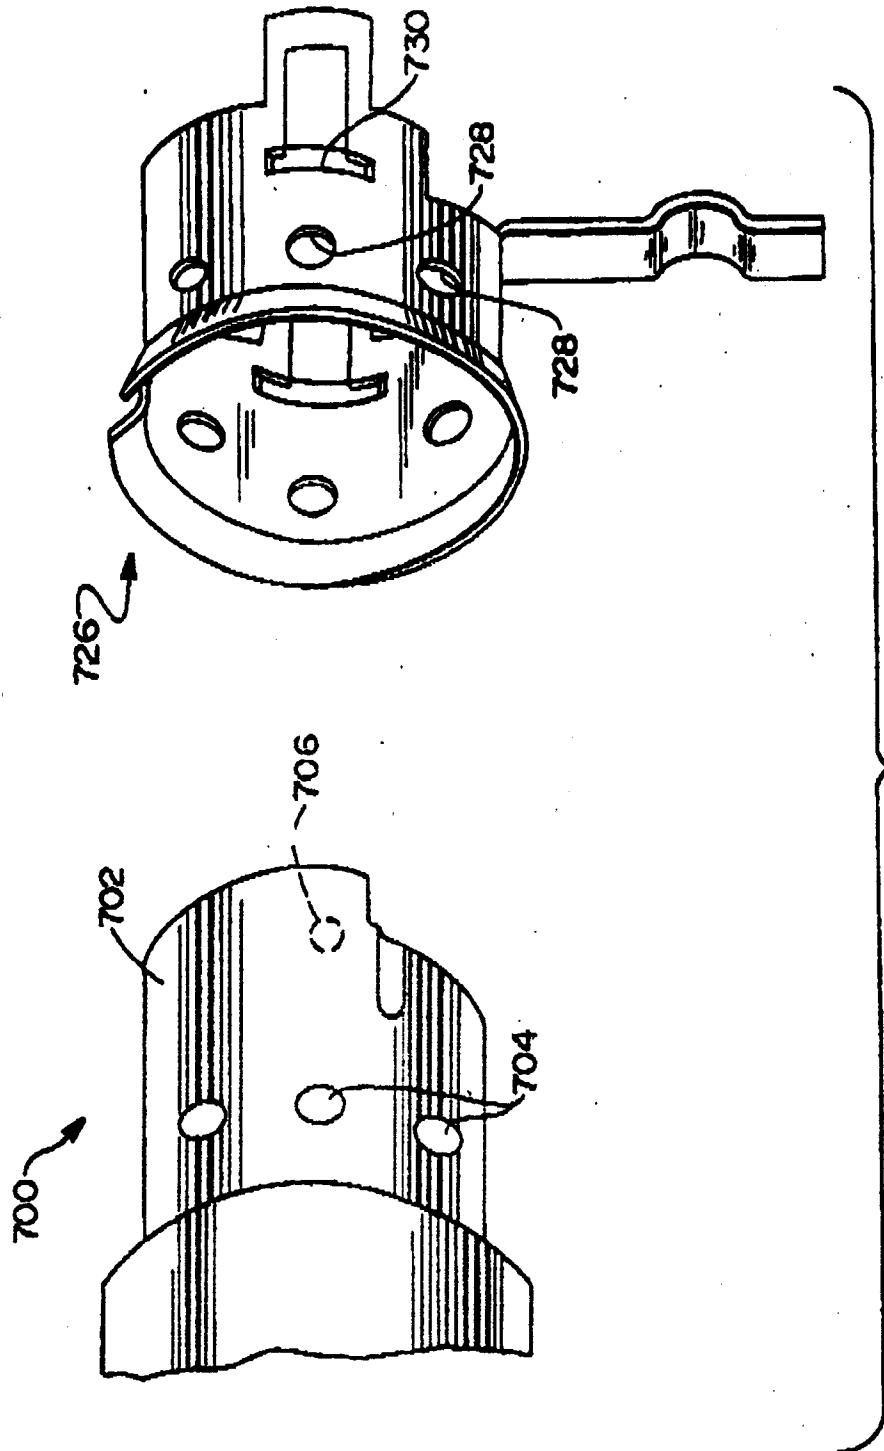


FIG. 28