




(72) POPP, RICHARD R., US
(71) PLAYSTAR, INC., US
(51) Int.Cl.⁷ A63B 9/00, A63B 69/00
(30) 1999/04/09 (09/289,040) US
(54) **MUR D'ESCALADE VERTICAL**
(54) **VERTICAL CLIMBING WALL**

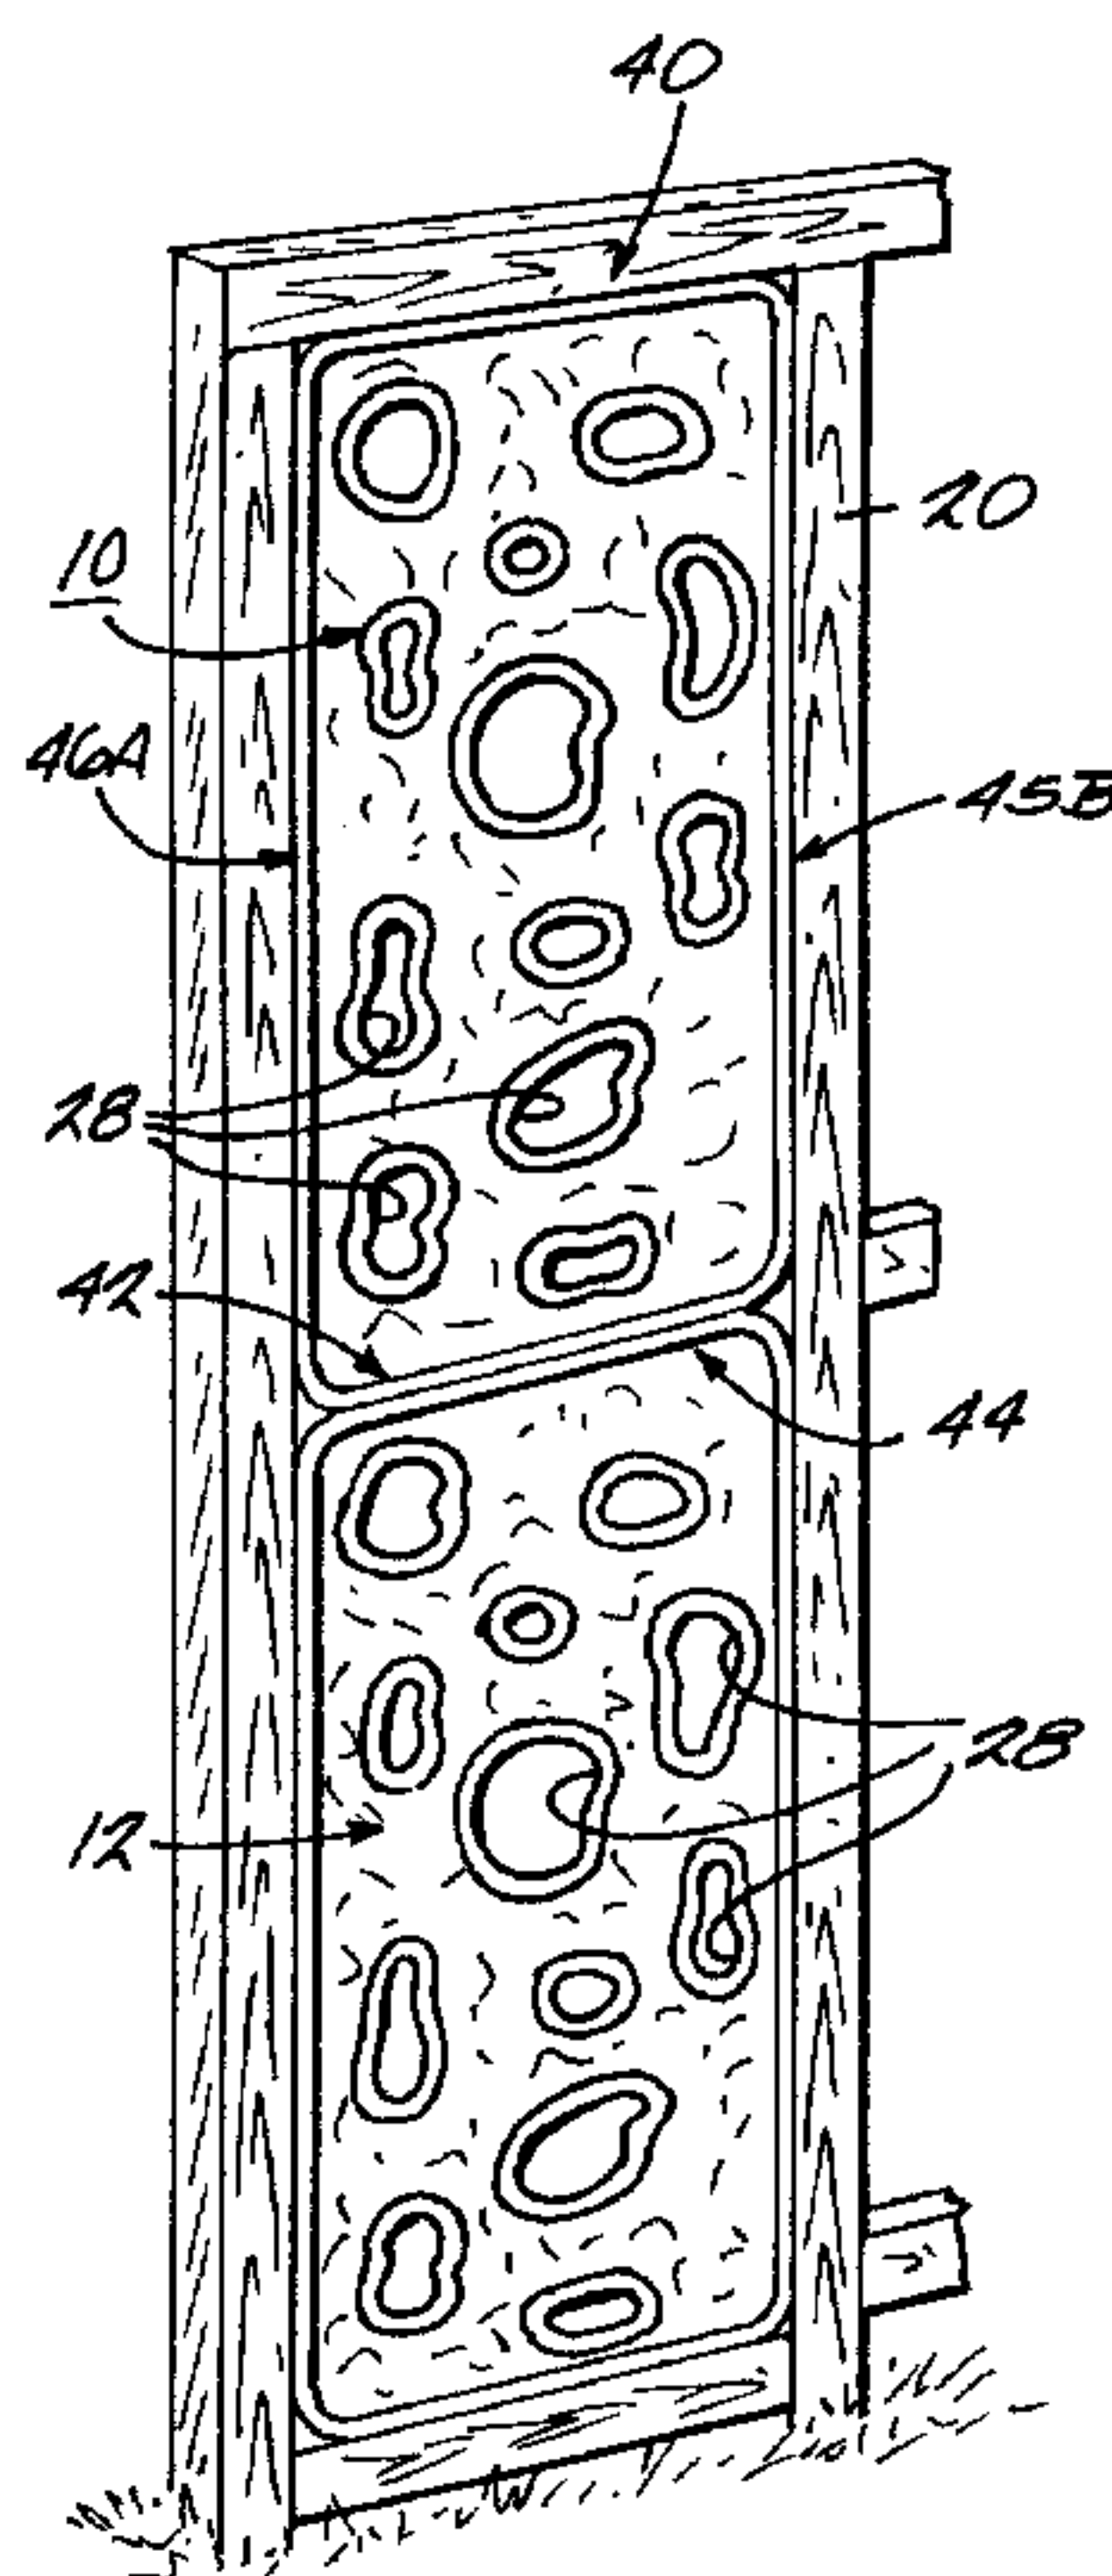

(57) The present invention relates to a climbing wall for simulating outdoor rock climbing activity. The climbing wall includes a front surface, a rear surface and an intermediate portion reaching between the front surface and the rear surface. The intermediate portion defines one or more openings which extend through the climbing wall. The openings are located in positions that allow a child to travel safely around on the climbing wall. The intermediate portion also includes a grip projecting outward from the front surface and preferably the rear surface of the climbing wall. The grips are designed to allow a child to maneuver safely around the climbing wall.

ABSTRACT

5 The present invention relates to a climbing wall
for simulating outdoor rock climbing activity. The
climbing wall includes a front surface, a rear surface
and an intermediate portion reaching between the front
surface and the rear surface. The intermediate portion
defines one or more openings which extend through the
climbing wall. The openings are located in positions
that allow a child to travel safely around on the
10 climbing wall. The intermediate portion also includes
a grip projecting outward from the front surface and
preferably the rear surface of the climbing wall. The
grips are designed to allow a child to maneuver safely
around the climbing wall.

15

VERTICAL CLIMBING WALL

BACKGROUND OF THE INVENTION

5 The invention relates to a climbing wall and a playstation incorporating the climbing wall, and particularly, to a climbing wall and a playstation incorporating the climbing wall that allows children to safely simulate rock climbing activity.

10 Climbing walls are normally used by experienced rock climbers to simulate outdoor rock climbing activity. The climbing walls provide rock climbing enthusiasts with the opportunity to simulate an outdoor climbing activity at an easily accessible location (e.g., an exercise facility or at home).

15 There are two conventional types of climbing walls that are used to simulate rock climbing activity. The first type of climbing wall includes a substantially vertical climbing surface that has a rock-like texture (see, e.g., United States Patent No. 5,254,058). The
20 shape, or texture, of the climbing wall determines the level of difficulty associated with maneuvering around on this type of climbing wall. The second type of climbing wall includes rock-like hand/foot holds that are attached to a normal (i.e., substantially smooth)
25 wall (see, e.g., United States Patent No. 5,125,877). There are two ways to adjust the level of difficulty associated with maneuvering about this type of climbing wall. First, the location of the hand/foot holds on the wall vary according to the level of skill of a
30 particular climber. Second, the shape of the individual hand/foot holds can be modified in order to make them easier, or more difficult, to grasp.

There are also climbing walls or structures that are specifically designed for climbing activity by
35 children (see, e.g., United States Patent Nos. 5,816,980, 5,634,687, 5,177,926 and D374,902). Conventional children's climbing walls typically include a variety of simply shaped geometric shapes and openings. The shapes and openings are arranged in a

-2-

variety of configurations that allow children to maneuver around the climbing wall or structure. One of the problems associated with prior art climbing walls/structures is that they provide an inadequate grip area for children. Due to the limited physical abilities of children (i.e., limited strength and small hand size), there is a safety risk associated with one or more children maneuvering around on existing climbing walls. Another problem associate with existing children's climbing walls/structures is that they provide a poor simulation of rock climbing activity.

SUMMARY OF THE INVENTION

Accordingly, the invention provides a climbing wall for simulating outdoor rock climbing activity. The climbing wall includes grips designed to allow a child to maneuver safely around on the climbing wall. The climbing wall also includes a front surface, a rear surface and at least one intermediate portion reaching between the front surface and the rear surface to define one or more openings which extend through the climbing wall. The openings are located in positions that allow a child to travel safely around on the climbing wall. The intermediate portion also includes a grip projecting outward from the front surface. In a preferred form of the invention, the grip also projects outward from the rear surface of the climbing wall.

The grips also reach around the circumference of one or more openings in the climbing wall, although the grips could reach around one or more portions of the circumferences of one or more openings.

In another form of the invention, the front and rear surfaces of the climbing wall are textured to have a rock-like appearance, and each of the openings has an irregular shape in order to facilitate the simulation of outdoor rock climbing activity.

-3-

The invention also provides a playstation including a frame. The climbing wall is attached to a support member on the frame.

5 It is an advantage of the invention to provide a playstation and a climbing wall for the playstation, the climbing wall having a simulated rock-like appearance.

10 It is another advantage of the invention to provide a climbing wall for children that includes grips which allow a child to maneuver safely around the climbing wall.

It is yet another advantage of the invention to provide a climbing wall for children that allows children to climb both sides of the wall.

15 It is still another advantage of the invention to provide a children's climbing wall that is readily attached to a playstation as well as other similar climbing walls for use as part of a climbing network.

20 Other features and advantages of the invention are set forth in the following drawings, detailed description and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Fig. 1 is a perspective view of a pair of climbing walls mounted one on top of the other and attached to a support structure of a playstation.

Fig. 2 is an enlarged plan view of a portion of one of the climbing walls of Fig. 1.

30 Fig. 3 is a section view of the climbing wall of Fig. 2 taken along line 3-3.

Fig. 4 is a section view of the climbing wall of Fig. 2 taken along line 4-4.

35 Fig. 5 is a section view of a portion of a climbing wall of the present invention where only the front surface is textured to have a rock-like appearance.

Before one embodiment of the invention is explained in detail, it is to be understood that the

-4-

invention is not limited in its application to the details of the construction and the arrangements of the components set forth in the following description or illustrated in the drawings. The invention is capable of other embodiments and of being practiced or being carried out in various ways. Also, it has to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 illustrates the climbing wall 10 of the invention. The climbing wall 10 is shown mounted on top of a second climbing wall 12. Both the climbing wall 10 and the climbing wall 12 are attached to a support structure 20. The climbing wall 10 is identical to the climbing wall 12. Accordingly, only the climbing wall 10 will be described in detail. Like parts are identified using like reference numerals. The support structure 20 is typically part of a play station, or some other structure that is sturdy enough to secure one or more climbing walls.

As shown most clearly in Figs. 2 and 4, the climbing wall of the present invention comprises a front surface 22, a rear surface 24 and an intermediate portion 26 extending between the front surface 22 and the rear surface 24. The intermediate portion 26 defines a plurality of openings 28 that extend through the climbing wall 10. In the preferred embodiment, the openings 28 are each a different size and shape, are irregularly shaped and are irregularly spaced. In other embodiments (not shown), the openings 28 may be the same size or shape, may be symmetrically shaped and may be regularly spaced in relation to each other. The intermediate portion 26 further includes a grip 30 projecting outward from the front surface 22 and preferably projecting outward from the rear surface 24.

-5-

As shown in Fig. 1, the climbing wall 10 also includes a top side 40 and a bottom side 42. The climbing wall 10 is designed so that, when properly mounted in the playstation, the top side 40 and the bottom side 42 mate with or abut snugly against the bottom side 42 or top side 40, respectively, of the adjacent climbing wall 10.

The climbing wall also includes lateral sides 46A, 46B. The lateral sides include a flange 48 (see Figs. 2 and 3) for mounting the climbing wall 10 to the support structure 20.

As shown in Fig. 3, the flange 48 includes a plurality of through-bores 50 (only one is shown) spaced along the flange. While other means of connecting the flange 48 to the support structure 20 are suitable, in the preferred embodiment, a wood screw or bolt extends through the bore 50 and into the support structure 20.

As shown most clearly in Figs. 2-4, the front surface 22 is preferably textured to have rock-like appearance, although the back surface 24 could also be textured (a comparison is shown in Figs. 4 and 5). The rock-like appearance of the front surface 22 and the back surface 24 facilitate the impression that children using the climbing wall are actually rock climbing. The simulation of outdoor rock climbing activity is also facilitated by further including additional irregularly-shaped openings (see Fig. 1). The openings 28 are located on the climbing wall in such a manner as to allow children to safely maneuver around on the climbing wall 10.

As shown in Figs. 3-5, the grip 30 preferably extends outward from both the front surface 22 and the rear surface 24. Moreover, and as clearly shown in Fig. 2, the grip 30 extends continuously around the entire opening 28. In other embodiments (not shown) the grip 30 may only extend around portions of the opening 28. The grip also includes a thickness (shown

-6-

as dimension "T" in Figs. 4 and 5), where the largest possible dimension of the thickness is less than 1.6 inches. This dimension corresponds to specification ASTM designation F 1148-97a.

- 5 Various features and advantages of the present invention are set forth in the following claims.

-7-

What is claimed is:

1. A climbing wall comprising:
a front surface;
5 a rear surface; and
an intermediate portion extending between the
front surface and the rear surface to define an opening
extending through the climbing wall, the intermediate
portion having a grip projecting outward from the front
10 surface.
2. The climbing wall of claim 1 wherein the
climbing wall is adapted to be used in conjunction with
a playstation.
15
3. The climbing wall of claim 1 further
comprising a top side and a bottom side, the top side
being adapted to mate with the bottom side on another
climbing wall and the bottom side being adapted to mate
20 with the top side of an additional climbing wall.
4. The climbing wall of claim 1 further
comprising a lateral side, the lateral side having a
flange for mounting the climbing wall.
25
5. The climbing wall of claim 1 wherein the
front surface is textured to have a rock-like
appearance.
- 30 6. The climbing wall of claim 1 wherein the
opening has an irregular shape.
7. The climbing wall of claim 1 further
comprising at least one additional opening extending
35 through the climbing wall.

-8-

8. The climbing wall of claim 1 wherein the grip extends outward from the front surface around the entire opening.

5 9. The climbing wall of claim 1 wherein the grip has a thickness and wherein the thickness is less than 1.6 inches.

10 10. The climbing wall of claim 1 wherein the grip is integral with the climbing wall.

11. The climbing wall of claim 1 wherein the grip extends outward from the rear surface.

-9-

12. A playstation comprising:
a frame having a support member; and
a climbing wall secured to the support
member, the climbing wall including
5 a front surface,
a rear surface, and
an intermediate portion extending
between the front surface and the rear surface to
define an opening extending through the climbing
10 wall, the intermediate portion having a grip
projecting outward from the front surface and the
rear surface.

13. The playstation of claim 12 wherein the
15 climbing wall further includes a top side and a bottom
side, the top side being adapted to mate with the
bottom side on another climbing wall and the bottom
side being adapted to mate with the top side of a third
climbing wall.

-10-

14. The playstation of claim 12 wherein the climbing wall further includes a lateral side extending between the front surface and the rear surface, the lateral side having a flange for mounting the climbing wall to the support member.

15. The playstation of claim 12 wherein the front surface and the rear surface are textured to have a rock-like appearance.

16. The playstation of claim 12 wherein the opening has an irregular shape.

17. The playstation of claim 12 further comprising at least one additional opening extending through the climbing wall.

18. The playstation of claim 12 wherein the grip has a thickness and wherein the thickness is less than 1.6 inches.

19. The playstation of claim 12 wherein the grip is integral with the climbing wall.

20. The playstation of claim 12 wherein the grip extends outward from the rear surface.

21. The playstation of claim 12 wherein the grip extends outward from the front surface around the entire opening and extends outward from the rear surface around the entire opening.

-11-

22. A climbing wall comprising:

a front surface textured to have a rock-like appearance;

5 a rear surface textured to have a rock-like appearance;

intermediate portions extending between the front surface and the rear surface to define irregularly shaped openings extending through the climbing wall, each of the intermediate portions having a grip integral with the climbing wall, the grip projecting outward from the front surface and the rear surface, the grip having a thickness and wherein the thickness is less than 1.6 inches;



10

a continuous peripheral edge connecting the front surface to the rear surface and having a top side a bottom side, the bottom side being adapted to mate with the top side of another climbing wall and a lateral side extending between the front surface and the back surface, the lateral side having a flange for mounting the climbing wall to a support.

15

20

Smart & Biggar
Ottawa, Canada
Patent Agents

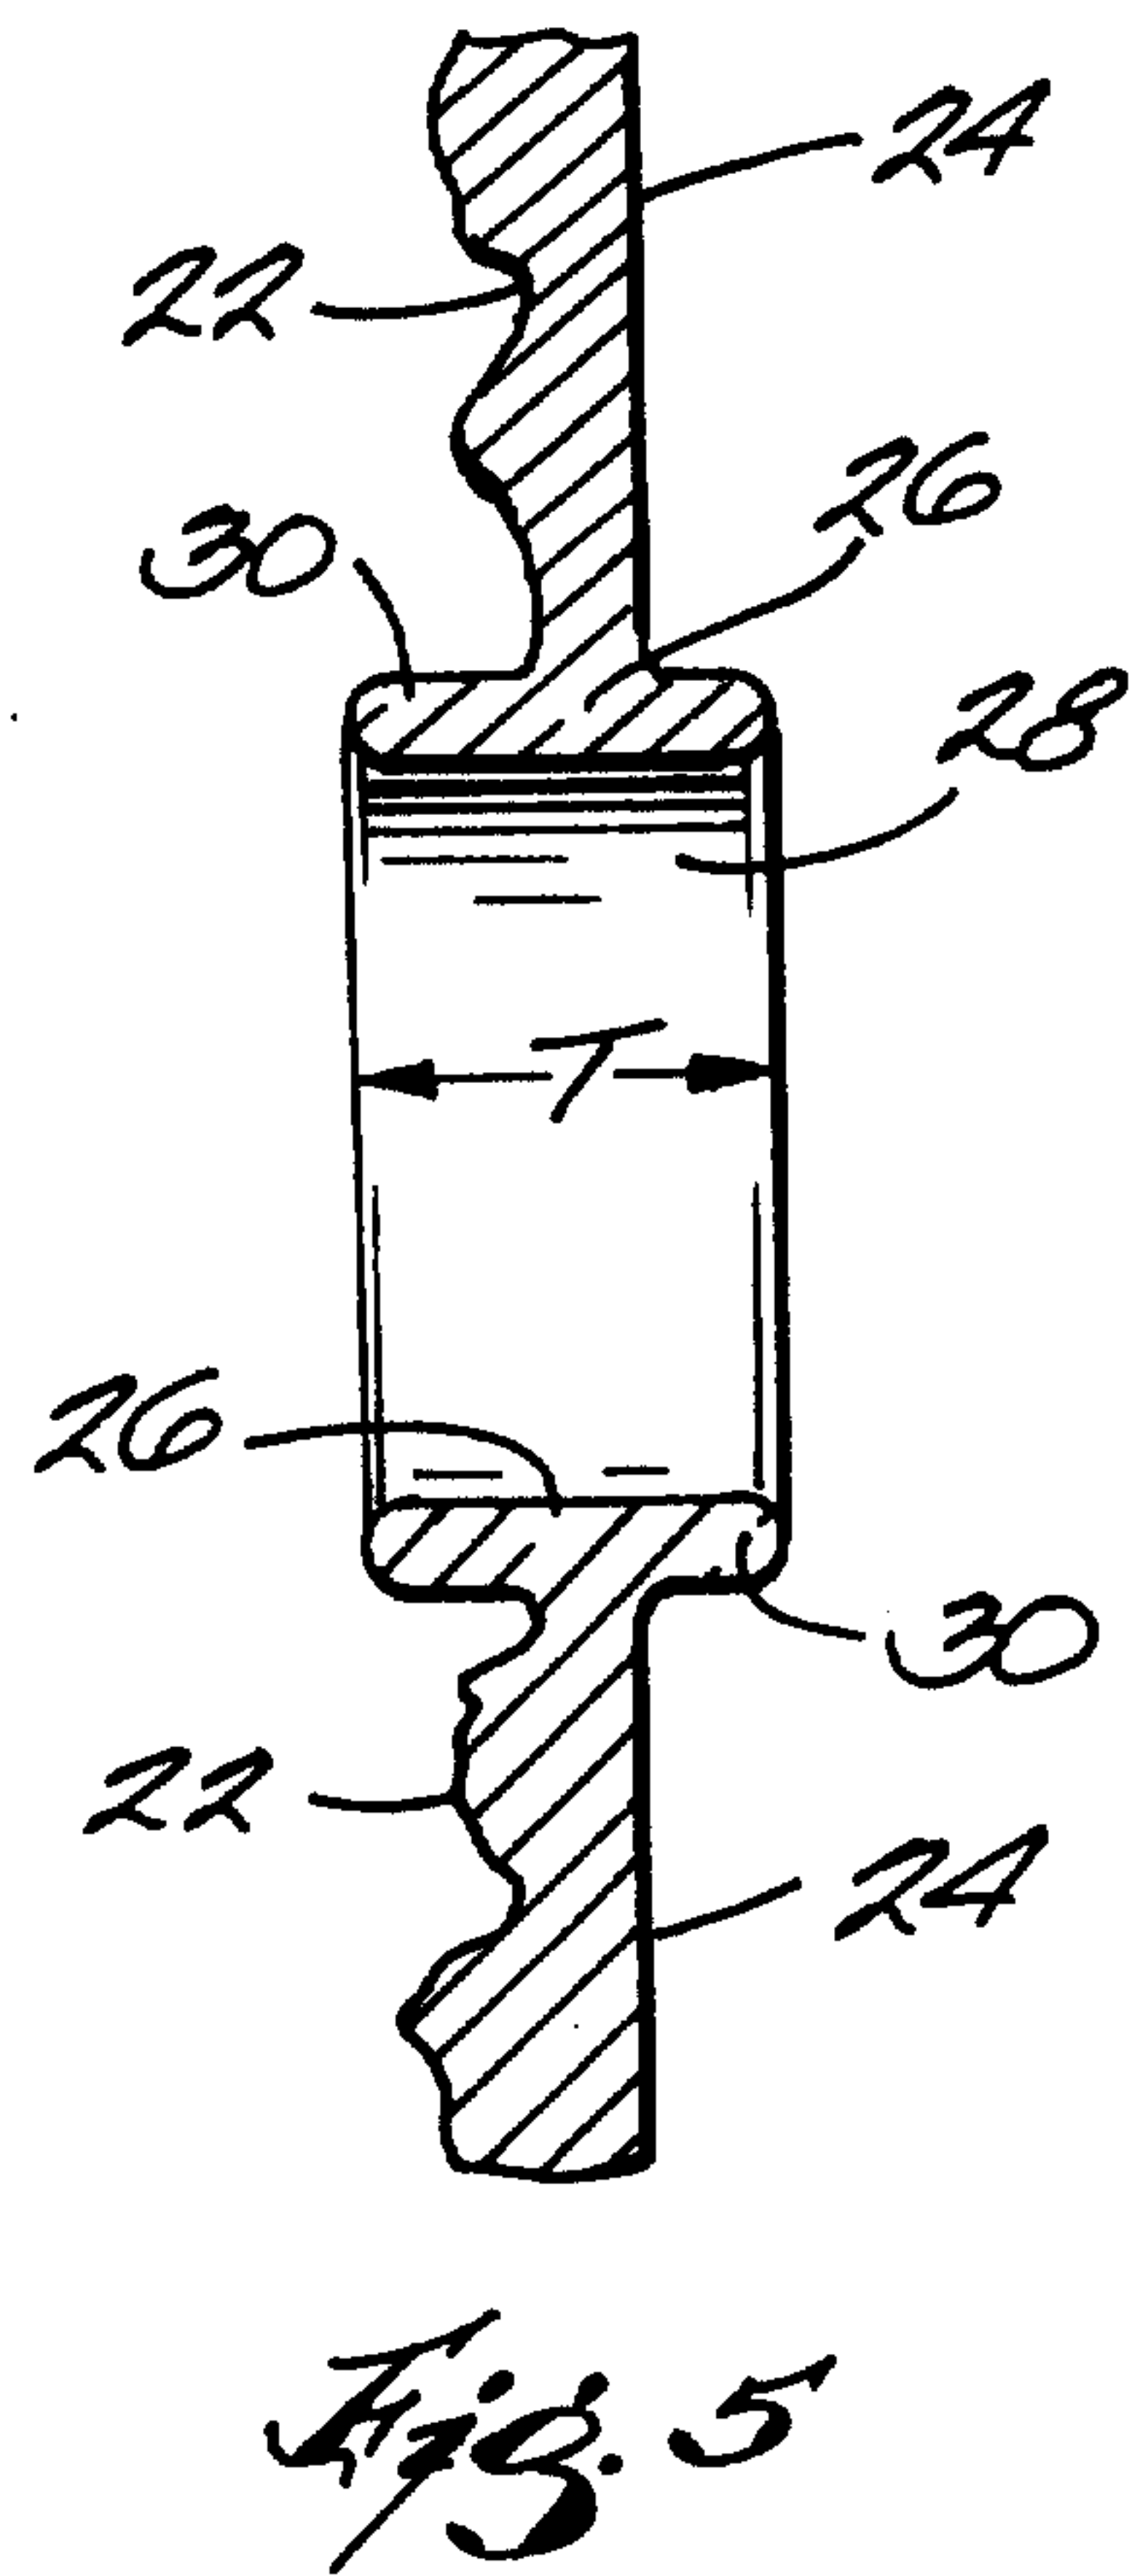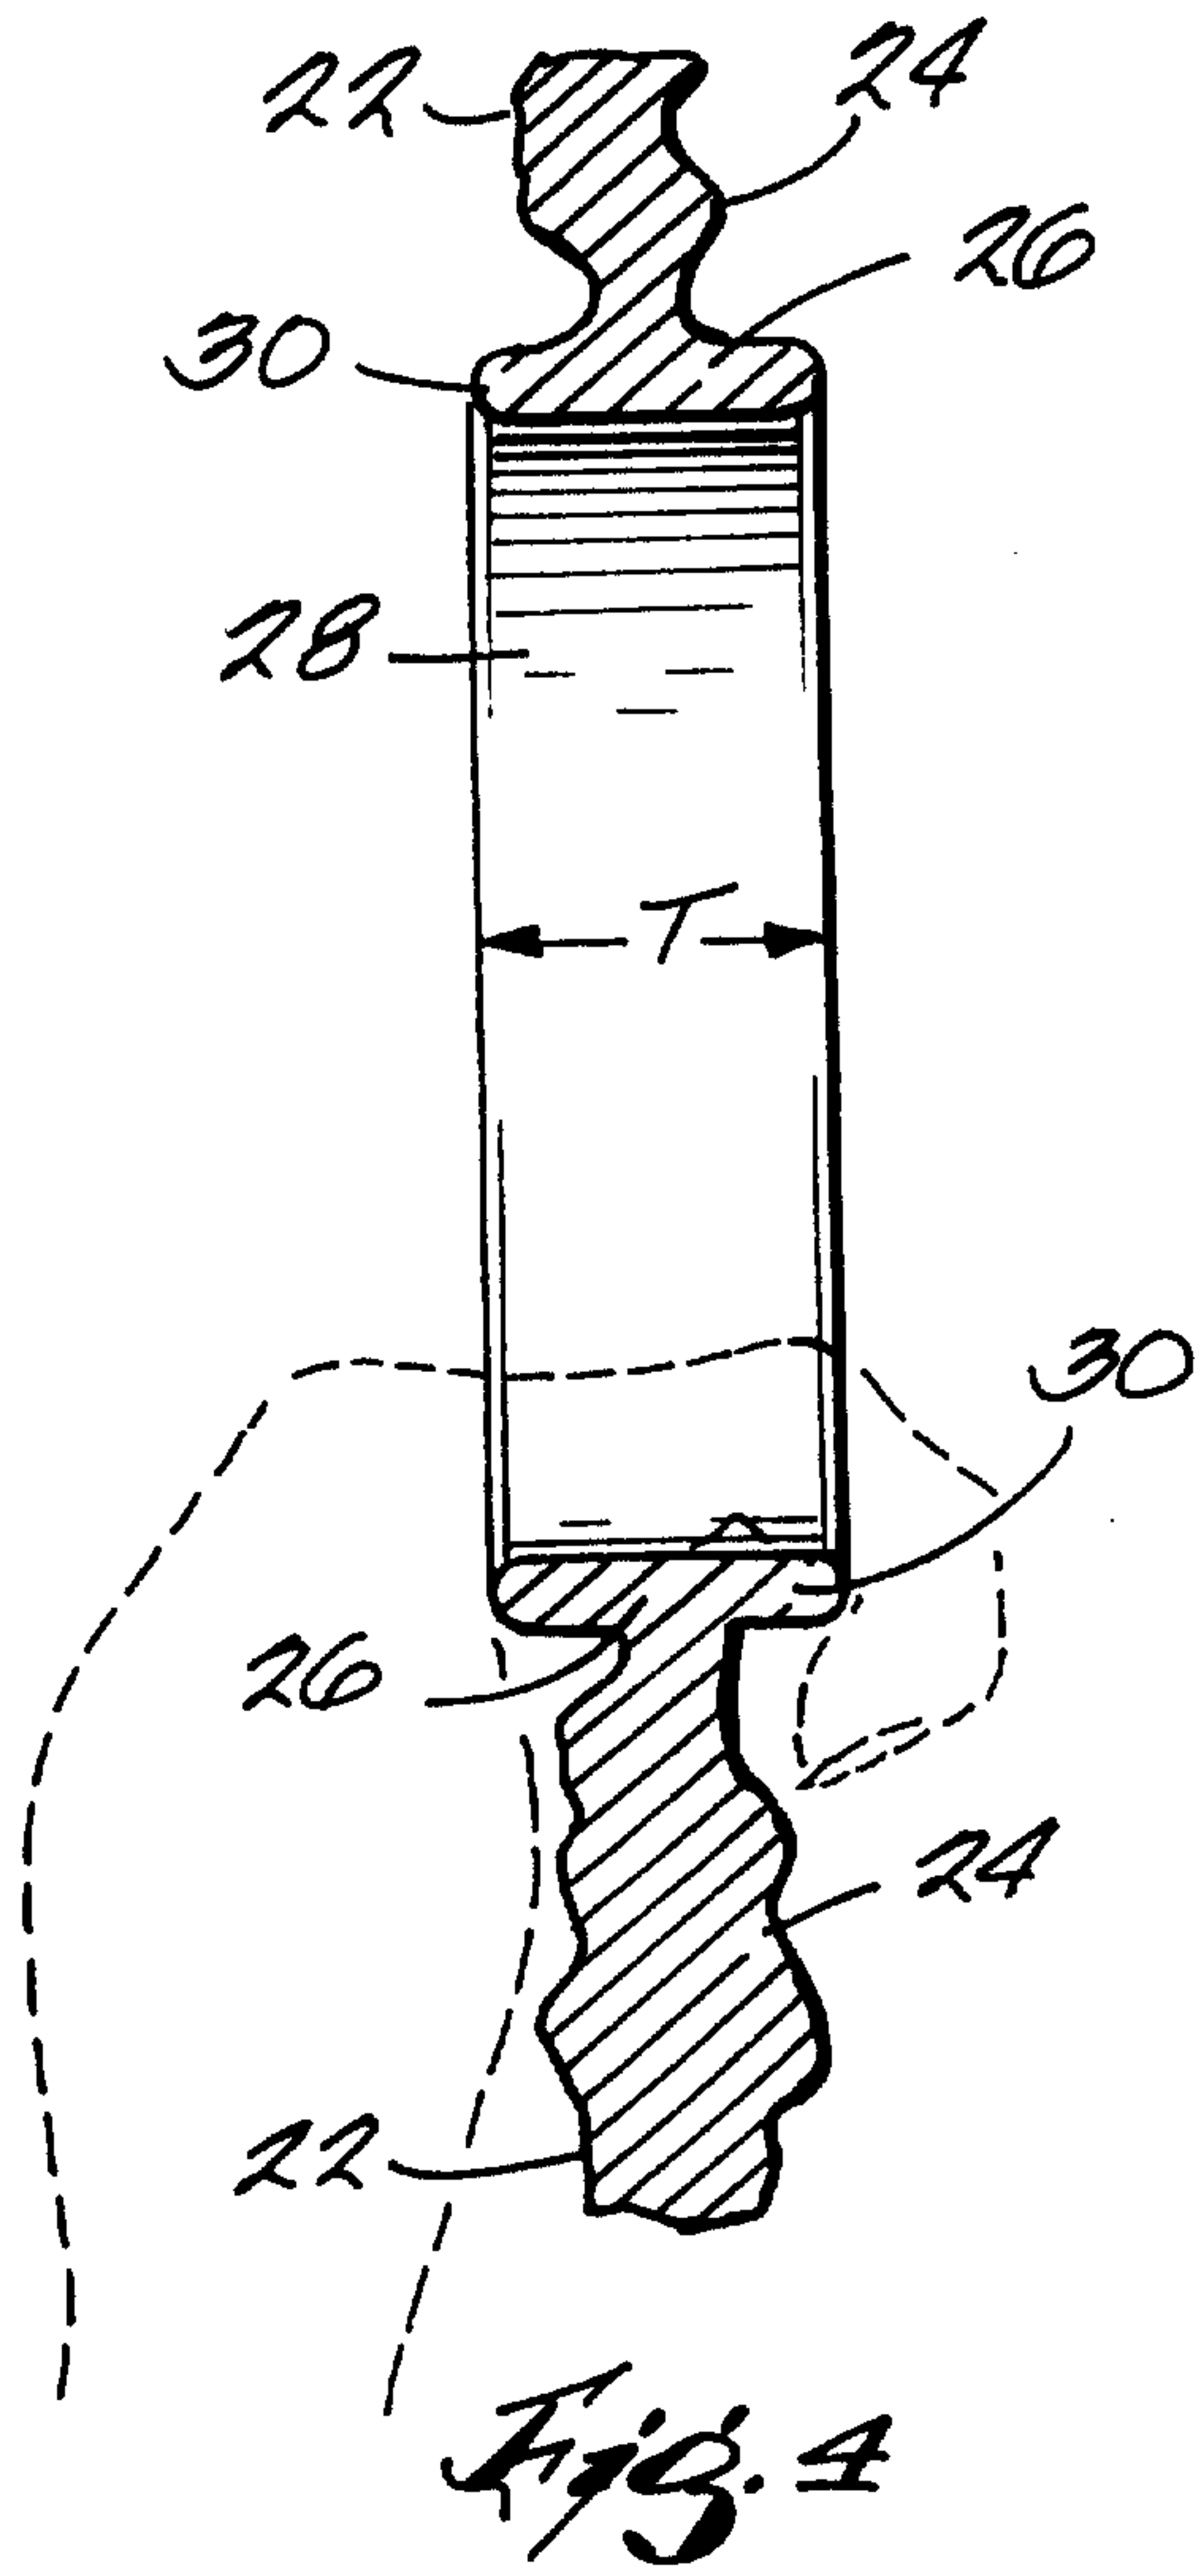

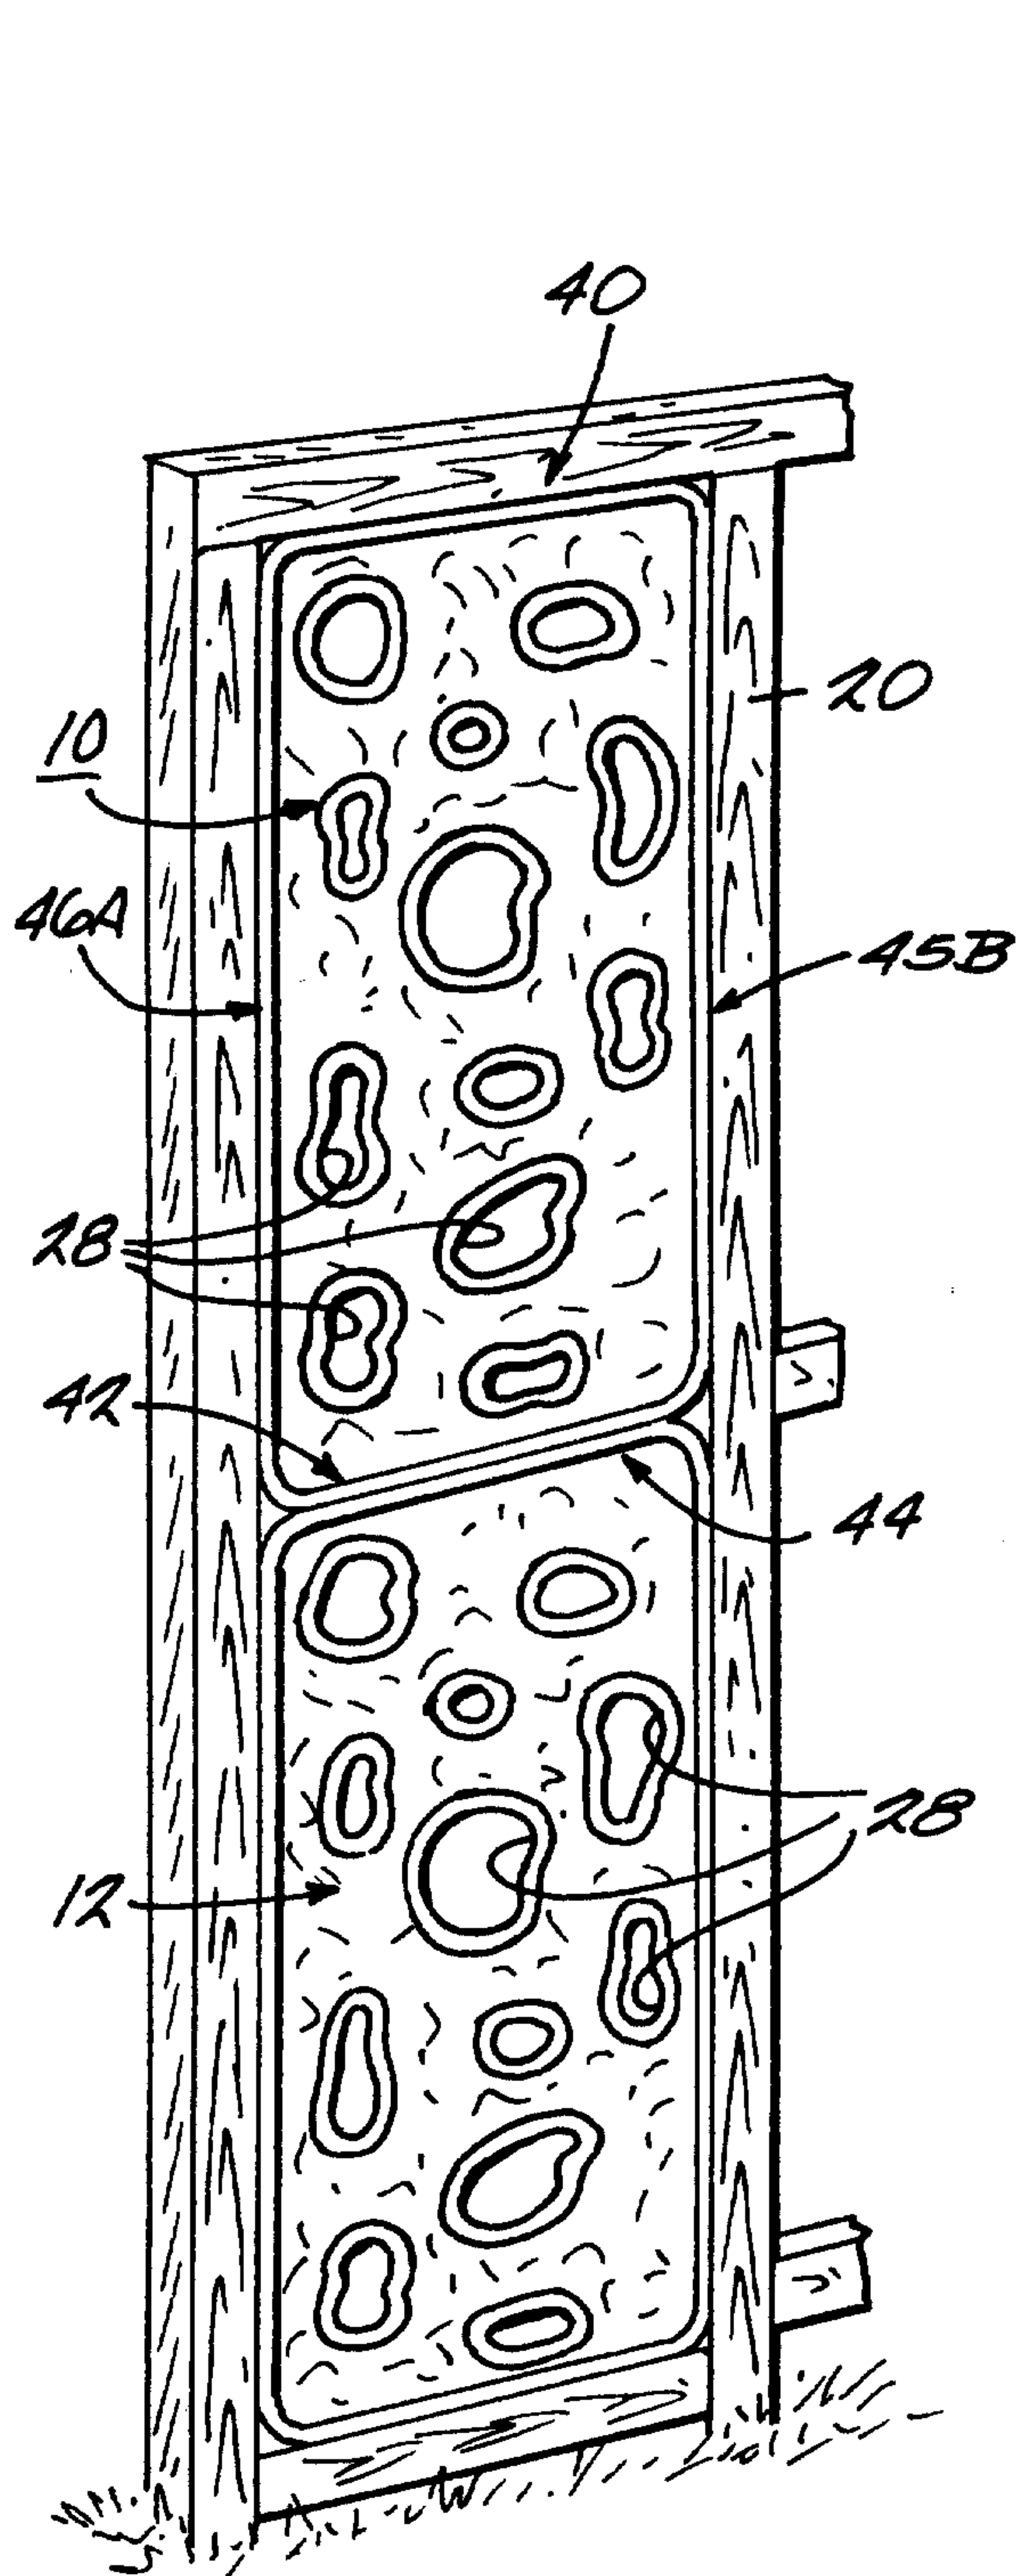


Fig. 1

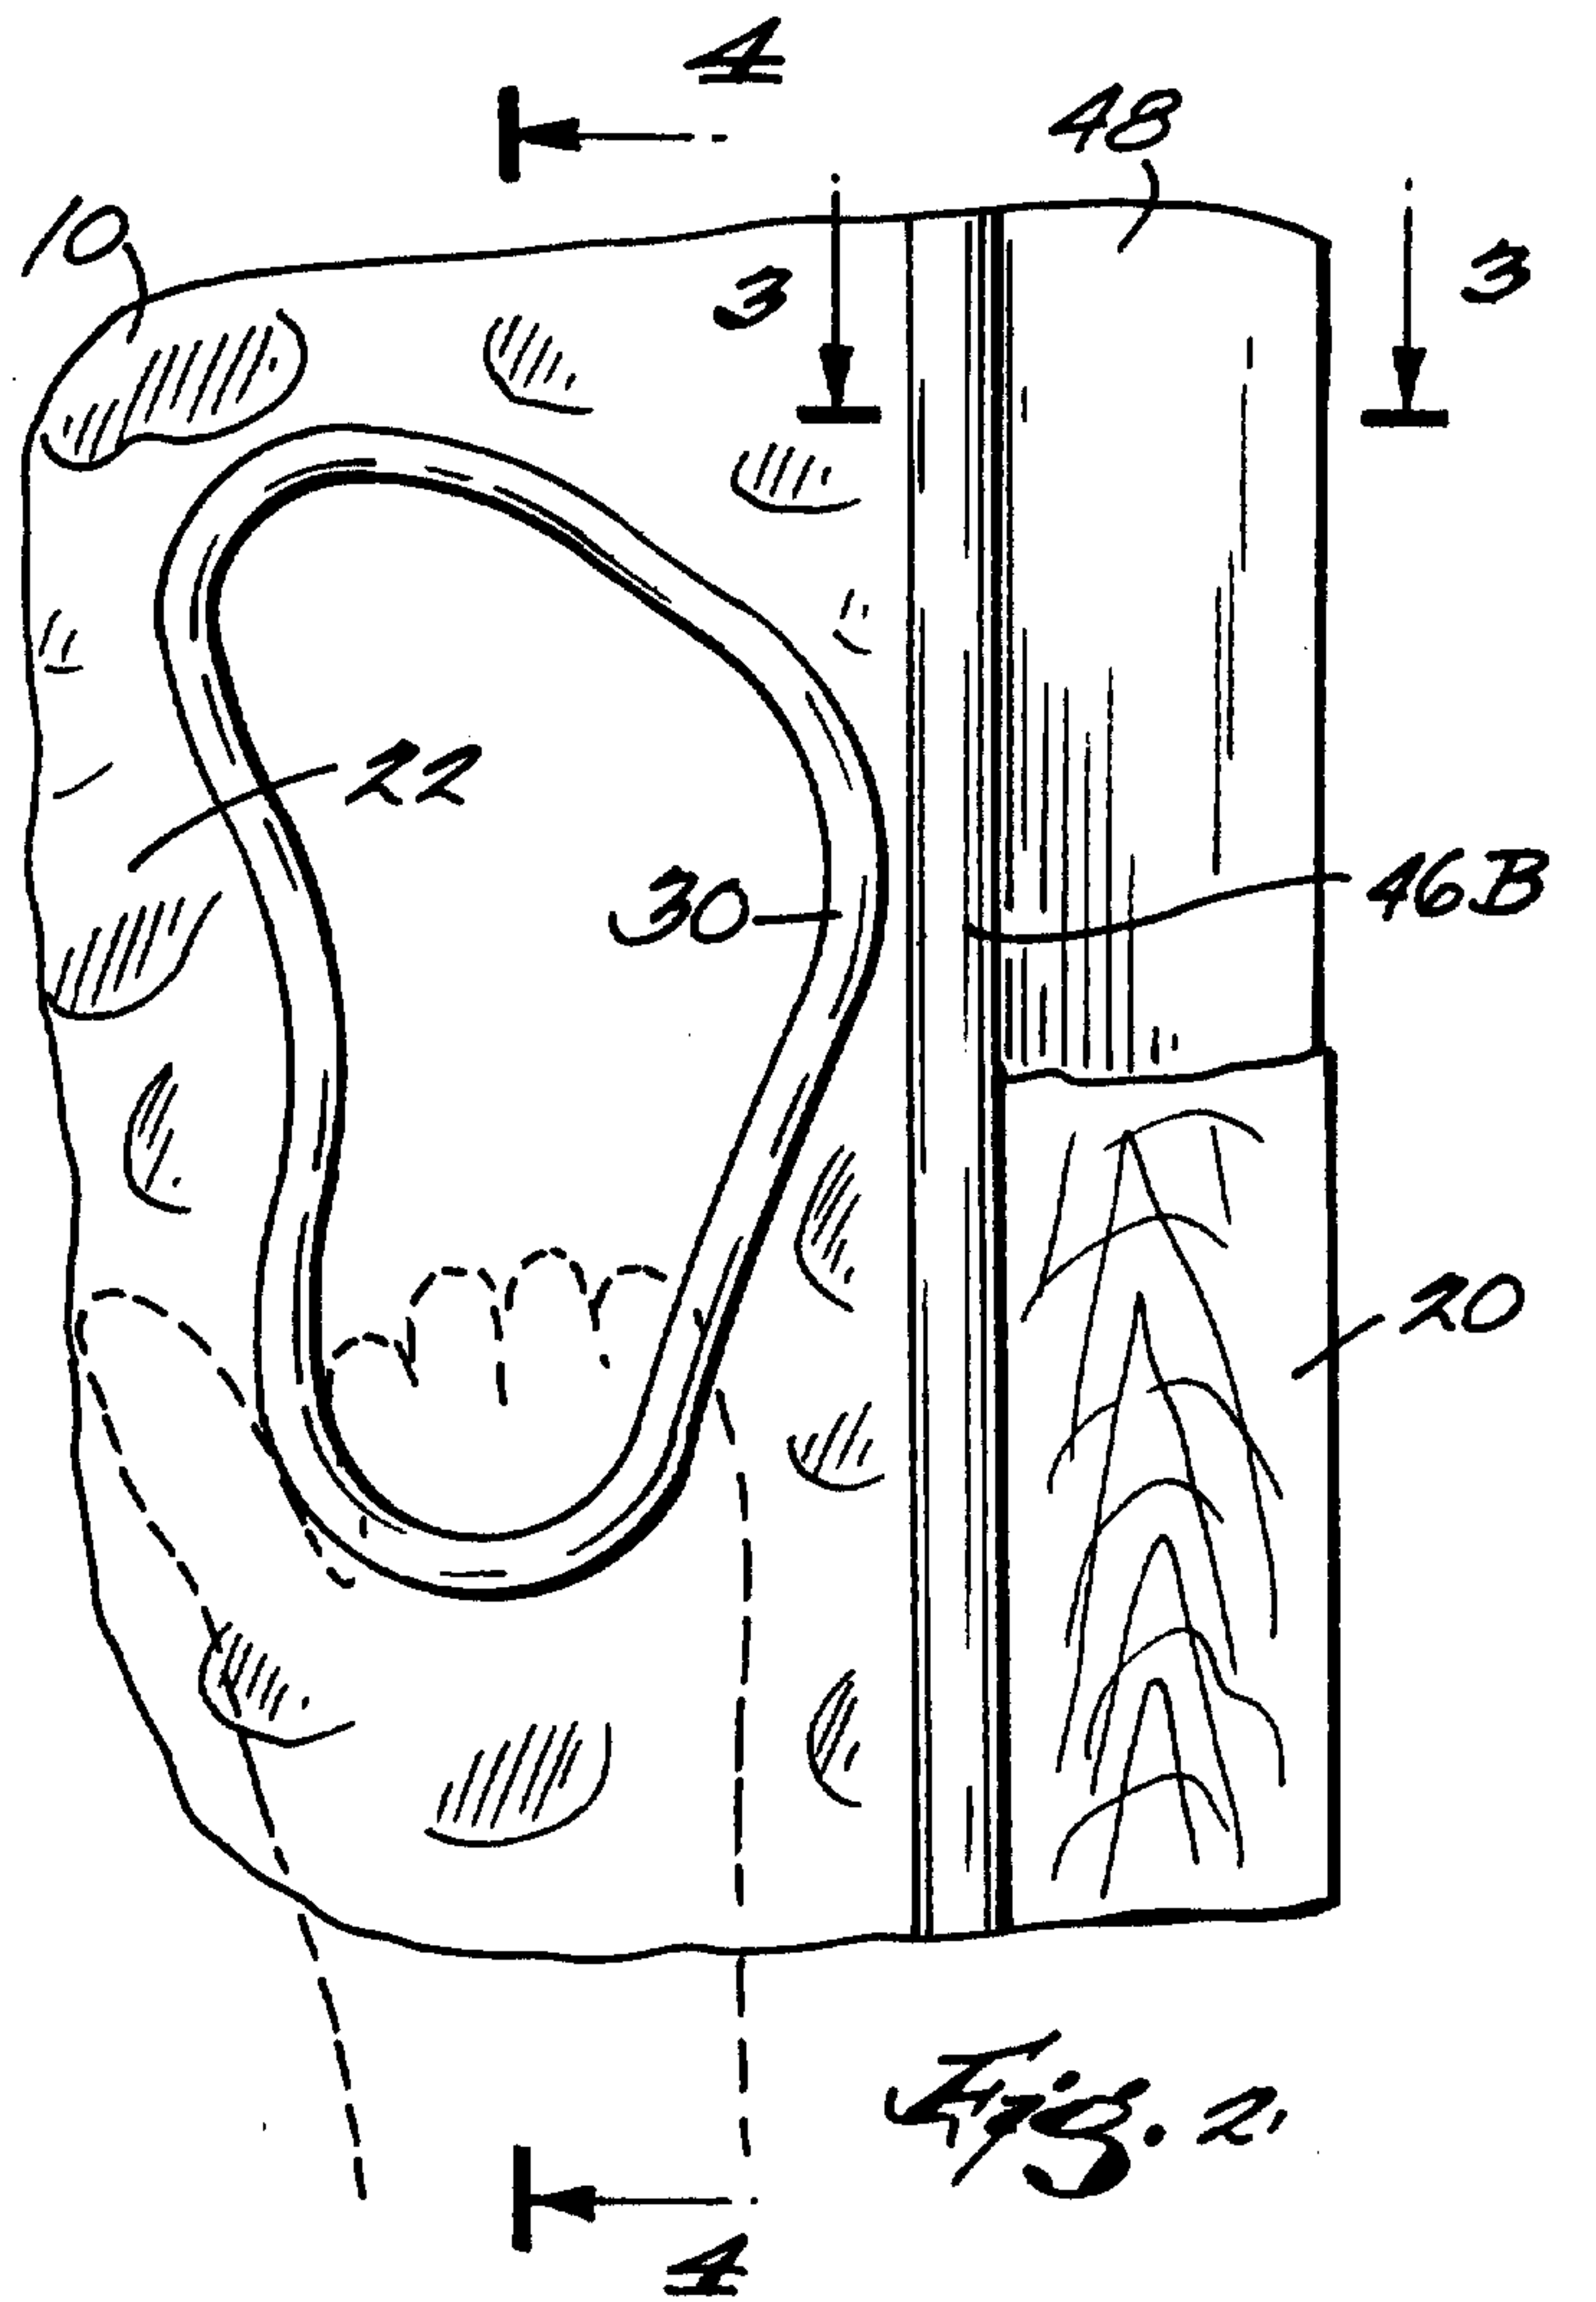


Fig. 2

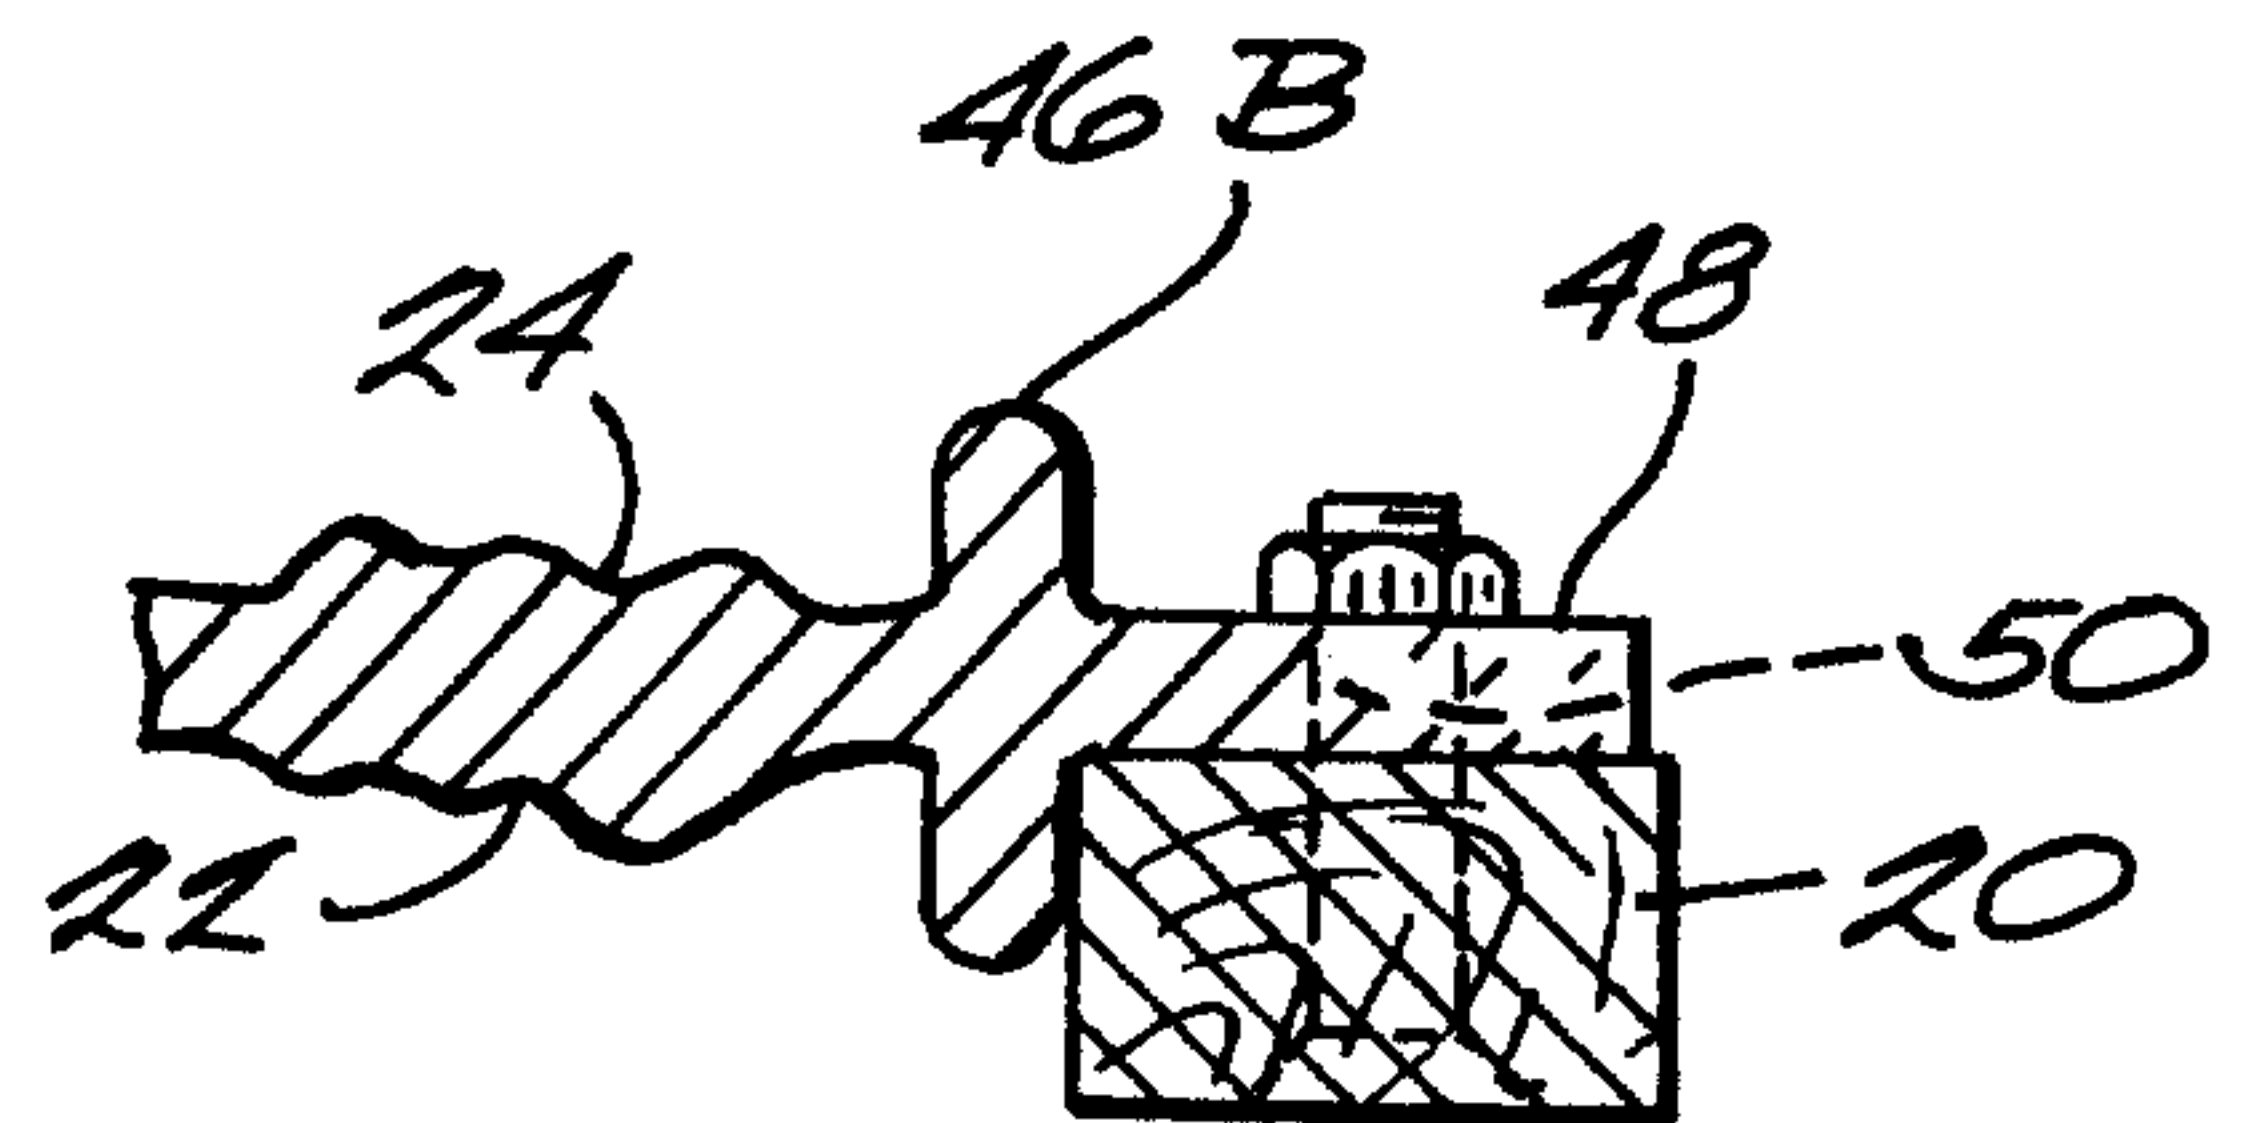


Fig. 3

