




(22) Date de dépôt/Filing Date: 1999/02/02
(41) Mise à la disp. pub./Open to Public Insp.: 1999/08/03
(45) Date de délivrance/Issue Date: 2007/07/31
(30) Priorité/Priority: 1998/02/03 (US09/017,970)

(51) Cl.Int./Int.Cl. *B60K 25/02* (2006.01),
F01P 5/10 (2006.01), *F02B 67/06* (2006.01)
(72) Inventeurs/Inventors:
GLANFIELD, IAN S., CA;
HARKEY, JERRY P., US
(73) Propriétaire/Owner:
DAIMLERCHRYSLER CORPORATION, US
(74) Agent: MARKS & CLERK

(54) Titre : POULIE D'ENTRAÎNEMENT PERMETTANT D'AMÉLIORER L'ENTRETIEN DES ACCESSOIRES MONTÉS SUR LE MOTEUR

(54) Title: DRIVE PULLEY FOR IMPROVED SERVICE OF ENGINE MOUNTED ACCESSORIES

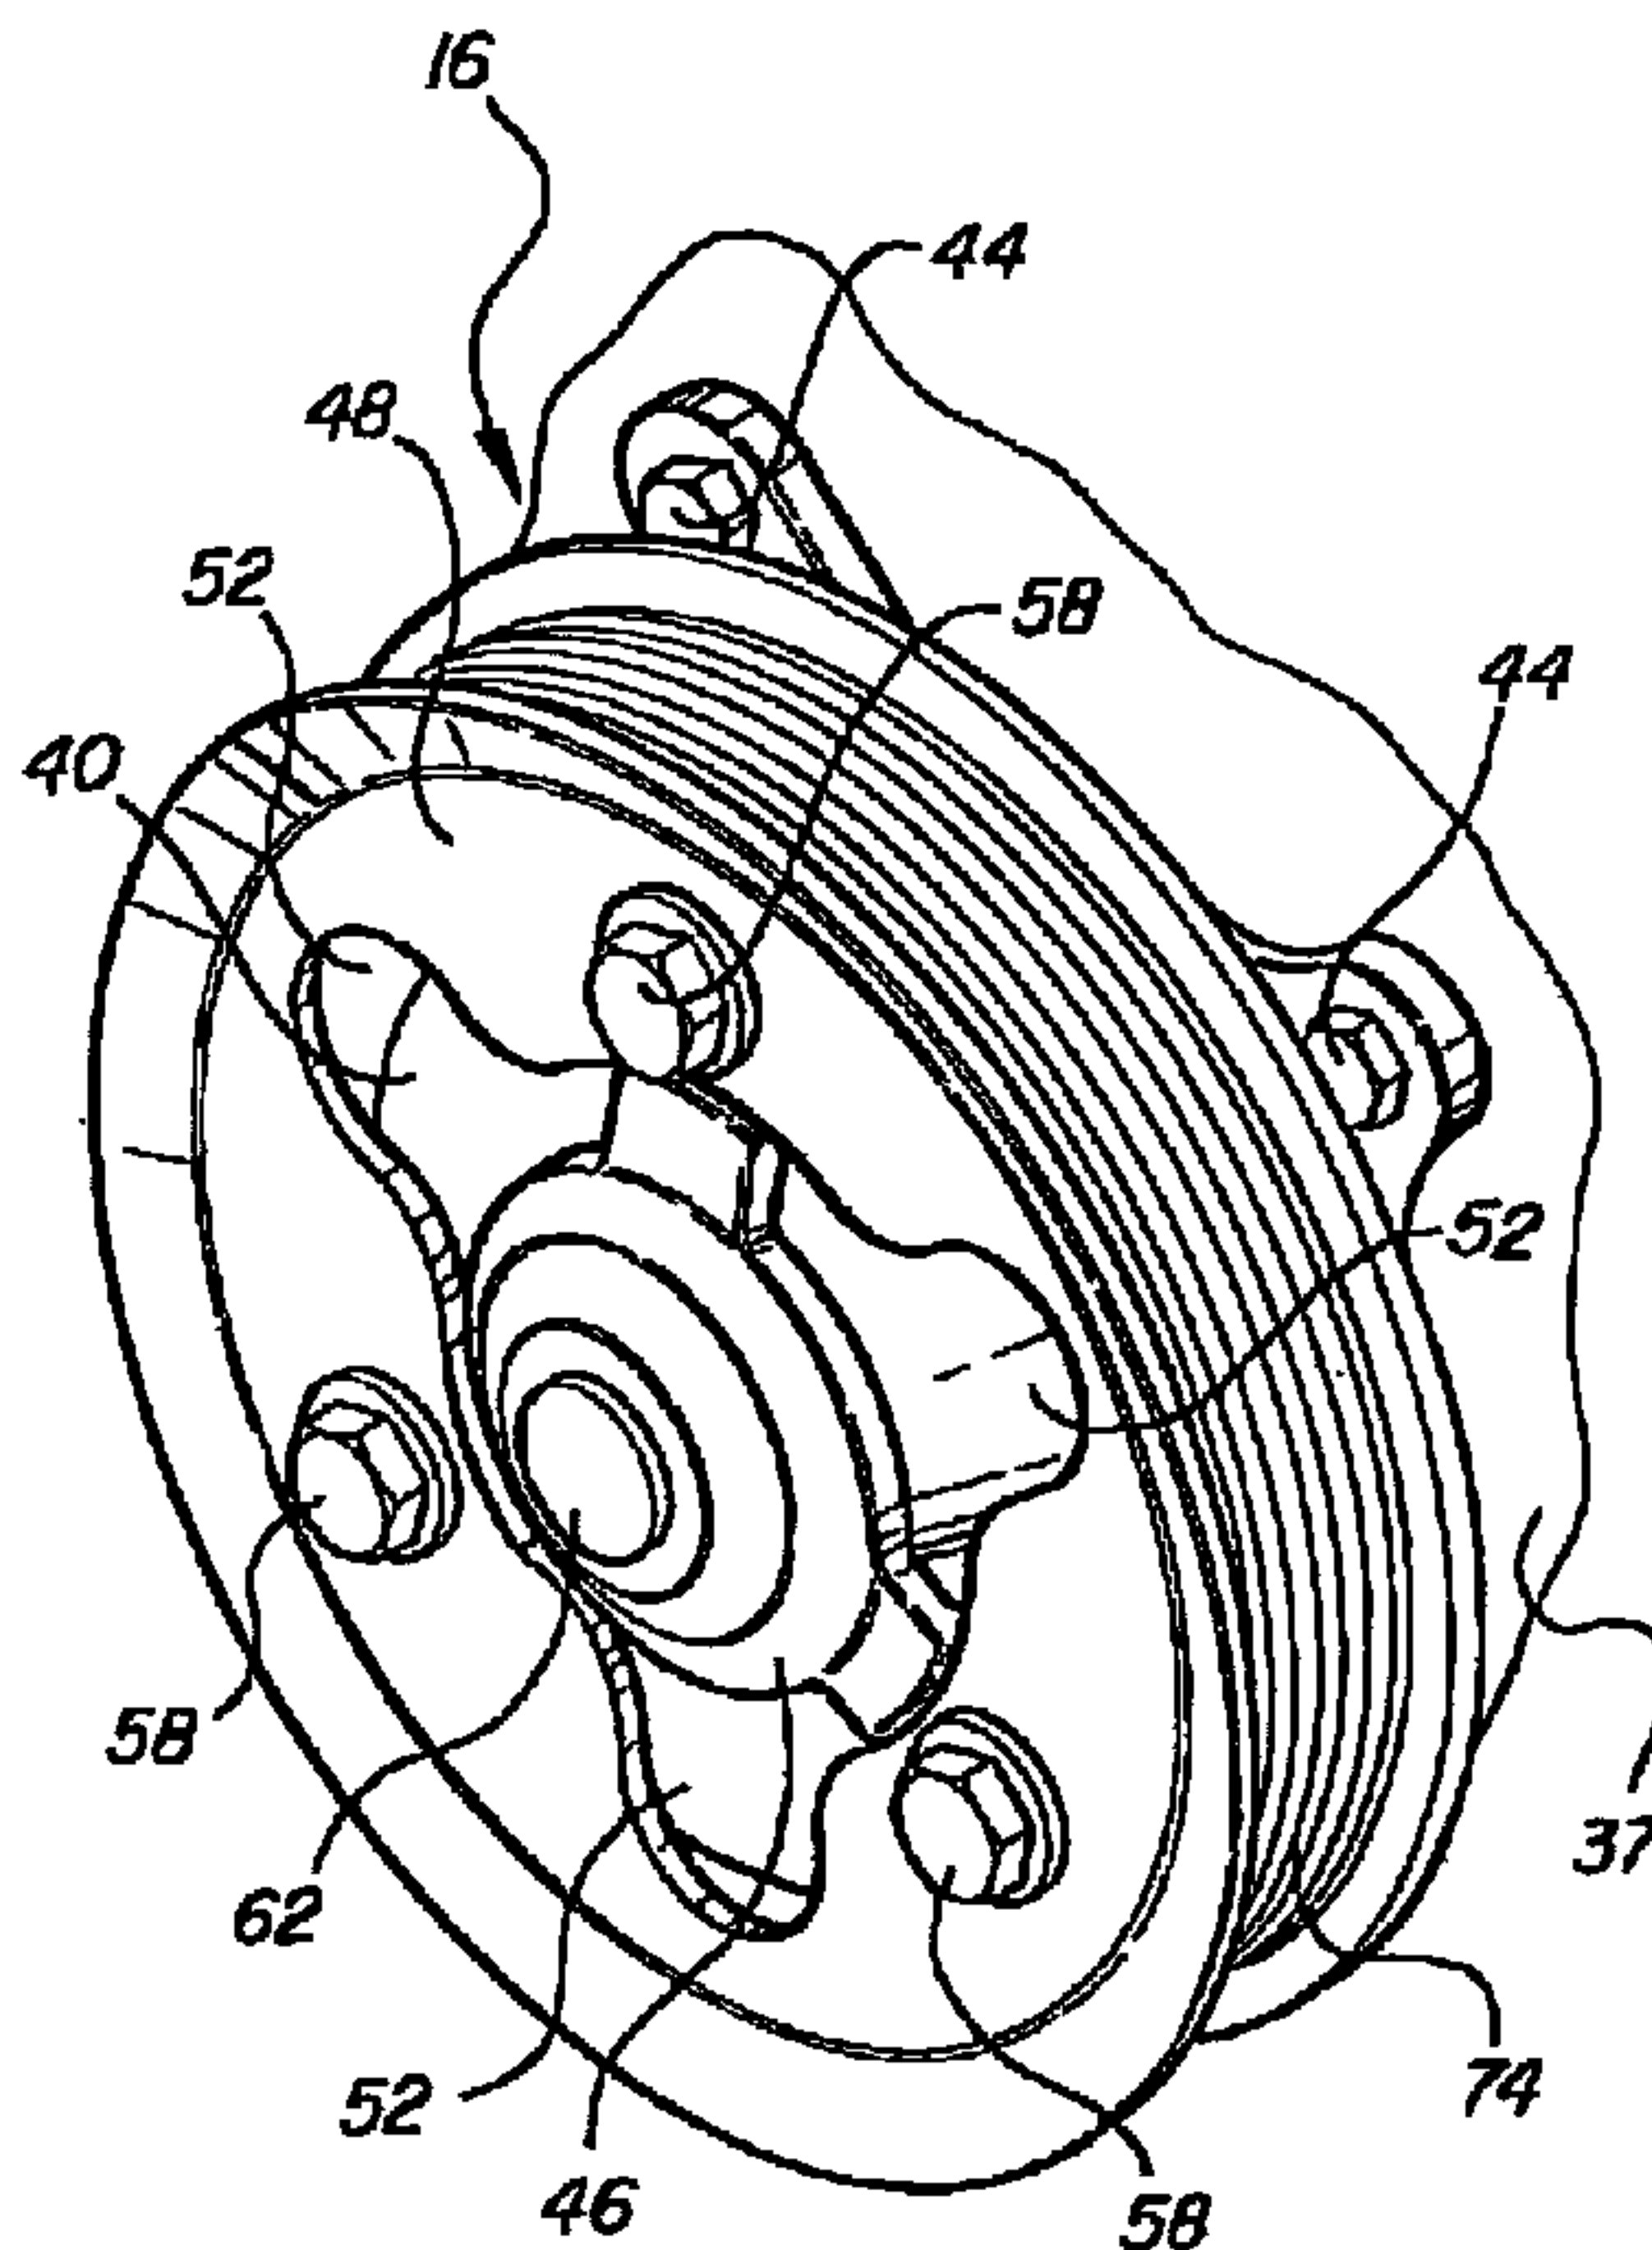

(57) **Abrégé/Abstract:**

Coolant pump service in a crowded engine compartment is provided by forming the side wall of the pump drive pulley with a centralized and radially lobed opening which can accommodate the radial arms of the drive hub that are normally connected by screws to the pulley side wall. The drive hub is fixed to the outboard end of the coolant pump drive shaft that extends through the housing of the pump that is removably secured by screws to the block of an internal combustion engine. The pump impeller is mounted on the inboard end of the drive shaft for fluid pumping operation in a coolant-receiving cavity in the coolant circuit of the engine. In the event of interference, which prevents or hampers the removal of the pulley axially from the drive shaft, the hub screws are removed and the pulley is turned into alignment with the lobes of the opening so that the pump housing screws are accessible. These screws are then removed so that the pump can be manually removed from the clearance between the engine and the frame side rail or other interfering component.

ABSTRACT

Coolant pump service in a crowded engine compartment is provided by forming the side wall of the pump drive pulley with a centralized and radially lobed opening which can accommodate the radial arms of the drive hub that are normally connected by screws to the pulley side wall. The drive hub is fixed to the outboard end of the coolant pump drive shaft that extends through the housing of the pump that is removably secured by screws to the block of an internal combustion engine. The pump impeller is mounted on the inboard end of the drive shaft for fluid pumping operation in a coolant-receiving cavity in the coolant circuit of the engine. In the event of interference, which prevents or hampers the removal of the pulley axially from the drive shaft, the hub screws are removed and the pulley is turned into alignment with the lobes of the opening so that the pump housing screws are accessible. These screws are then removed so that the pump can be manually removed from the clearance between the engine and the frame side rail or other interfering component.

- 1 -

DRIVE PULLEY FOR IMPROVED SERVICE OF
ENGINE MOUNTED ACCESSORIES

This invention relates to drive pulleys for augmenting service of associated belt-driven accessories mounted on the engine in crowded vehicle engine compartments and more particularly to a new and improved drive pulley and pulley hub for the liquid coolant pump operatively mounted on the engine block that allows the pulley to be disconnected from the drive hub and displaced inboard to a position on the pump housing to provide ready access to pump attachment screws for augmenting their removal and removal of the pump from the block of the
10 engine.

Prior to the present invention, various coolant pump designs for internal combustion engines have been devised to provide effective engine cooling during a wide range of engine operations. U.S. Patents 5,537,956 issued July 23, 1996 for "Coolant Circuit" and 5,409,350 issued April 25, 1995 for "Water Pump Bearing and Seal Cartridge" as well as the "Cooling System" shown in the Figure on page 346 of Auto Service and Repair, c. 1984, by the Goodheart - Wilcox Co. Inc., exemplify such designs. While these prior designs generally meet their design objectives, they do not address new and higher standards for improved coolant pump service in crowded spaces particularly in an engine transversely mounted
20 in an accessory packed engine compartment found in many modern automobiles with front wheel drives.

The belt driven pulley of an accessory operatively mounted on the engine as set forth in this invention is readily removed from driving connection with the pulley hub and connected drive shaft of the accessory even though it may be in close quarters in a crowded engine compartment of a vehicle. With the pulley free, the retention screws holding the accessory to the engine are accessible and removed so that the accessory can be removed. More particularly, in some installations, the tight clearance between the outboard end of the coolant pump housing and a side rail of the vehicle frame with a transversely mounted engine hinders or precludes
30 the ready disconnect and removal of the coolant pump pulley and subsequent removal of the pump from the engine block for service or replacement. This is remedied in the present invention by providing the side wall of the pulley with a

multi-lobed opening which provides a window allowing the through passage of the separate pulley hub with its radial arms after their disconnect from the side wall of the pulley. With this invention, the following method steps may be employed for pump service. The pulley may be released from its hub by suitable tooling and is subsequently turned until the arms of the hub are aligned with the opening in the pulley. The pulley is then axially moved over the pulley hub and onto the coolant pump housing to provide access to the retention screws securing the pump body to the engine. After removal of the pump body retention screws, the pump can be axially withdrawn from the engine block and moved with the pulley telescoped aboard into the clearance between the engine and side rail and subsequently from the clearance to a completely free position for pump service or for pump replacement.

Broadly then in one aspect the invention provides in combination a rotary device for an internal combustion engine in an automotive vehicle and a drive pulley therefore, the combination comprising:

a rotary device with a housing operatively mounted on said engine;

said rotary device housing having a hub portion extending outwardly from said engine to a terminal end;

a drive shaft extending through said hub portion of said rotary device,

a pulley hub operatively mounted on the outer end of said drive shaft adjacent to the terminal end of said hub portion of said housing, said pulley hub having a plurality of arcuately spaced and radial extending arms, said pulley having a side portion; and

fasteners for releasably connecting the outer ends of said radial arms to the side portion of said pulley, said side portion of said pulley having a centralized opening therein forming a window to receive the pulley hub and radial arms thereof to allow said pulley to be telescoped over said hub portion of said rotary device housing subsequent to the pulley being disconnected from the radial arms of said pulley hub.

In another aspect, the invention provides in combination a drive pulley and a fluid pump for pumping fluid in a cooling system for an internal combustion engine in an automotive vehicle, the combination comprising:

a fluid pump housing operatively mounted on said engine, said fluid pump housing having a hub portion extending outwardly from said engine to a terminal end;

2a

a drive shaft extending through said hub portion of said pump housing;
a fluid pumping impeller operatively mounted on the inner end of said drive shaft;
a pulley hub operatively mounted on the outer end of said drive shaft adjacent to the
terminal end of said hub portion of said housing, said pulley hub having a plurality of

5 arcuately spaced and radial extending arms, said pulley having a side portion; and
fasteners for releasably connecting the outer ends of said radial arms to the side portion
of said pulley, said side portion of said pulley having a centralized opening therein
forming a window to receive the pulley hub and radial arms thereof to allow said pulley
to be telescoped over said hub portion of said pump housing subsequent to the pulley
10 being disconnected from the radial arms of said pulley hub.

In another aspect, the invention provides in combination a rotary device and a
drive pulley for an internal combustion engine in an automotive vehicle, the combination
comprising:

a rotary device housing having a mounting surface for operative mounting on the block
15 of the internal combustion engine, said rotary device housing having a hub portion
extending outwardly from said mounting surface to a terminal end;

a drive shaft operatively mounted in said hub portion and extending through said rotary
device housing;

a drive pulley operatively mounted on the outer end of said drive shaft;

20 a pulley drive hub having a plurality of radial arms, said drive pulley having an annular
outer rim and an outer side extending inward toward said pulley drive hub, said side
having an axial opening therethrough;

fastener devices for connecting the outer ends of said radial arms to the side of said
pulley; and

25 fasteners for connecting said radial arms to the interior of side of said pulley, said side
of said pulley having a central recess formed therein to provide a window for the drive
hub and radial arms thereof to allow said pulley to be telescoped over said hub of said
rotary device housing subsequent to the pulley being disconnected from the arms of said
hub.

30 In other aspect, the invention provides a coolant pump having a housing
operatively mounted by retention screws on the block of an internal combustion engine

2b

adjacent to a side rail of the framework of the vehicle compressing a pulley and pulley hub driving the pump, said pulley being disposed between said side rail and the end of a pump housing, said pulley hub being releasably connected between the outer end of the drive shaft and the pulley, said pulley having a side with a centralized opening defined in part by a plurality of radially extending lobes, said hub having a plurality of radial arms which are sized to pass through said opening, screws for releasably connecting said arms to said side of said screws have been removed so that the pulley can be moved onto the housing of the pump to provide access to the retention screws of the pump housing.

In this invention the new and improved pulley and its associated pulley hub can be readily employed with a wide range of coolant pump designs or with other accessories since little or no modifications of the pulley driven components are required.

These and other features, objects and advantages of the present invention will become more apparent from the following drawings, descriptions and specifications.

Fig. 1 is an end elevation view of an internal combustion engine transversely mounted in the engine compartment of an automotive vehicle;

Fig. 2 is a cross sectional view taken generally along sight lines 2-2 of Fig. 1 illustrated with a portion of the side rail of the vehicle;

Fig. 2a is a view similar to the view of Fig. 2 but showing a prior art construction;

Fig. 2b is a cross-sectional view taken generally along lines 2b-2b of Fig. 2;

Fig. 3 is a pictorial view of the pulley construction of Fig. 2;

Fig. 4 is a view similar to that of Fig. 2 but showing the water pump being disconnected from the engine block;

Fig. 5 is a pictorial view of the disconnected water pump pulley of Fig. 4; and

- 3 -

Fig. 6 is a cross sectional view similar to Fig. 2 but showing the removal of the water pump and pulley from the engine.

Turning now in detail to the drawing Fig. 1 illustrates in side view an automotive internal combustion engine as operatively mounted in the engine compartment 12 of an automotive vehicle. The engine compartment hood is represented by the dashed line 13. The engine 10 powers an accessory system drive pulley 14 driven through the engine crankshaft which in turn drives an coolant pump drive pulley 16, an air conditioner compressor drive pulley 18, a generator drive pulley 20 and a power steering gear pump drive pulley 22. The rotational
10 drive for these pulleys is through a drive belt 24 routed in a serpentine and endless path around pulleys 16, 18, 20, and 22 and around belt tensioning pulley 26 and idler wheel 28.

The side rail 32 of the frame of the vehicle is outboard of and so close to the coolant pump drive pulley 16 that only tight clearance is available for service of the engine-mounted coolant pump 34 and its drive pulley 16. Fig. 2a illustrates service problems related to such tight clearances in which the clearance
20 36 between the block 37 of engine 10 and the adjacent side rail 32 is not adequate to allow the ready removal of a prior drive pulley 40 from the prior pump drive hub 42 and the subsequent removal of the pump 34 from the engine block for pump replacement or service.

With such prior construction there is initial difficulty in accessing and removing the screws 43 attaching the pulley 40 to the pulley hub 42. Moreover, since the prior pulley 40 covers the pump 34, the screws 44 attaching the pump 34 to the engine block are not readily accessible for their removal so that the pump cannot be easily removed from the engine block.

In this invention, however, removal of the pump pulley from the pulley hub, and more importantly, the subsequent removal of the pump from the engine is augmented by the improved method of pump service and by the design of the pump pulley 16 and the associated pulley hub 46 best illustrated in Figs. 1-5. In
30 the preferred embodiment of this invention, the outer side 48 of the pulley 16 is formed with a generally circular opening 50 enlarged by three radial and arcuately spaced lobed openings 52. This enlarged opening is designed to match, with

- 4 -

clearance, the pulley hub 46 with its three radial and arcuately spaced arms 56 each drivingly connected to the coolant pump pulley 10 by screws 58. As shown best in Figs. 2, 4 and 5, the end portions of each of the radial arms is stepped in an inboard direction to provide offset seat 60 for improved seating and attachment of the pulley to the hub. This offset seat construction and the inwardly offset side 48 of the pulley effectively moves the pulley-hub attachment in an inboard direction closest to the engine providing increased clearance for tooling to access screws 58.

The pulley hub 46 is drivingly secured to the outboard end of the pump drive shaft 62 that is rotatably mounted by bearing 64 in an axial bore 66 formed in the generally conical and laterally extending hub portion 68 of the body of the pump or housing 70. A fluid seal 71 operatively mounted in the inboard end of the bore fluid seals to the drive shaft and prevents fluid leakage from the pump 34. The conical hub portion 68 extends from a flattened base portion 72 of the housing into the confines of the pulley 16 as defined by the multi-grooved cylindrical rim 74 of the pulley and its side 48 as best shown in Figs. 2 and 4.

As shown best in Fig. 2b, the base portion 72 of the housing has radially extending and arcuately spaced attachment ears 80, 81 formed with openings 82 that receive screws 44 that secures the pump housing 70 to the block of the engine.

The pump 34 further comprises a multi-bladed impeller 86 secured to the inner end of the drive shaft 62 which is disposed in a pumping cavity 88 formed in the block of the engine that is part of the engine coolant circuit. With this construction, the rotation of the pulley 16 by the drive belt will effect rotation of the impeller to circulate coolant in the circuit for engine and component cooling purposes as well as for the selective heating of the occupant compartment of the vehicle.

For service of the coolant pump 34 the screws 58 securing the pulley 16 to the pulley hub 46 are accessed. This can be readily accomplished by removing the drive belt 24 from the rim or periphery of the pulley and turning the pulley until each of the pulley hub screws 58 is moved to their most accessible position with respect to the side rail 32. This position is shown in Fig. 2 in which upper screw 58 is accessible. This screw is removed and the pulley is turned in

- 5 -

index fashion so that the other two screws are accessed and in turn removed. After
of the screws 58 are removed, the pulley 16 is turned to effect alignment of the
lobes of the opening 52 with the radial arms 56 of the hub 46. On such alignment,
the pulley 16 is axially displaced in an inboard direction so that the pulley hub 45
passes through the window provided by the opening 50 in the pulley and onto the
conical hub portion 68 of the pump housing as shown best in Figs. 4 and 5. Tools
such as the ratchet 96 and socket 98 can then be inserted through the lobed opening
in the side 48 of pulley 16 to remove the screws 84 holding the pump housing to
the engine block. After removal of the screws 44, the pump 34 with the pulley 16
10 telescoped aboard are axially withdrawn and moved into the clearance 36 between
the side rail 32 and the engine block, shown in Fig. 6. The components can be
subsequently moved into a free work area for pump repair. The serviced or
replacement pump can be easily reinstalled by reversing the service steps outline
above.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. In combination a rotary device for an internal combustion engine in an automotive vehicle and a drive pulley therefore, the combination comprising:
 - a rotary device with a housing operatively mounted on said engine, said rotary device housing having a hub portion extending outwardly from said engine to a terminal end;
 - a drive shaft extending through said hub portion of said rotary device;
 - a pulley hub operatively mounted on the outer end of said drive shaft adjacent to the terminal end of said hub portion of said housing, said pulley hub having a plurality of arcuately spaced and radial extending arms, said pulley having a side portion; and
 - fasteners for releasably connecting the outer ends of said radial arms to the side portion of said pulley, said side portion of said pulley having a centralized opening therein forming a window to receive the pulley hub and radial arms thereof to allow said pulley to be telescoped over said hub portion of said rotary device housing subsequent to the pulley being disconnected from the radial arms of said pulley hub.
2. The combination of claim 1, further including threaded fasteners for operatively attaching said rotary device housing to the engine, and wherein said threaded fasteners are accessible to tooling through said opening in said side of said pulley after said pulley has been disconnected from said hub.
3. In combination a drive pulley and a fluid pump for pumping fluid in a cooling system for an internal combustion engine in an automotive vehicle, the combination comprising:
 - a fluid pump housing operatively mounted on said engine, said fluid pump housing having a hub portion extending outwardly from said engine to a terminal end;
 - a drive shaft extending through said hub portion of said pump housing;
 - a fluid pumping impeller operatively mounted on the inner end of said drive shaft;
 - a pulley hub operatively mounted on the outer end of said drive shaft adjacent to the terminal end of said hub portion of said housing, said pulley hub having a plurality of arcuately spaced and radial extending arms, said pulley having a side portion; and

fasteners for releasably connecting the outer ends of said radial arms to the side portion of said pulley, said side portion of said pulley having a centralized opening therein forming a window to receive the pulley hub and radial arms thereof to allow said pulley to be telescoped over said hub portion of said pump housing subsequent to the pulley being disconnected from the radial arms of said pulley hub.

4. The combination of claim 3, further including threaded fasteners for operatively attaching said pump housing to the engine, and wherein said threaded fasteners are accessible to tooling through said opening in said side of said pulley after said pulley has been disconnected from said hub.

5. In combination a rotary device and a drive pulley for an internal combustion engine in an automotive vehicle, the combination comprising:

a rotary device housing having a mounting surface for operative mounting on the block of the internal combustion engine, said rotary device housing having a hub portion extending outwardly from said mounting surface to a terminal end;

a drive shaft operatively mounted in said hub portion and extending through said rotary device housing;

a drive pulley operatively mounted on the outer end of said drive shaft;

a pulley drive hub having a plurality of radial arms, said drive pulley having an annular outer rim and an outer side extending inward toward said pulley drive hub, said side having an axial opening therethrough;

fastener devices for connecting the outer ends of said radial arms to the side of said pulley; and

fasteners for connecting said radial arms to the interior of side of said pulley, said side of said pulley having a central recess formed therein to provide a window for the drive hub and radial arms thereof to allow said pulley to be telescoped over said hub of said rotary device housing subsequent to the pulley being disconnected from the arms of said hub.

6. The combination of claim 5, in which the rotary device takes the form of a fluid pump for pumping fluid in a cooling system of an internal combustion engine in an

automotive vehicle and includes a fluid pumping impeller operably mounted on the inner end portion of said drive shaft.

7. A coolant pump having a housing operatively mounted by retention screws on the block of an internal combustion engine adjacent to a side rail of the framework of the vehicle compressing a pulley and pulley hub driving the pump, said pulley being disposed between said side rail and the end of a pump housing, said pulley hub being releasably connected between the outer end of the drive shaft and the pulley, said pulley having a side with a centralized opening defined in part by a plurality of radially extending lobes, said hub having a plurality of radial arms which are sized to pass through said opening, screws for releasably connecting said arms to said side of said screws have been removed so that the pulley can be moved onto the housing of the pump to provide access to the retention screws of the pump housing.

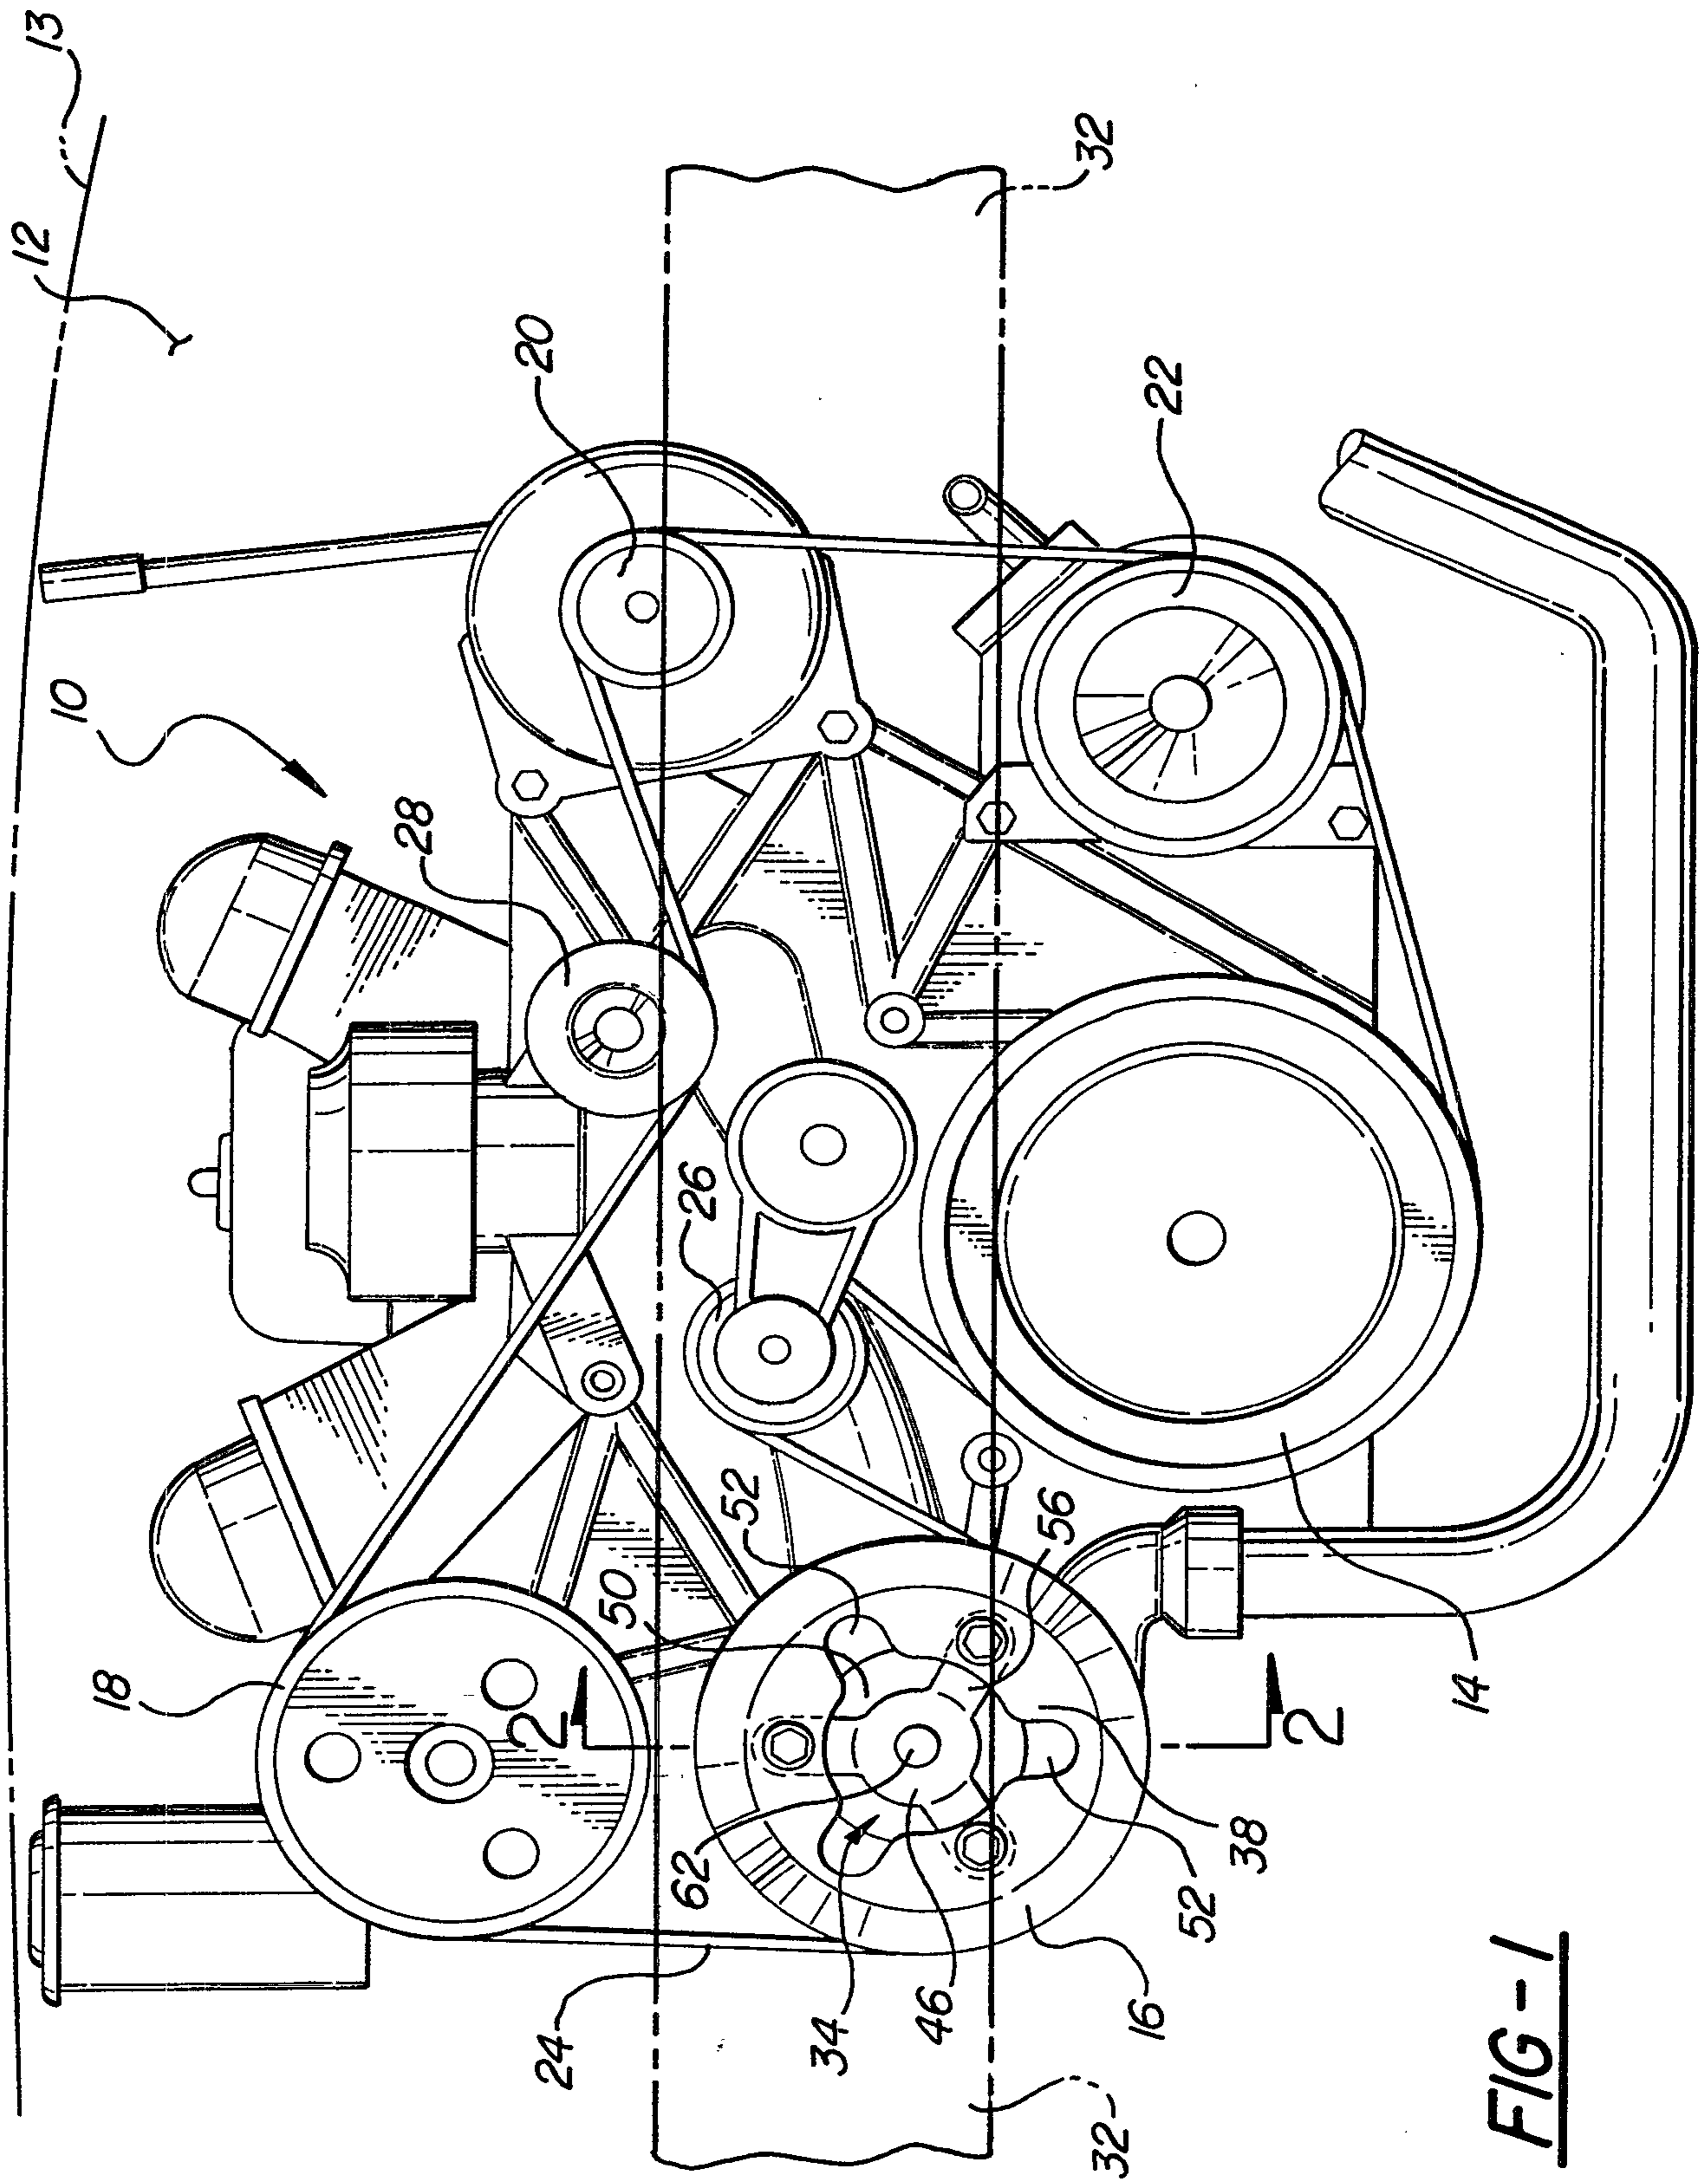


FIG-1

Marks & Clerk

FIG-2


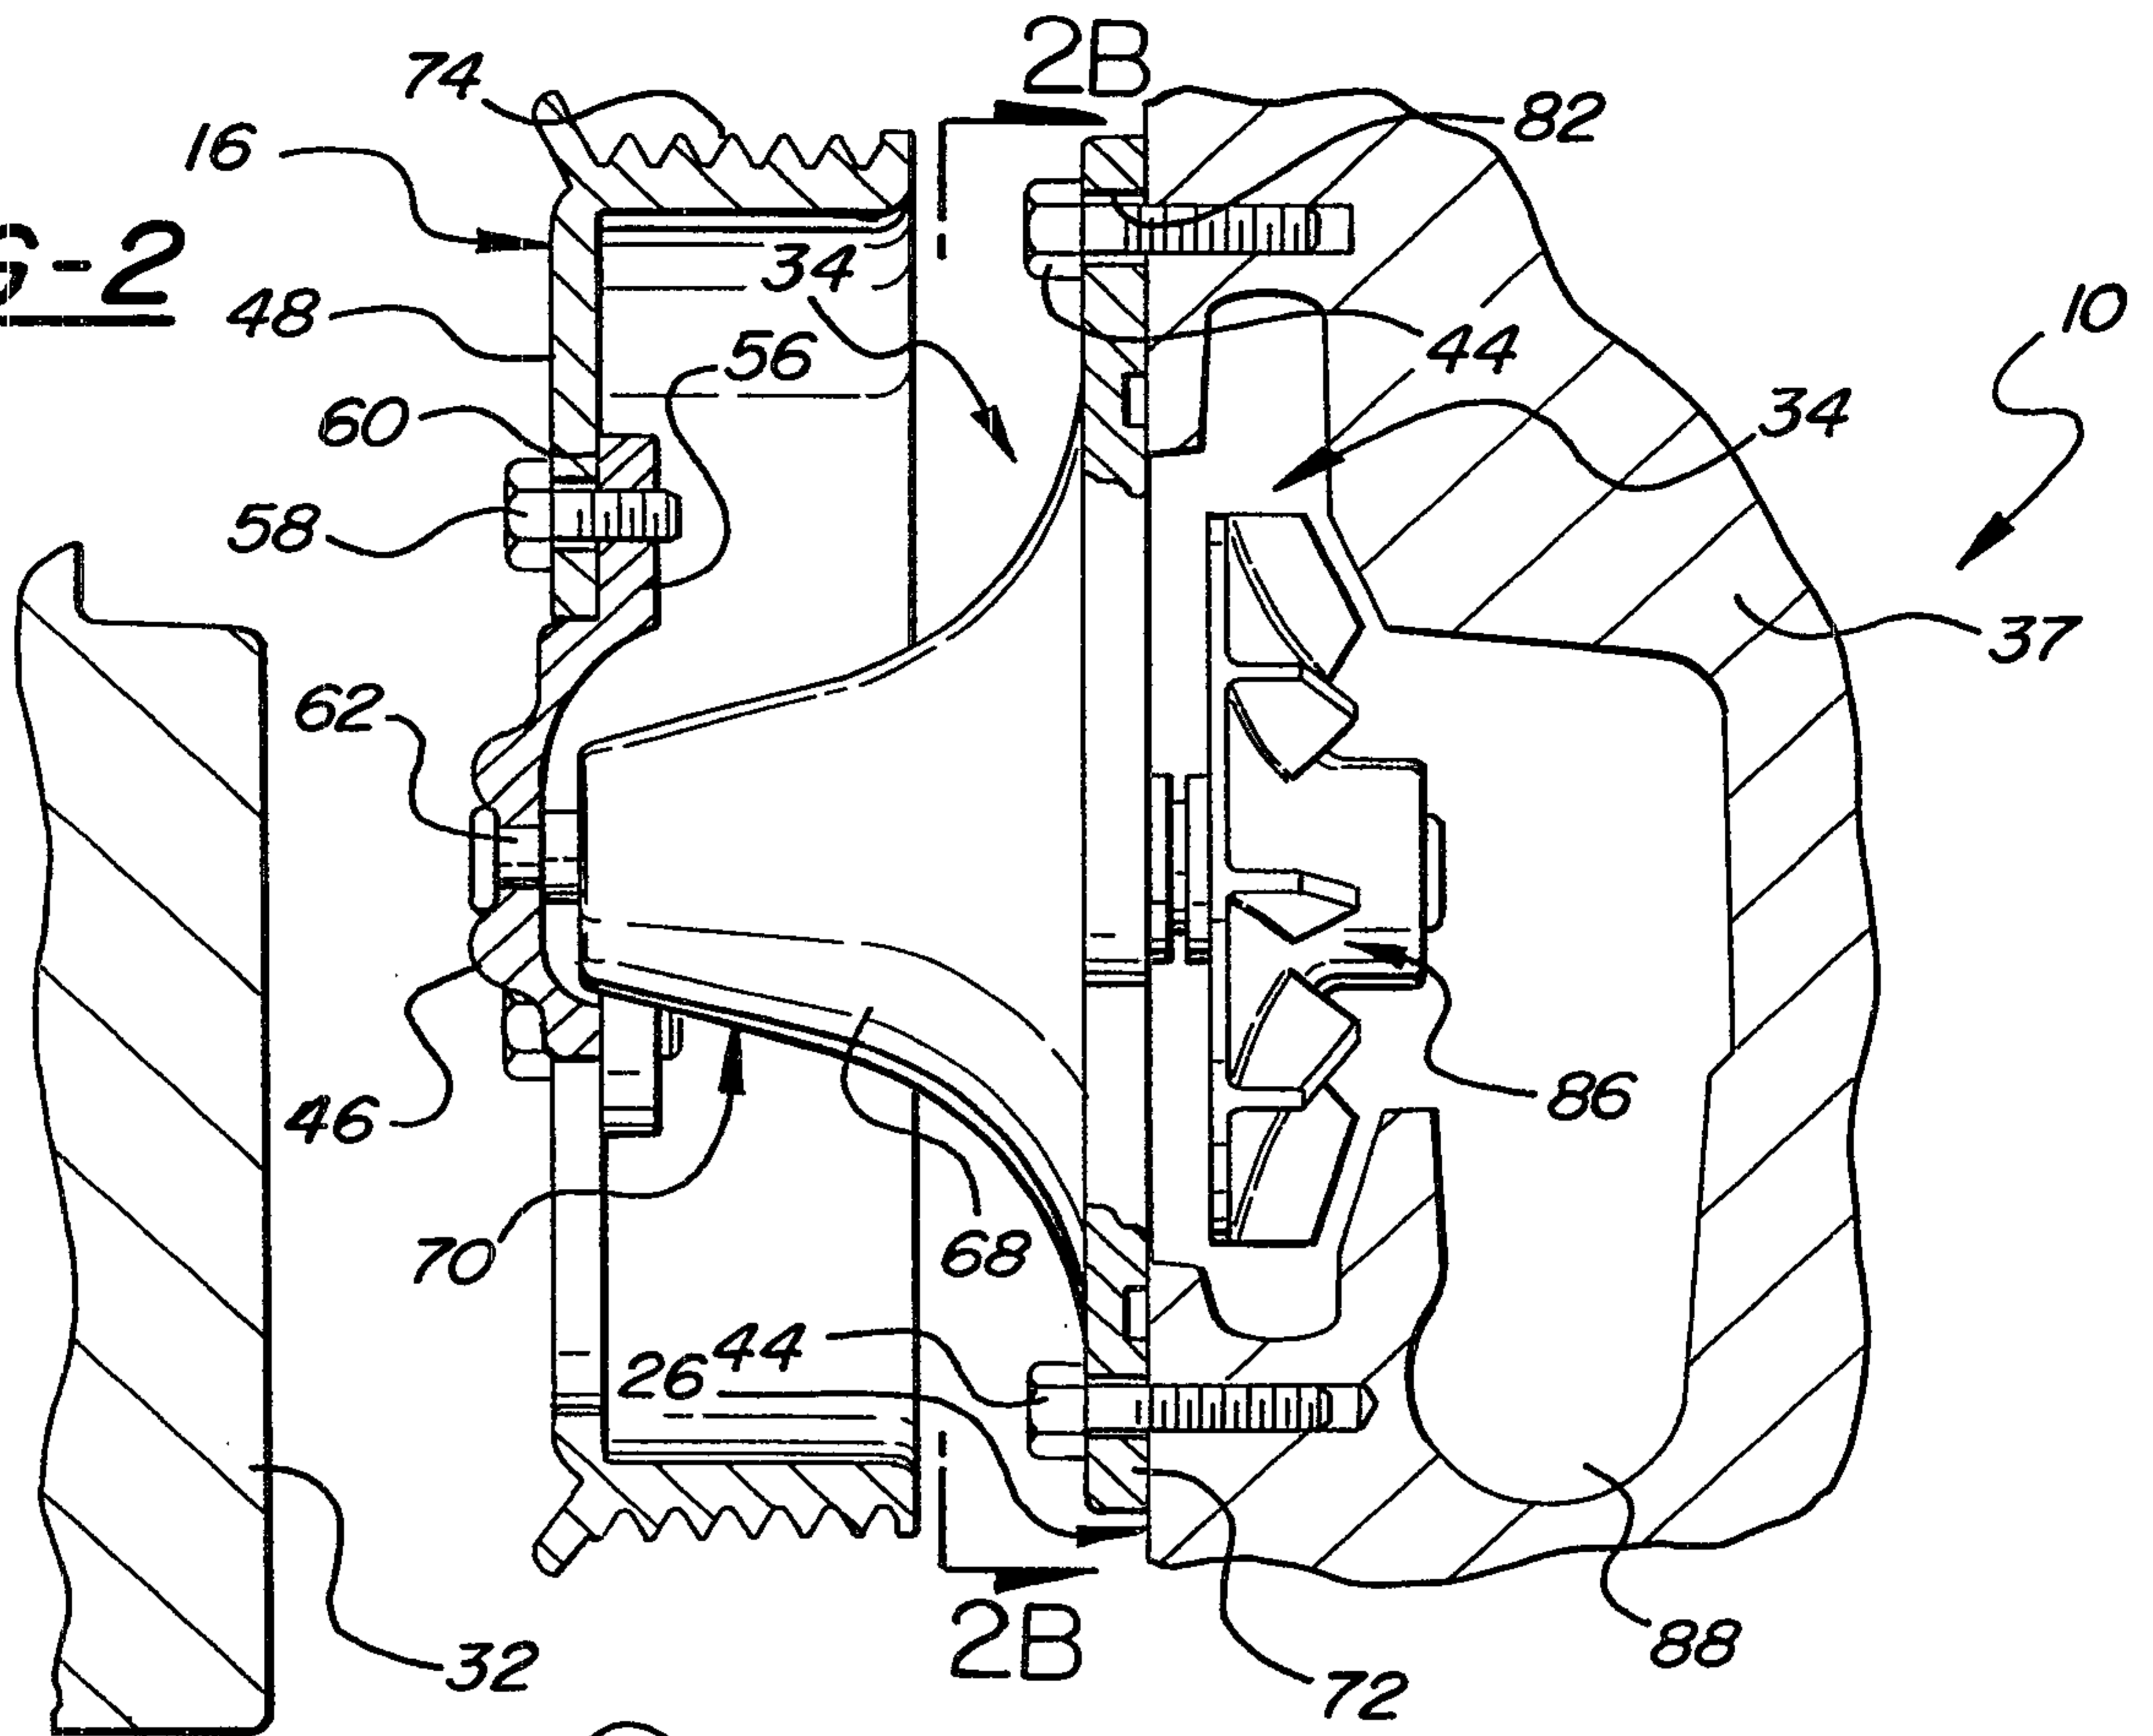


FIG-2A
(PRIOR ART)

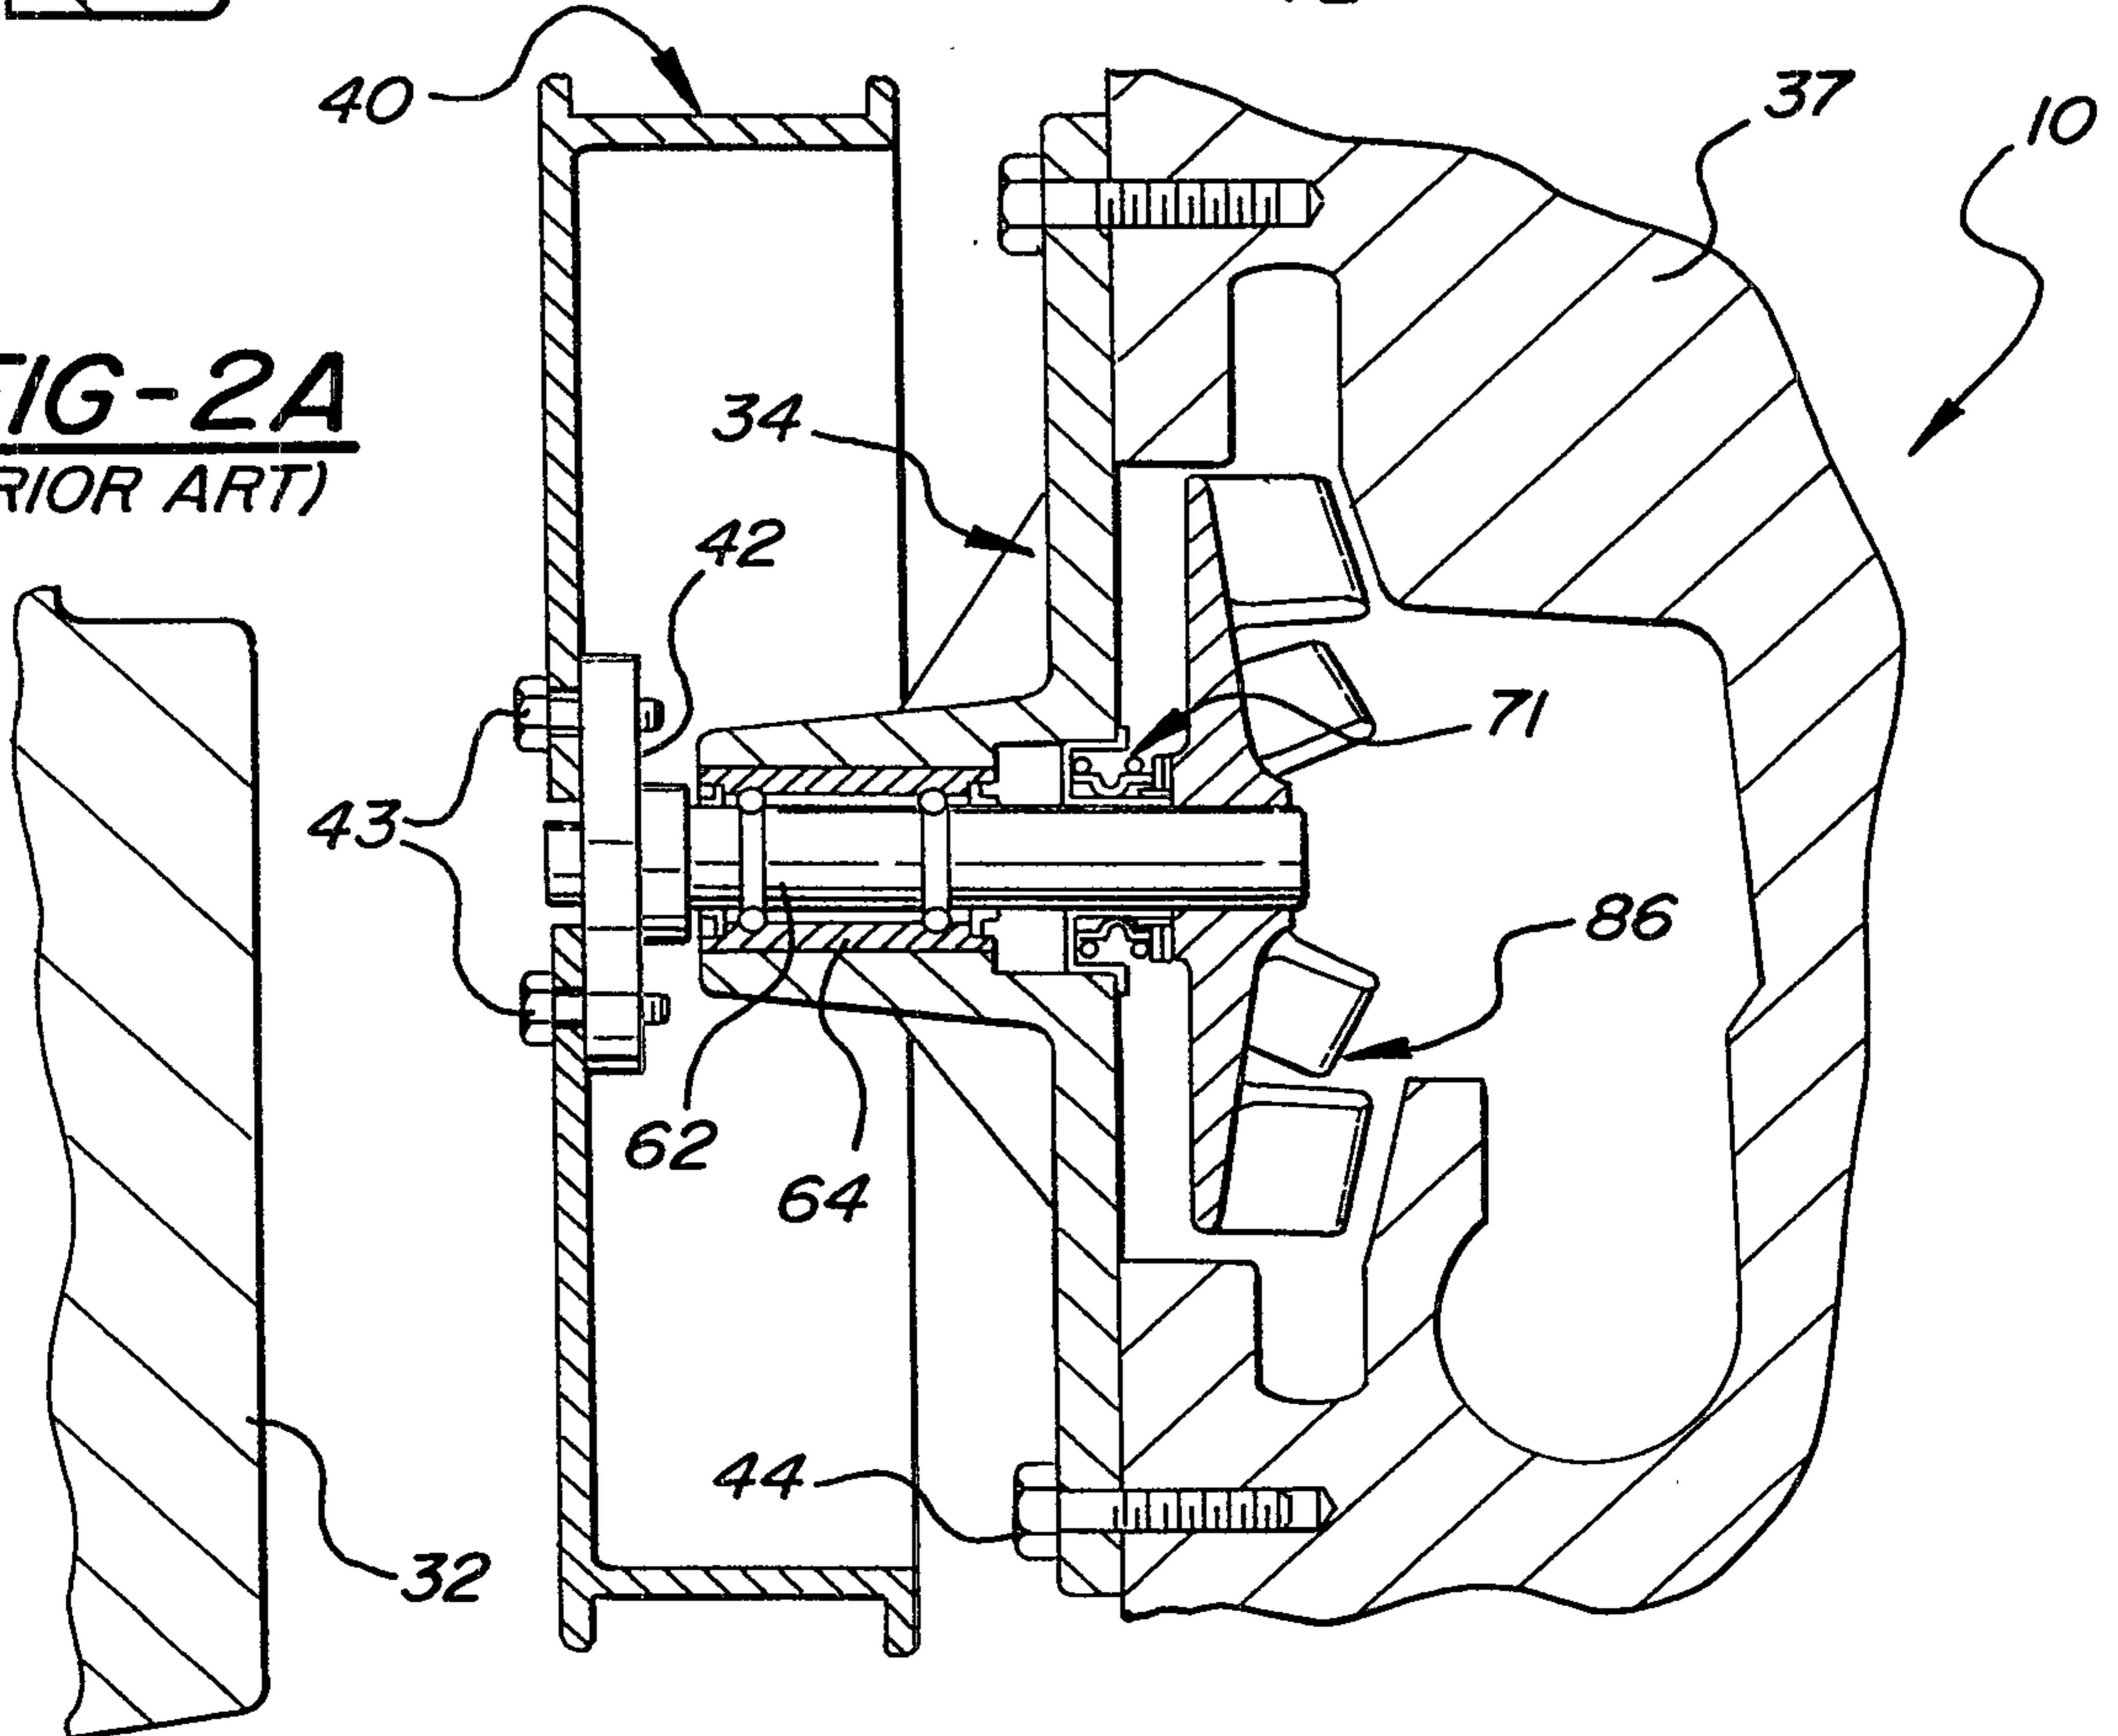

Marks + Clerk

FIG-2B

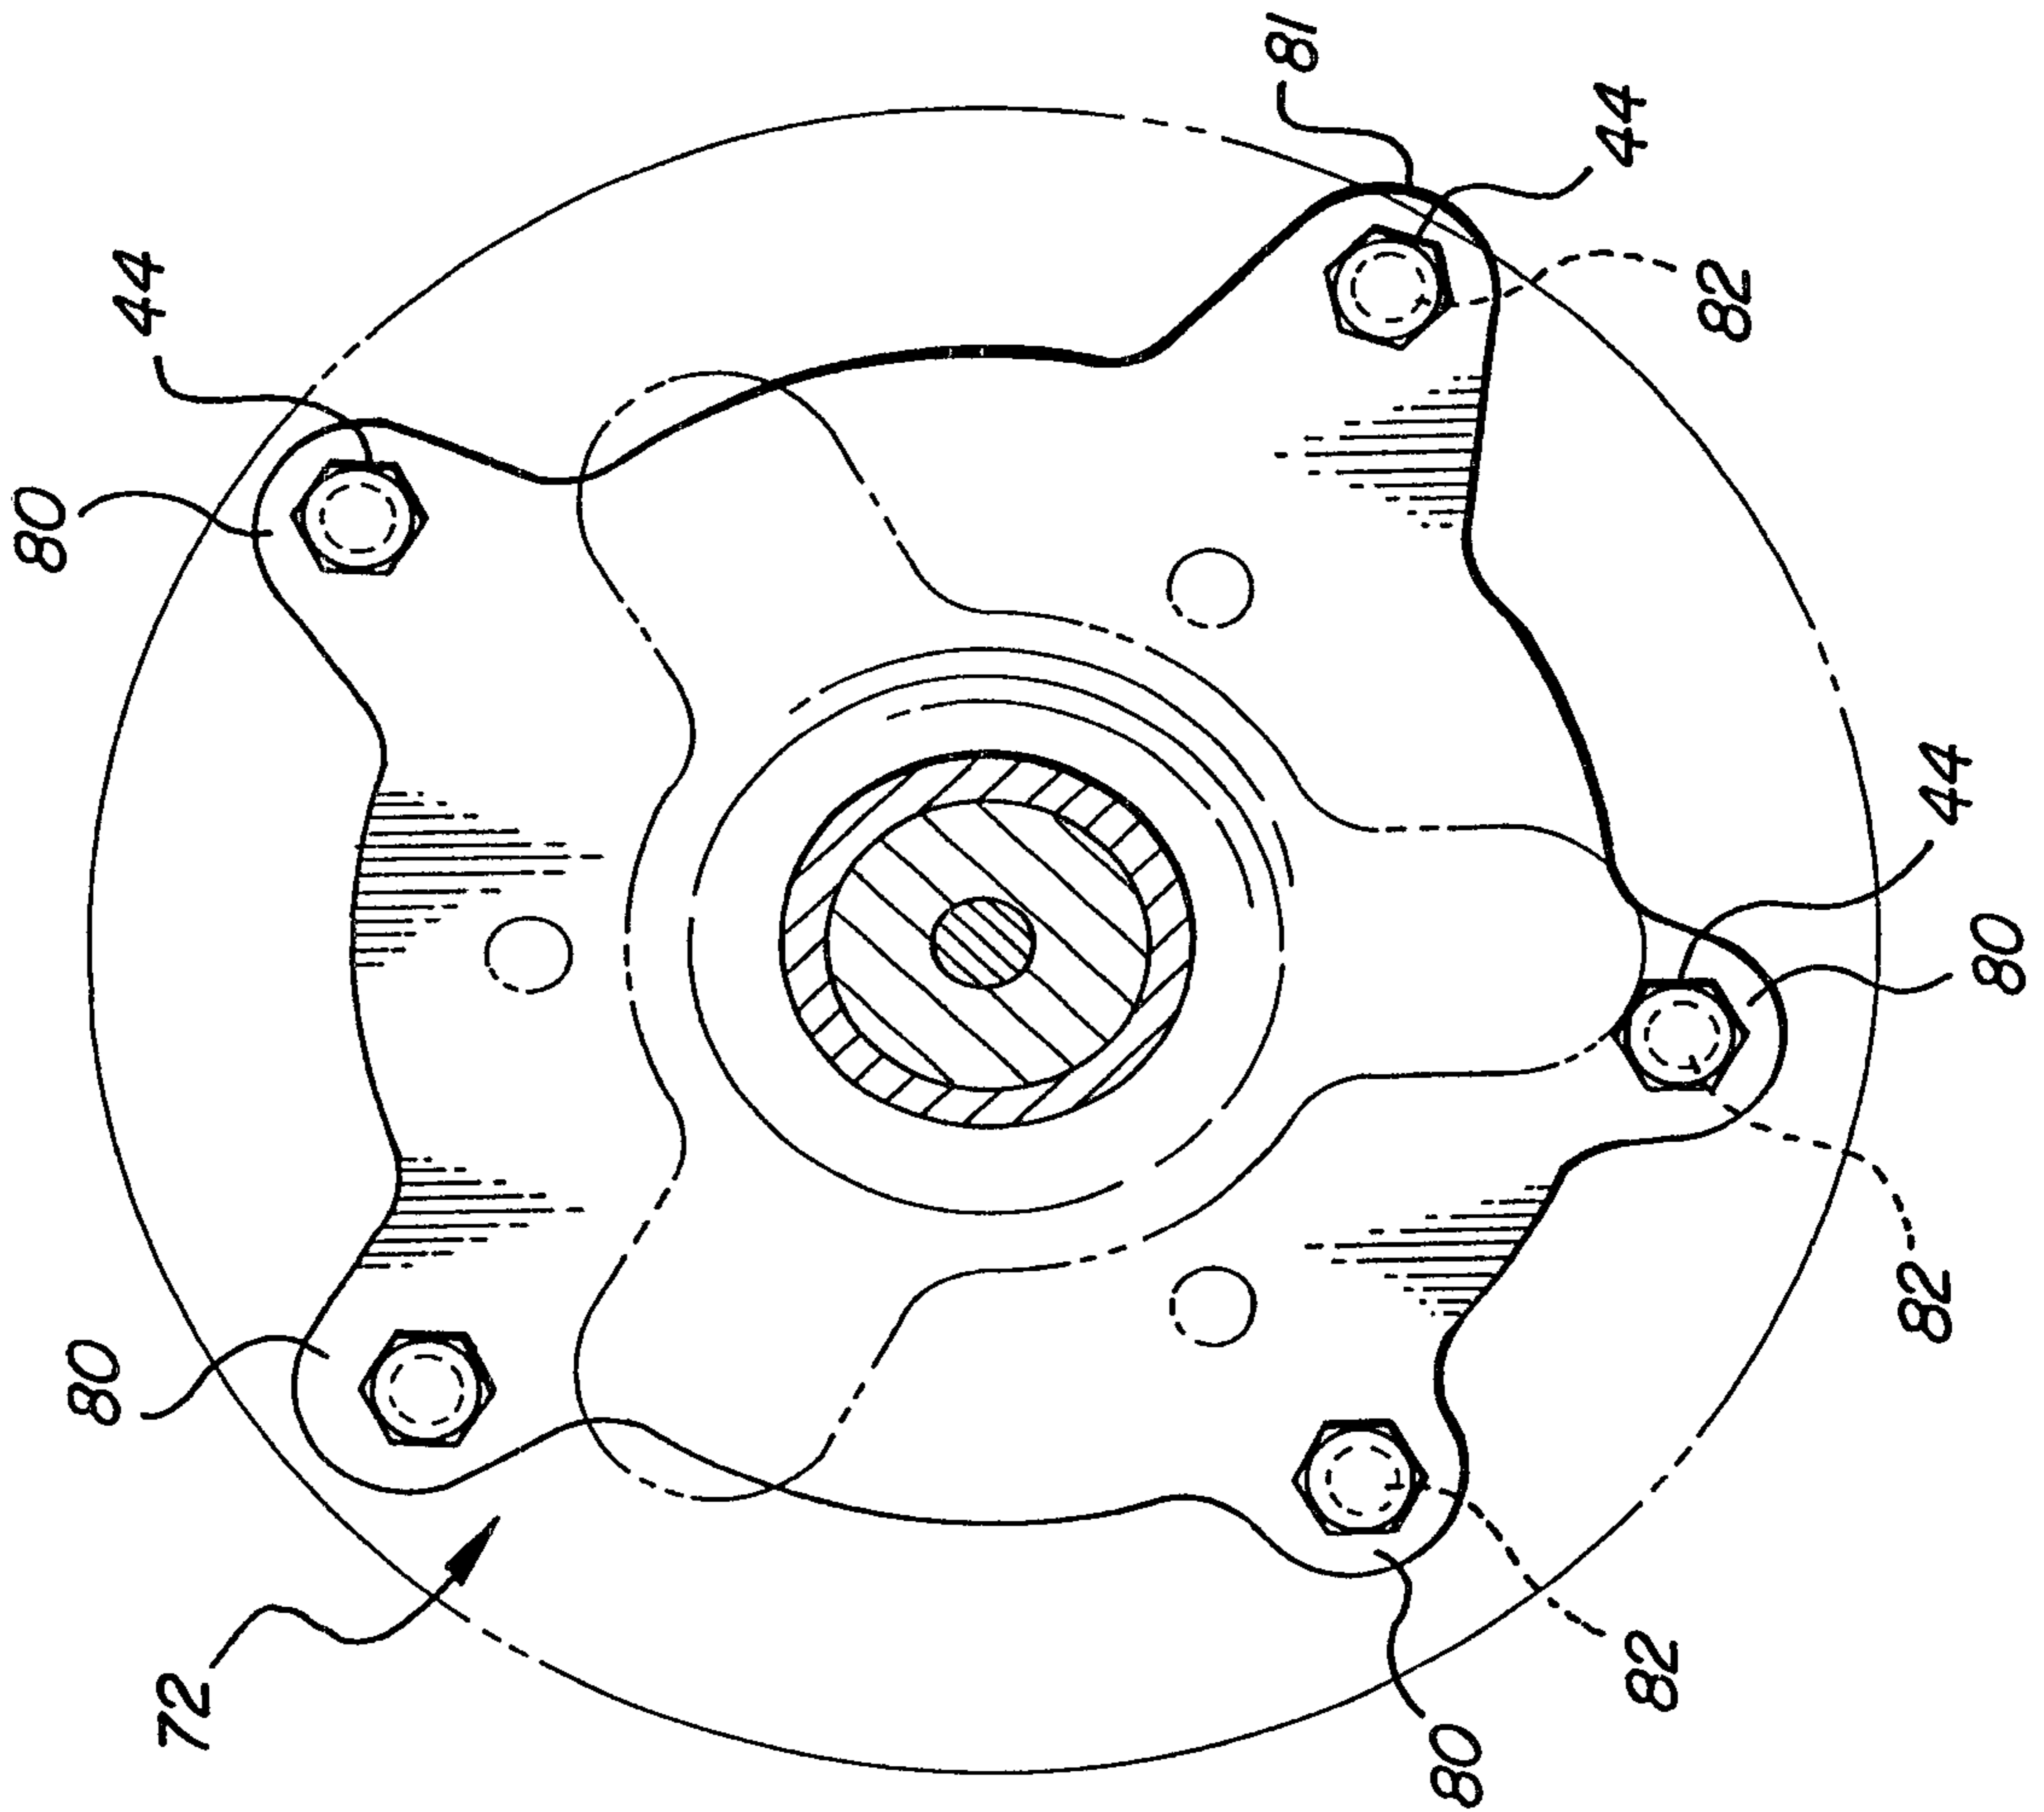


FIG-3

